



Basic control for 3 independent loads

H4652/3 - L4652/3 - AM5832/3

Description

Three module flush mounted control, with six pushbuttons and three LED (in the LIVING and MÀTIX version) or 6 LEDs (in the AXOLUTE version), which signal the status of the control. The device can drive 1 relay single load actuators.

The device can be installed in a MY HOME system and configured physically or virtually. In this mode the control can drive actuators with 2 interlocked relays and send controls for the management of advanced devices, if configured using the CEN configurator. When installed as a component of the Lighting Management system, specific configuration procedures are used (Plug&go, Push&Learn, Project&Download).

Technical data

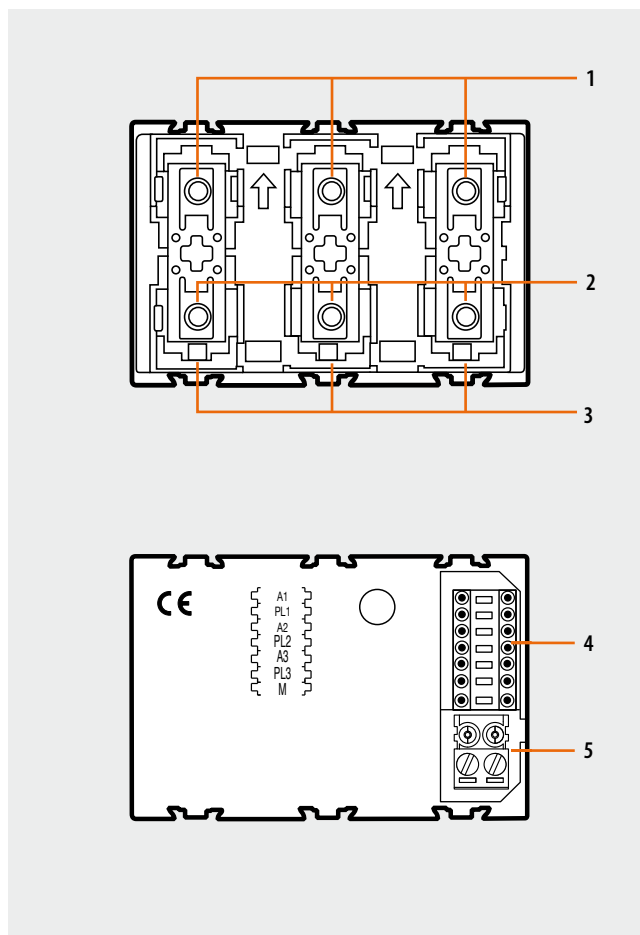
Power supply from SCS BUS: 27 Vdc
 Operating power supply with SCS BUS: 18 – 27 Vdc
 Absorption: 9 mA

Dimensional data

Size: 3 flush mounted modules

MY HOME configuration

When installed in a MY HOME system, the device may be configured in two ways:
 - PHYSICAL CONFIGURATION, by connecting the physical configurators to their sockets.
 - VIRTUAL CONFIGURATION, by connecting the system to the PC using the 3503N Kit or the web server. The Virtual configurator software must be installed on the PC.

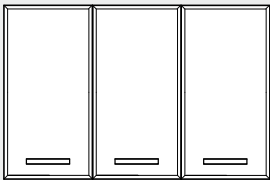


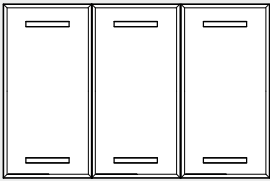
Legend

1. Upper pushbutton
2. Lower pushbutton
3. LED
4. Configurator socket
(attention, it must only be used in MY HOME systems with physical configuration)
5. BUS

Physical configuration

The device consists of three independent controls, and found on the back of the devices are three separate A and PL positions, which relate to the keys on the front of the control. From left to right, the three front buttons correspond to control 1 (A1, PL1), control 2 (A2, PL2), and control 3 (A3, PL3).

Configurator value in position M	Key covers used/function
	
No configurator	Cyclical ON/OFF
NOTE: if the control is associated to a dimmer actuator item H/L4678 item H/L4674 with operating modes cyclical ON-OFF, ON (upper key) and OFF (lower key) the brightness can also be adjusted.	

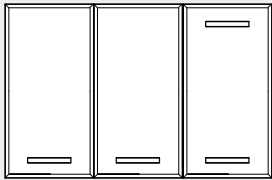
Configurator value in position M	Key covers used/function
	
3	UP/DOWN
6	monostable UP/DOWN
9	ON (upper key) OFF (lower key)
CEN	enabling the T1-T2-T3 (upper) and T4-T5-T6 (lower) keys to manage scenarios of the programmer MH200N*

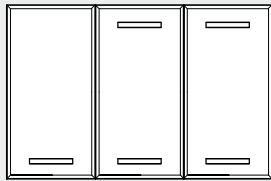
Note (*): Do not configure positions A2, PL2 and A3, PL3.

Virtual configuration

Using the Virtual Configurator software it is possible to perform all the functions listed below:

- double light control
- double rolling shutter control
- double CEN control
- double CEN PLUS control
- double AUX control

Configurator value in position M	Key covers used/function	
		
1	Cyclical ON/OFF	UP/DOWN
4	Cyclical ON/OFF	monostable UP/DOWN
7	Cyclical ON/OFF	ON (upper key) OFF (lower key)

Configurator value in position M	Key covers used/function	
		
2	Cyclical ON/OFF	UP/DOWN
5	Cyclical ON/OFF	monostable UP/DOWN
8	Cyclical ON/OFF	ON (upper key) OFF (lower key)

Lighting Management configuration

When installed in a Lighting Management system, the device can be configured in the following ways:

- Plug&Go (see the dedicated technical guide)
- Push&Learn
- Project&Download,

Using the Virtual Configurator software it is possible to perform all the functions listed below:

- double light control
- double CEN control
- double CEN PLUS control
- double AUX control

For more information on the functions see the glossary before the Technical sheets chapter.