

Baby WIFI CLOCK Camera

User Manual



**FOR PUBLIC
RELEASE**

Contents

Overview	1
Clock Operation	2
APP operation	6
Connecting to Internet.....	8
Viewing Live Video	10
Time Stamp	12
Recording to Memory Card	13
Viewing Photos and Videos	14
Alarm Recordings	15
FTP uploads and email alerts	16
Playback on PC and Web UI.....	18
IPMultiView Clie.....	20

Overview



**FOR PUBLIC
RELEASE**



**FOR PUBLIC
RELEASE**

Copyright © 2024

Clock Operation

- Open the plastic cover on the back of the camera. Insert Micro SD Memory card (Up to 64GB) into the SD Memory Card Slot and switch on the power and then connect the adapter to wall socket with camera.

Note:

built-in battery: 1200mAh, power supply for camera only.

AA alkaline battery: 3 AAA battery, power supply for clock only.

AC power: AC 100V~240V, 50/60Hz, 1A, power supply for camera only.

Press the SET for three seconds to enter time setup. The YEAR will begin go blink. Press the UP/DOWEN to enter current year. Press the SET again and UP/DOWEN to enter current MONTH. Press the SET again and UP/DOWEN to enter the current DATE. Press the SET again and UP/DOWEN to enter the current HOUR.

Press the SET again and UP/DOWEN to enter the current MINUTE

Press SET again and press UP/DOWEN to change 24-hour clock between 12-hour clock.

- **Setting Alarm**

On the normal clock mode, press DOWN to set the alarm clock. The clock display will show the alarm time. Press UP to

turn on the alarm 1 and press SET and UP/DOWN to enter hour. Press the SET again to move over to the minute and press UP/DOWN to enter minute.

Press SET to set the alarm 2. Follow the same as preceding method to enter alarm time

press SET to set the alarm 3. Follow the same as preceding method to enter alarm time.

- **Setting voice control and display**

In default situation, the voice control on. The display will off

after time, date and temperature was displayed circularly which about 15 second. When the voice up to 60dB the display go back on.

Press V/S to turn off voice and the display show --:SD which the display will keep showing time, date and temperature circularly. Press the V/S again to turn on voice control and the display show ON:SD

FOR PUBLIC RELEASE

Setting up a computer to use the Internet

unite between Celsius and Fahrenheit.

- **Setting brightness**

On the normal clock mode, press UP unstill showing 8:01 then press UP/DOWN to adjust brightness.

- **RESET**

The clock camera have two reset bottom. The clock rest on the back of the clock and The camera reset bottom in the battery slot.

If your clock is unresponsive, press the clock reset bottom with a needle to

reboot clock

If your camera is unresponsive, press the camera reset bottom with a needle to

the camera indicator will flash to indicate a successfully reboot.

**FOR PUBLIC
RELEASE**

PEPWIFICAM.RU

WIFISEC.RU

DIVARY.RU

APP Operation

● Download APP

DOWNLOAD THE APP P2PLiveCam from Google Play or APP Store.

You can also scan below QRcode to download the app directly.



FOR PUBLIC RELEASE


↓ CONNECT DIRECTLY TO THE CAMERA'S WIFI

After the camera is powered on, the blue light will blink slowly to indicate that it is transmitting a local WIFI signal. Use your mobile phone to search for WIFI network. The WIFI name start with the letter CM. Connect to this network. (See below for example)



FOR PUBLIC RELEASE

Once connected to the network open P2PLiveCam. From the main live video screen press the ADD(+) button in the top right corner.




FOR PUBLIC RELEASE

Form the ADD button press the ADD NEW ONLINE CAMERA to add camera.

Form the ADD NEW ONLINE CAMERA screen tap QR SCAN to use your phone's camera to scan the sticker on the back of the camera or manually enter the UID.

You can also tap SEARCH LAN to see your camera. This will also

show you the IP Address of your camera.



No SIM 10:18 47%

< Add Device Add new online device


Name Cam

UID UID

Password

Search (LAN)

Cancel



FOR PUBLIC RELEASE



The camera can be named anything and the default password is 8888


Press OK to add camera and return to the main live view screen

● Connecting to Internet

Once the camera is added the settings can be accessed by

pressing the gear to the right of the camera.

Form the pop up menu press Device Settings.

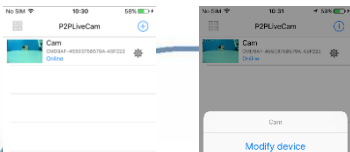

FOR PUBLIC RELEASE

On this screen select the WIFI network with sent by your home router and connect.




There will be a pop up prompt to input the password to connect to the WIFI network.

It will ask you want to connect to this network and when ok is pressed the camera will reboot. The light on the camera will blink for 30 seconds and then turn solid once the clock connects to the WIFI network.

You can now reconnect your phone or tablet to your home

FOR PUBLIC RELEASE

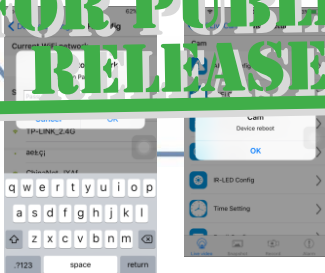

● Viewing live video

From the live video tab of the app, the cam will show up at the top and it will say online when it is functioning and connected correctly. Tap on the camera to bring up the live view.



**FOR PUBLIC
RELEASE**

Brightness, Contrast and Sound

⚙️ **Brightness.**

🔊 **Contrast**

Normal Set video resolution you want to display

🔊 Turn Audio on or off. Note: by default the Mic is off.

 **Snapshot - Save a current screenshot to the phone**

 **record video – Save a video to the phone**

Setting Time Stamp

To set time choose the **Time settings** menu from the Device Settings screen.


This screen will allow you to set and sync the timestamp for the video so it is correct.



Recording to Memory

Enter the advanced config menu by tapping on the gear on the right side of the cam and selecting Advanced Config. Then

selecting SD Card record config.



**FOR PUBLIC
RELEASE**

Record settings

Video Resolution


File length

Sound on and off

Loop Recording on and off

Format (completely erase) the memory card

● Photos And Videos comeback view



FOR PUBLIC RELEASE

🔍 Edit – allows for easy deletion of videos



Phone view videos saved to the phone



SD card – View videos saved to the clock's SD card



Downloads – View progress of files downloading from SD

card to phone



Completed downloads – View files that have been downloaded to the phone



Select active cameras – Choose which camera to view files form if there are more than one

● Alarm Recordings


To activate motion detection based recording enter the alarm config menu form the Device Settings menu.

From here turn on the motion detection and set a sensitivity for alarm.



When the camera detects motion it will snap a photo and send an alert to the phone. To set the camera to record with motion capture you must enable alarm based recording in the SDCARD Record config.

In the Device Settings menu enter the SDCard Record config menu. From here set the record function to on-alarm. Other settings can also be changed on this screen such as file length for video recordings, sound recording on or off, and loop recording which will record as when the memory card is full.

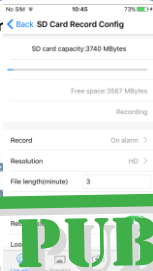

**FOR PUBLIC
RELEASE**

- **Email alerts/FTP uploads**

Configuring FTP uploads and email alerts can both be done from the Device Settings menu.

Contact your local network administrator or IT technician for

help configure the settings. (See below for example)



**FOR PUBLIC
RELEASE**

● Playback on PC and [VARY.RU](http://www.vary.ru)

Videos can be reviewed and copied to a hard drive for backup by connecting the camera to a computer by removing micro SD card from the camera and inserting into a computer. It will come up as a removable drive and all the files can be accessed by opening the folder.

For playback we currently recommend a free program called Potplayer, found at thepts:\\potplayer.daum.net

Eyerayo is NOT AFFILIATED with potplayer.daum.net

● Playback on PC and web

The WIFI clock camera can be accessed from a computer by using the IPCAMERA application that can be found on the include CD. Open the program and click on the ip camera that comes up.




FOR PUBLIC RELEASE

A prompt will appear asking for the username and password.

The default username is "admin" and the default password is

left blank.






FOR PUBLIC RELEASE

The WIFI clock camera also can be remote view from a computer by IPMultiView application that can be found on the include CD. Install IPMultiView on your computer. Open the program and enter name and password. The default user name is admin and the default password is left blank.




Form the main UI clicl SETTING to add camera.




FOR PUBLIC RELEASE

Click ADD to add a new IP Device to the list. The UID can be found the sticker on the back of the camera and the password default is 8888.

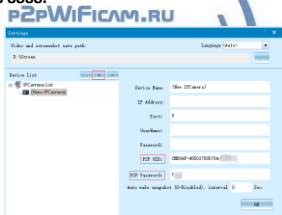

Live View

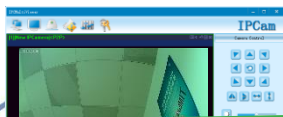

**FOR PUBLIC
RELEASE**

WIFISEC.RU

DIVARY.RU