

Baby monitor
1080P WIFI/LAN Camera
DE-WWI-A1080

Manual



APP: Camwf

PC client download URL



<http://www.mymitech.com/download.html>

Initial use, pull out the battery insulation sheet !!!

Contents


1: 1-10 English instructions




Product schematic



(4-1)

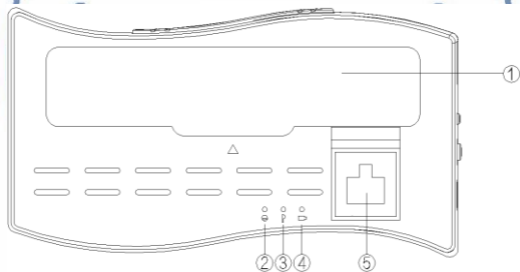

(4-2)

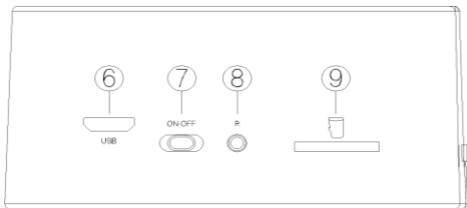

(4-3)

》 : Figure () : (4-1) (4-2) (4-3)

- ① cell cover (电池盖)
- ② Network lamp(网络指示灯)
- ③ power light (电源指示灯)
- ④ charge lamp (充电指示灯)
- ⑤ RJ45
- ⑥ USB
- ⑦ power switch (电源开关)
- ⑧ reset to defaults (恢复出厂键)
- ⑨ TF

》 : Function Keys () DIVARY.RU

- ⑧ Restore
 - * AP (Press 2-3 seconds) AP模式 (按2-3秒)
 - * Restore factory settings(Press 8 seconds) 恢复出厂设置 (按8秒)
- ② Function lamp
 - * Instruction -AP (指示灯常亮-AP模式)
 - * Indicator light flashes fast-WIFI (指示灯快速闪烁-WIFI模式)
 - * Indicator light slow flash -Video status (指示灯慢闪烁-TF卡录像)

(4-4)

Instructions


1:Setting instruction of clock application SEE:(4-1)

1.1: Function introduction

- ◇ Time display
- ◇ Press the key "PLUS" (switch of 12-hour to 24-hour)

1.2: Function setting


- ◇ Setting of current time

◇ Press the key "SET" at the condition of time display"  and enter the time setting, the screen shows twinkle at the hour position, press the key "PLUS" to set the hour.

Setting the hour

Setting the minute



◇ Then press the key "SET" and enter the minute setting, the screen shows"  " twinkle at the minute position, press the key "PLUS" to set the minute.

◇ Press the key "M" again to complete the time setting.

◇ **For the first time, please charge. Do not remove the battery.**

2: Setting instruction of WIFI camera application

2.1: Apply and download real time video surveillance mobile phone APP[Camwf] software

2.1.1: For mobile phones of IOS system, please search the English [Camwf] in APP Store and then download the APP software freely.

2.1.2: For mobile phones of Android system, please search the English [Camwf] in Play store of google, 360 mobile assistant, Android Market, Snap Pea, 91 assistants and Baidu applications, then download the APP software freely.

2.1.3: Default user name: admin Password: 888888

3: Phone connection AP

3.1 : See product schematic. (4-4)

3.2 : WIFI camera boot , WIFI indicator flashes , Then the system will load the WiFi mode according to the last set of WiFi , Will follow the appropriate mode LED flashes , After waiting a long bright finished loading machine. You can open the phone open WIFI find (RT -*****) at the beginning of the WIFI connection , Open the phone APP [Camwf]. See product schematic. (14-1)

3.3 : Restore the factory Settings

Restore factory settings, See product schematic. (4-4) 。 Please see the product schematic,The camera will automatically restart , And restore all settings to Factory state , Including passwords and WiFi mode (AP hot spot mode) , The default user name : **admin** Password: **888888**


3.4 : How to use APP. Select APP : Camwf




(14-1)



(14-2)

Select icon at the top right-hand corner "  " SEE : (14-3)
Choose" LAN Search Devices " SEE : (14-4)




(14-3)



(14-4)

Select the UID SEE : (14-5) Choose "OK" SEE : (14-6)




(14-5)




(14-6)

Add complete camera SEE : (14-7) Choose "LAN Search Devices"
SEE : (14-4) Manually add SEE : (14-8) . "🔄" Refresh




(14-7)



(14-8)


4: How to set up WIFI

4.1: SEE :(14-7)Select the Settings icon " " window SEE :(14-9) choose" Network Settings "




(14-9)

4.2 : SEE : (14-10) choose" 🔍 " SEE : (14-11) Choose the WIFI click ok,Enter a password click ok. The pop-up window (14-7) .



(14-10)





(14-11)

4.3: Remember WIFI account and password are case sensitive.


After entering the correct password WIFI network lights flashing on the device description is looking for connection (WIFI) router , Connection prompt tone.

4.4: Your phone as long as there is internet (WIFI connection or 2G, 3G, 4G network) can be watched at any time in any place.

5: Use a mobile phone APP video pictures . "🔄" Refresh
SEE : (14-12) (14-13)




(14-12)



(14-13)

6: Set the video resolution, timing video, SD card video, please click "ok". restart. SEE (14-14) .



(14-14)

7: Indicator Description

7.1: See product schematic (4-4)

7.2: LEDs function as follows:

7.2.1 : WiFi AP mode indicator

Said flash is being launched at startup hot spot mode WiFi AP , After a long bright LED start , Phone can directly search (RT-*****) via WiFi hot spots , Click on it to connect directly to the camera.

7.2.2 : STA routing mode indicator.

Said flash is being launched at startup STA routing mode , After a long bright LED start , Said that it has connected to the router , Then you can access the phone camera by routing , Including remote access.

8: Camera parameters

Image Sensor : HD1080P/30fps

Audio : F2.2 FOV: 160° :25cm Infinity

Wireless : IEEE802.11 b/g/n

Wireless Mode : AP/STA

PC WIFI Video : 1080P 1920x1080

Mobile WIFI Video : 1080P 1920x1080 , 720P 1280x720 , 640x480

Storage Media : Micro TF(64GB)

Compression formats : H.264 Dual-stream

SD video : Support 64GB , Loop video recording,

Download Videos from Website

Support : IOS, Android APP XP,Win7 Please install the CD file