5 SECOND ASSEMBLY

Step 1:
Set the O-Dock on a flat surface

Step 2:
Hold & lift the O-Dock table edges

Step 3:
O-Dock will set automatically

Step 4:
To lock - press down firmly adjacent to the orange catches on both sides. The O-Dock is ready to use.

HOW TO FOLD THE O-DOCK

Step 1:
Firmly grip the orange catches as shown above.

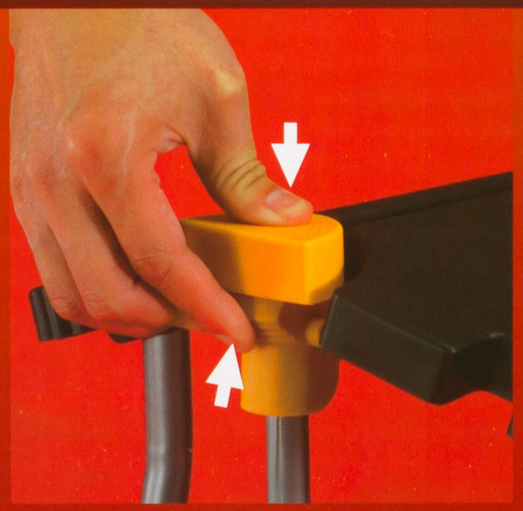

Step 2:
Pull upward and inward on the orange catches.

Step 3:
Lift the O-Dock while still gripping the orange catches as shown above.

Step 4:
Your O-Dock can now be carried using the built in handle.