


Washer-Extractor

Cabinet Hardmount

Refer to Page 5 for Model Numbers

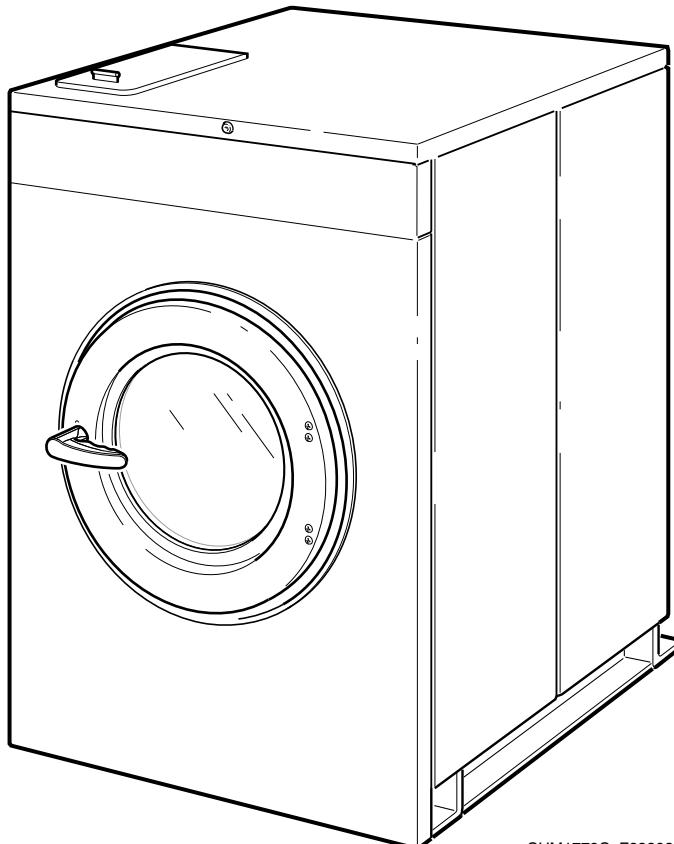

CHM1772C_F8339301

Table of Contents

Title	Page
Parts Ordering Information.....	3
Nameplate Location	3
Model Identification	5
Product Overview - M9, M30, Galaxy 400, Galaxy 600, Quantum Silver and Quantum Gold.....	6
Product Overview - M4, Galaxy 200 and Quantum Standard.....	8
Decals	10
Control Module - 2 Speed OPL Models	12
Control Module - F-Speed Design 1 OPL Models.....	14
Control Module - F-Speed Design 2 OPL Models.....	16
Control Module - 2 Speed Coin Models	18
Control Module - F-Speed Design 1 Coin Models.....	20
Flush Mount Coin Meter Assembly (Drawing 1 of 2).....	22
Flush Mount Coin Meter Assembly (Drawing 2 of 2).....	24
Electronic Coin Meter Assembly	26
Card Reader - GY Models	28
Optional Coin Box	30
Rocker Switch, Temperature Knob and Emergency Stop Button - GN Models	32
Front Panels and Control Panel - Coin Models.....	34
Front Panel and Control Panel - GN and GY Models	36
Control Panel Overlays	38
Panels (Drawing 1 of 2)	40
Panels (Drawing 2 of 2)	42
Door	44
Door Lock.....	46
Basket, Shell, Frame and Trunnion - Design 1 Models (Drawing 1 of 3).....	48
Basket, Shell, Frame and Trunnion - Design 1 Models (Drawing 2 of 3).....	50
Basket, Shell, Frame and Trunnion - Design 1 Models (Drawing 3 of 3).....	52
Basket, Shell, Frame and Trunnion - Design 2 Models (Drawing 1 of 3).....	54
Basket, Shell, Frame and Trunnion - Design 2 Models (Drawing 2 of 3).....	56
Basket, Shell, Frame and Trunnion - Design 2 Models (Drawing 3 of 3).....	58
Drain Plumbing - Design 1 Models	60
Drain Plumbing - Design 2 Models	62
Drain Valve Assembly - 20 and 30 Pound Models.....	64
Drain Valve Assembly - 40 and 60 Pound Models.....	66
Steam Filter (Optional) and Water Supply Hose	68
Fill Plumbing Assembly (Drawing 1 of 2)	70
Fill Plumbing Assembly (Drawing 2 of 2)	72
Pulley and Belt - Design 1 Models (Drawing 1 of 3).....	74
Pulley and Belt - Design 1 Models (Drawing 2 of 3).....	76
Pulley and Belt - Design 1 Models (Drawing 3 of 3).....	78
Pulley and Belt - Design 2 Models (Drawing 1 of 2).....	80

© Copyright 2013, Alliance Laundry Systems LLC

All rights reserved. No part of the contents of this book may be reproduced or transmitted in any form or by any means without the expressed written consent of the publisher.

Pulley and Belt - Design 2 Models (Drawing 2 of 2).....	82
Motor - Design 1 Models	84
Motor - Design 2 Models	86
Electric Heat Option	88
Steam Heat Option	90
Parts Index	93

Parts Ordering Information


If literature or replacement parts are required, contact the source from whom the machine was purchased or contact Alliance Laundry Systems at (920) 748-3950 for the name and address of the nearest authorized parts distributor.

For technical assistance, call either of the numbers listed below:

(920) 748-3121 Ripon, Wisconsin
+32 56 41 20 54 Wevelgem, Belgium

Nameplate Location

When calling or writing about your product, be sure to mention model and serial numbers. Model and serial numbers are located on nameplate(s) as shown.

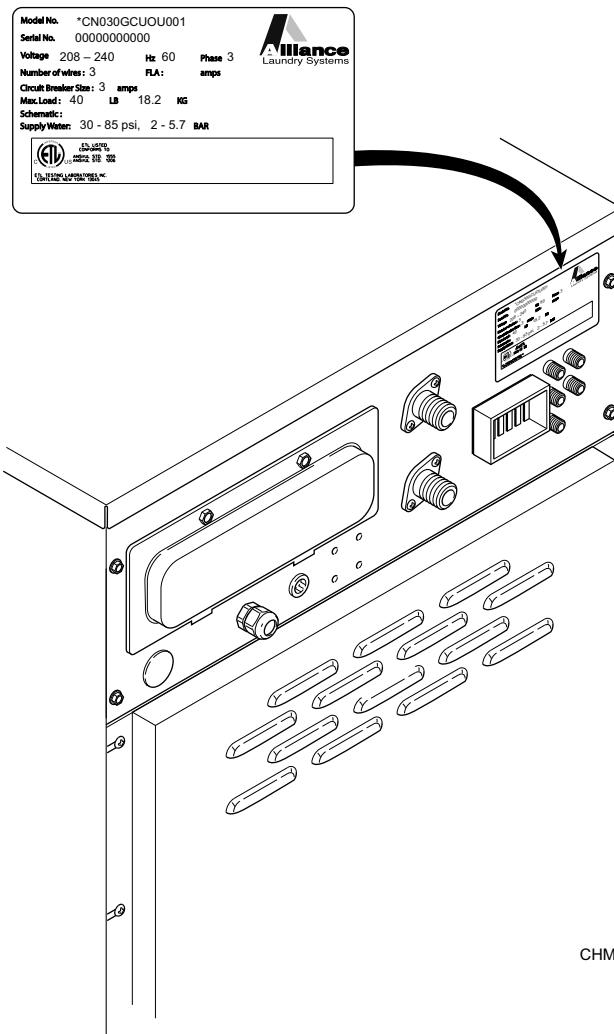

CHM3025P_F8339301



Notes

Model Identification


Information in this manual is applicable to these washer-extractor models:

HCD020GD2	HCU020GC2	SCD030GD2	SCU020GC2	UCL020GN2
HCL020GC2	HCU020GD2	SCD040GD2	SCU020GD2	UCL020GNF
HCL020GD2	HCU020GE2	SCD060GD2	SCU020GE2	UCL030GN2
HCL020GN2	HCU020GL2	SCL020GC2	SCU020GL2	UCL030GNF
HCL030GN2	HCU020GN2	SCL020GN2	SCU020GN2	UCL040GN2
HCL030GNF	HCU020GX2	SCL020GNF	SCU020GX2	UCL040GNF
HCL040GN2	HCU020GY2	SCL030GC2	SCU020GY2	UCL060GN2
HCL040GNF	HCU030GC2	SCL030GN2	SCU030GC2	UCL060GNF
HCL060GN2	HCU030GD2	SCL030GNF	SCU030GD2	UCN020GN2
HCL060GNF	HCU030GE2	SCL040GC2	SCU030GE2	UCN020GNF
HCN020GC2	HCU030GL2	SCL040GN2	SCU030GL2	UCN030GN2
HCN020GD2	HCU030GN2	SCL040GNF	SCU030GN2	UCN030GNF
HCN020GE2	HCU030GX2	SCL060GC2	SCU030GNF	UCN040GN2
HCN020GN2	HCU030GY2	SCL060GN2	SCU030GX2	UCN040GNF
HCN020GNF	HCU040GC2	SCL060GNF	SCU030GY2	UCN060GN2
HCN020GX2	HCU040GD2	SCN020GC2	SCU040GC2	UCN060GNF
HCN020GY2	HCU040GE2	SCN020GD2	SCU040GD2	UCU020GN2
HCN030GC2	HCU040GL2	SCN020GE2	SCU040GE2	UCU030GN2
HCN030GD2	HCU040GN2	SCN020GN2	SCU040GL2	UCU040GN2
HCN030GE2	HCU040GX2	SCN020GNF	SCU040GN2	UCU060GN2
HCN030GN2	HCU040GY2	SCN020GX2	SCU040GNF	UCZ020GN2
HCN030GNF	HCU060GC2	SCN020GY2	SCU040GX2	UCZ020GNF
HCN030GX2	HCU060GD2	SCN030GC2	SCU040GY2	UCZ030GN2
HCN030GY2	HCU060GE2	SCN030GD2	SCU060GC2	UCZ030GNF
HCN040GC2	HCU060GL2	SCN030GE2	SCU060GD2	VCU030GN2
HCN040GD2	HCU060GN2	SCN030GN2	SCU060GE2	VCU040GN2
HCN040GE2	HCU060GX2	SCN030GNF	SCU060GL2	VCU060GN2
HCN040GN2	HCU060GY2	SCN030GX2	SCU060GN2	
HCN040GNF	HCZ020GN2	SCN030GY2	SCU060GNF	
HCN040GX2	HCZ030GN2	SCN040GC2	SCU060GX2	
HCN040GY2		SCN040GD2	SCU060GY2	
HCN060GC2		SCN040GE2	SCZ020GN2	
HCN060GCF		SCN040GN2	SCZ020GNF	
HCN060GD2		SCN040GNF	SCZ030GN2	
HCN060GE2		SCN040GX2		
HCN060GN2		SCN040GY2		
HCN060GNF		SCN060GC2		
HCN060GX2		SCN060GCF		
HCN060GY2		SCN060GD2		
		SCN060GDF		
		SCN060GE2		
		SCN060GN2		
		SCN060GNF		
		SCN060GX2		
		SCN060GY2		


Product Overview - M9, M30, Galaxy 400, Galaxy 600, Quantum Silver and Quantum Gold

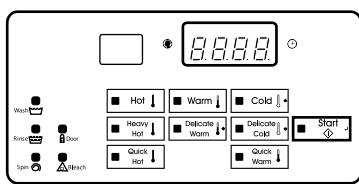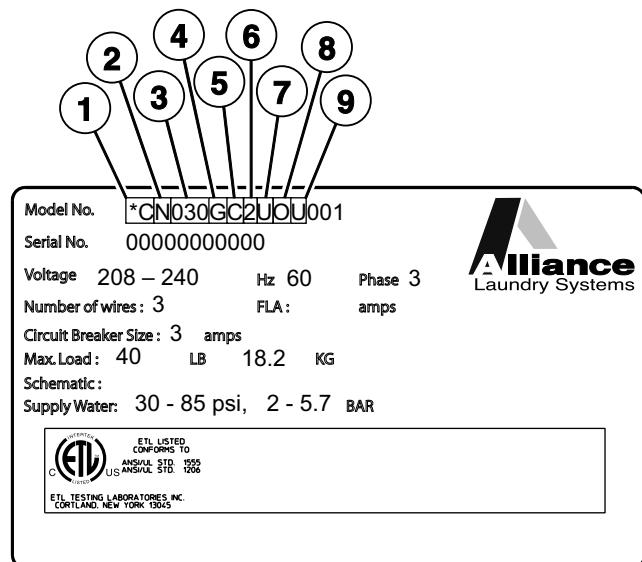


Galaxy 400 Coin

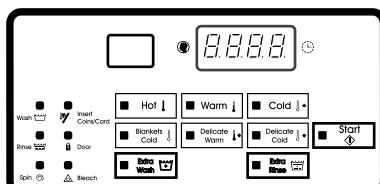


Galaxy 600 Coin (Domestic)

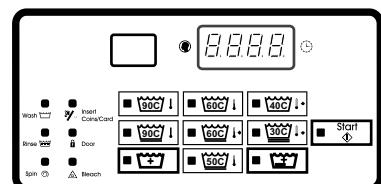


Galaxy 600 Coin (International)

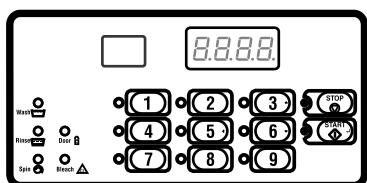


M9/Galaxy 400 OPL/Quantum Silver OPL

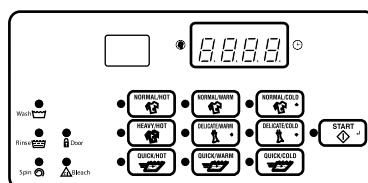


Quantum Silver Coin (Domestic)

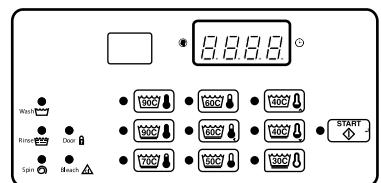

Quantum Silver Coin (International)



M30/Quantum Gold OPL

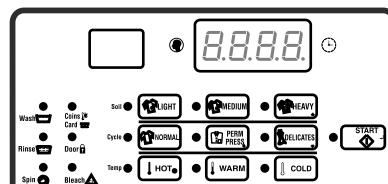



Quantum Gold

CHM3217P_F8339301

Product Overview - M9, M30, Galaxy 400, Galaxy 600, Quantum Silver and Quantum Gold

REF	PART NO.	DESCRIPTION	COMMENTS
1	-	Product Family	HC NC SC UC
2	-	Market	D (Daiwa) L (International ETL9c)) N (Domestic ETL(c)) U (International CE) Z (No Agency International)
3	-	Capacity (Pounds)	020 030 040 060 080 125
4	-	Control	G H J K L W
5	-	Actuation	C (Drop Coin Meter) D (Digital Coin Meter) E (Electronic World Drop) L (Prep for Remote/Central Pay) N (Non-Coin OPL) X (Prep for Coin Meter) Y (Prep for Card Reader)
6	-	Speed	2 (2 Speed) F (F-Speed) V (V-Speed)
7	-	Voltage	B (120/60/1/2) C (380-415/50/3/4) F (440-480/60/3/3) J (200/50/3/3) N (440-480/50/60/3) O (208/220-240/60/3/3) P (380-415/50/60/3) Q (200-208/220-240/50/60/3) R (380-415/440-480/50/60/3) X (200-208/220-240/50/60/1/3) Y (208/220-240/60/1/2)
8	-	Side Panel	U (Standard) 1 (Stainless Steel)
9	-	Design	1 2

Product Overview - M4, Galaxy 200 and Quantum Standard

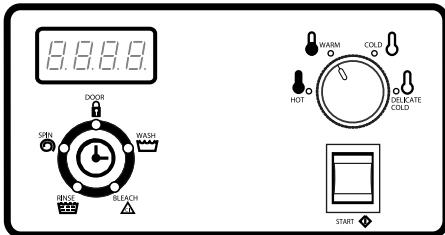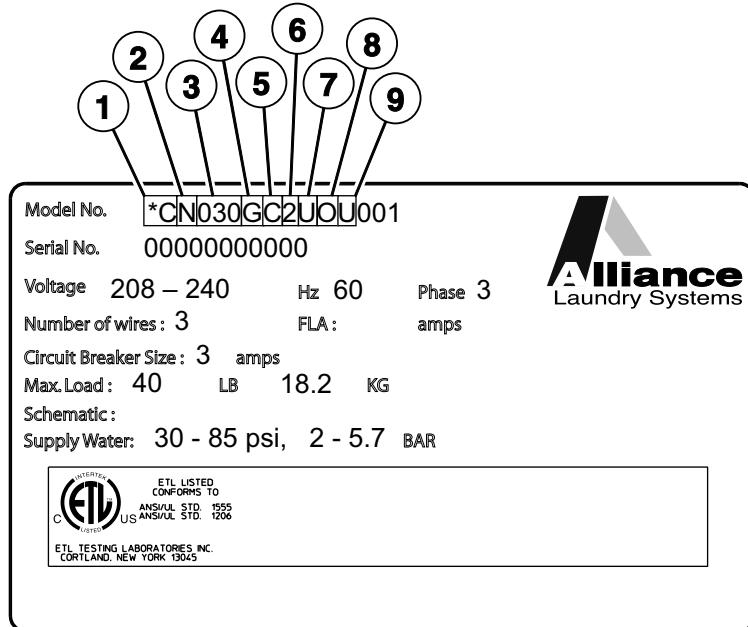


M4/Galaxy 200/Quantum Standard

CHM3218P_F8339301

Product Overview - M4, Galaxy 200 and Quantum Standard

REF	PART NO.	DESCRIPTION	COMMENTS
1	-	Product Family	HC NC SC UC
2	-	Market	D (Daiwa) L (International ETL9c)) N (Domestic ETL(c)) U (International CE) Z (No Agency International)
3	-	Capacity (Pounds)	020 030 040 060 080 125
4	-	Control	G H J K L W
5	-	Actuation	C (Drop Coin Meter) D (Digital Coin Meter) E (Electronic World Drop) L (Prep for Remote/Central Pay) N (Non-Coin OPL) X (Prep for Coin Meter) Y (Prep for Card Reader)
6	-	Speed	2 (2 Speed) F (F-Speed) V (V-Speed)
7	-	Voltage	B (120/60/1/2) C (380-415/50/3/4) F (440-480/60/3/3) J (200/50/3/3) N (440-480/50/60/3) O (208/220-240/60/3/3) P (380-415/50/60/3) Q (200-208/220-240/50/60/3) R (380-415/440-480/50/60/3) X (200-208/220-240/50/60/1/3) Y (208/220-240/60/1/2)
8	-	Side Panel	U (Standard) 1 (Stainless Steel)
9	-	Design	1 2

Decals

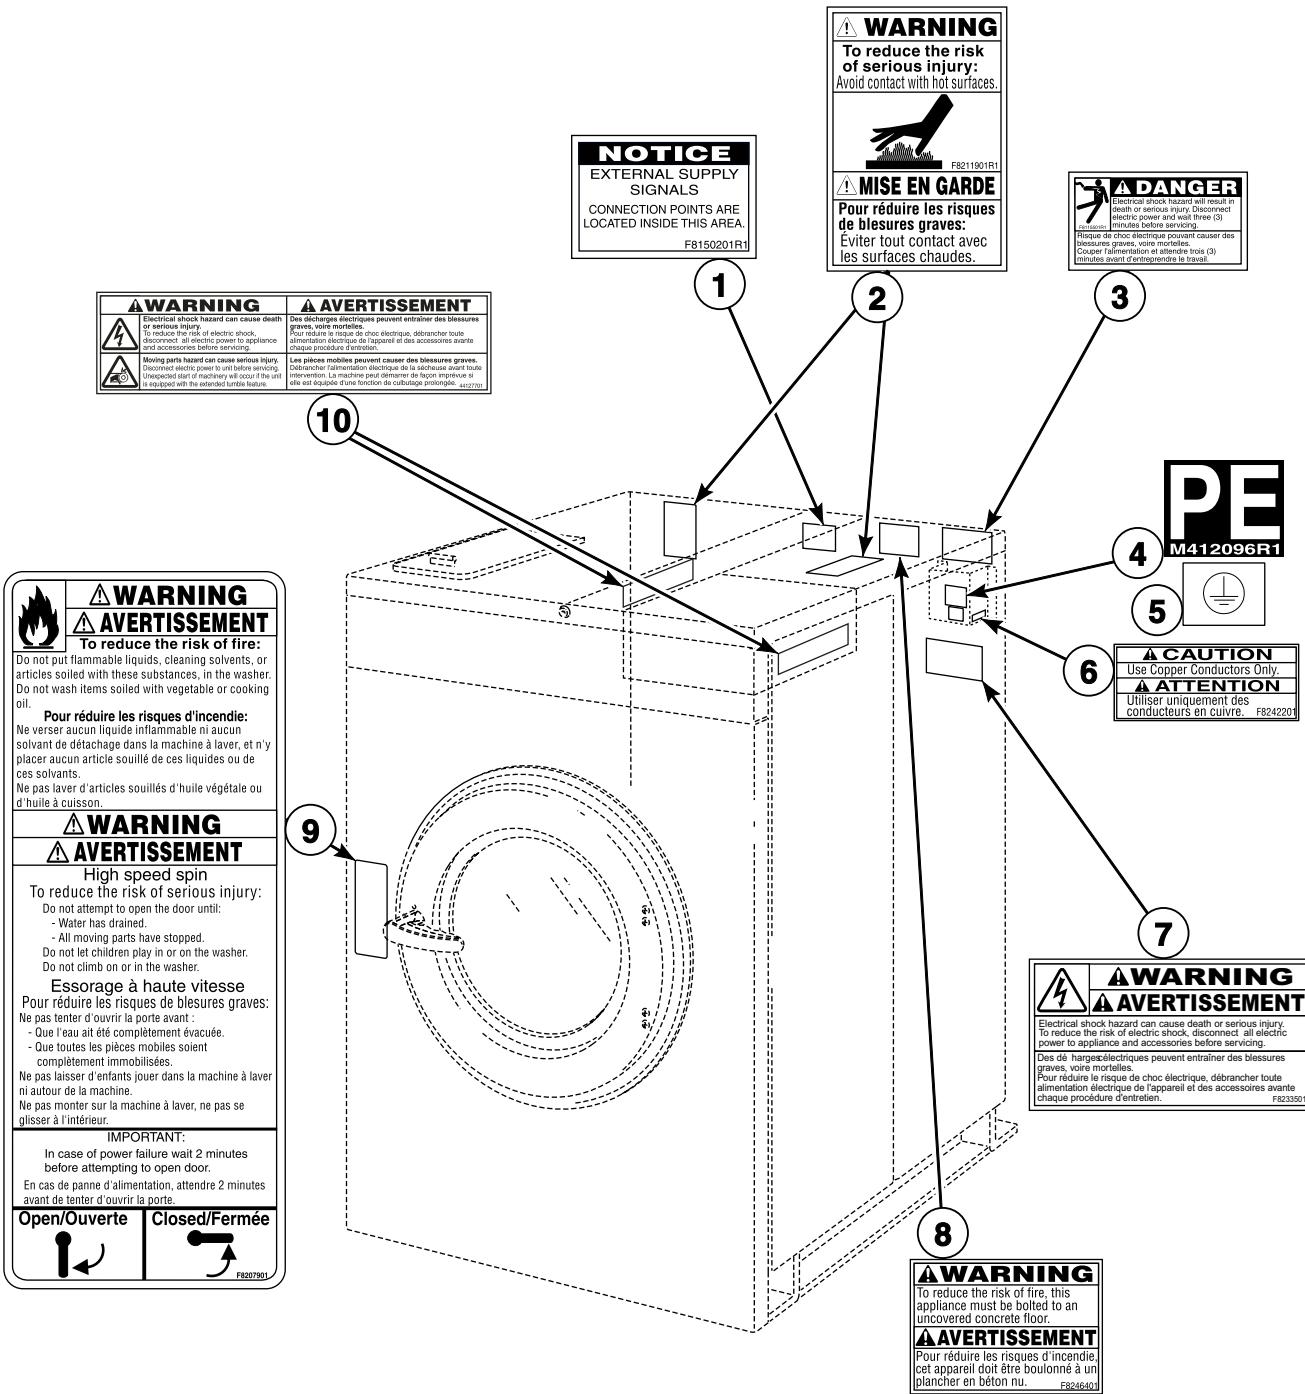


CHM3027P_F8339301

Decals

REF	PART NO.	DESCRIPTION	COMMENTS
1	F8150201	External Supply Connection Decal	
2	F8211901	Hot Surface Warning Plate	
3	F8115501	Electric Shock Danger Label	
4	M412096	Earth Terminal Sticker	
5	F230739	Ground Decal	
6	F8242201	Use Copper Conductors Only Caution Label	
7	F8233501	Warning Label	
8	F8246401	Mount on Concrete Warning Label	
9	F8207901	Warning Label	
10	44127701	Warning Label	

Control Module - 2 Speed OPL Models

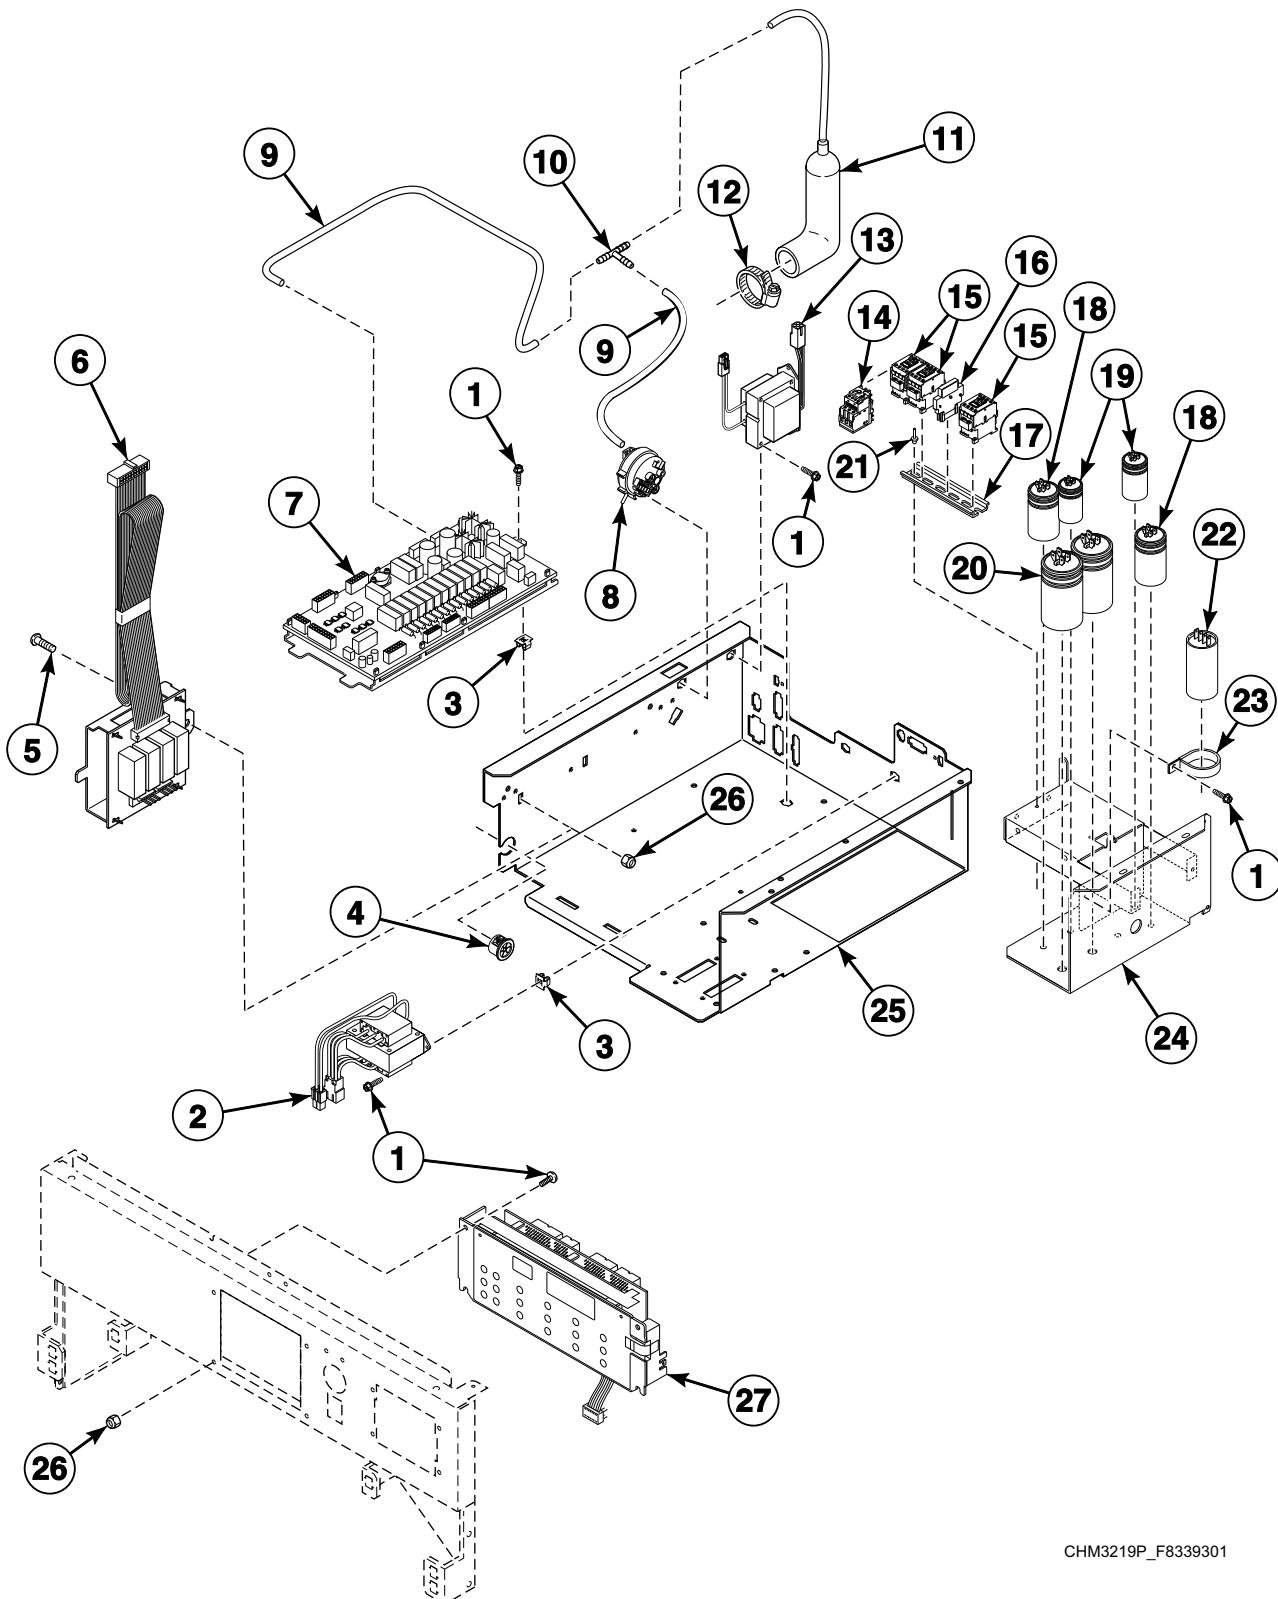


CHM3219P_F8339301

Control Module - 2 Speed OPL Models

REF	PART NO.	DESCRIPTION	COMMENTS
	F8028701	Output/Logic Harness	
	F8167901	USB IR Device Assembly	
	F8191201P	External Supply Harness	
	F937P3	External Supply Kit	Includes items 1, 6, 13, F8191201P External Supply Harness and screws
	F8028101P	Machine Size Configuration Harness	20 pound models
	F8028103P	Machine Size Configuration Harness	30 pound models
	F8028104P	Machine Size Configuration Harness	40 pound models
	F8028105P	Machine Size Configuration Harness	60 pound models
	F8261501P	Control Tray Harness	
	M413506	Jumper Harness Assembly	208 Volt
	M413507	Jumper Configuration Assembly	240 Volt
1	F8206901	Screw	
2	803527P	Transformer	
3	70030501	Expansion Clip	
4	44071501	Snap Bushing	
5	F430903	Screw	
6	F8189401	Auxiliary Control Assembly	
7	F980P3	Control Assembly Kit	Includes item 10 and F8108001 Output Assembly
	802493	Fuse	2.5 Amp
8	F8223001P	Water Pressure Switch	
9	F8153901	Tubing	
10	F8246601	Tee	
11	F020014200	Air Trap Hose	
12	F200222	Hose Clamp	No. 12
13	201616	Transformer	External supply
14	F8176101P	Overload Contactor	
15	F330177P	Contactor	
16	F330186P	Interlock Contactor	
17	F8200101	DIN Rail	
18	F8411901	Capacitor	50 MFD; 20 pound models Y-voltage, 1 used; 40 pound models Y-voltage, 2 used
	F370221	Capacitor	100 MFD; 20 pound models; B-voltage, 1 used
19	F8411701	Capacitor	20 MFD; 30 pound models Y-voltage, 4 used; 40 pound models Y-voltage, 2 used
	F8411801	Capacitor	25 MFD; 20 pound models; Y-voltage, 2 used
20	F370220	Capacitor	130 MFD; 20 pound models B-voltage, 2 used; 30 pound models Y-voltage, 1 used
	F370218P	Capacitor	160 MFD; 40 pound models; Y-voltage, 2 used
21	70058501	Pop Rivet	
22	F340002	Motor Switch	50 Amp
23	F0340722-00	Switch Clamp	
24	F8199601	Capacitor Tray Assembly	20 pound models; B and Y-voltage
	F8199901	Capacitor Tray Assembly	All other models; B and Y-voltage
	F8343401	Contactor Tray Assembly	C, F, J and O-voltage
25	F8205901	Control Tray Assembly	
26	F430232	Nut	
27	F999P3	Control Kit	

Control Module - F-Speed Design 1 OPL Models

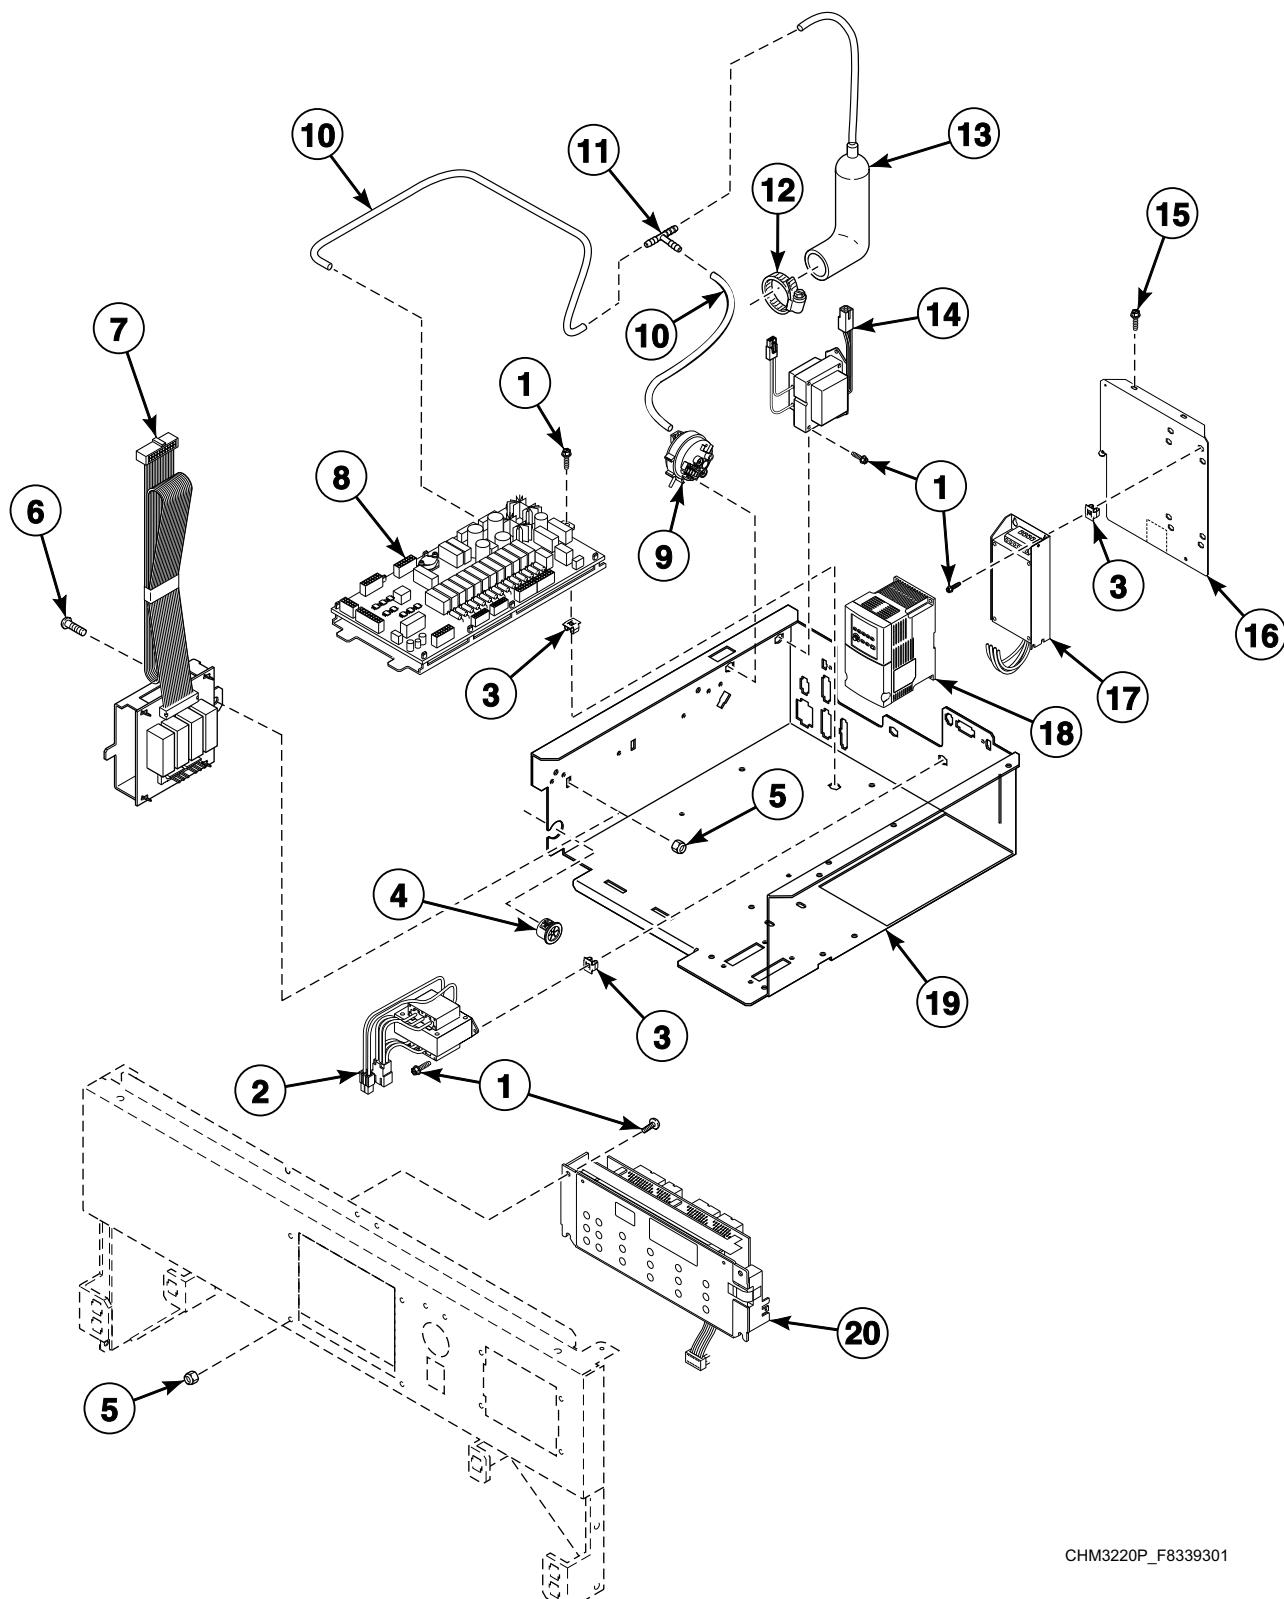


CHM3220P_F8339301

Control Module - F-Speed Design 1 OPL Models

REF	PART NO.	DESCRIPTION	COMMENTS
	F8028701	Output/Logic Harness	
	F8060501	Emergency Stop Harness	
	F8167901	USB IR Device Assembly	
	F8191201P	External Supply Harness	
	F937P3	External Supply Kit	Includes items 1, 6, 13, F8191201P External Supply Harness and screws
	F8028105P	Machine Size Configuration Harness	
	F8261501P	Control Tray Harness	
	M413506	Jumper Harness Assembly	208 Volt
	M413507	Jumper Configuration Assembly	240 Volt
1	F8206901	Screw	
2	803527P	Transformer	
3	70030501	Expansion Clip	
4	44071501	Snap Bushing	
5	F430232	Nut	
6	F430903	Screw	
7	F8189401	Auxiliary Control Assembly	
8	F980P3	Control Assembly Kit	Includes item 11 and F8108001 Output Assembly
	802493	Fuse	2.5 Amp
9	F8223001P	Water Pressure Switch	
10	F8153901	Tubing	
11	F8246601	Tee	
12	F200222	Hose Clamp	No. 12
13	F020014200	Air Trap Hose	
14	201616	Transformer	External supply
15	430497	Screw	
16	F8195803	Support Bracket	
17	F8053901P	EMI Filter	200 Volt
	F8053902	EMI Filter	400 Volt
18	F8169407	PowerFlex 40 Drive	Models through 3/8/10; Q and X-voltage; Models with an Elmo motor
	F8169408	PowerFlex 40 Drive	Models through 3/8/10; N, P and R-voltage; Models with an Elmo motor
	F8169440	PowerFlex 40 Drive	Models starting 3/9/10; Q and X-voltage; Models with a Hanning motor
	F8169441	PowerFlex 40 Drive	Models starting 3/9/10; N, P and R-voltage; Models with a Hanning motor
19	F8205903	Control Tray Assembly	
20	F999P3	Control Kit	

Control Module - F-Speed Design 2 OPL Models

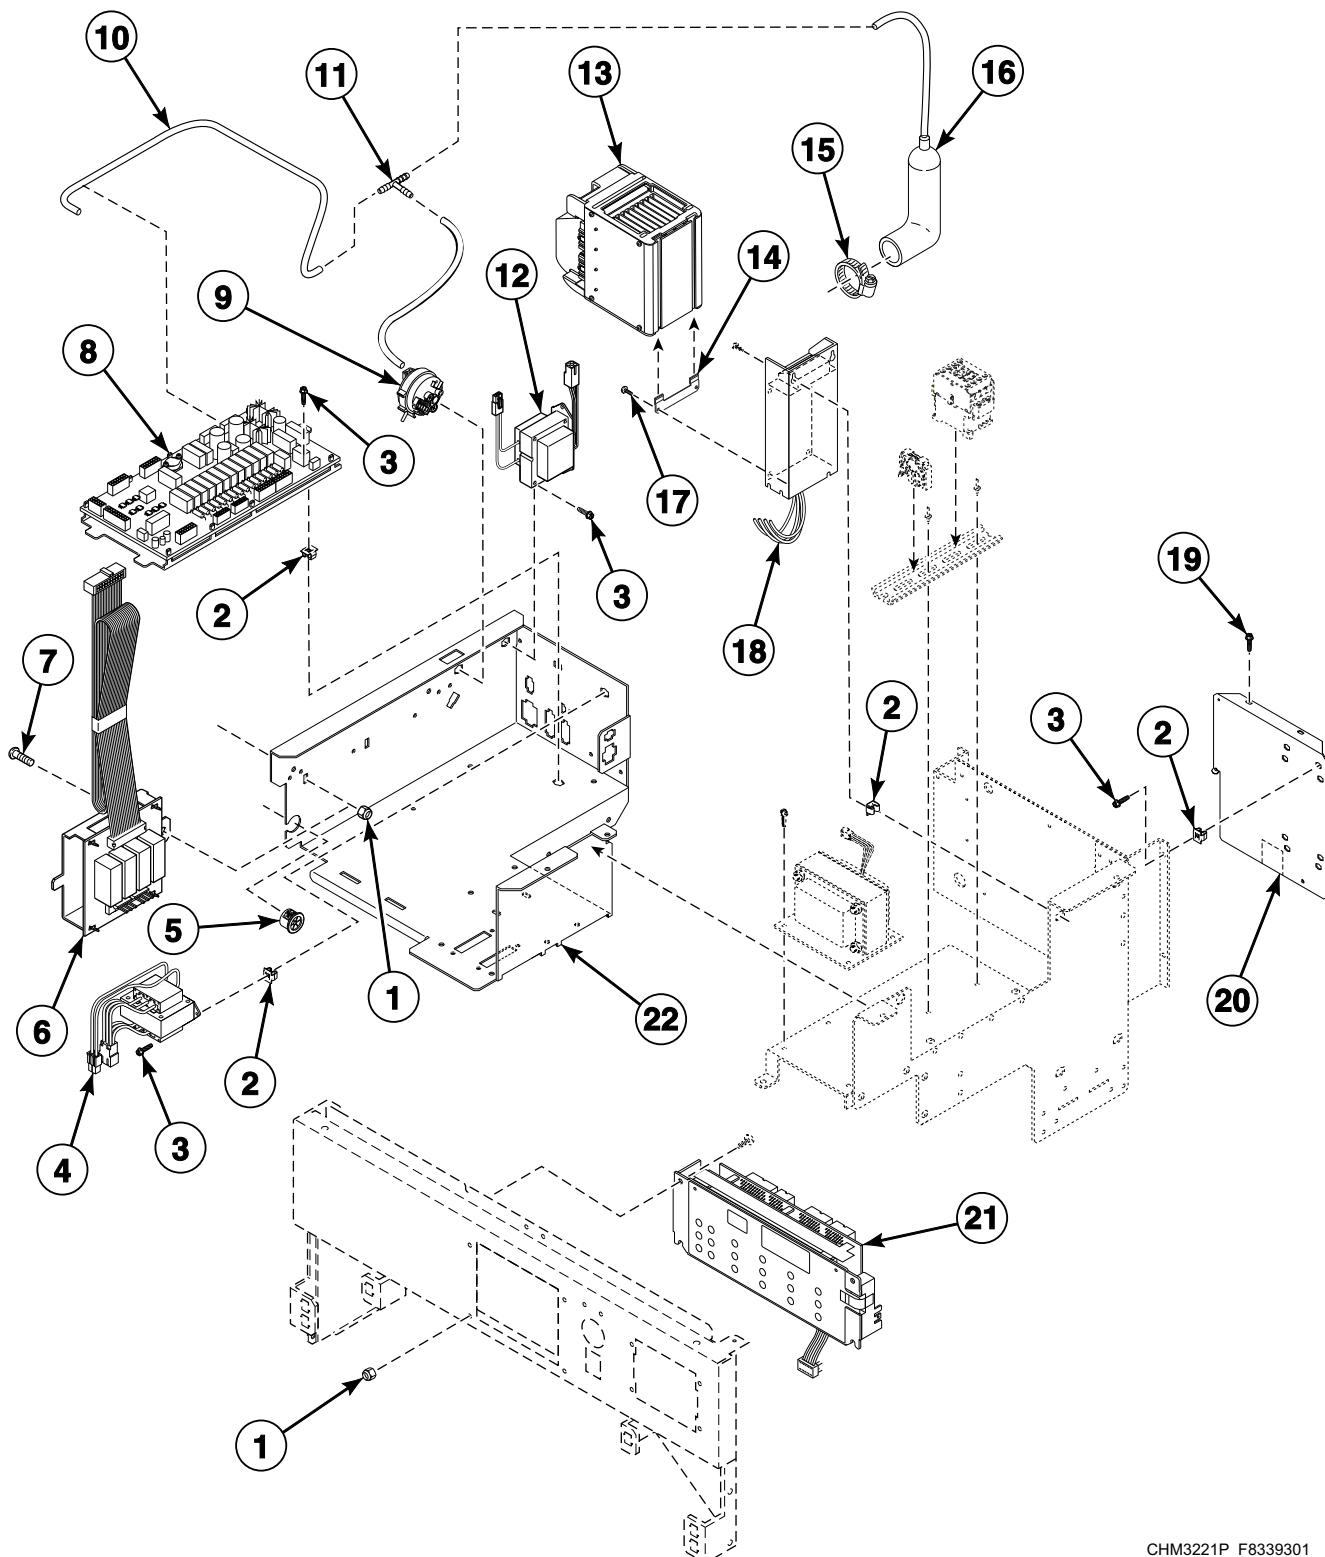


CHM3221P_F8339301

Control Module - F-Speed Design 2 OPL Models

REF	PART NO.	DESCRIPTION	COMMENTS
	F8028701	Output/Logic Harness	
	F8060501	Emergency Stop Harness	
	F8167901	USB IR Device Assembly	
	F8191201P	External Supply Harness	
	F937P3	External Supply Kit	Includes items 3, 7, 16, F8191201P External Supply Harness and screws
	F8028105P	Machine Size Configuration Harness	
	F8261501P	Control Tray Harness	
	M413506	Jumper Harness Assembly	208 Volt
	M413507	Jumper Configuration Assembly	240 Volt
1	F430232	Nut	
2	70030501	Expansion Clip	
3	F8206901	Screw	
4	803527P	Transformer	
5	44071501	Snap Bushing	
6	F8189401	Auxiliary Control Assembly	
7	F430903	Screw	
8	F980P3	Control Assembly Kit	Includes item 11 and F8108001 Output Assembly
	802493	Fuse	2.5 Amp
9	F8404401	Water Pressure Switch	
10	F8153901	Tubing	
11	F8246601	Tee	
12	201616	Transformer	External supply
13	F8327301	Drive Assembly	20, 30 and 40 pound models; B, Q and X-voltage; 2 hp
	F8303601	Drive Assembly	N and P-voltage; 5 hp
	F8204701	Drive Assembly	60 pound models; Q and X-voltage; 5 hp
14	F8322401	Drive Mounting Bracket	
15	F200222	Hose Clamp	No. 12
16	F020014200	Air Trap Hose	
17	503688	Screw	
18	F8053901P	EMI Filter	200 Volt
	F8053902	EMI Filter	400 Volt
19	430497	Screw	
20	F8195803	Support Bracket	
21	F117P3	Front End Control Kit	
22	F8359701	Control Tray Assembly	20 and 30 pound models
	F8359703	Control Tray Assembly	40 and 60 pound models

Control Module - 2 Speed Coin Models

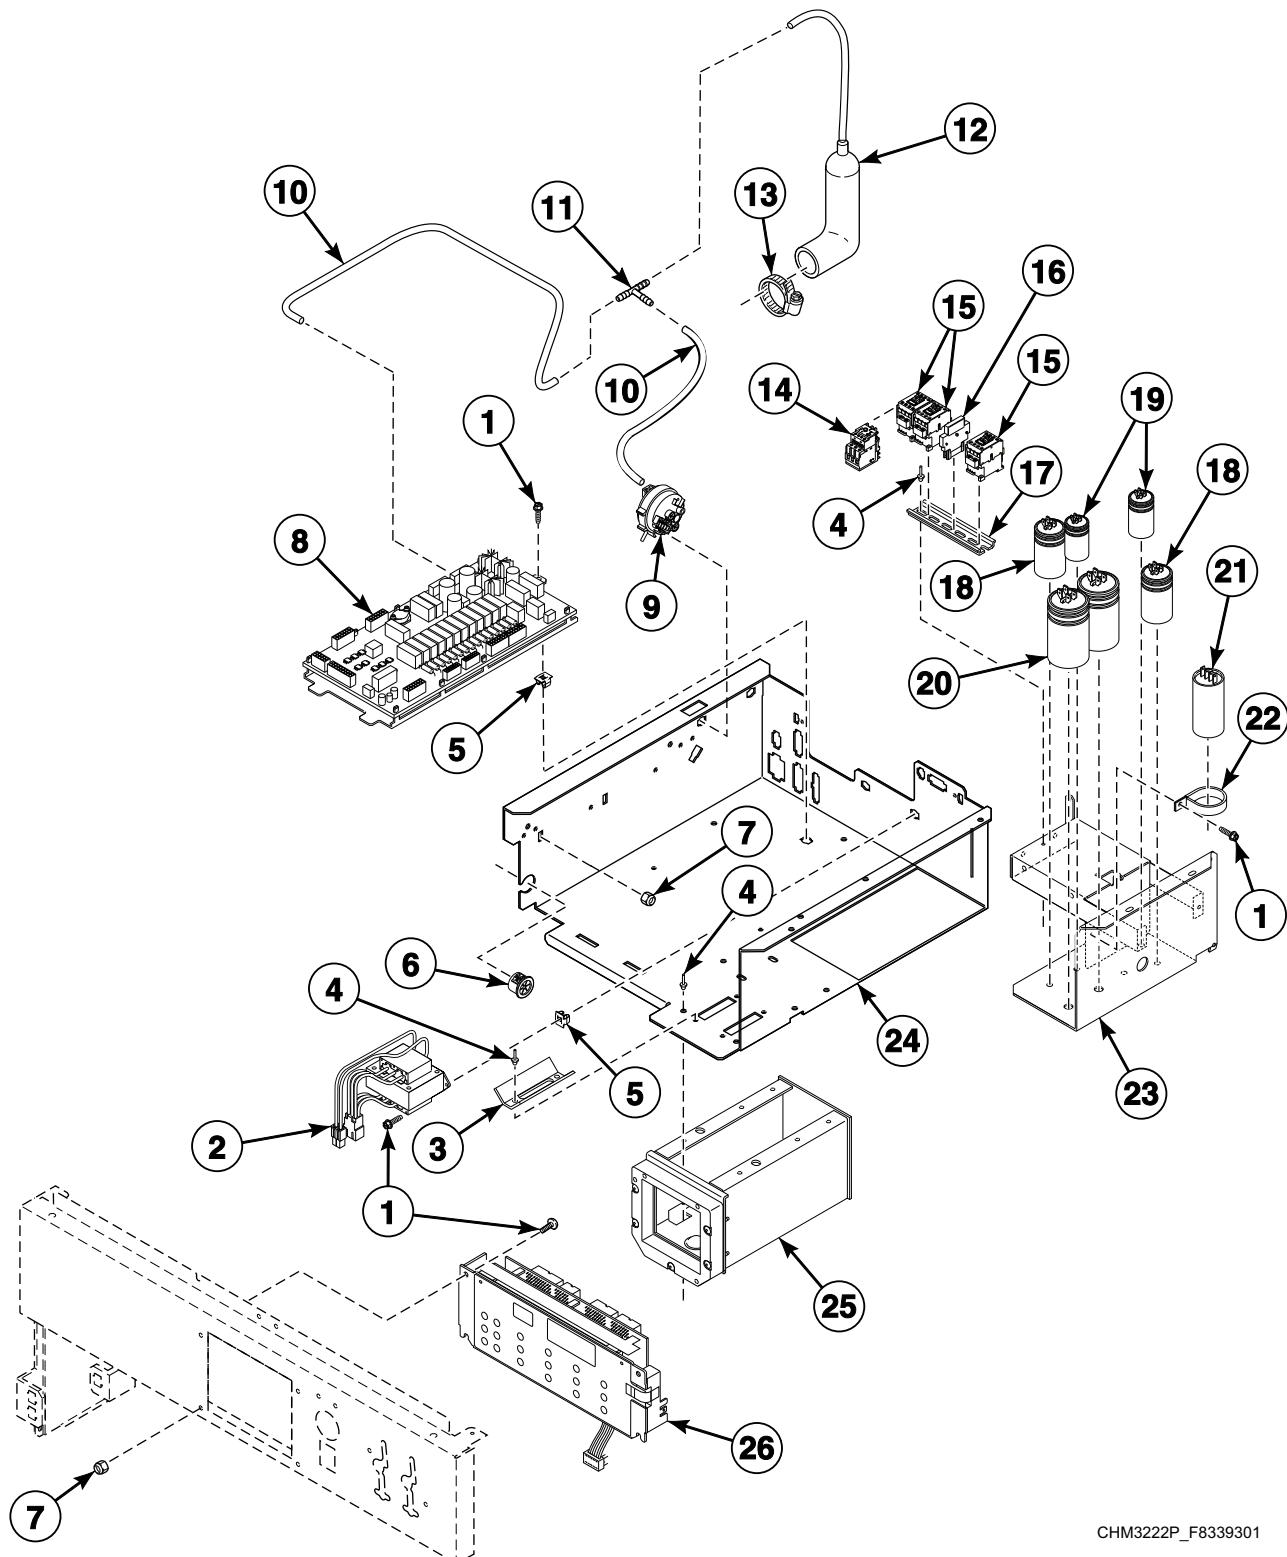


CHM3222P_F8339301

Control Module - 2 Speed Coin Models

REF	PART NO.	DESCRIPTION	COMMENTS
	F8028701	Output/Logic Harness	
	F8167901	USB IR Device Assembly	
	F8028101P	Machine Size Configuration Harness	20 pound models
	F8028103P	Machine Size Configuration Harness	30 pound models
	F8028104P	Machine Size Configuration Harness	40 pound models
	F8028105P	Machine Size Configuration Harness	60 pound models
	F8261501P	Control Tray Harness	
	M413506	Jumper Harness Assembly	208 Volt
	M413507	Jumper Configuration Assembly	240 Volt
1	F8206901	Screw	
2	803527P	Transformer	
3	F8170801	Coin Chute	
4	70058501	Pop Rivet	
5	70030501	Expansion Clip	
6	44071501	Snap Bushing	
7	F430232	Nut	
8	F980P3	Control Assembly Kit	Includes item 11 and F8108001 Output Assembly
	802493	Fuse	2.5 Amp
9	F8223001P	Water Pressure Switch	
10	F8153901	Tubing	
11	F8246601	Tee	
12	F020014200	Air Trap Hose	
13	F200222	Hose Clamp	No. 12
14	F8176101P	Overload Contactor	
15	F330177P	Contactor	
16	F330186P	Interlock Contactor	
17	F8200101	DIN Rail	
18	F8411901	Capacitor	50 MFD; 20 pound models Y-voltage, 1 used; 40 pound models Y-voltage, 2 used
	F370221	Capacitor	100 MFD; 20 pound models; B-voltage, 1 used
19	F8411701	Capacitor	20 MFD; 30 pound models Y-voltage, 4 used; 40 pound models Y-voltage, 2 used
	F8411801	Capacitor	25 MFD; 20 pound models; Y-voltage, 2 used
20	F370220	Capacitor	130 MFD; 20 pound models B-voltage, 2 used; 30 pound models Y-voltage, 1 used
	F370218P	Capacitor	160 MFD; 40 pound models; Y-voltage, 2 used
21	F340002	Motor Switch	50 Amp
22	F0340722-00	Switch Clamp	
23	F8199601	Capacitor Tray Assembly	20 pound models; B and Y-voltage
	F8199901	Capacitor Tray Assembly	All other models; B and Y-voltage
	F8343401	Contactor Tray Assembly	C, F, J and O-voltage
24	F8205902	Control Tray Assembly	20 and 30 pound models; Includes items 3 and 25
	F8205903	Control Tray Assembly	40 and 60 pound models; Includes items 3 and 25
25	F8182501	Coin Vault Assembly	20 and 30 pound models
	F8182601	Coin Vault Assembly	40 and 60 pound models
26	F999P3	Control Kit	

Control Module - F-Speed Design 1 Coin Models

Models HCN060GCF, SCN060GCF and SCN060GDF

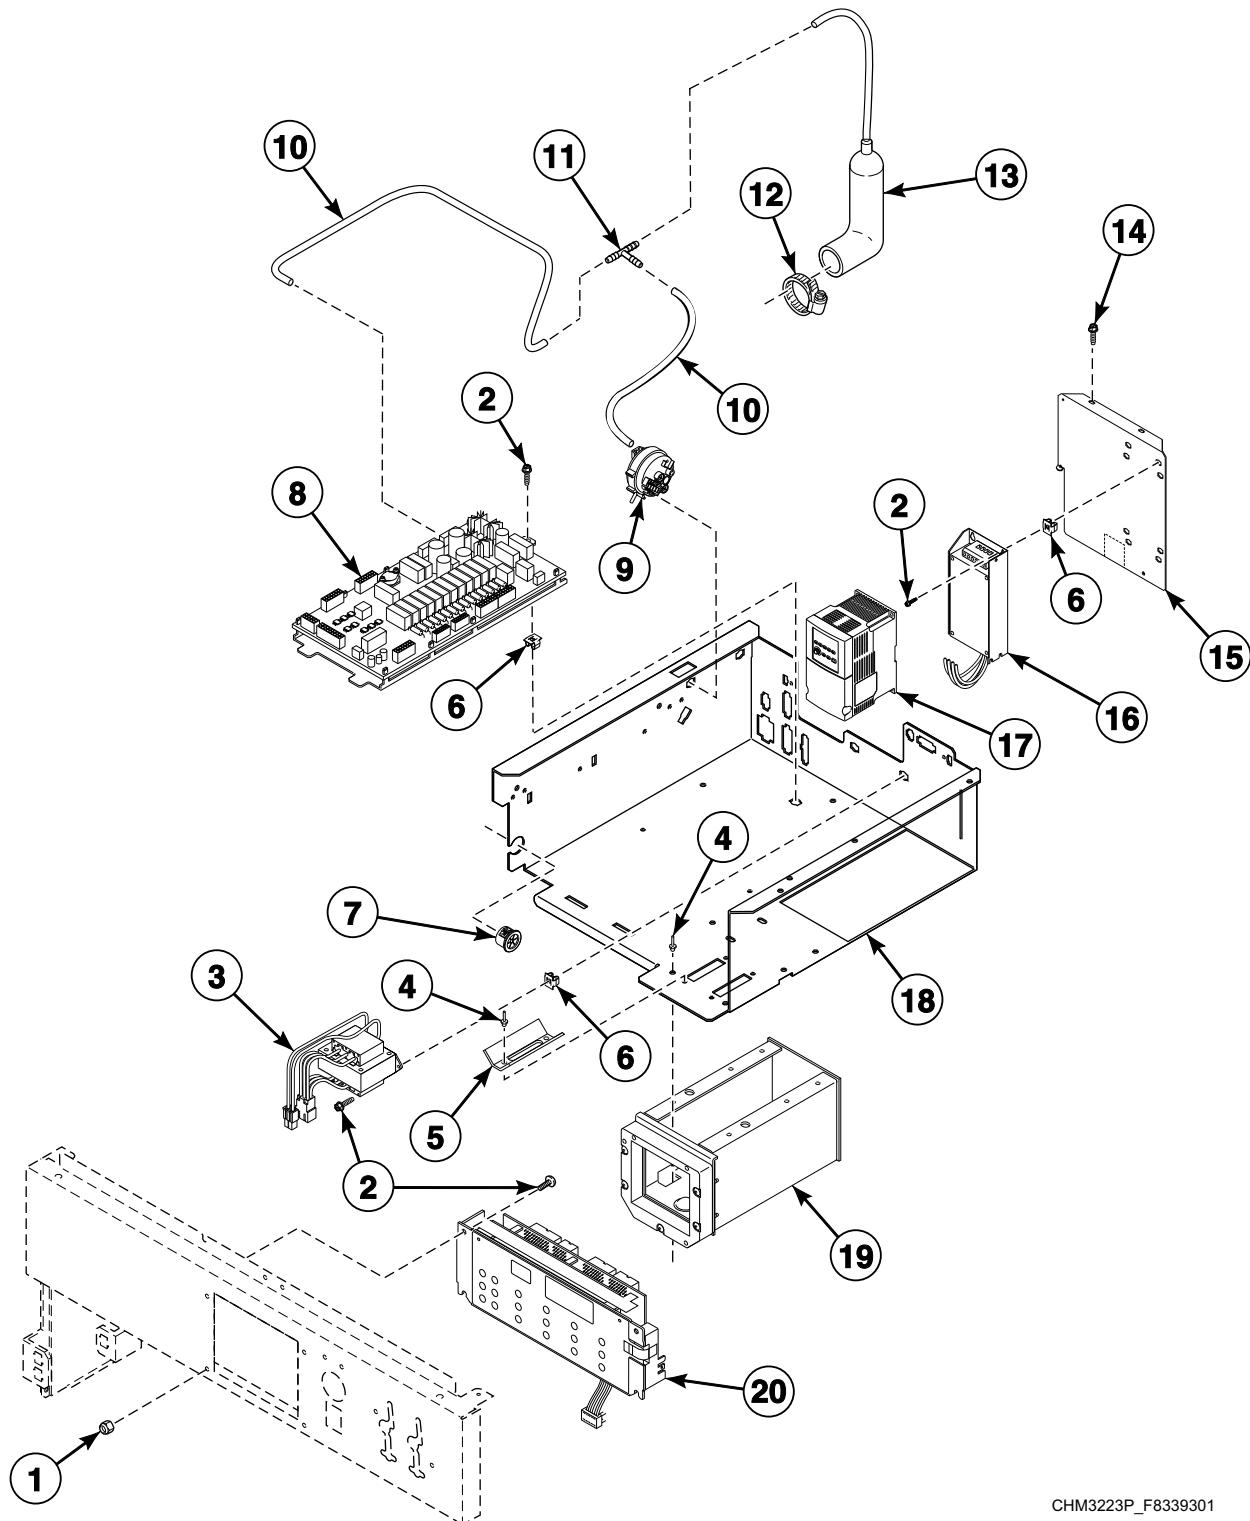


CHM3223P_F8339301

Control Module - F-Speed Design 1 Coin Models

REF	PART NO.	DESCRIPTION	COMMENTS
	F8028701	Output/Logic Harness	
	F8167901	USB IR Device Assembly	
	F8028105P	Machine Size Configuration Harness	
	F8261501P	Control Tray Harness	
	M413506	Jumper Harness Assembly	208 Volt
	M413507	Jumper Configuration Assembly	240 Volt
1	F430232	Nut	
2	F8206901	Screw	
3	803527P	Transformer	
4	70058501	Pop Rivet	
5	F8170801	Coin Chute	
6	70030501	Expansion Clip	
7	44071501	Snap Bushing	
8	F980P3	Control Assembly Kit	Includes item 11 and F8108001 Output Assembly
	802493	Fuse	2.5 Amp
9	F8223001P	Water Pressure Switch	
10	F8153901	Tubing	
11	F8246601	Tee	
12	F200222	Hose Clamp	No. 12
13	F020014200	Air Trap Hose	
14	430497	Screw	
15	F8195803	Support Bracket	
16	F8053901P	EMI Filter	200 Volt
	F8053902	EMI Filter	400 Volt
17	F8169407	PowerFlex 40 Drive	Models through 3/8/10; Q and X-voltage; Models with an Elmo motor
	F8169408	PowerFlex 40 Drive	Models through 3/8/10; N, P and R-voltage; Models with an Elmo motor
	F8169440	PowerFlex 40 Drive	Models starting 3/9/10; Q and X-voltage; Models with a Hanning motor
	F8169441	PowerFlex 40 Drive	Models starting 3/9/10; N, P and R-voltage; Models with a Hanning motor
18	F8205903	Control Tray Assembly	Includes items 5 and 19
19	F8182601	Coin Vault Assembly	
20	F999P3	Control Kit	

Flush Mount Coin Meter Assembly (Drawing 1 of 2)

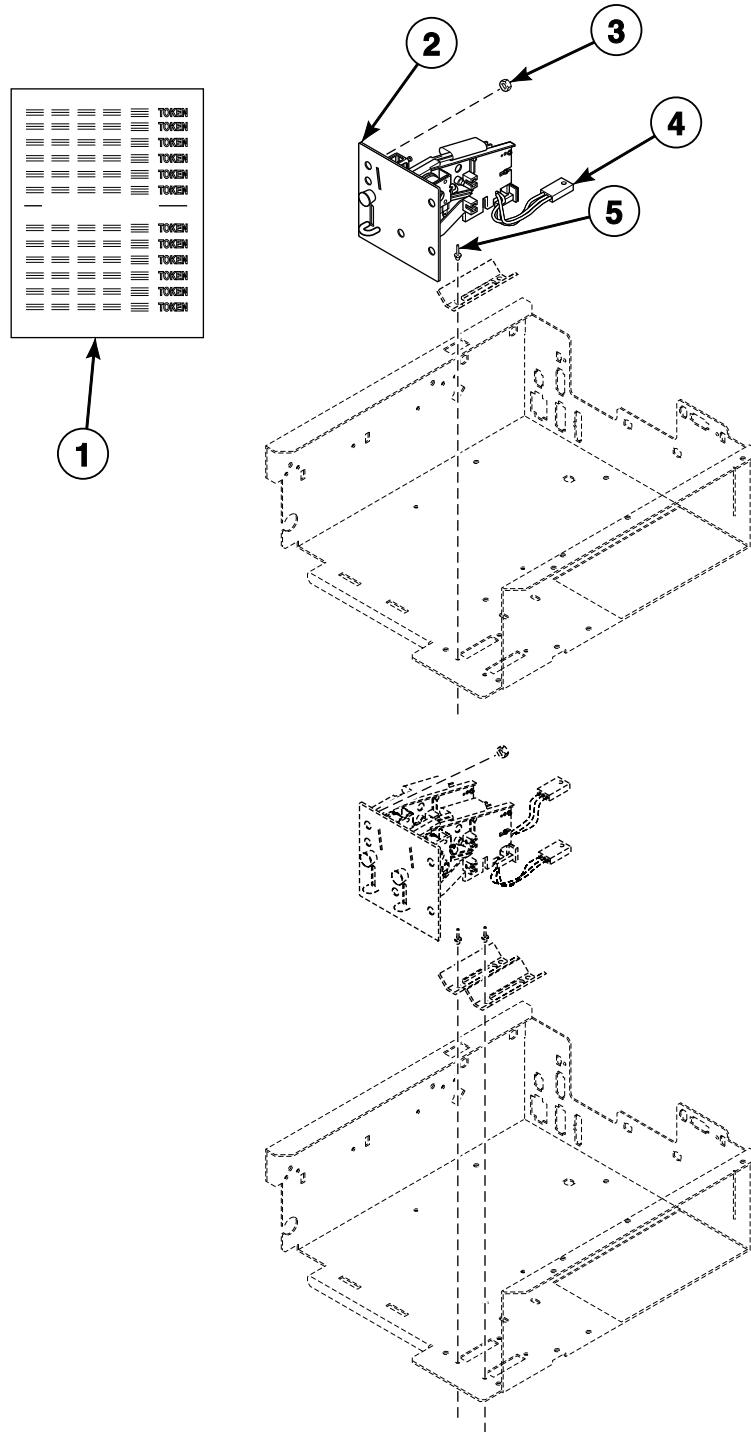


CHM3088P_F8339301

Flush Mount Coin Meter Assembly (Drawing 1 of 2)

REF	PART NO.	DESCRIPTION	COMMENTS
	F200010000P	Coin Meter Assembly	Single drop; U.S. \$.25; Includes items 2 and 3
	F200010006	Coin Meter Assembly	Single drop; .800 token; Includes items 2 and 3
	F200010007	Coin Meter Assembly	Single drop; .880 token; Includes items 2 and 3
	F200010009	Coin Meter Assembly	Single drop; .990 token; Includes items 2 and 3
	F200010011	Coin Meter Assembly	Single drop; Jeton WH121 token; Includes items 2 and 3
	F200010012	Coin Meter Assembly	Single drop; Jeton .08 token; Includes items 2 and 3
1	38725	Coin Identification Paper	
2	38464P	Coin Drop Assembly	Single drop; Canada .25
	N/A	Coin Drop Assembly	Single drop; Australia .20
	N/A	Coin Drop Assembly	Single drop; Belgium 5 franc
	N/A	Coin Drop Assembly	Single drop; Denmark 2 krone
	N/A	Coin Drop Assembly	Single drop; United Kingdom 20 pence
	N/A	Coin Drop Assembly	Single drop; France 2 franc
	N/A	Coin Drop Assembly	Single drop; Hong Kong 5 dollar
	N/A	Coin Drop Assembly	Single drop; Italy 500 lirraiget
	N/A	Coin Drop Assembly	Single drop; Japan 100 yen
	N/A	Coin Drop Assembly	Single drop; Korea 500 won
	N/A	Coin Drop Assembly	Single drop; South Africa 2 rand
	N/A	Coin Drop Assembly	Single drop; Spain 100 peseta
	N/A	Coin Drop Assembly	Single drop; Thailand 10 baht
	N/A	Coin Drop Assembly	Single drop; .886 token
	N/A	Coin Drop Assembly	Single drop; 1.000 token
	N/A	Coin Drop Assembly	Single drop; Jeton 08 token
	70441601P	Coin Drop	Single drop; U.S. \$.25
	N/A	Coin Drop Assembly	Single drop; .800 token
	38462P	Coin Drop Assembly	Single drop; .880 token
	38463	Coin Drop Assembly	Single drop; .990 token
	N/A	Coin Drop Assembly	Single drop; Jeton WH121 token
	N/A	Coin Meter	Single drop; Jeton .08 token
3	685846	Nut	Single drop
4	200674P	Opto Coupler	
5	70058501	Pop Rivet	Single drop

N/A = Part no longer available

Flush Mount Coin Meter Assembly (Drawing 2 of 2)

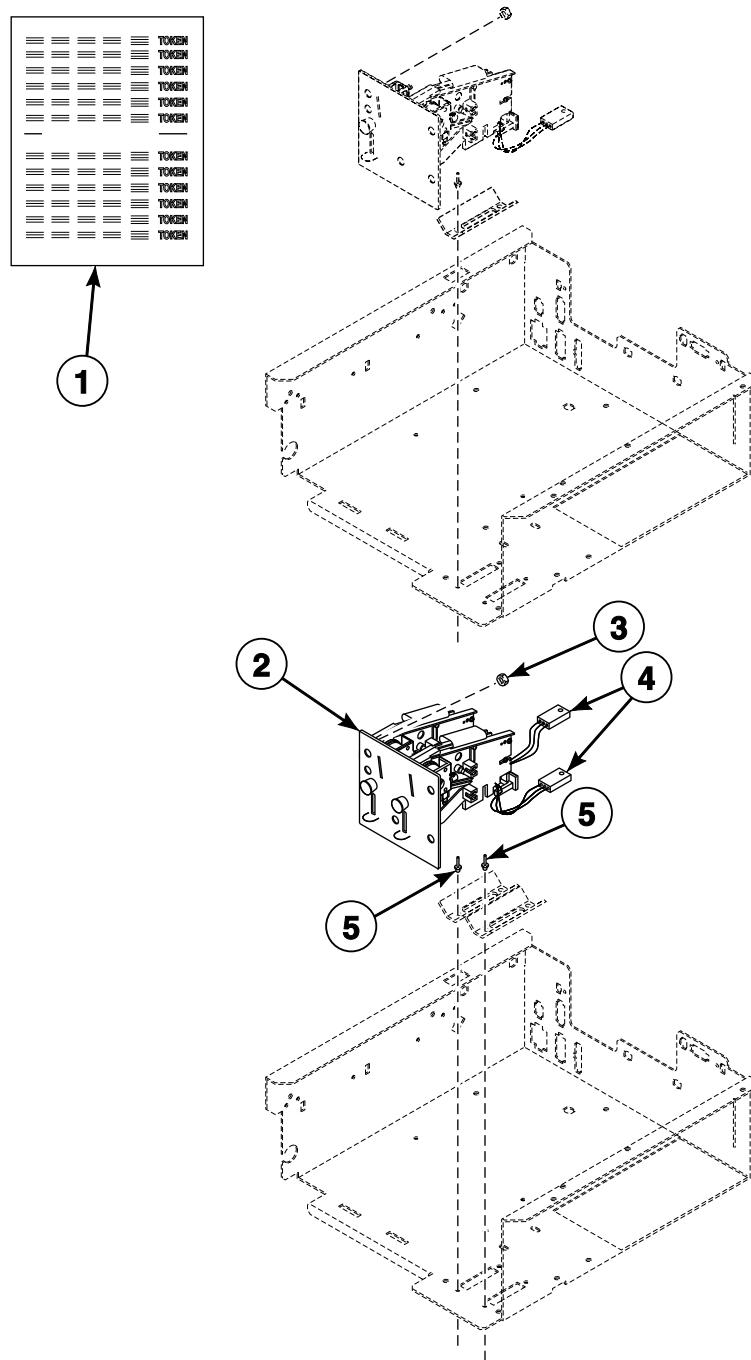


CHM3088PA_F8339301

Flush Mount Coin Meter Assembly (Drawing 2 of 2)

REF	PART NO.	DESCRIPTION	COMMENTS
	F200010001	Coin Meter Assembly	Dual drop; Australia .20 and 1; Includes items 2 and 3
	F200010002	Coin Meter Assembly	Dual drop; 100 and 500 yen; Includes items 2 and 3
	F200010003	Coin Meter Assembly	Dual drop; Canada 1.00 and .25; Includes items 2 and 3
	F200010004	Coin Meter Assembly	Dual drop; New Zealand .20 and 1; Includes items 2 and 3
	F200010005	Coin Meter Assembly	Dual drop; U.S. \$1 and \$.25; Includes items 2 and 3
	F200010008	Coin Meter Assembly	Dual drop; .50 and 2.00 euro; Includes items 2 and 3
	F200010010	Coin Meter Assembly	Dual drop; 10 and 50 Taiwan; Includes items 2 and 3
1	38725	Coin Identification Paper	
2	N/A	Coin Meter	Dual drop; 10 and 50 Taiwan
	N/A	Coin Meter	Dual drop; Belgium 5 and 20 franc
	N/A	Coin Meter	Dual drop; Denmark 1 and 5 krone
	N/A	Coin Meter	Dual drop; Denmark 5 and 10 krone
	38472	Coin Drop Assembly	Dual drop; United Kingdom 20 pence and 1 pound
	N/A	Coin Meter	Dual drop; .20 and .50 euro
	210195	Coin Drop Assembly	Dual drop; .20 and 1.00 euro
	210196	Coin Drop Assembly	Dual drop; .50 and 1.00 euro
	N/A	Coin Meter	Dual drop; 2 and 5 franc
	N/A	Coin Meter	Dual drop; 2 and 10 franc
	39157	Coin Drop Assembly	Dual drop; Israel 1 and 5 shekel
	38521	Coin Drop Assembly	Dual drop; Korea 100 and 500 won
	N/A	Coin Meter	Dual drop; Spain 100 and 500 peseta
	N/A	Coin Drop Assembly	Dual drop; Australia .20 and 1
	N/A	Coin Drop Assembly	Dual drop; Japan 100 and 500 yen
	N/A	Coin Drop Assembly	Dual drop; Canada 1.00 and .25
	N/A	Coin Drop Assembly	Dual drop; New Zealand .20 and 1
	70256402P	Coin Drop	Dual drop; U.S. \$1 and \$.25
	F0160737-00	Coin Meter	Dual drop; .50 and 2.00 euro
	70281102	Coin Drop Assembly	Dual drop; 10 and 50 Taiwan dollar
	N/A	Coin Meter	Dual drop; Taiwan 5 and 10 dollar
3	685846	Nut	Single drop
4	200674P	Opto Coupler	
5	70058501	Pop Rivet	Single drop

N/A = Part no longer available

Electronic Coin Meter Assembly

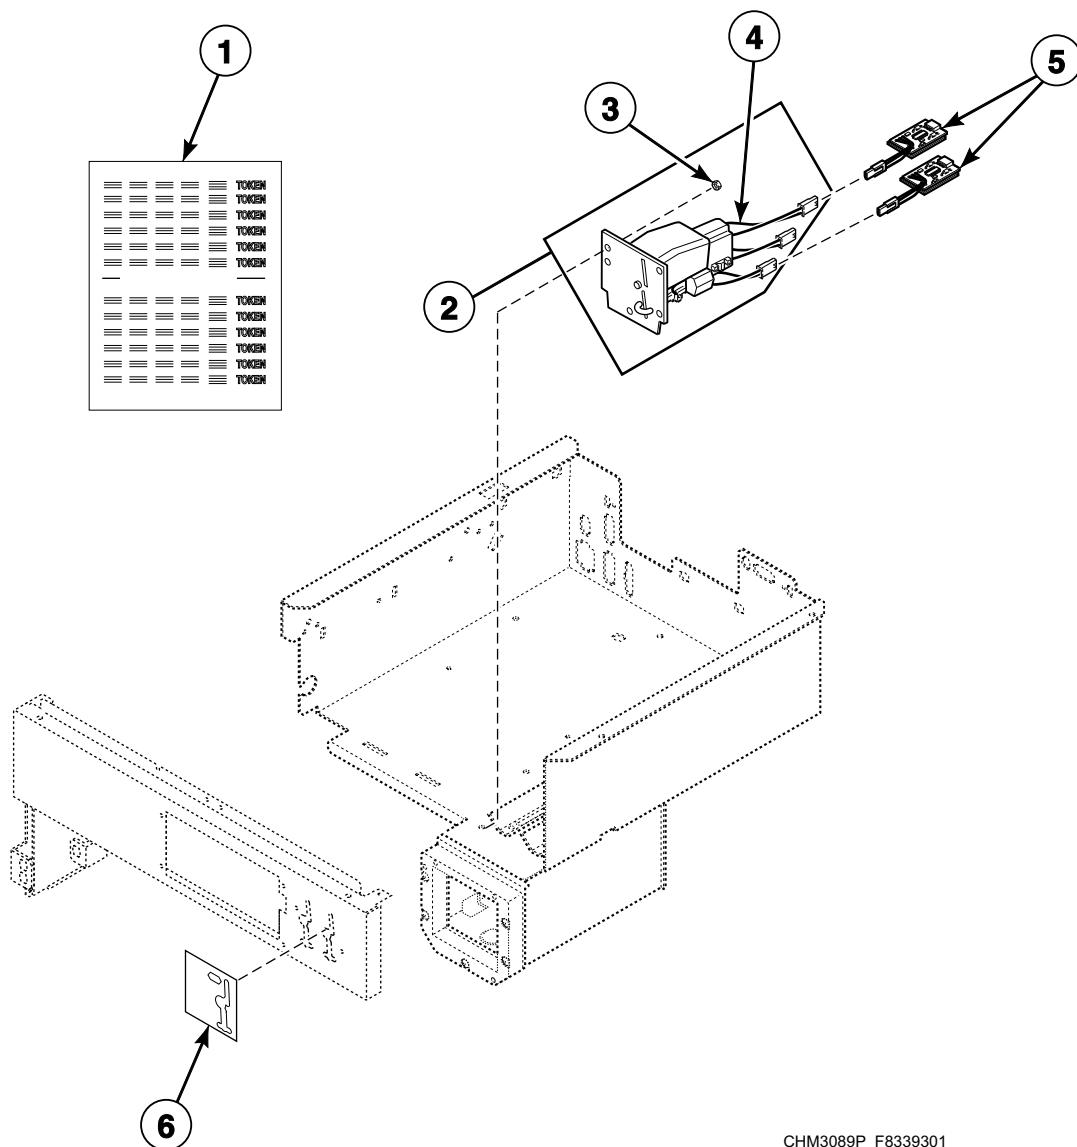


CHM3089P_F8339301

Electronic Coin Meter Assembly

REF	PART NO.	DESCRIPTION	COMMENTS
	CK500	Electronic Coin Drop Kit	Includes item 2
1	38725	Coin Identification Paper	
2	F200021600	Coin Meter Assembly	U.S., Canada, Japan and Taiwan; Includes items 3 and 4; Requires CK500 Electronic Coin Drop Kit for installation
	F200021601	Coin Meter Assembly	Australia, New Zealand, Hong Kong, South Korea and Malaysia; Includes items 3 and 4; Requires CK500 Electronic Coin Drop Kit for installation
	F200021602	Coin Meter Assembly	United Kingdom and euro; Includes items 3 and 4; Requires CK500 Electronic Coin Drop Kit for installation
	F200021603	Coin Meter Assembly	Denmark, Norway and euro; Includes items 3 and 4; Requires CK500 Electronic Coin Drop Kit for installation
	F200021604	Coin Meter Assembly	U.S., Mexico and Ecuador; Includes items 3 and 4; Requires CK500 Electronic Coin Drop Kit for installation
	F200021605	Coin Meter Assembly	Euro, Latvia and Lithuania; Includes items 3 and 4; Requires CK500 Electronic Coin Drop Kit for installation
	F8238601	Coin Meter Assembly	China, Russia and Malaysia; Includes items 3 and 4; Requires CK500 Electronic Coin Drop Kit for installation
3	685846	Nut	
4	70294101P	Electronic Coin Drop Assembly	U.S., Canada, Japan and Taiwan
	CK095	Electronic Coin Drop Kit	U.S., Canada, Japan and Taiwan; Includes item 1; Requires CK500 Electronic Coin Drop Kit for installation
	70294105P	Electronic Coin Drop Assembly	Australia, New Zealand, Hong Kong, South Korea and Malaysia
	CK099	Electronic Coin Drop Kit	Australia, New Zealand, Hong Kong, South Korea and Malaysia; Includes item 1; Requires CK500 Electronic Coin Drop Kit for installation
	70294103P	Electronic Coin Drop Assembly	United Kingdom and euro
	CK100	Electronic Coin Drop Kit	United Kingdom and euro; Includes item 1; Requires CK500 Electronic Coin Drop Kit for installation
	70294104	Electronic Coin Drop Assembly	Denmark, Norway and euro
	CK101	Electronic Coin Drop Kit	Denmark, Norway and euro; Includes item 1; Requires CK500 Electronic Coin Drop Kit for installation
	CK110	Electronic Coin Drop Kit	U.S., Mexico and Ecuador; Includes item 1; Requires CK500 Electronic Coin Drop Kit for installation
	70294106	Electronic Coin Drop Assembly	U.S., Mexico and Ecuador
	70294107	Electronic Coin Drop Assembly	Euro, Latvia and Lithuania
	CK103	Electronic Coin Drop Kit	Euro, Latvia and Lithuania; Includes item 1; Requires CK500 Electronic Coin Drop Kit for installation
	70294109	Electronic Coin Drop Assembly	Singapore, China, Russia and Malaysia
	CK106	Electronic Coin Drop Kit	Singapore, China, Russia and Malaysia; Includes item 1; Requires CK500 Electronic Coin Drop Kit for installation
	CK109	Electronic Coin Drop Kit	Euro; Includes item 1; Requires CK500 Electronic Coin Drop Kit for installation
	70294111	Electronic Coin Drop Assembly	Euro
5	F8034701P	Pulse Expander Assembly	
6	70295101	Overlay	Black
	70295301	Overlay	Gray

Card Reader - GY Models

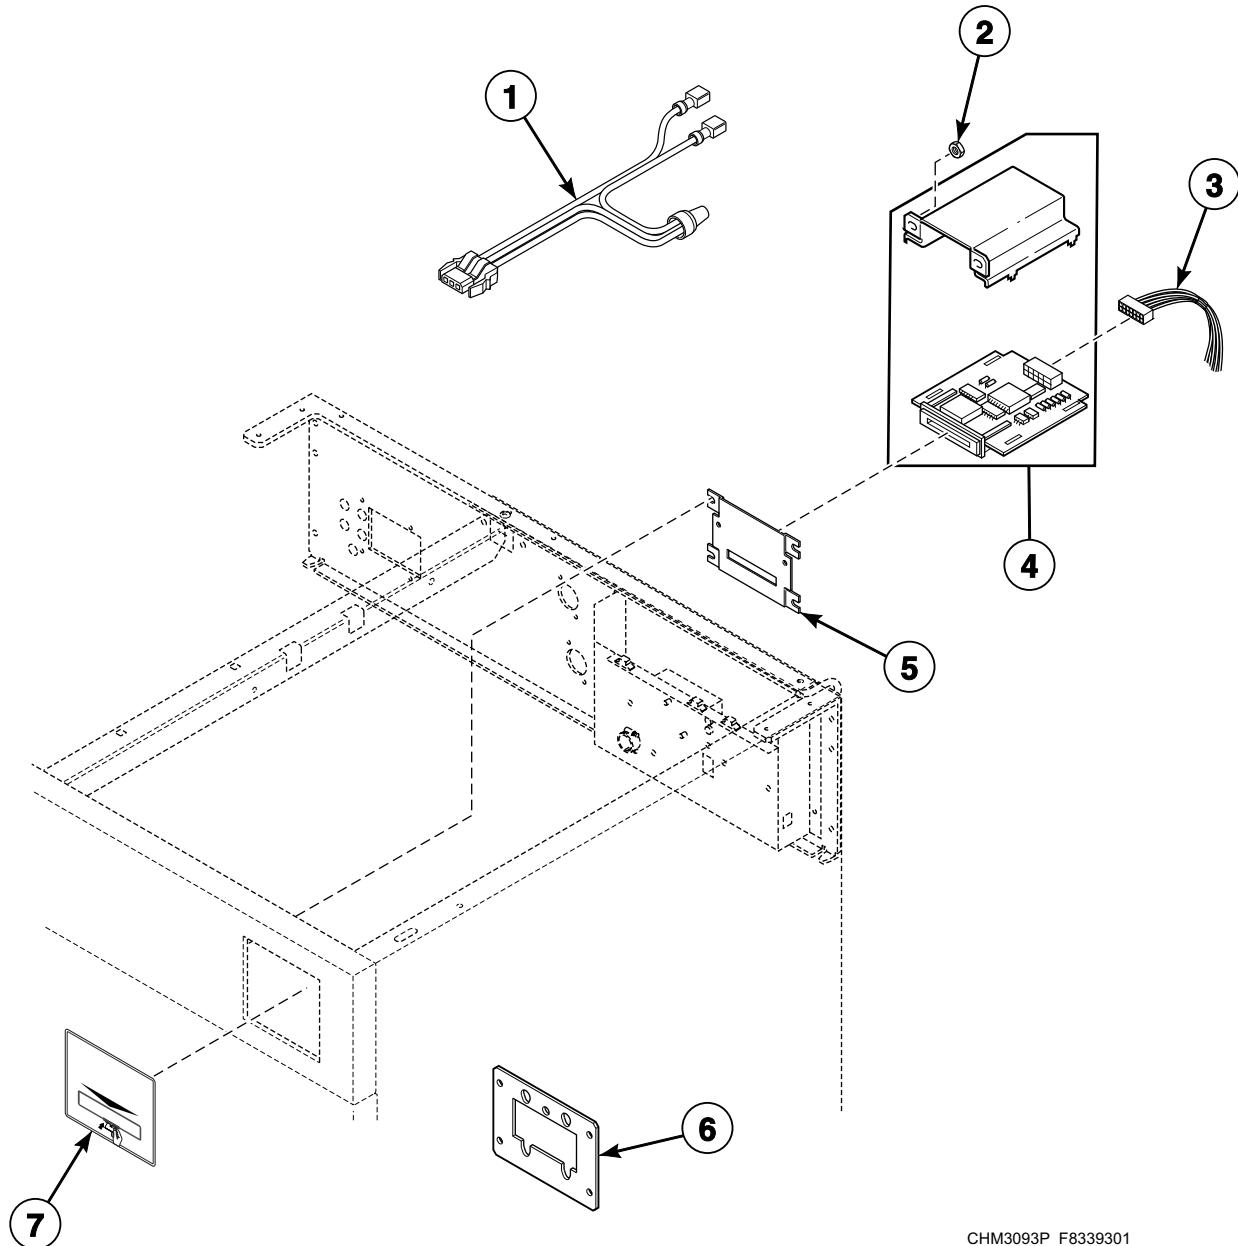


CHM3093P_F8339301

Card Reader - GY Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	F631973-2	Harness	Access
2	F430174	Screw	
3	F141887	Card Reader Harness	
4	510068P	Card Reader and Bracket Assembly	
5	F8201501	Card Plate Assembly	
6	70208801	Mounting Plate	
7	70334201	Card Reader Overlay	SC models
	70334301	Card Reader Overlay	HC models

Optional Coin Box

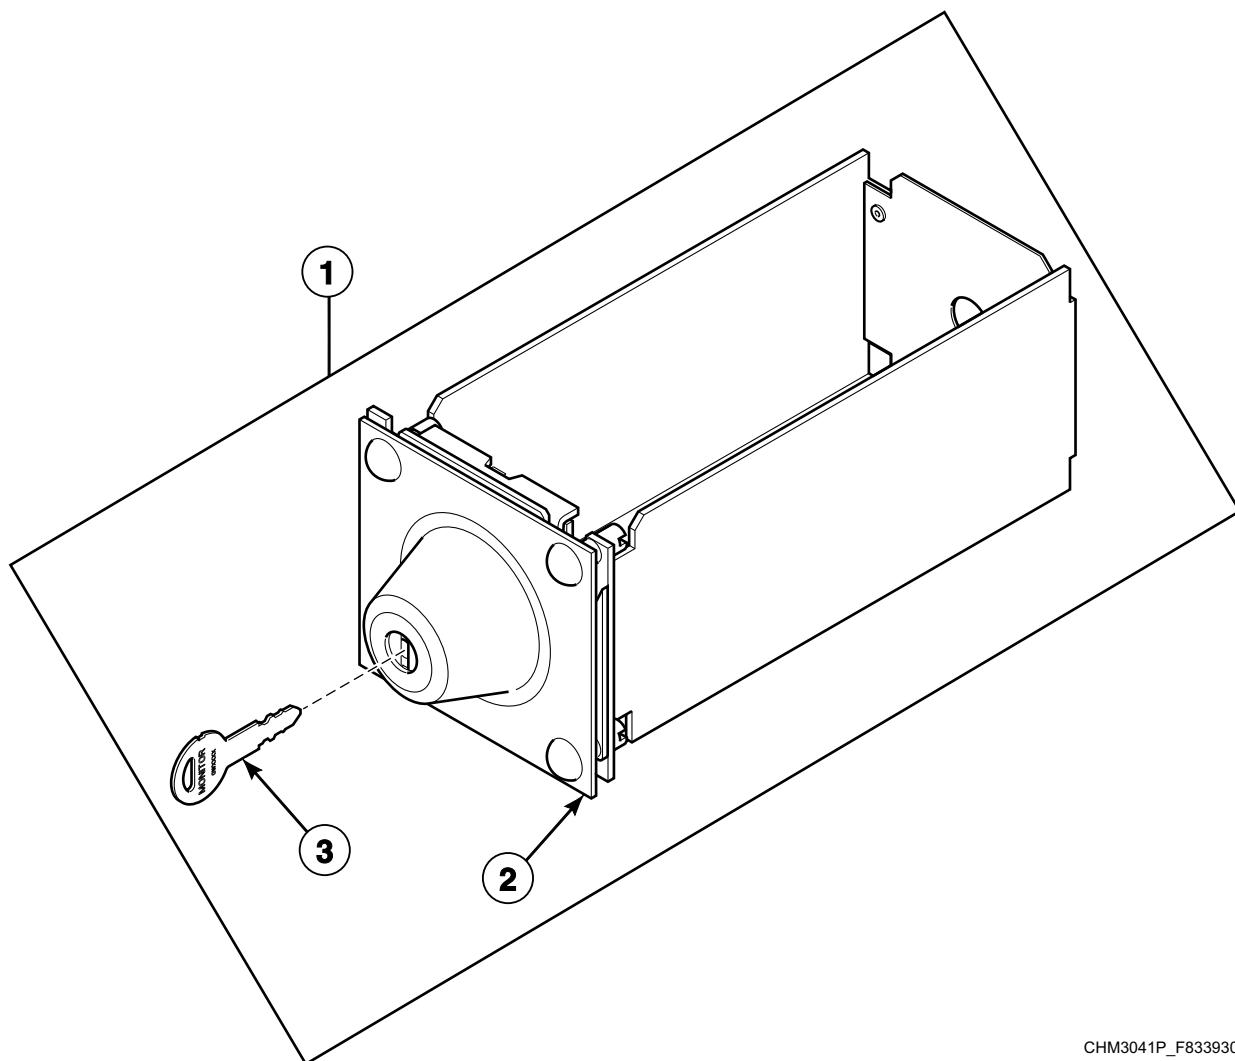


CHM3041P_F8339301

Optional Coin Box

REF	PART NO.	DESCRIPTION	COMMENTS
1	F8182001	Coin Drawer Assembly	40 and 60 pound models
2	F160672	Coin Box	20 and 30 pound models; GW0023
3	F160420	Key	GW0023

Rocker Switch, Temperature Knob and Emergency Stop Button - GN Models

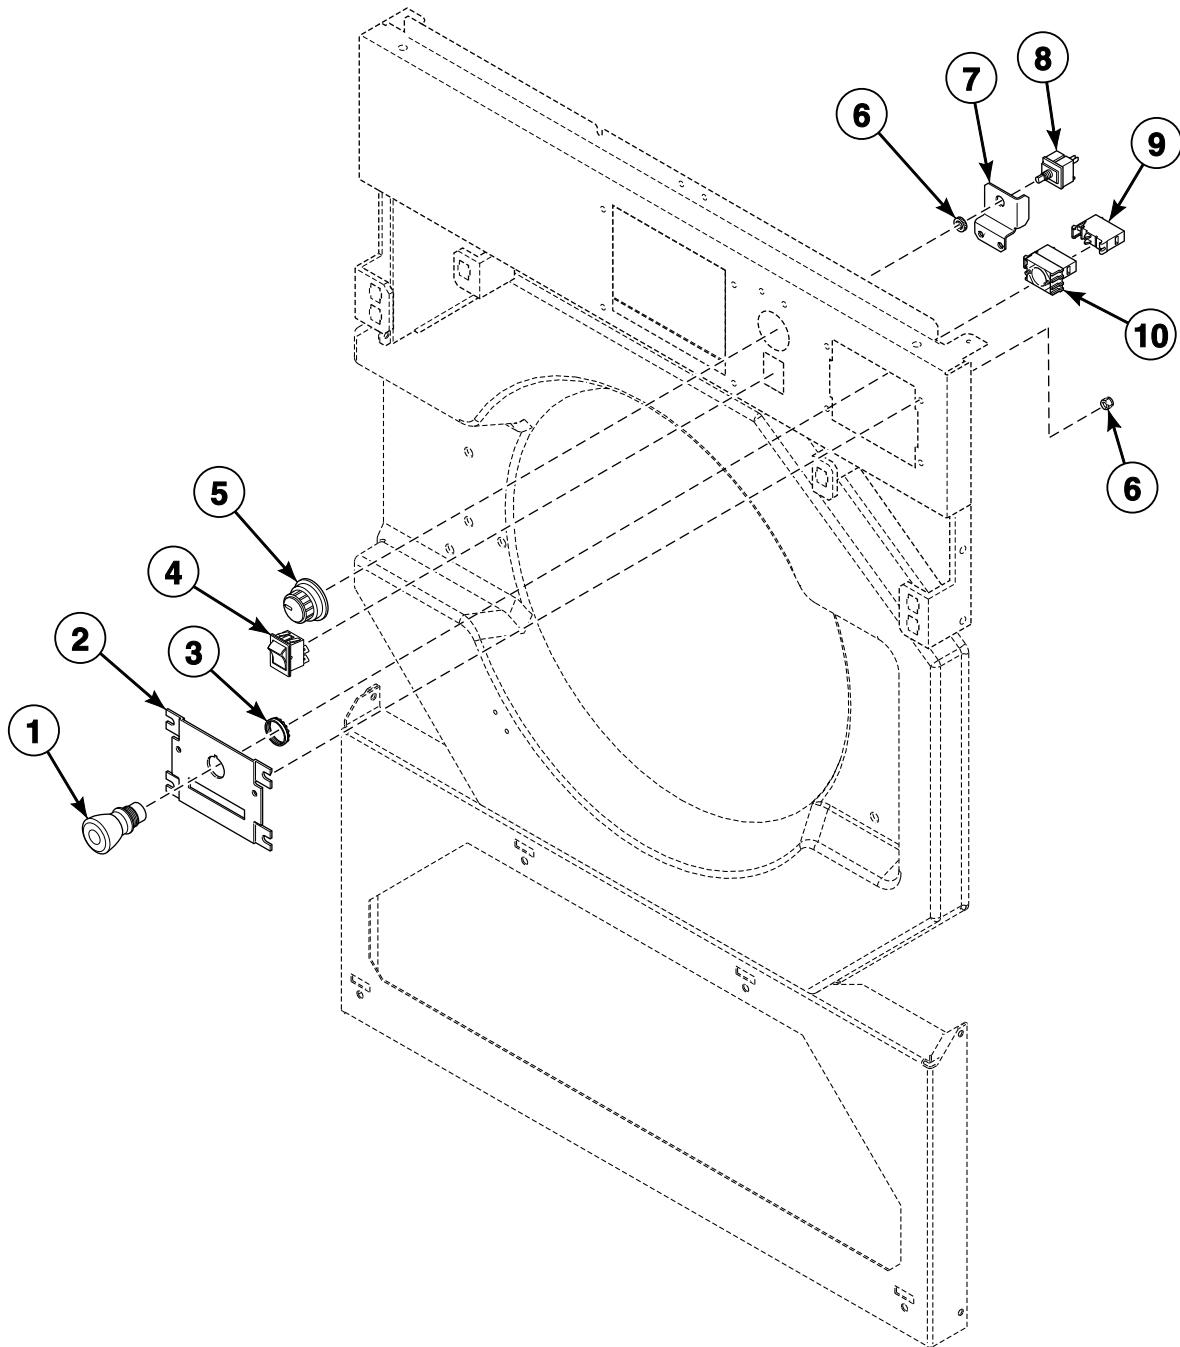


CHM3160P_F8339301

Rocker Switch, Temperature Knob and Emergency Stop Button - GN Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	F200233500	Emergency Stop Pushbutton	
2	F8201301	Emergency Stop Plate	
3	24205	Nut	
4	70455101	Rocker Switch	
5	44104601	Temperature Knob	
6	F431017	Nut	
7	70391701	Temperature Selector Switch Bracket	
8	511711	Temperature Selector Switch	
9	F8069501	Contact Switch	
10	F200233401	Contact Block Switch	

Front Panels and Control Panel - Coin Models

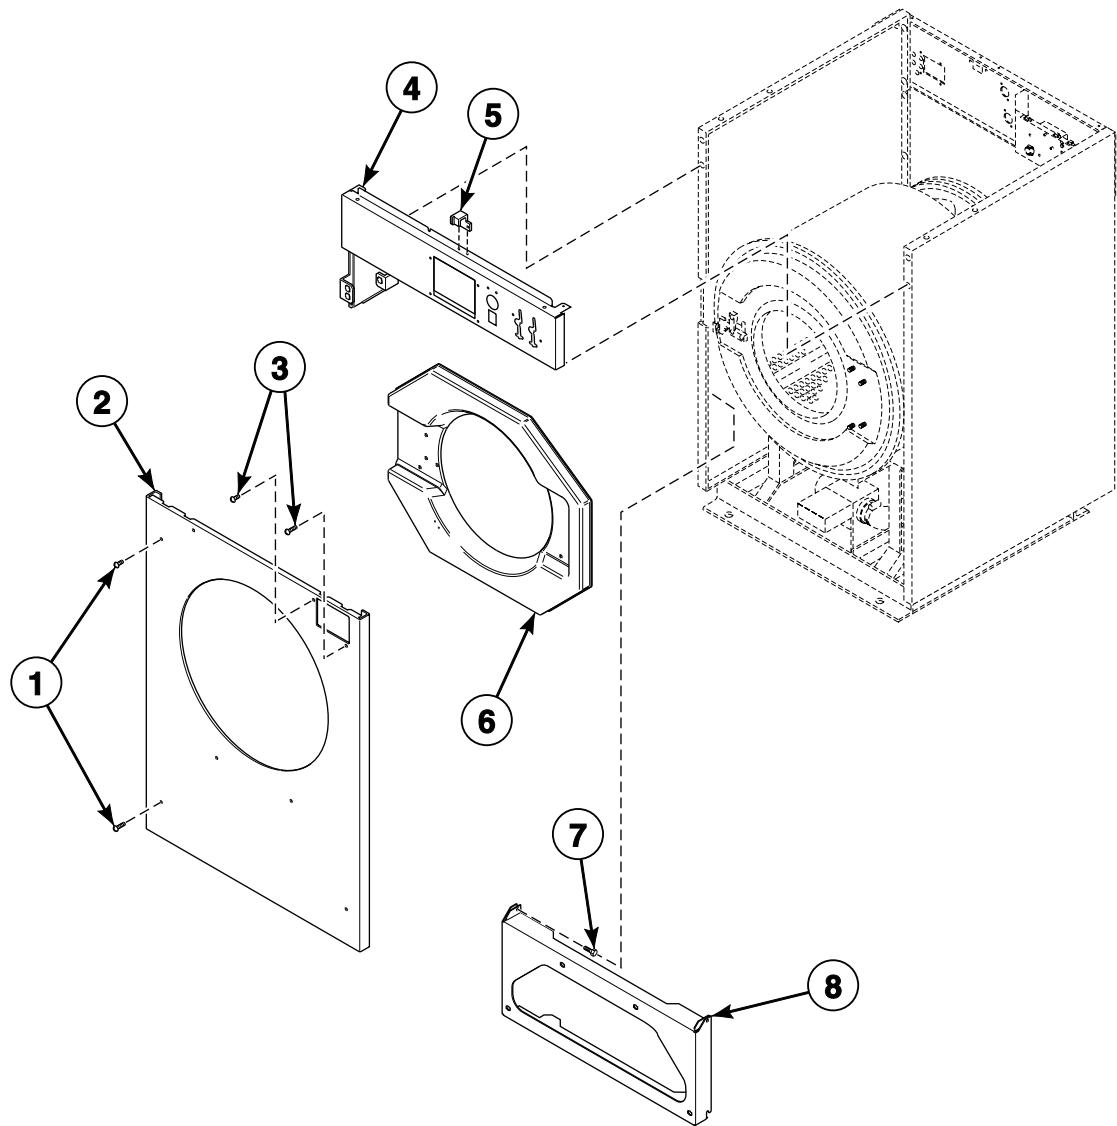


CHM3103P_F8339301

Front Panels and Control Panel - Coin Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	F8117601	Screw	
2	F8171301	Front Panel	Stainless steel; 20 pound models
	F8173001	Front Panel	Stainless steel; 30 pound models
	F8173101P	Front Panel	Stainless steel; 40 pound models
	F8173201P	Front Panel	Stainless steel; 60 pound models
3	801019	Screw	
4	F8038502	Control Panel Assembly	20 pound models
	F8038602	Control Panel Assembly	30 pound models
	F8038702	Control Panel Assembly	40 pound models
	F8038802	Control Panel Assembly	60 pound models
5	F8201001	Top Cover Latch	
6	F170416-1	Door Bezel	Black; 20 pound SC models
	F170416-2	Door Bezel	Pantone 403; 20 pound HC models; Models through 1/10/10
	F170416-3	Door Bezel	Gray; 20 pound HC models; Models starting 1/11/10
	F170417-1	Door Bezel	Black; 30 pound SC models
	F170417-2	Door Bezel	Pantone 403; 30 pound HC models; Models through 1/10/10
	F170417-3	Door Bezel	Gray; 30 pound HC models; Models starting 1/11/10
	F0170426-00	Door Bezel	Black; 40 and 60 pound SC models
	F0170426-10	Door Bezel	Pantone 403; 40 and 60 pound HC models; Models through 1/10/10
	F0170426-30	Door Bezel	Gray; 40 and 60 pound HC models; Models starting 1/11/10
7	F430174	Screw	
8	F8173801	Front Cabinet Brace	20 pound models
	F8173901	Front Cabinet Brace	30 pound models
	F8174001	Front Cabinet Brace	40 pound models
	F8174101	Lower Cabinet Brace	60 pound models

Front Panel and Control Panel - GN and GY Models

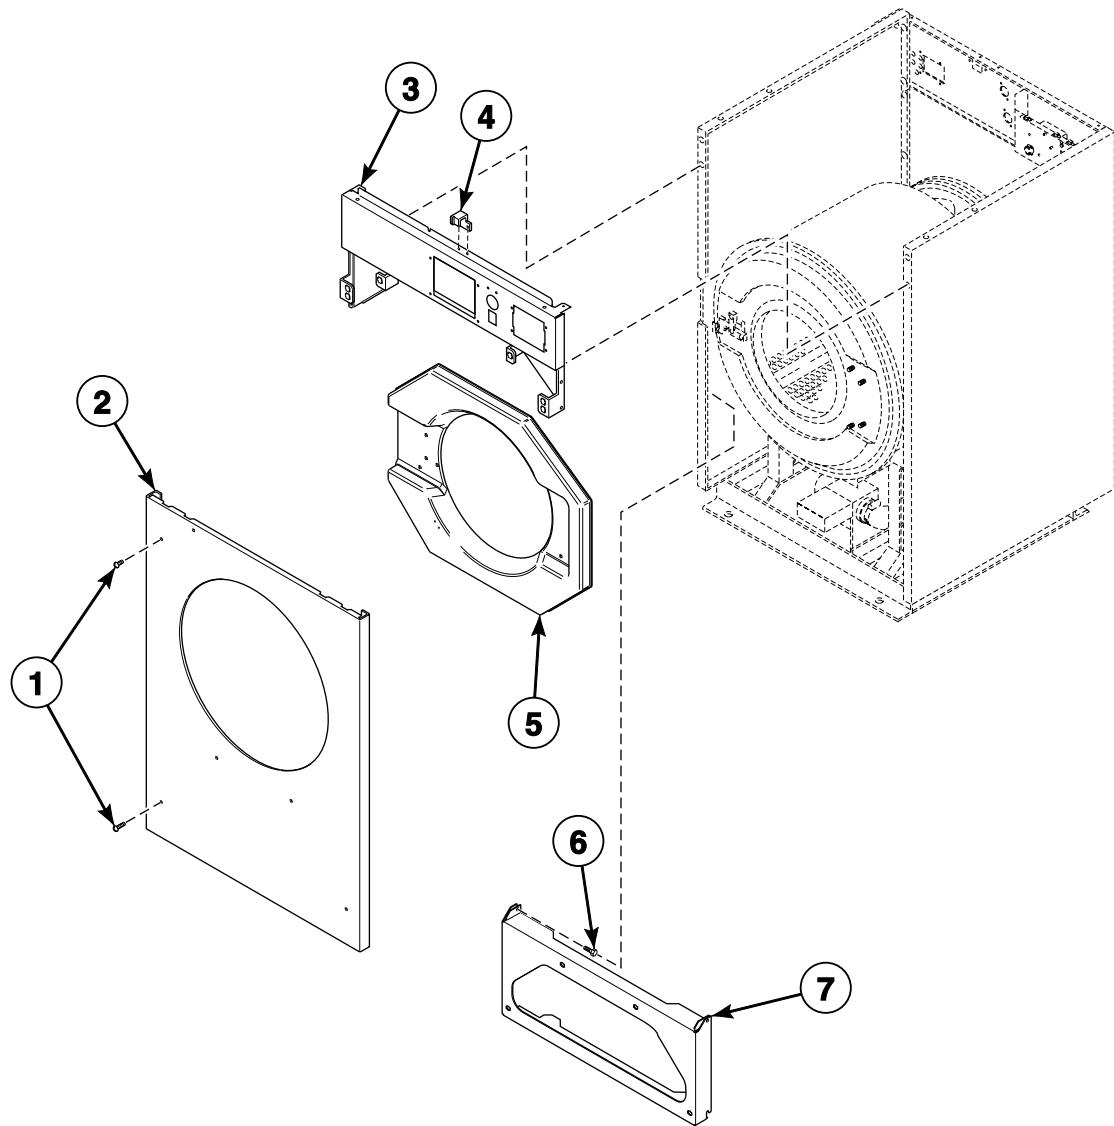


CHM3104P_8339301

Front Panel and Control Panel - GN and GY Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	F8117601	Screw	
2	F8171302P	Front Panel	Stainless steel; 20 pound models
	F8173002P	Front Panel	Stainless steel; 30 pound models
	F8173102P	Front Panel	Stainless steel; 40 pound models
	F8173202P	Front Panel	Stainless steel; 60 pound models
3	F8038504	Control Panel Assembly	20 pound models
	F8038604	Control Panel Assembly	30 pound models
	F8038704	Control Panel Assembly	40 pound models
	F8038804	Control Panel Assembly	60 pound models
4	F8201001	Top Cover Latch	
5	F170416-1	Door Bezel	Black; 20 pound SC and UC models
	F170416-2	Door Bezel	Pantone 403; 20 pound HC models; Models through 1/10/10
	F170416-3	Door Bezel	Gray; 20 pound HC models; Models starting 1/11/10
	F170417-1	Door Bezel	Black; 30 pound SC and UC models
	F170417-2	Door Bezel	Pantone 403; 30 pound HC models; Models through 1/10/10
	F170417-3	Door Bezel	Gray; 30 pound HC models; Models starting 1/11/10
	F0170426-00	Door Bezel	Black; 40 and 60 pound SC and UC models
	F0170426-10	Door Bezel	Pantone 403; 40 and 60 pound HC models; Models through 1/10/10
	F0170426-30	Door Bezel	Gray; 40 and 60 pound HC models; Models starting 1/11/10
6	F430174	Screw	
7	F8173801	Front Cabinet Brace	20 pound models
	F8173901	Front Cabinet Brace	30 pound models
	F8174001	Front Cabinet Brace	40 pound models
	F8174101	Lower Cabinet Brace	60 pound models

Control Panel Overlays

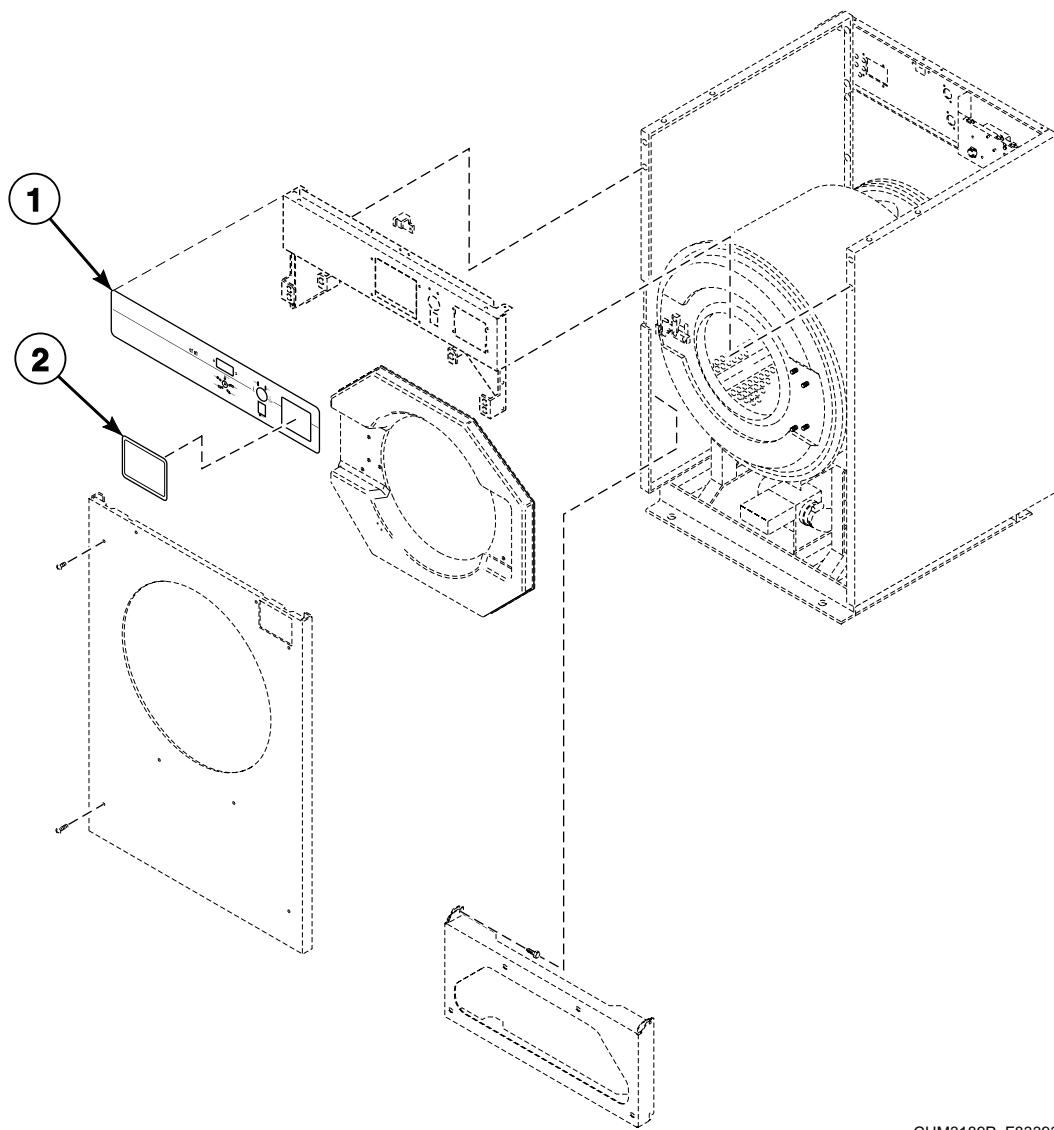


CHM3189P_F8339301

Control Panel Overlays

REF	PART NO.	DESCRIPTION	COMMENTS
1	F8293001	Overlay	Single coin drop; 20 pound SC models with GC, GD, GE, GL, GX and GY in the 7th and 8th position in the model number
	F8293002	Overlay	Dual coin drop; 20 pound SC models with GC, GD, GE, GL, GX and GY in the 7th and 8th position in the model number
	F8293101	Overlay	Single coin drop; 30 pound SC models with GC, GD, GE, GL, GX and GY in the 7th and 8th position in the model number
	F8293102	Overlay	Dual coin drop; 30 pound SC models with GC, GD, GE, GL, GX and GY in the 7th and 8th position in the model number
	F8293201	Overlay	Single coin drop; 40 pound SC models with GC, GD, GE, GL, GX and GY in the 7th and 8th position in the model number
	F8293202	Overlay	Dual coin drop; 40 pound SC models with GC, GD, GE, GL, GX and GY in the 7th and 8th position in the model number
	F8293301	Overlay	Single coin drop; 60 pound SC models with GC, GD, GE, GL, GX and GY in the 7th and 8th position in the model number
	F8293302	Overlay	Dual coin drop; 60 pound SC models with GC, GD, GE, GL, GX and GY in the 7th and 8th position in the model number
	F8218701	Overlay	Single coin drop; 20 pound HC models with GC, GD, GE, GL, GX and GY in the 7th and 8th position in the model number
	F8218702	Overlay	Dual coin drop; 20 pound HC models with GC, GD, GE, GL, GX and GY in the 7th and 8th position in the model number
	F8218801	Overlay	Single coin drop; 30 pound HC models with GC, GD, GE, GL, GX and GY in the 7th and 8th position in the model number
	F8218802	Overlay	Dual coin drop; 30 pound HC models with GC, GD, GE, GL, GX and GY in the 7th and 8th position in the model number
	F8218901	Overlay	Single coin drop; 40 pound HC models with GC, GD, GE, GL, GX and GY in the 7th and 8th position in the model number
	F8218902	Overlay	Dual coin drop; 40 pound HC models with GC, GD, GE, GL, GX and GY in the 7th and 8th position in the model number
	F8219001	Overlay	Single coin drop; 60 pound HC models with GC, GD, GE, GL, GX and GY in the 7th and 8th position in the model number
	F8219002	Overlay	Dual coin drop; 60 pound HC models with GC, GD, GE, GL, GX and GY in the 7th and 8th position in the model number
	F8293501	Overlay	20 pound SC models with GN in the 7th and 8th position in the model number
	F8293601	Overlay	30 pound SC models with GN in the 7th and 8th position in the model number
	F8293701	Overlay	40 pound SC models with GN in the 7th and 8th position in the model number
	F8293801	Overlay	60 pound SC models with GN in the 7th and 8th position in the model number
2	F8219201	Overlay	Models HCL020GN2, HCN020GN2, HCU020GN2 and HCZ020GN2
	F8219301	Overlay	Models HCL030GN2, HCN030GN2, HCU030GN2 and HCZ030GN2
	F8219401	Overlay	Models HCL040GN2, HCN040GN2 and HCU040GN2
	F8219501	Overlay	Models HCL060GN2, HCN060GN2 and HCU060GN2; Models HCL060GNF and HCN060GNF Design 1 models
	F8443601	Overlay	Models HCL030GNF, HCL040GNF, HCN020GN2, HCN030GNF and HCN040GNF; Models HCL060GNF and HCN060GNF Design 2 models
2	F8219701	Overlay	20 pound UC models with GN in the 7th and 8th position in the model number
	F8219801	Overlay	30 pound UC models with GN in the 7th and 8th position in the model number
	F8219901	Overlay	40 pound UC models with GN in the 7th and 8th position in the model number
	F8220001	Overlay	60 pound UC models with GN in the 7th and 8th position in the model number
	F8236801	Control Panel Overlay	Models VCU030GN2, VCU040GN2 and VCU060GN2
2	39564	Coin Drop Overlay	Models HCU020GL2, HCU030GL2, HCU040GL2, HCU060GL2, SCU020GL2, SCU030GL2, SCU040GL2 and SCU060GL2

Panels (Drawing 1 of 2)

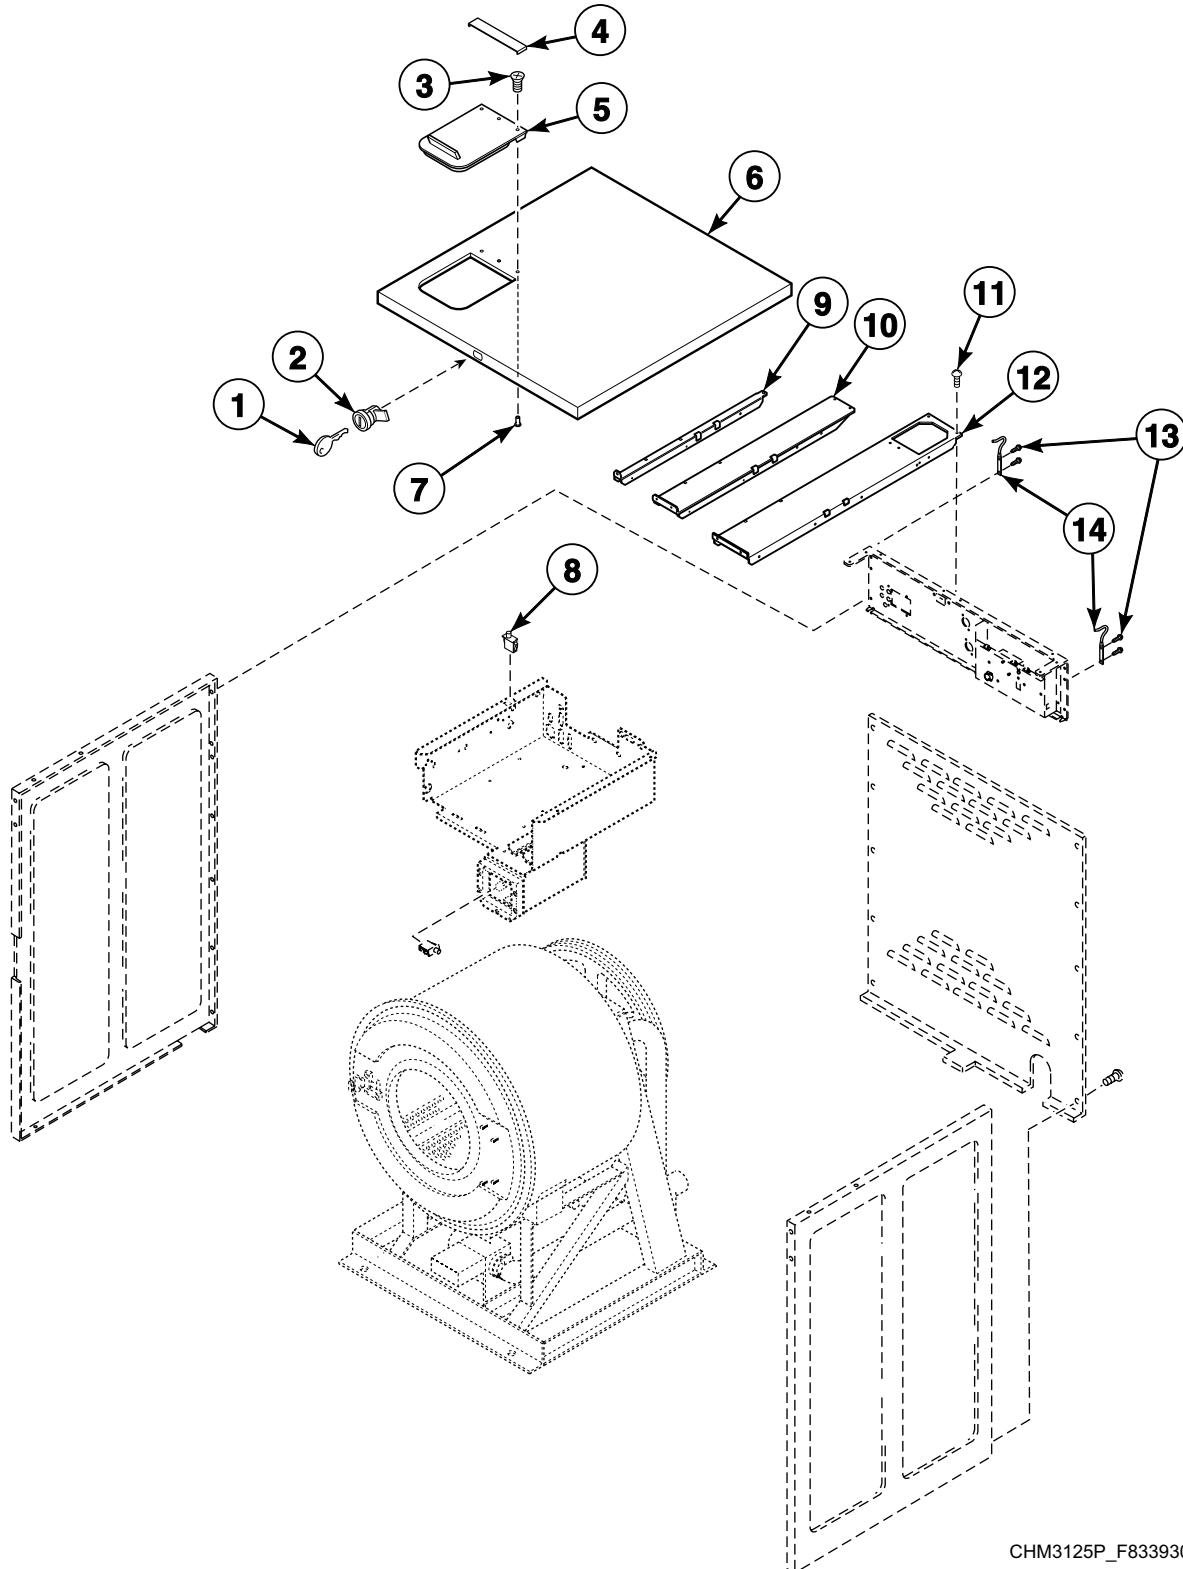


CHM3125P_F8339301

Panels (Drawing 1 of 2)

REF	PART NO.	DESCRIPTION	COMMENTS
1	70155603	Key	
2	44089303P	Panel Lock	
3	F8230601	Screw	
4	F8091701	Lid Clamp	
5	F8048101	Dispenser Lid	Gray
6	F8040201	Top Cover	20 pound models
	F8017401	Top Cover	30 pound models
	F8040301	Top Cover	40 pound models
	F8040401P	Top Cover	60 pound models
7	F8230501	Bolt	
8	70107001	Pushbutton Switch	
9	F8043501	Top Cabinet Brace	20 pound models
10	F8043701	Top Cabinet Brace	30 pound models
11	F430174	Screw	
12	F8043801	Top Cabinet Brace	40 pound models
	F8043901	Top Cabinet Brace	60 pound models
13	F8206901	Screw	
14	F8258601	Top Cover Hinge	

Panels (Drawing 2 of 2)

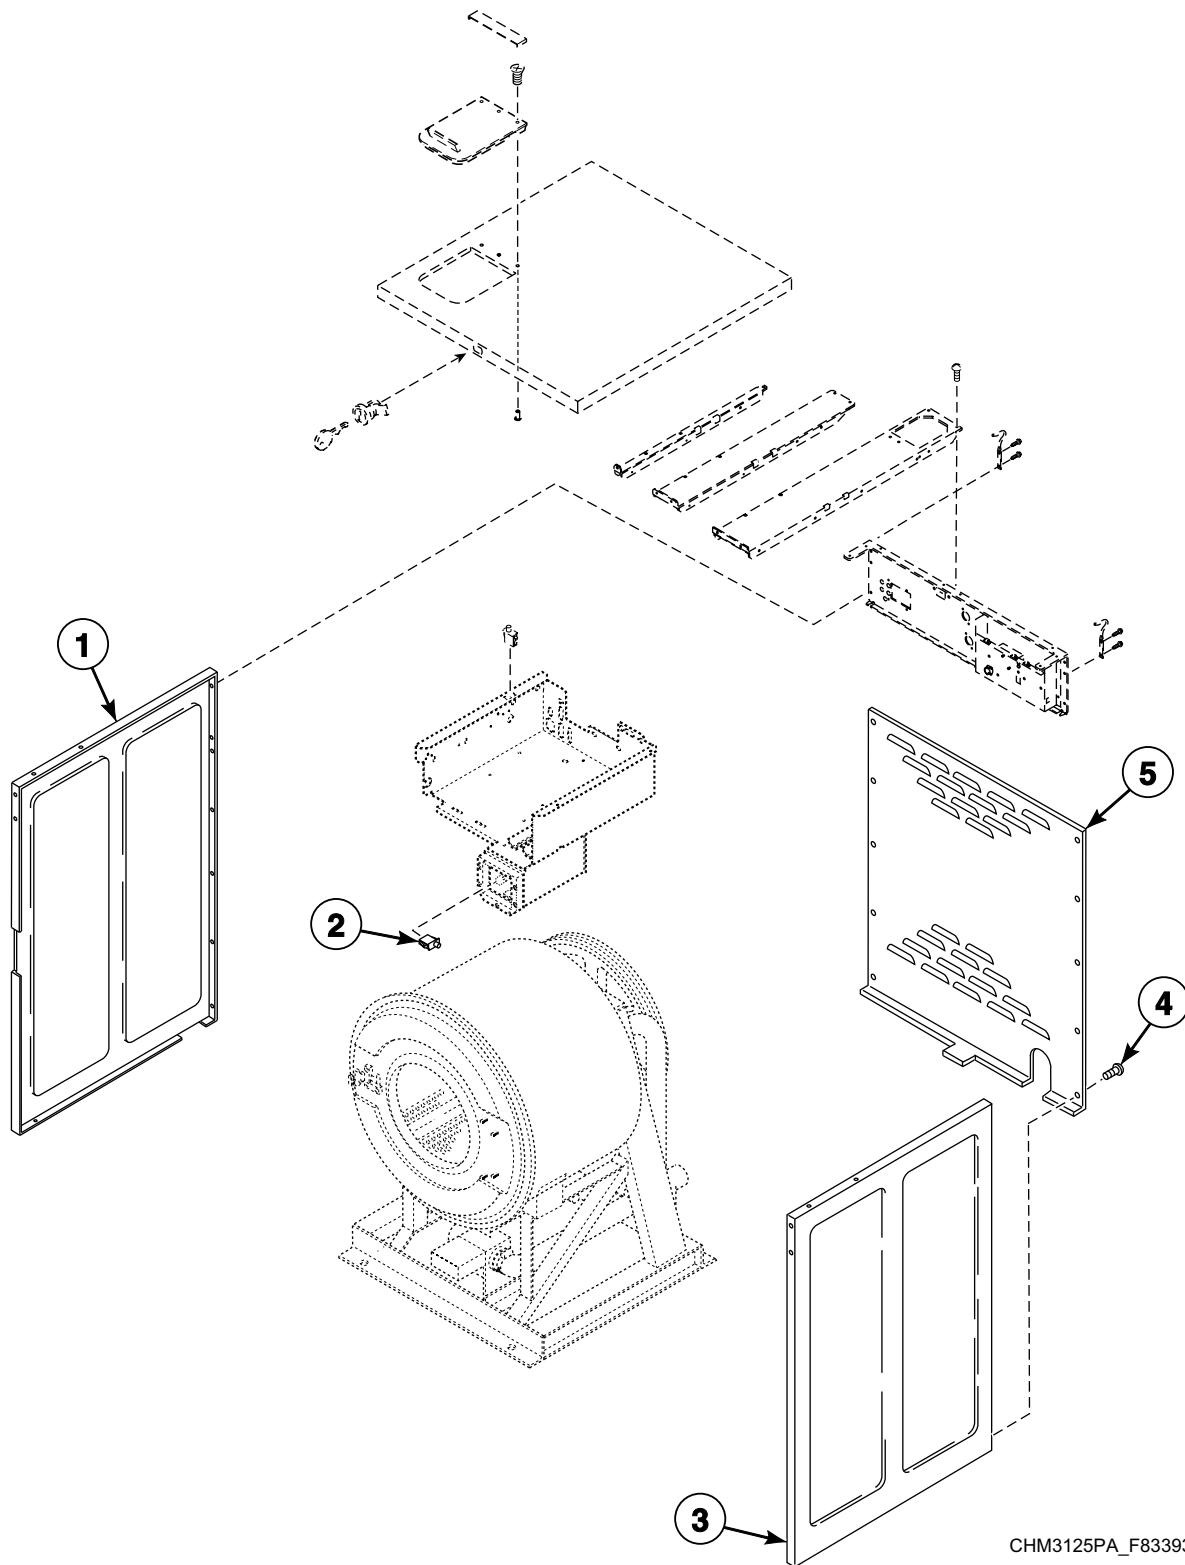


CHM3125PA_F8339301

Panels (Drawing 2 of 2)

REF	PART NO.	DESCRIPTION	COMMENTS
1	F8042902P	Left Side Panel	Vinyl; 20 pound Design 1 models
	F8043102P	Left Side Panel	Vinyl; 30 pound Design 1 models
	F8043202P	Left Side Panel	Vinyl; 40 pound Design 1 models
	F8043302P	Left Side Panel	Vinyl; 60 pound Design 1 models
	F8399202	Left Side Panel	20 pound Design 2 models
	F8399302	Left Side Panel	30 pound Design 2 models
	F8399402	Left Side Panel	40 pound Design 2 models
	F8399502	Left Side Panel	60 pound Design 2 models
2	70107001	Pushbutton Switch	Coin models
3	F8042901P	Right Side Panel	Vinyl; 20 pound Design 1 models
	F8043101P	Right Side Panel	Vinyl; 30 pound Design 1 models
	F8043201P	Right Side Panel	Vinyl; 40 pound Design 1 models
	F8043301P	Right Side Panel	Vinyl; 60 pound Design 1 models
	F8399201	Right Side Panel	20 pound Design 2 models
	F8399301	Right Side Panel	30 pound Design 2 models
	F8399401	Right Side Panel	40 pound Design 2 models
	F8399501	Right Side Panel	60 pound Design 2 models
4	F8206901	Screw	
5	F8176201P	Rear Panel	20 pound Design 1 models
	F8176301	Rear Panel	30 pound Design 1 models
	F8177701P	Rear Panel	40 pound Design 1 models
	F8177501P	Rear Panel	60 pound Design 1 models
	F8362401	Rear Panel	20 pound Design 2 models
	F8352801	Rear Panel	30 pound Design 2 models
	F8365201	Rear Panel	40 pound Design 2 models
	F8367101	Rear Panel	60 pound Design 2 models

Door

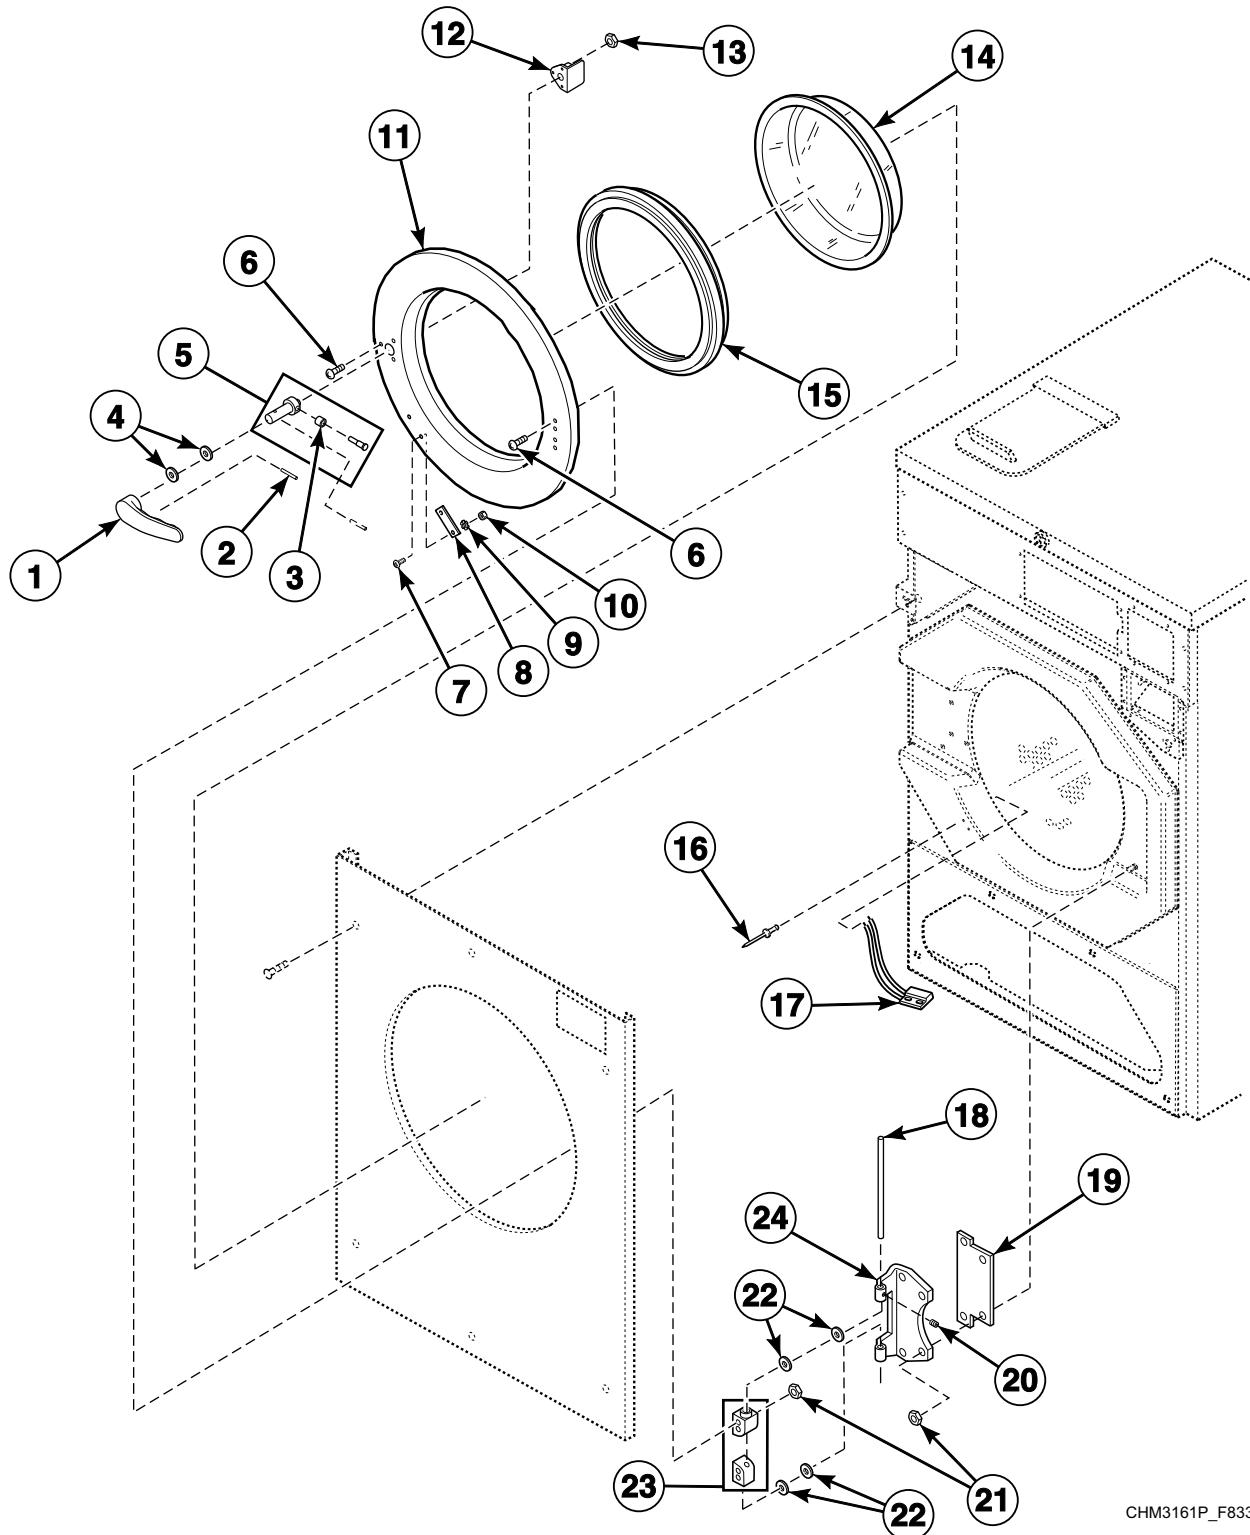


CHM3161P_F8339301

Door

REF	PART NO.	DESCRIPTION	COMMENTS
	F8187201	Door Assembly	20 pound SC and UC models; Includes items 1-15 and 18-24
	F8187203	Door Assembly	20 pound HC models; Includes items 1-15 and 18-24
	F8187301	Door Assembly	30 pound SC and UC models; Includes items 1-15 and 18-24
	F8187303	Door Assembly	30 pound HC models; Includes items 1-15 and 18-24
	F8187401	Door Assembly	40 and 60 pound SC and UC models; Includes items 1-15 and 18-24
	F8187403	Door Assembly	40 and 60 pound HC models; Includes items 1-15 and 18-24
1	F8199501	Door Handle	Gray; HCL, HCN and HCU Models
	F8199401P	Door Handle	Black; All other models
2	F431222	Spring Pin	
3	F8221701	Bearing Sleeve	
4	F431916	Washer	
5	F8221401	Door Latch Arm Assembly	
6	F430976	Screw	
7	F430916	Screw	
8	F8390801	Magnet	
9	F431133	Washer	
10	F431022	Nut	
11	F0602431-02	Door	20 pound models
	F0602837-02	Door	30 pound models
	F602842-2	Door	40 and 60 pound models
12	F8223701	Door Handle Spacer	
13	F430232	Nut	
14	F290205P	Door Glass Kit	20 pound SC and UC models; 20 pound HC models through 1/10/10
	F8341701	Door Glass	20 pound HC models; Models starting 1/11/10
	F290207P	Door Glass Kit	30 pound SC and UC models; 30 pound HC models through 1/10/10
	F8341801P	Door Glass	30 pound HC models; Models starting 1/11/10
	F290208P	Door Glass	40 and 60 pound SC and UC models; 40 and 60 pound HC models through 1/10/10
	F8341901	Door Glass	40 and 60 pound HC models; Models starting 1/11/10
15	F200000200	Door Gasket	20 pound models; Gray
	F200000202	Door Gasket	20 pound models; Black
	F8111601	Door Gasket	30 pound models; Gray
	F8111602	Door Gasket	30 pound models; Black
	F170124	Door Gasket	40 and 60 pound models; Gray
	F8111502	Door Gasket	40 and 60 pound models; Black
16	F8245101	Blind Rivet	
17	F8066802	Reed Switch Assembly	
18	F602813-2	Rod	20 and 30 pound models
	F602813-3	Rod	40 and 60 pound models
19	F200131000	Door Hinge Shim	
20	F430536	Screw	
21	F430215	Nut	
22	F431929	Washer	
23	F150271	Door Mount	
24	F190216P	Door Hinge	

Door Lock

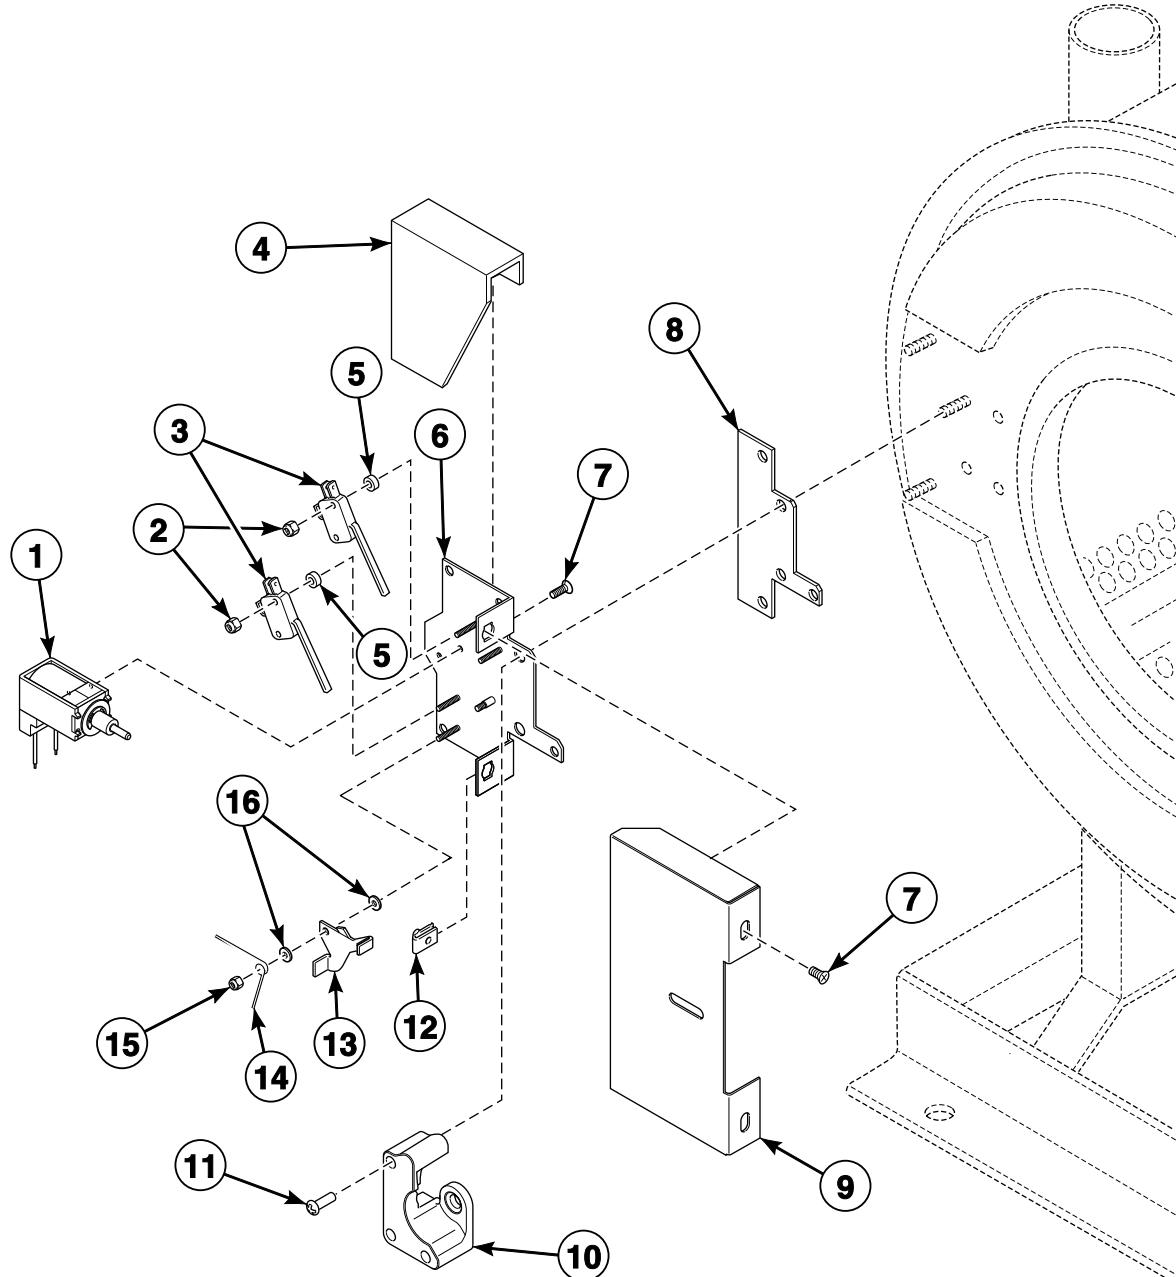


CHM3044P_F8339301

Door Lock

REF	PART NO.	DESCRIPTION	COMMENTS
	F8197101	Door Lock Assembly	Includes F8339902 External Door Lock Harness; Models through 10/31/10
	F8340501	Door Lock Assembly	Includes F8340001 External Door Lock Harness; Models starting 11/1/10
	F977P3	Door Lock Solenoid Replacement Kit	Includes F8340101 Solenoid
1	F8340101	Solenoid	Includes F8224201 Solenoid; Models through 10/31/10; Order F977P3 Door Lock Solenoid Replacement Kit
	F8340001	External Door Lock Harness	Models starting 11/1/10
2	F430225	Nut	
3	F200203200	Door Lock Microswitch	
4	F320200	Door Lock Splash Shield	
5	F431901	Spacer	
6	F8223201	Door Lock Plate Assembly	Models through 10/31/10
7	F430956	Screw	
8	F8059701	Door Lock Plate Shim	Models through 9/25/09
	F8344401	Door Lock Plate Shim	Models starting 9/26/09
9	F8245001	Door Lock Cover	
10	F8223601	Door Lock Catch	Models through 10/31/10
	F8344501	Door Lock Catch	Models starting 11/1/10
11	F8270701	Bolt	
12	F430264	Nut	
13	F8223401	Door Lock Switch Lever	
14	F8070301	Torsion/Door Lock Spring	
15	F430232	Nut	
16	F431902	Washer	

Basket, Shell, Frame and Trunnion - Design 1 Models (Drawing 1 of 3)

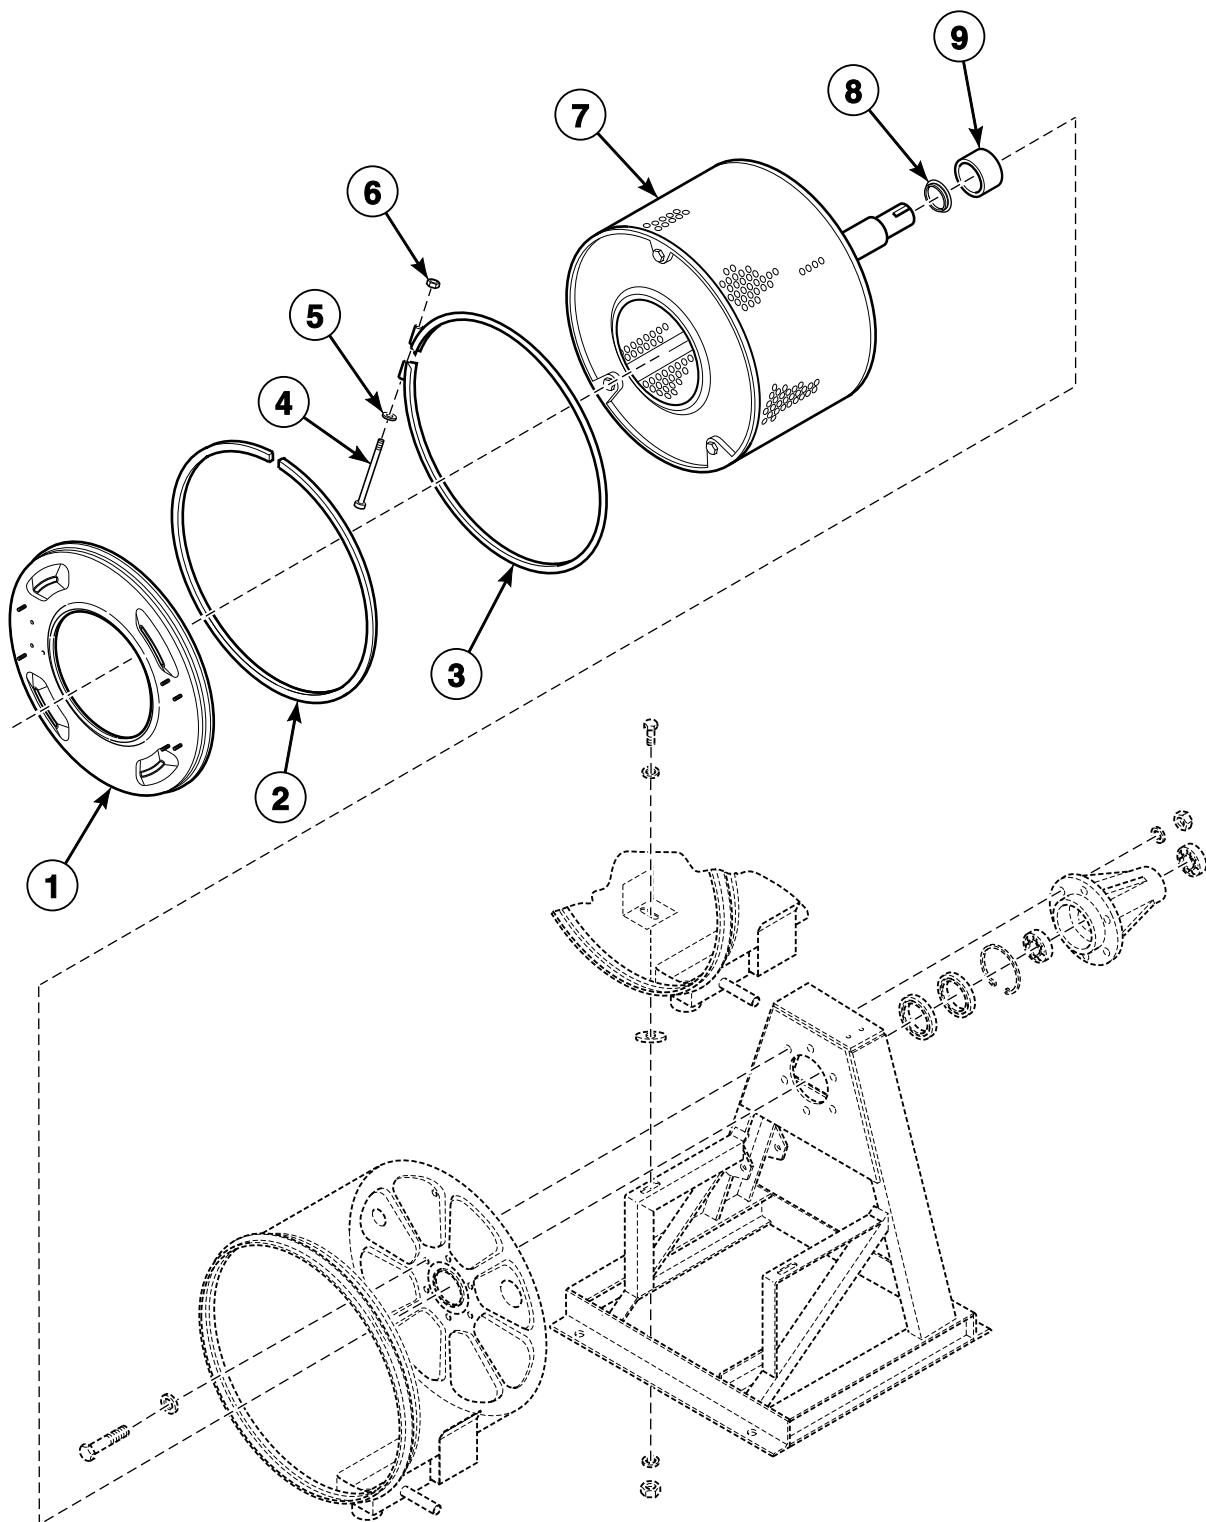


CHM3153P_F8339301

Basket, Shell, Frame and Trunnion - Design 1 Models (Drawing 1 of 3)

REF	PART NO.	DESCRIPTION	COMMENTS
	389P4	Basket Tool Kit	
	390P4	Basket Rental Tool Kit	
1	F8229401	Shell Front Assembly	20 pound models
	F8229501	Shell Front Assembly	30 pound models
	F8229601	Shell Front Assembly	40 pound models
	F8229701	Shell Front Assembly	60 pound models
2	F200001600P	Shell Band Gasket	
3	F602757	Shell Band Assembly	20 pound models
	F631977	Shell Band Assembly	30 pound models
	F741701	Shell Band Kit	40 pound models
	F741702	Shell Band Kit	60 pound models
4	F430518	Screw	
5	F430317	Washer	
6	F430215	Nut	
7	F935P3	Pressfit Upgrade Kit	20 pound models; Includes items 8 and 9, F8347801 Basket Assembly and F747001 Trunnion Kit; Models through 3/31/10
	F8347801P	Basket Assembly	20 pound models; Includes items 8 and 9; Models that have been upgraded with F935P3 Pressfit Upgrade Kit or models starting 4/1/10
	F936P3	Pressfit Upgrade Kit	30 pound models; Includes items 8 and 9, F8347901 Basket Assembly and F747002 Trunnion Kit; Models through 3/31/10
	F8347901P	Basket Assembly	30 pound models; Includes items 8 and 9; Models that have been upgraded with F936P3 Pressfit Upgrade Kit or models starting 4/1/10
	F938P3	Pressfit Upgrade Kit	40 pound models; Includes items 8 and 9, F8336301 Basket Assembly and F747003 Trunnion Kit; Models through 3/31/10
	F8336301P	Basket Assembly	40 pound models; Includes items 8 and 9; Models that have been upgraded with F938P3 Pressfit Upgrade Kit or models starting 4/1/10
	F939P3	Pressfit Upgrade Kit	60 pound models; Includes items 8 and 9, F8336501 Basket Assembly and F747005 Trunnion Kit; Models through 3/31/10
	F8336501P	Basket Assembly	60 pound models; Includes items 8 and 9; Models that have been upgraded with F939P3 Pressfit Upgrade Kit or models starting 4/1/10
	F8336801	Excluder Seal	20 pound models; Models that have been upgraded with F935P3 Pressfit Upgrade Kit or models starting 4/1/10
	F8336901	Excluder Seal	30 pound models; Models that have been upgraded with F936P3 Pressfit Upgrade Kit or models starting 4/1/10
8	F8337001	Excluder Seal	40 pound models; Models that have been upgraded with F938P3 Pressfit Upgrade Kit or models starting 4/1/10
	F8337101	Excluder Seal	60 pound models; Models that have been upgraded with F939P3 Pressfit Upgrade Kit or models starting 4/1/10
	F8312001P	Shaft Seal Sleeve	20 pound models; Models that have not been upgraded with F935P3 Pressfit Upgrade Kit or models through 3/31/10
	F8343901P	Shaft Seal Sleeve Kit	20 pound models; Models that have been upgraded with F935P3 Pressfit Upgrade Kit or models starting 4/1/10
9	F8312004P	Shaft Seal Sleeve	30 pound models; Models that have not been upgraded with F936P3 Pressfit Upgrade Kit or models through 3/31/10
	F8343904P	Shaft Seal Sleeve Kit	30 pound models; Models that have been upgraded with F936P3 Pressfit Upgrade Kit or models starting 4/1/10
	F8312006P	Shaft Seal Sleeve	40 pound models; Models that have not been upgraded with F938P3 Pressfit Upgrade Kit or models through 3/31/10
	F8343906P	Shaft Seal Sleeve Kit	40 pound models; Models that have been upgraded with F938P3 Pressfit Upgrade Kit or models starting 4/1/10
	F8343909P	Shaft Seal Sleeve Kit	60 pound models

Basket, Shell, Frame and Trunnion - Design 1 Models (Drawing 2 of 3)

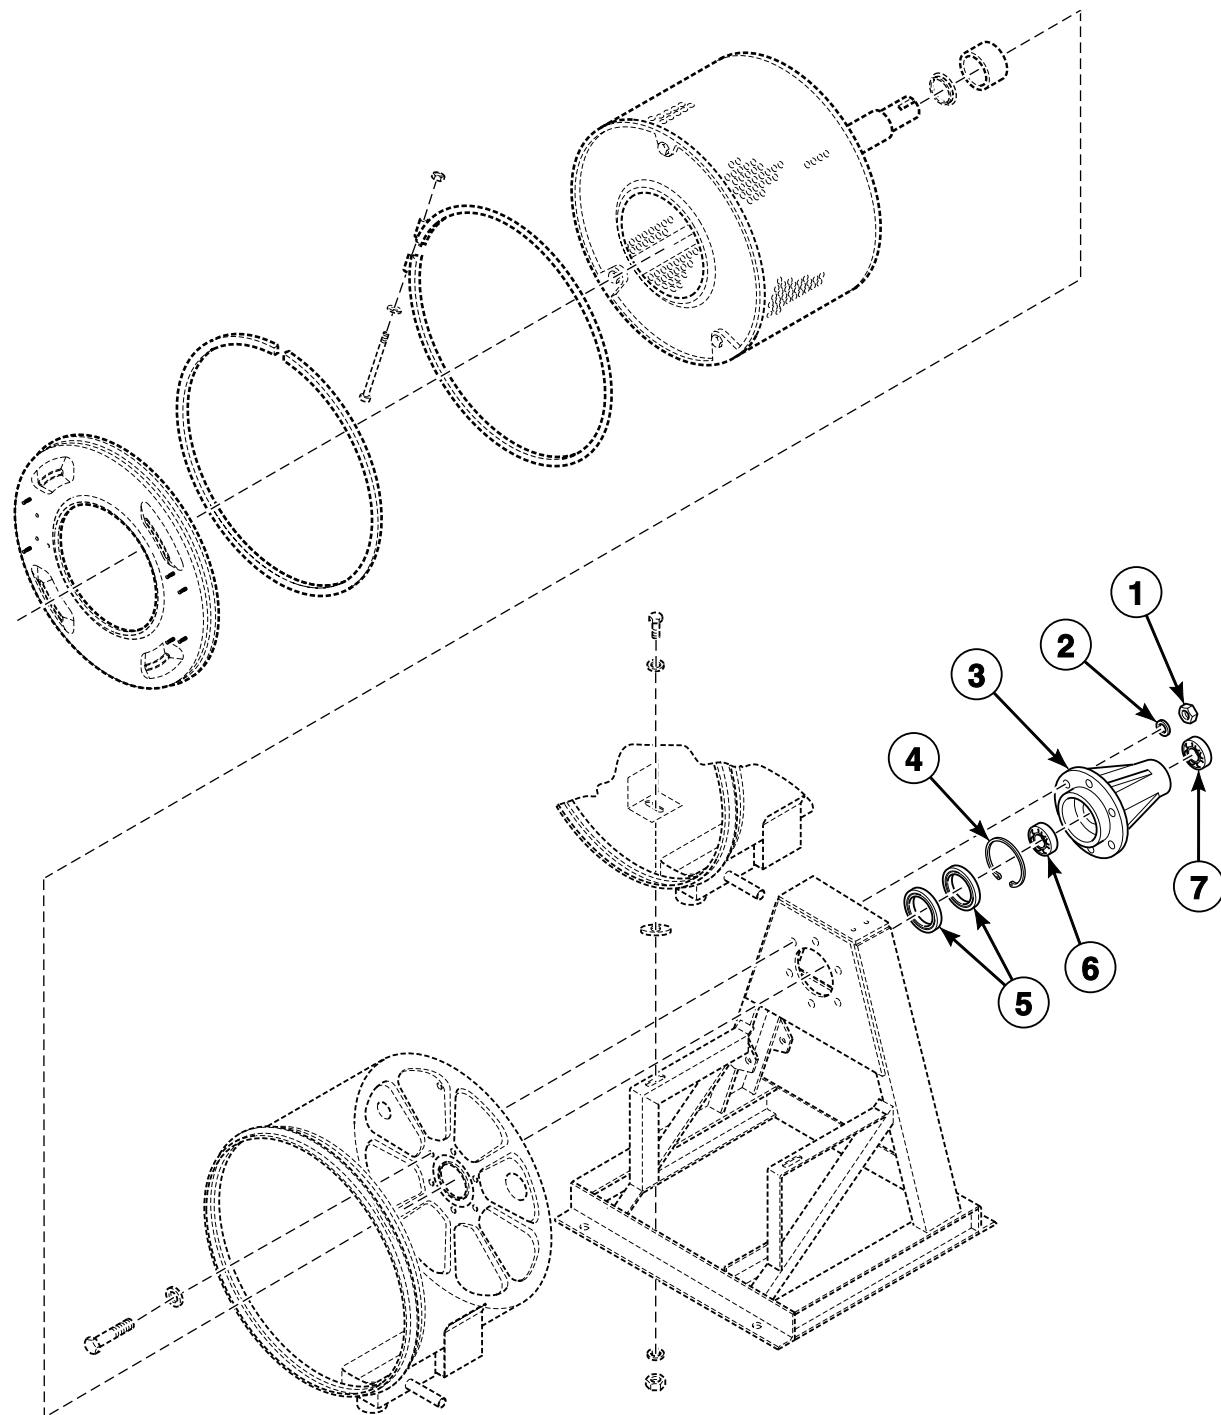


CHM3153PA_F8339301

Basket, Shell, Frame and Trunnion - Design 1 Models (Drawing 2 of 3)

REF	PART NO.	DESCRIPTION	COMMENTS
1	F430239	Nut	20 pound models
	F430240	Nut	All other models
2	F431128	Washer	20 pound models
	F431131	Washer	All other models
3	F747001	Trunnion Kit	Includes items 4-6; 20 pound models
	F747002	Trunnion Kit	Includes items 4-6; 30 pound models
	F747003	Trunnion Kit	Includes items 4-6; 40 pound models
	F747005	Trunnion Kit	Includes items 4-6; 60 pound models
4	F8344901	Retaining Ring	20 pound models; Models that have been upgraded with F935P3 Pressfit Upgrade Kit or models starting 4/1/10
	F8345001	Retaining Ring	30 pound models; Models that have been upgraded with F936P3 Pressfit Upgrade Kit or models starting 4/1/10
	F8337801	Retaining Ring	40 pound models; Models that have been upgraded with F938P3 Pressfit Upgrade Kit or models starting 4/1/10
	F8337901	Retaining Ring	60 pound models; Models that have been upgraded with F939P3 Pressfit Upgrade Kit or models starting 4/1/10
5	F8203801	Triple Lip Seal	20 pound models
	F8203802	Triple Lip Seal	30 pound models
	F8203803	Triple Lip Seal	40 pound models
	F8203806	Triple Lip Seal	60 pound models
6	F100137P	Bearing	6308 2RS C3; Front; 20 and 40 pound models
	F100123P	Bearing	6309 2RS C3; Front; 30 pound models
	F100135	Bearing	6313 2RS C3; Front; 60 pound models
7	F100136P	Bearing	6307 2RS C3; Rear; 20 pound models
	F100108	Bearing	Rear; 30 pound models
	F100134	Bearing	6310 2RS C3; Rear; 40 and 60 pound models

Basket, Shell, Frame and Trunnion - Design 1 Models (Drawing 3 of 3)

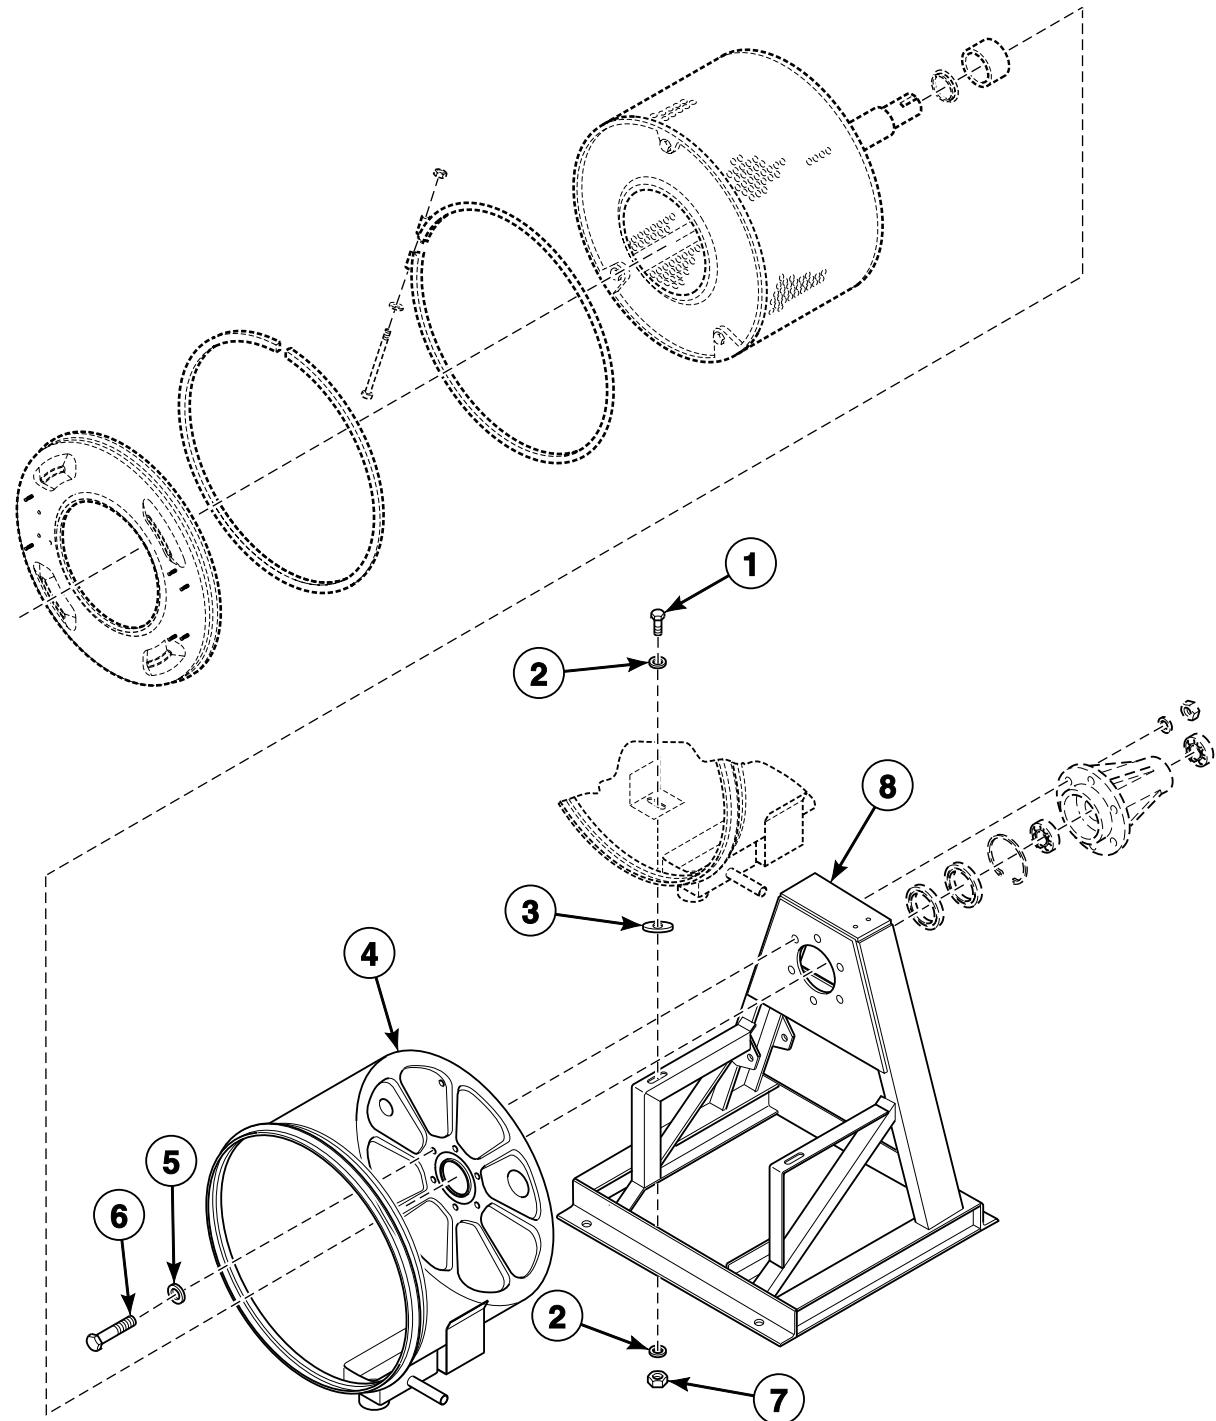


CHM3153PB_F8339301

Basket, Shell, Frame and Trunnion - Design 1 Models (Drawing 3 of 3)

REF	PART NO.	DESCRIPTION	COMMENTS
1	F430942	Screw	
2	M400081	Washer	
3	F430303	Washer	
4	F8179201	Shell Weldment	20 pound models; Standard
	F8179202	Shell Weldment	20 pound models; Models with electric heat
	F8179301	Shell Weldment	30 pound models; Standard
	F8179302	Shell Weldment	30 pound models; Models with electric heat
	F8179401	Shell Weldment	40 pound models; Standard
	F8179402	Shell Weldment	40 pound models; Models with electric heat
	F8179501	Shell Weldment	60 pound models; Standard
	F8179502	Shell Weldment	60 pound models; Models with electric heat
5	F431128	Washer	20 pound models
	F431131	Washer	All other models
6	F430949	Screw	20 pound models
	F430987	Screw	All other models
7	F430218	Nut	
8	F8195901	Frame Weldment	20 pound models
	F8196001	Frame Weldment	30 pound models
	F8196101	Frame Weldment	40 pound models
	F8199101	Frame Weldment	60 pound models

Basket, Shell, Frame and Trunnion - Design 2 Models (Drawing 1 of 3)

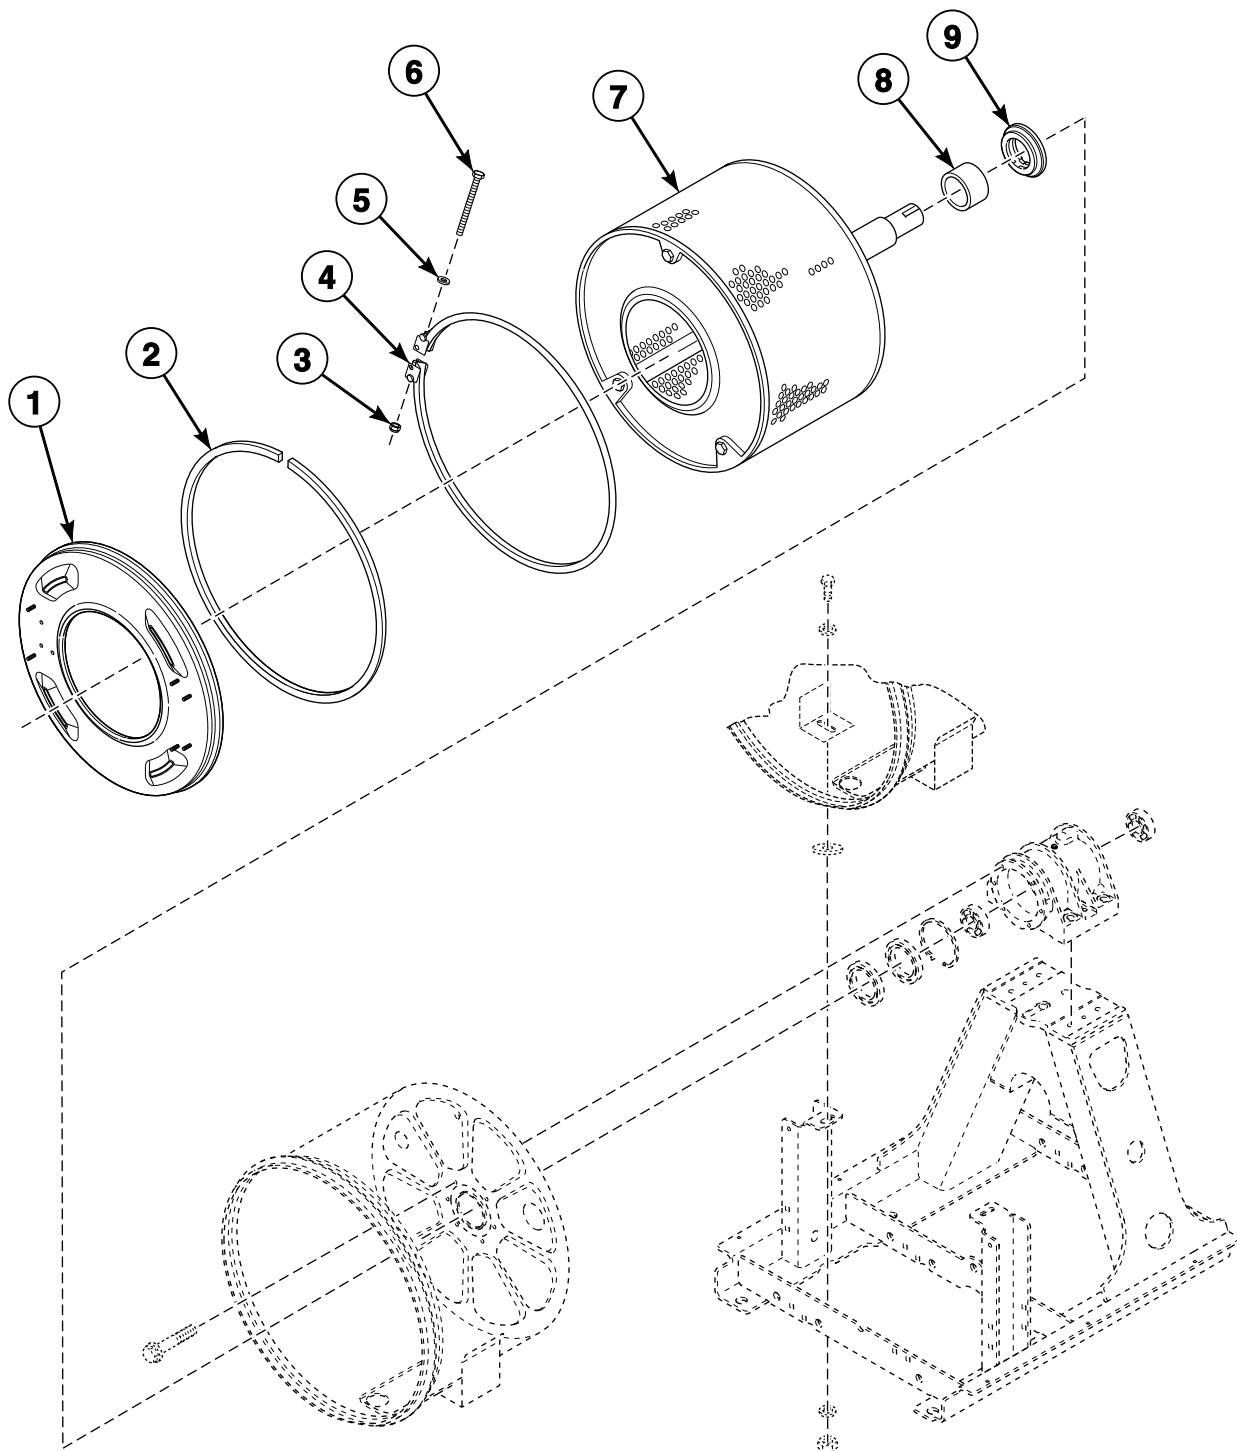


CHM3202P_F8339301

Basket, Shell, Frame and Trunnion - Design 2 Models (Drawing 1 of 3)

REF	PART NO.	DESCRIPTION	COMMENTS
	389P4	Basket Tool Kit	Use with F935P3, F936P3, F938P3 and F939P3 Pressfit Upgrade Kits
	390P4	Basket Rental Tool Kit	Use with F935P3, F936P3, F938P3 and F939P3 Pressfit Upgrade Kits
1	F8229401	Shell Front Assembly	20 pound models
	F8229501	Shell Front Assembly	30 pound models
	F8229601	Shell Front Assembly	40 pound models
	F8229701	Shell Front Assembly	60 pound models
2	F200001600P	Shell Band Gasket	
3	F430215	Nut	
4	F602757	Shell Band Assembly	20 pound models
	F631977	Shell Band Assembly	30 pound models
	F741701	Shell Band Kit	40 pound models
	F741702	Shell Band Kit	60 pound models
5	F430317	Washer	
6	F430518	Screw	
7	F8391301	Basket Assembly	20 pound models
	F8391501	Basket Assembly	30 pound models
	F8391701	Basket Assembly	40 pound models
	F8391901	Basket Assembly	60 pound models
8	F8336801	Excluder Seal	20 pound models; Models that have been upgraded with F935P3 Pressfit Upgrade Kit or models starting 4/1/10
	F8336901	Excluder Seal	30 pound models; Models that have been upgraded with F936P3 Pressfit Upgrade Kit or models starting 4/1/10
	F8337001	Excluder Seal	40 pound models; Models that have been upgraded with F938P3 Pressfit Upgrade Kit or models starting 4/1/10
	F8337101	Excluder Seal	60 pound models; Models that have been upgraded with F939P3 Pressfit Upgrade Kit or models starting 4/1/10
9	F8343901P	Shaft Seal Sleeve Kit	20 pound models
	F8343904P	Shaft Seal Sleeve Kit	30 pound models
	F8343906P	Shaft Seal Sleeve Kit	40 pound models
	F8343909P	Shaft Seal Sleeve Kit	60 pound models

Basket, Shell, Frame and Trunnion - Design 2 Models (Drawing 2 of 3)

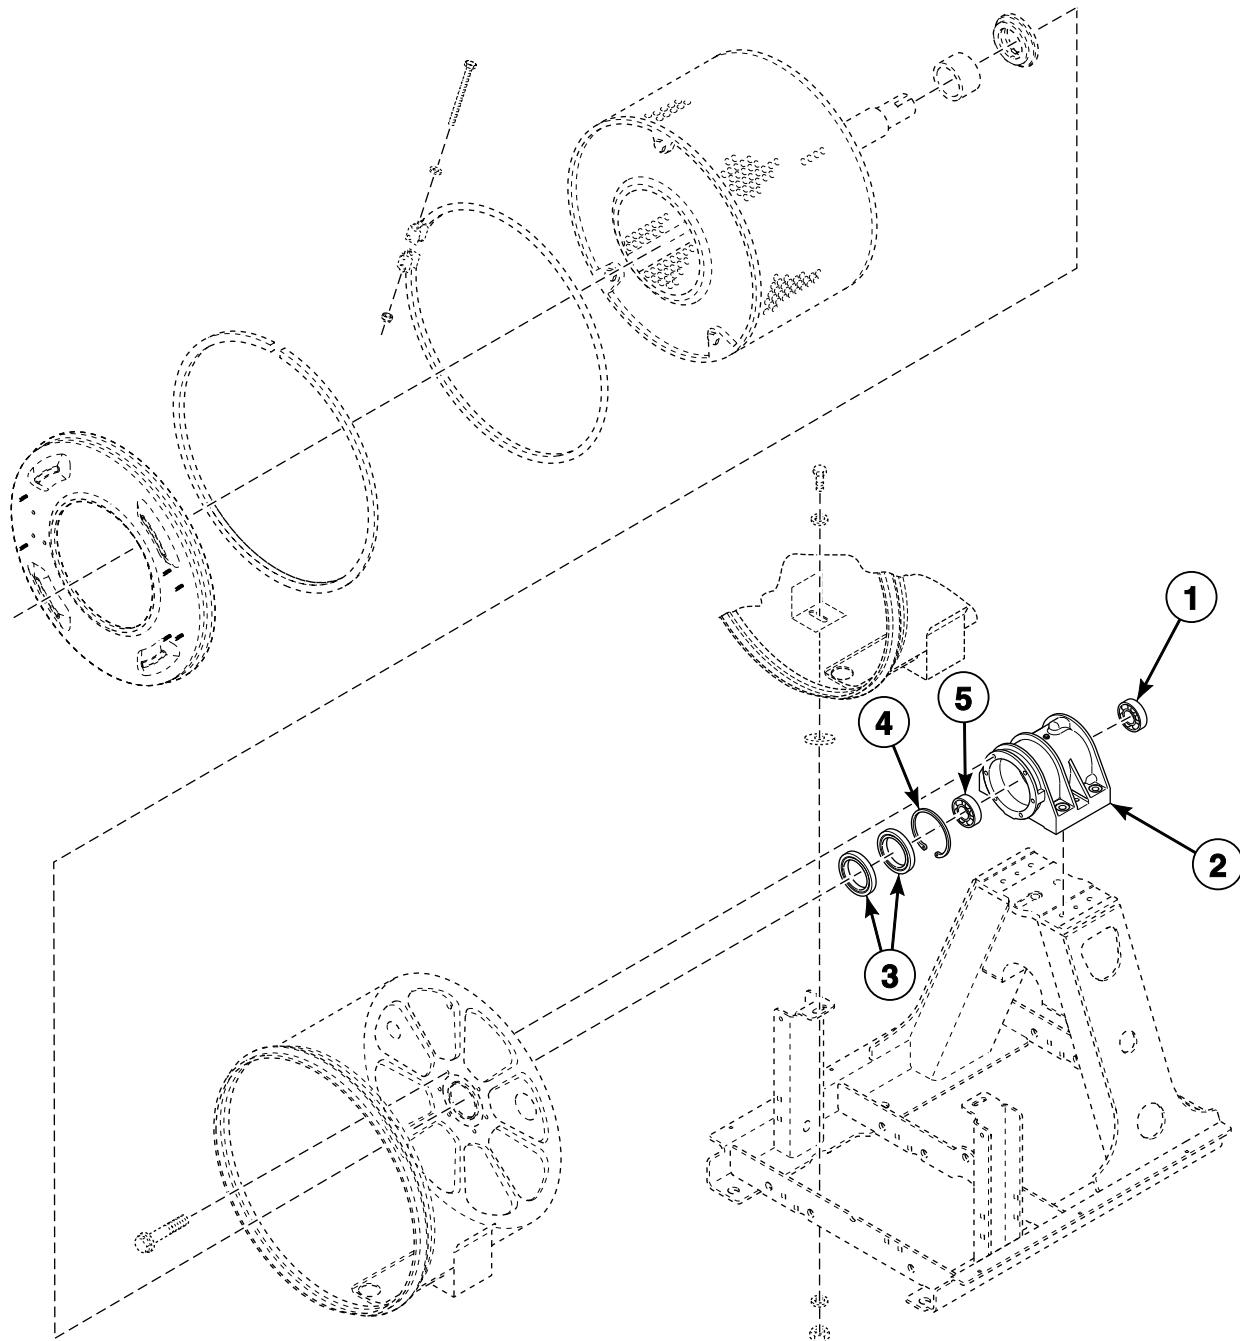


CHM3202PA_F8339301

Basket, Shell, Frame and Trunnion - Design 2 Models (Drawing 2 of 3)

REF	PART NO.	DESCRIPTION	COMMENTS
1	F100136P	Bearing	20 pound models; 6307 2RS C3; Rear
	F100108	Bearing	30 pound models; Rear
	F100134	Bearing	40 and 60 pound models; 6310 2RS C3; Rear
2	F8271601	Bearing Housing Assembly	20 pound models
	F8271701	Bearing Housing Assembly	30 pound models
	F8271801	Bearing Housing Assembly	40 pound models
	F8271901	Bearing Housing Assembly	60 pound models
3	F8203801	Triple Lip Seal	20 pound models
	F8203802	Triple Lip Seal	30 pound models
	F8203803	Triple Lip Seal	40 pound models
	F8203806	Triple Lip Seal	60 pound models
4	F8344901	Retaining Ring	20 pound models; Models that have been upgraded with F935P3 Pressfit Upgrade Kit or models starting 4/1/10
	F8345001	Retaining Ring	30 pound models; Models that have been upgraded with F936P3 Pressfit Upgrade Kit or models starting 4/1/10
	F8337801	Retaining Ring	40 pound models; Models that have been upgraded with F938P3 Pressfit Upgrade Kit or models starting 4/1/10
	F8337901	Retaining Ring	60 pound models; Models that have been upgraded with F939P3 Pressfit Upgrade Kit or models starting 4/1/10
5	F100137P	Bearing	20 and 40 pound models; 6308 2RS C3; Front
	F100123P	Bearing	30 pound models; 6309 2RS C3; Front
	F100135	Bearing	60 pound models; 6313 2RS C3; Front

Basket, Shell, Frame and Trunnion - Design 2 Models (Drawing 3 of 3)

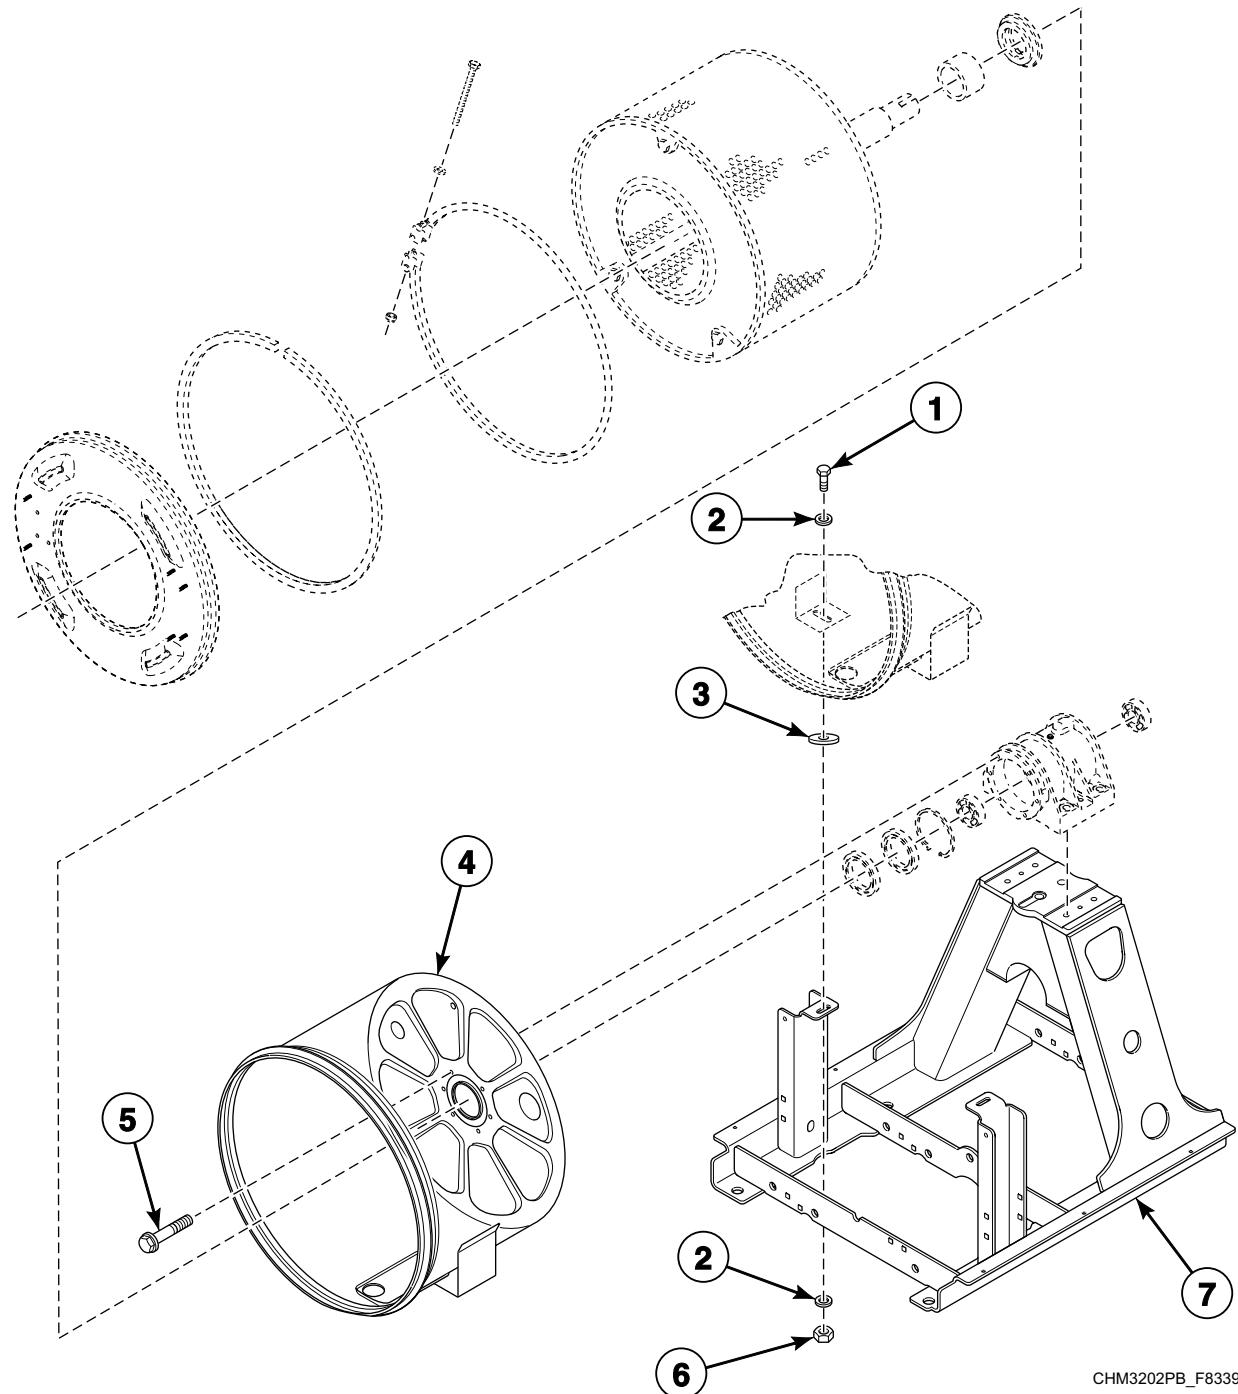


CHM3202PB_F8339301

Basket, Shell, Frame and Trunnion - Design 2 Models (Drawing 3 of 3)

REF	PART NO.	DESCRIPTION	COMMENTS
1	F430942	Screw	
2	M400081	Washer	
3	F430303	Washer	
4	F8360601	Shell Weldment	20 pound models; Standard
	F8360701	Shell Weldment	30 pound models; Standard
	F8360801	Shell Weldment	40 pound models; Standard
	F8360901	Shell Weldment	60 pound models; Standard
	F8360603	Shell Weldment	20 pound models; Standard
	F8360602	Shell Weldment	20 pound models; Models with electric heat
	F8360703	Shell Weldment	30 pound models; Standard
	F8360702	Shell Weldment	30 pound models; Models with electric heat
	F8360803	Shell Weldment	40 pound models; Standard
	F8360802	Shell Weldment	40 pound models; Models with electric heat
	F8360903	Shell Weldment	60 pound models; Standard
	F8360902	Shell Weldment	60 pound models; Models with electric heat
5	F430949	Screw	20 pound models
	F430987	Screw	All other models
6	F430218	Nut	
7	F8247001	Frame Weldment	20 pound models
	F8248001	Frame Weldment	30 pound models
	F8249001	Frame Weldment	40 pound models
	F8250001	Frame Weldment	60 pound models

Drain Plumbing - Design 1 Models

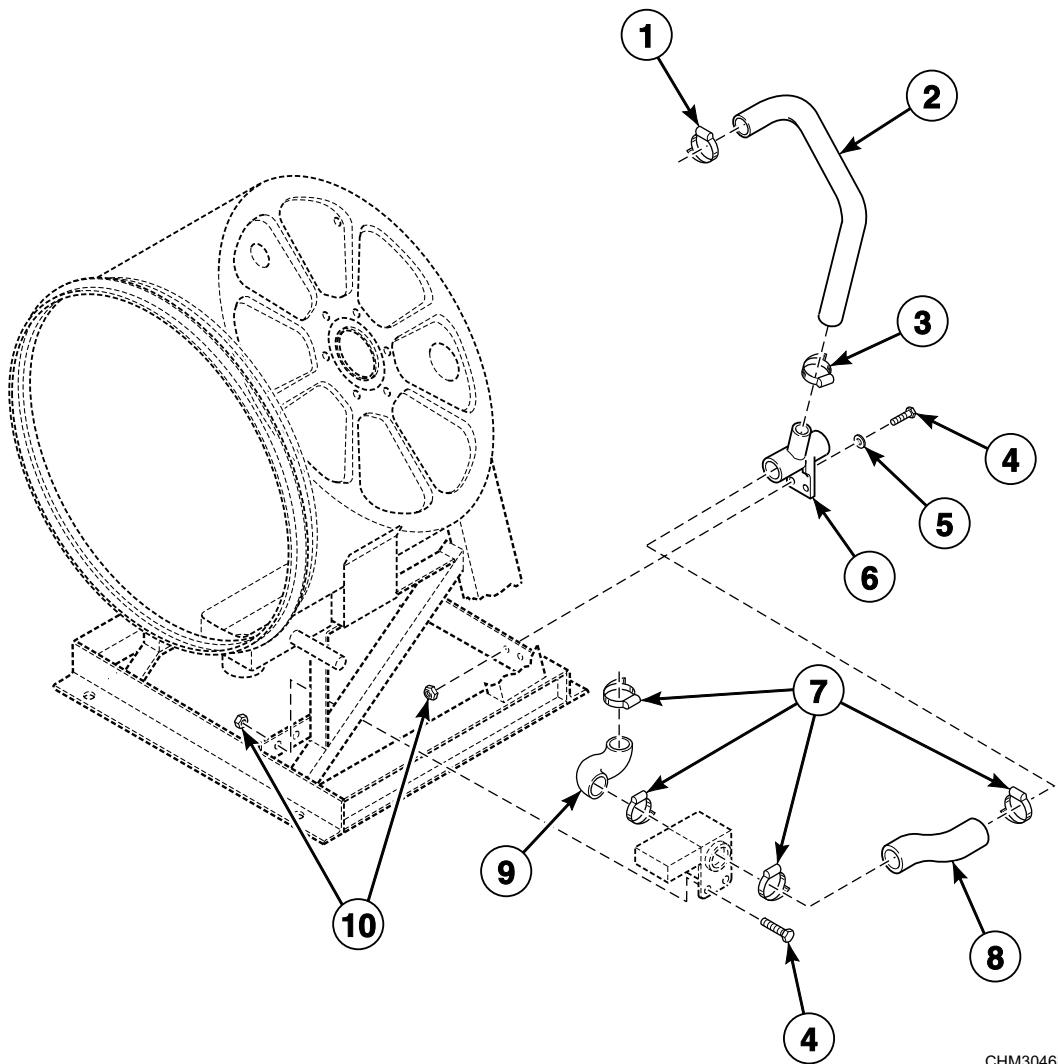


CHM3046P_F8339301

Drain Plumbing - Design 1 Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	F200213	Hose Clamp	No. 40
2	F150308	Overflow Hose	20 and 30 pound models
	F0200238-00	Overflow Hose	40 pound models
	F8337701	Overflow Hose	40 pound models; Electric heat
	F150417	Overflow Hose	60 pound models
3	F200215	Hose Clamp	40 pound models
	F200213	Hose Clamp	All other models; No. 40
4	F430107	Screw	
5	F430317	Washer	
6	F150318	Drain Connect Tee	20 and 30 pound models
	F150398	Drain Tee	40 and 60 pound models
7	F200213	Hose Clamp	20 and 30 pound models; No. 40
	F200201	Hose Clamp	40 and 60 pound models; No. 56
8	F8233101	Drain Hose	20 pound models
	F8233102	Drain Hose	30 pound models
	F8231901	Drain Hose	40 pound models
	F8231902	Drain Hose	60 pound models
9	F8233001	Drain Hose	20 and 30 pound models
	F8232901	Drain Hose	40 and 60 pound models
10	F430215	Nut	

Drain Plumbing - Design 2 Models

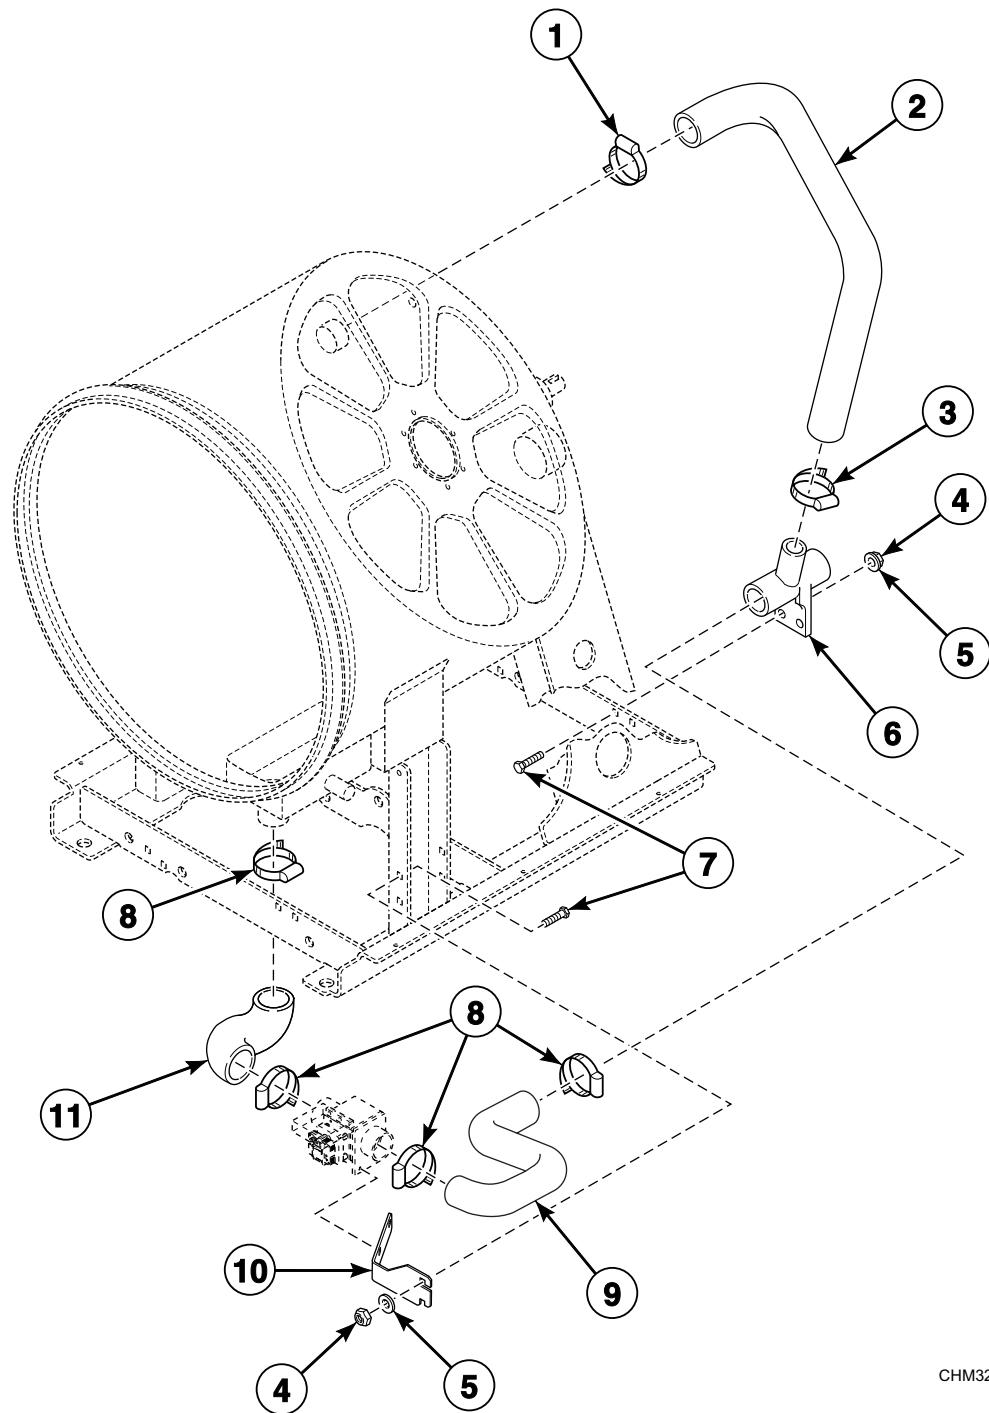


CHM3204P_F8339301

Drain Plumbing - Design 2 Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	F200213	Hose Clamp	No. 40
2	F8367901	Overflow Hose	20 pound models
	F8368001	Overflow Hose	30 pound models
	F8367201	Overflow Hose	40 and 60 pound models
3	F200215	Hose Clamp	No. 28; 40 pound models
	F200213	Hose Clamp	No. 40; All other models
4	F430215	Nut	
5	F430317	Washer	
6	F150318	Drain Connect Tee	20 and 30 pound models
	F150398	Drain Tee	40 and 60 pound models
7	F430107	Screw	
8	F200213	Hose Clamp	No. 40; 20 and 30 pound models
	F200201	Hose Clamp	No. 56; 40 and 60 pound models
9	F8365601	Rear Drain Hose	20 pound models
	F8365602	Rear Drain Hose	30 pound models
	F8231904	Rear Drain Hose	40 pound models
	F8231905	Rear Drain Hose	60 pound models
10	F8365401	Bracket	20 pound models
	F8365402	Bracket	30 pound models
	F8434601	Bracket	40 pound models
	F8434701	Bracket	60 pound models
11	F8261302	Drain Hose	20 and 30 pound models
	F8261303	Drain Hose	20 and 30 pound models; Electric heat
	F8232901	Drain Hose	40 and 60 pound models
	F8464701	Drain Hose	40 and 60 pound models; Electric heat

Drain Valve Assembly - 20 and 30 Pound Models

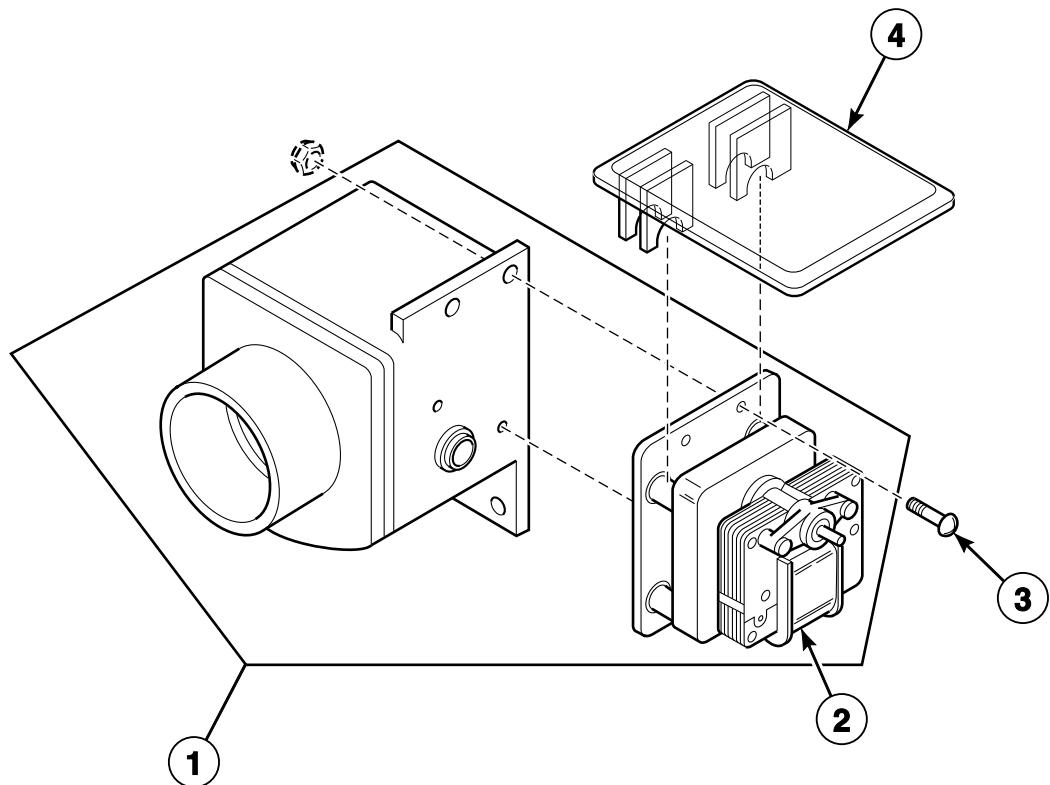


CHM2450P_F8339301

Drain Valve Assembly - 20 and 30 Pound Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	803292	Gravity Drain Valve	220 Volt
2	F380933P	Drain Valve Motor	Round shaft; 220 Volt
3	G159764P	Drain Valve Motor and Gear Box Assembly	Keyed shaft; 220 Volt
	F200182700	Bolt	
4	F200133600	Drain Valve Cover	

Drain Valve Assembly - 40 and 60 Pound Models


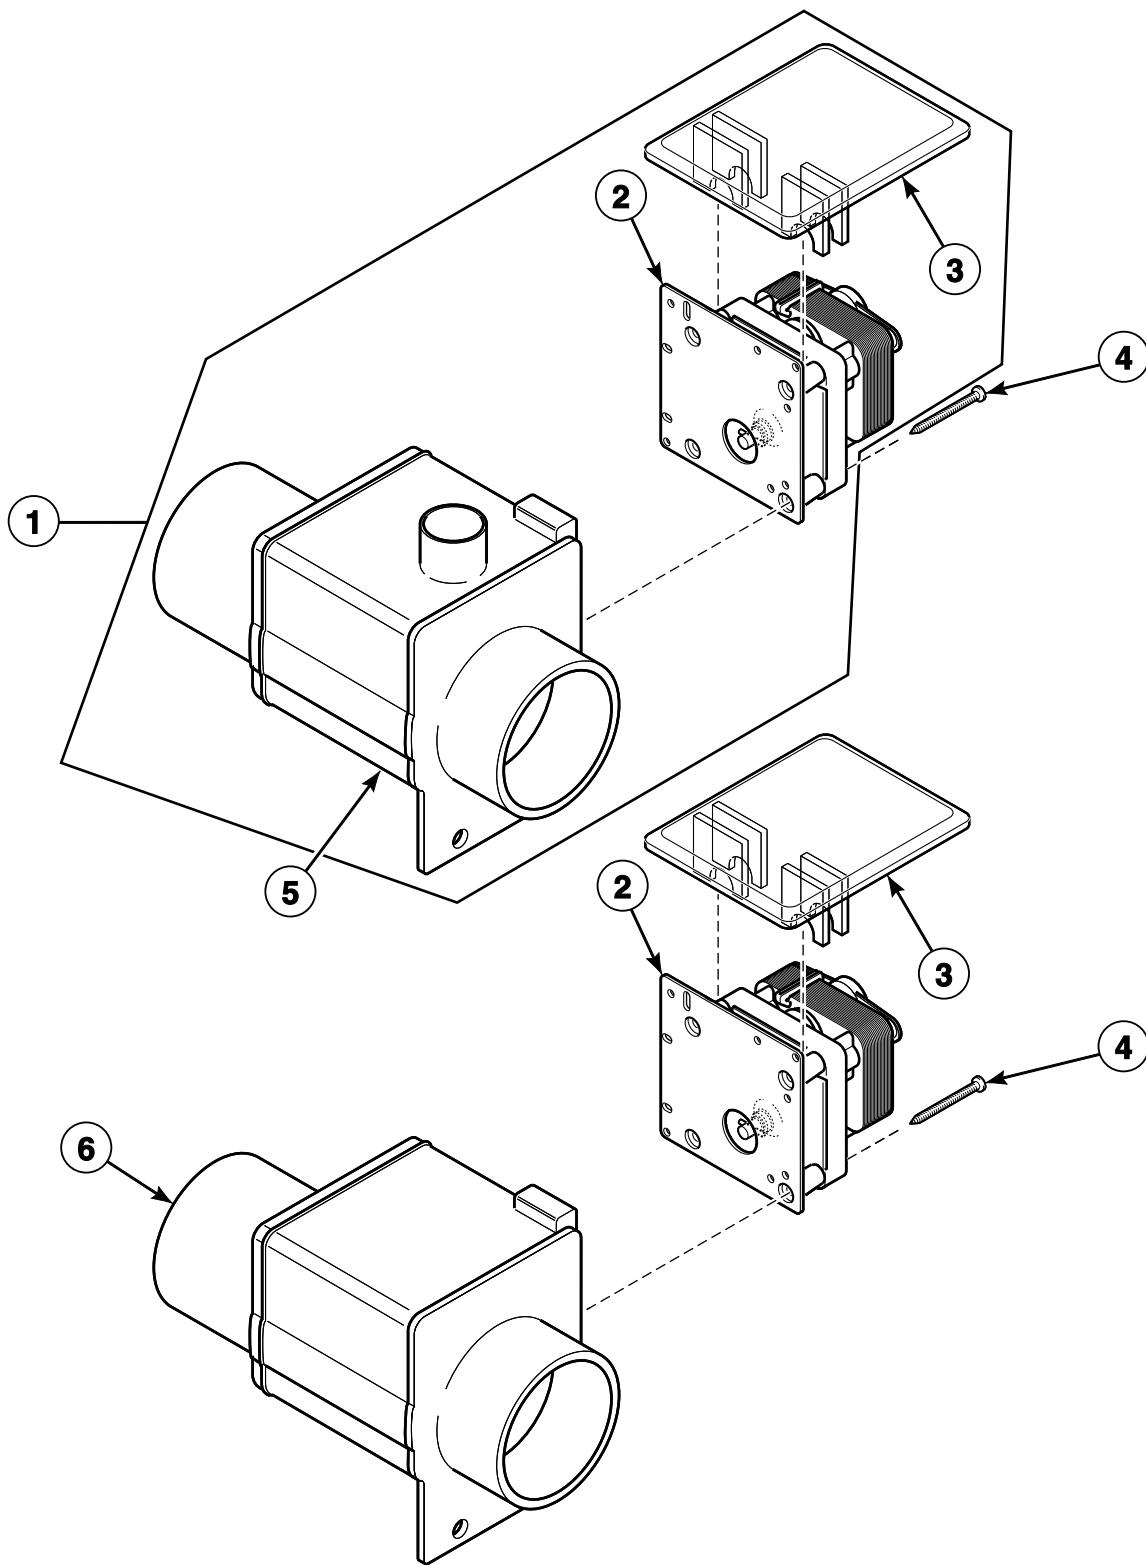


CHM3081P_F8339301

Drain Valve Assembly - 40 and 60 Pound Models

REF	PART NO.	DESCRIPTION	COMMENTS
	F200215	Hose Clamp	No. 28
	F150352	Overflow Plug	
1	F200166400	Drain Valve Kit	220 Volt; Models with heat
2	F380933P	Drain Valve Motor	Round shaft; 220 Volt
	G159764P	Drain Valve Motor and Gear Box Assembly	Keyed shaft; 220 Volt
3	F200133600	Drain Valve Cover	
4	F200182700	Bolt	
5	F8406307	Drain Valve	240 Volt; Models with heat
6	F200166402	Drain Valve Kit	220 Volt

Steam Filter (Optional) and Water Supply Hose

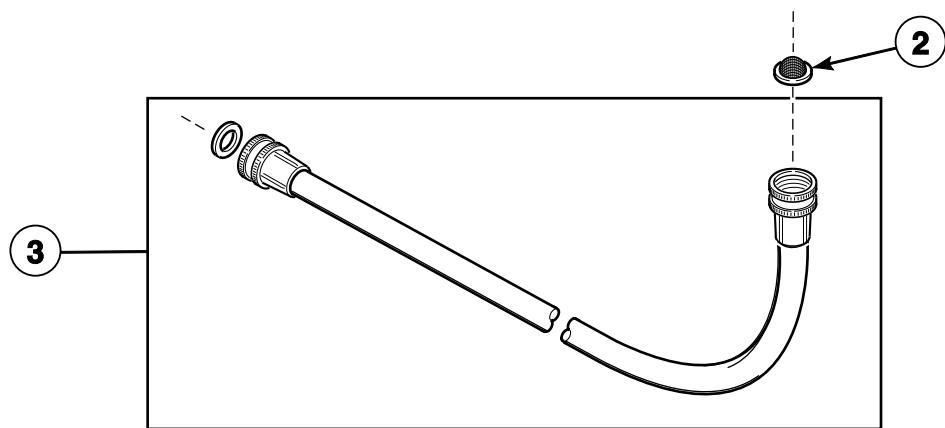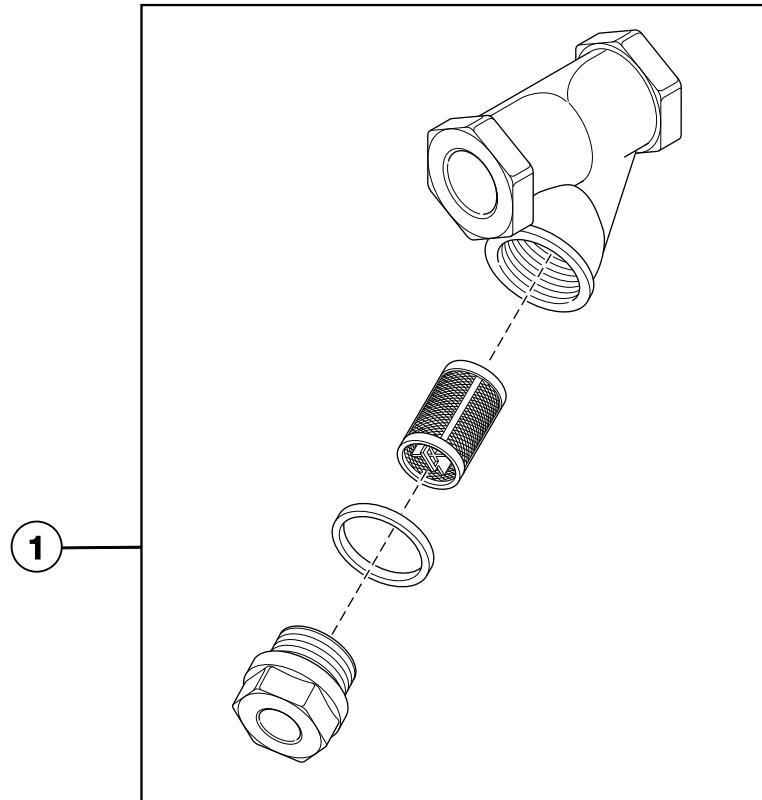


CHM3049P_F8339301

Steam Filter (Optional) and Water Supply Hose

REF	PART NO.	DESCRIPTION	COMMENTS
1	F270307	Steam Filter	1/2 inch
	F270308	Steam Filter	3/4 inch
2	803615	Washer	
3	F200116	Water Hose	3/8 inch; Standard thread
	F200108P	Water Hose	1/2 inch; Standard or metric thread
	223/00049/10P	Fill Hose	Metric thread

Fill Plumbing Assembly (Drawing 1 of 2)

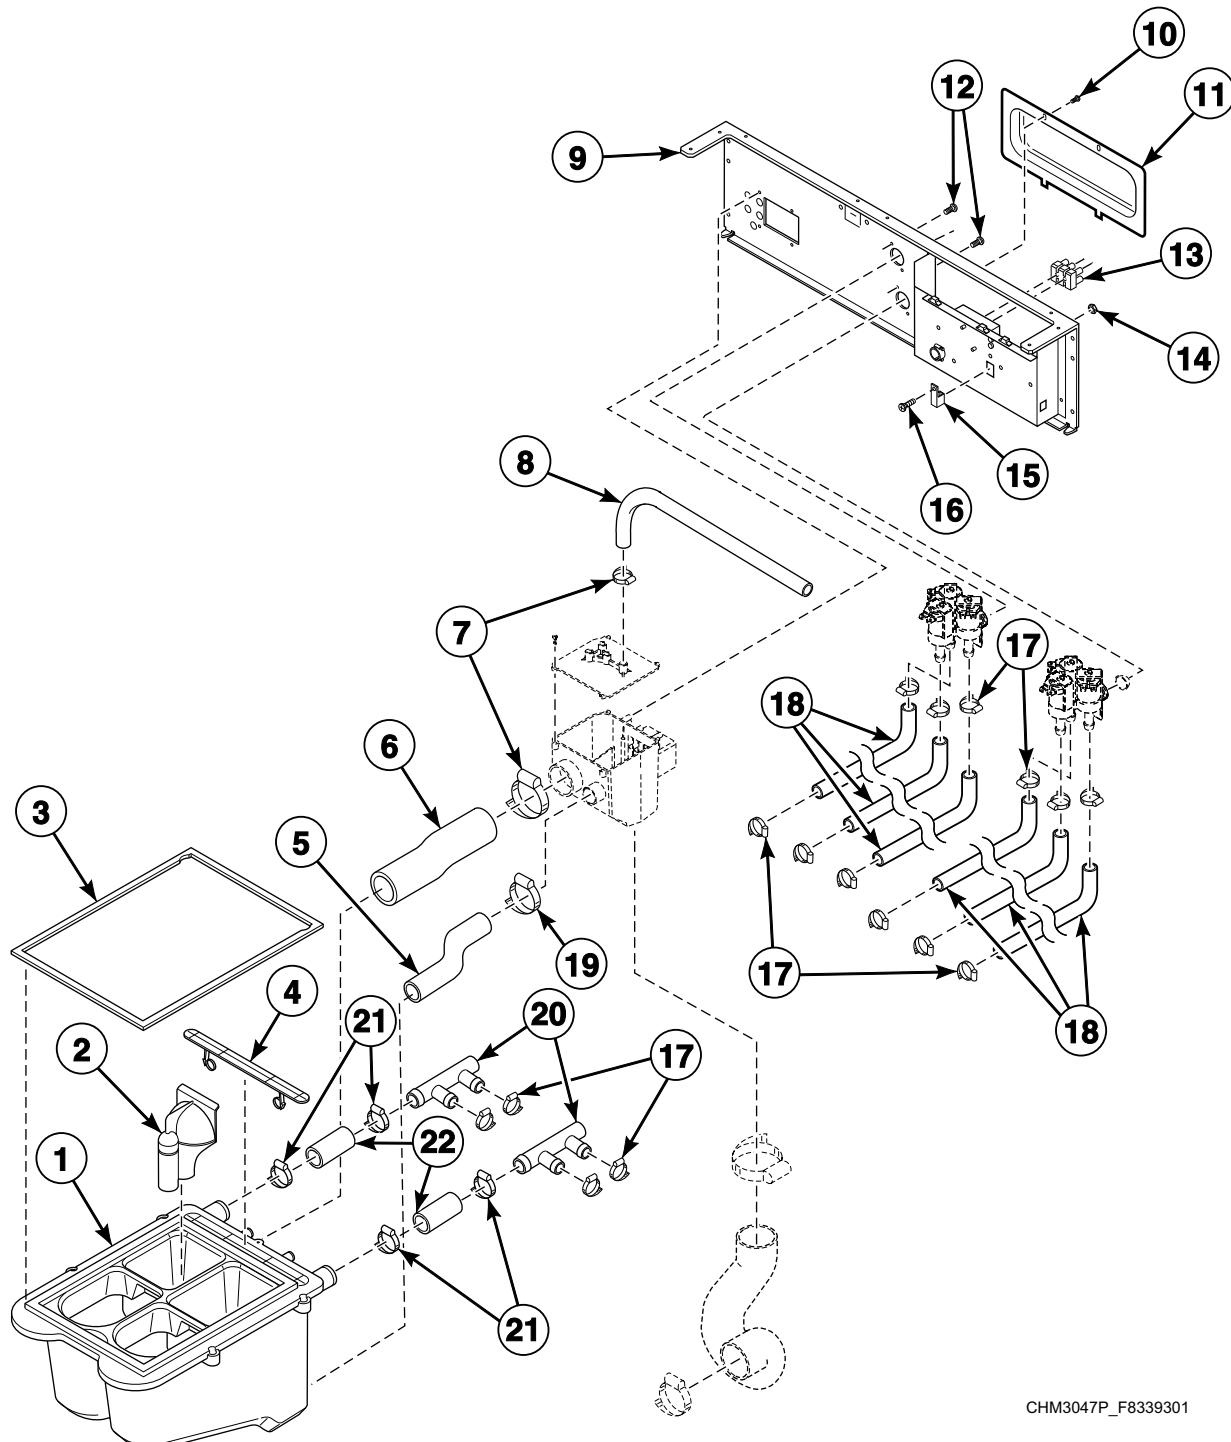


CHM3047P_F8339301

Fill Plumbing Assembly (Drawing 1 of 2)

REF	PART NO.	DESCRIPTION	COMMENTS
1	F8047401	Dispenser Assembly	
2	F8047901	Siphon Cover	
3	F8308301	Dispenser Gasket	
4	F8047801	Access Cover	
5	F8043401	Dispenser Overflow Hose	20 pound models
	F8043403	Dispenser Overflow Hose	30 pound models
	F8043404	Dispenser Overflow Hose	40 pound models
	F8043405	Supply Overflow Hose	60 pound models
6	F8042801	Vacuum Supply Hose	20 pound models
	F8042803	Vacuum Supply Hose	30 pound models
	F8042804	Vacuum Supply Hose	40 pound models
	F8042805	Vacuum Supply Hose	60 pound models
7	F200213	Hose Clamp	No. 40
8	F0200244-01	Vacuum Breaker Hose	60 pound models
	F0200244-02	Vacuum Breaker Hose	All other models
9	F8039901	Valve Panel	20 pound Design 1 models
	F8017501	Valve Panel	30 pound Design 1 models
	F8039601	Valve Panel	40 pound Design 1 models
	F8039801	Valve Panel	60 pound Design 1 models
	F8398701	Valve Panel	20 pound Design 2 models
	F8398801	Valve Panel	30 pound Design 2 models
	F8398901	Valve Panel	40 pound Design 2 models
	F8399001	Valve Panel	60 pound Design 2 models
10	F8206901	Screw	
11	F8177001	Terminal Tray Cover	
12	F8230301	Screw	
13	430642	Terminal Block	Includes screws
14	F430232	Nut	
15	M411283	Ground Lug Connector	
16	F430909	Screw	
17	36801	Hose Clamp	No. 8
18	F8232004	Hose	20 pound models
	F8232001	Hose	30 pound models
	F8232002	Hose	40 and 60 pound models
19	20211	Hose Clamp	No. 17
20	F8333201	Manifold	
21	F200222	Hose Clamp	No. 12
22	F606816-1	Hose	

Fill Plumbing Assembly (Drawing 2 of 2)

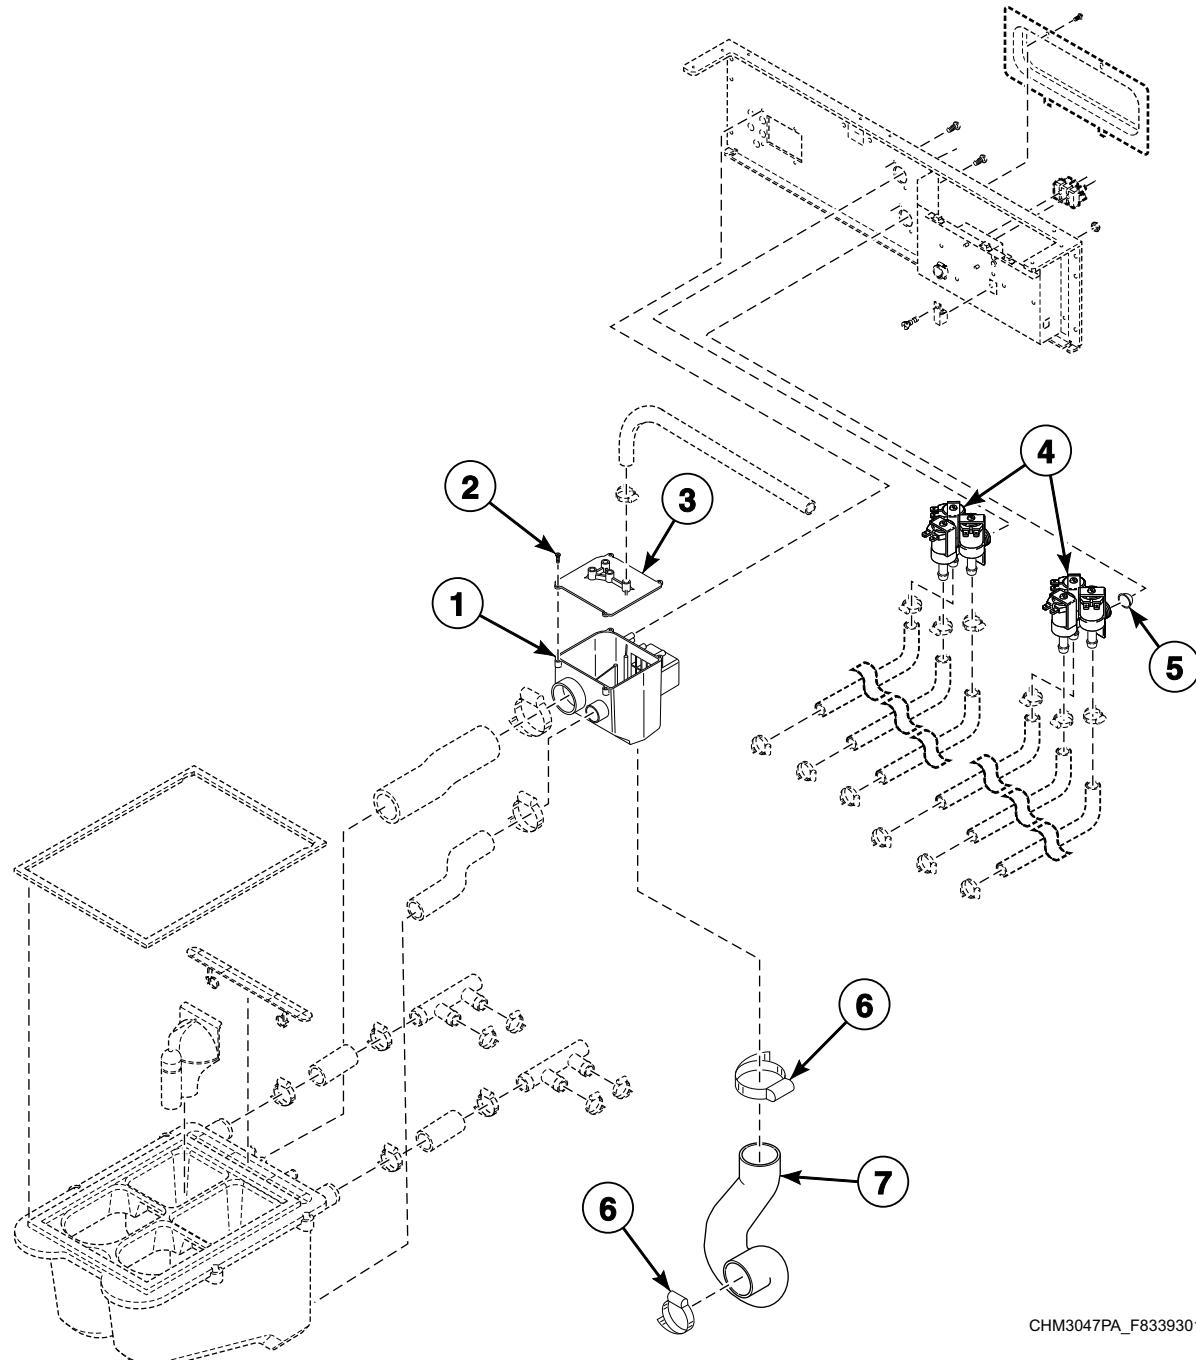


CHM3047PA_F8339301

Fill Plumbing Assembly (Drawing 2 of 2)

REF	PART NO.	DESCRIPTION	COMMENTS
1	F8048601	Vacuum Breaker Assembly	Includes items 2 and 3
2	800548	Screw	
3	F8048501	Vacuum Breaker Cover	
4	F8286401P	3-Way Valve	240 Volt/50 or 60 Hertz; U.S.
	F8286402P	3-Way Valve	240 Volt/50 or 60 Hertz; Metric
	395P4	Water Valve Tool	Elbi valves
5	803615	Washer	
6	F200213	Hose Clamp	No. 40
7	F8042201	P-Trap Hose	20 pound models
	F8042202	P-Trap Hose	30 and 40 pound models
	F8042301	P-Trap Hose	60 pound models

Pulley and Belt - Design 1 Models (Drawing 1 of 3)

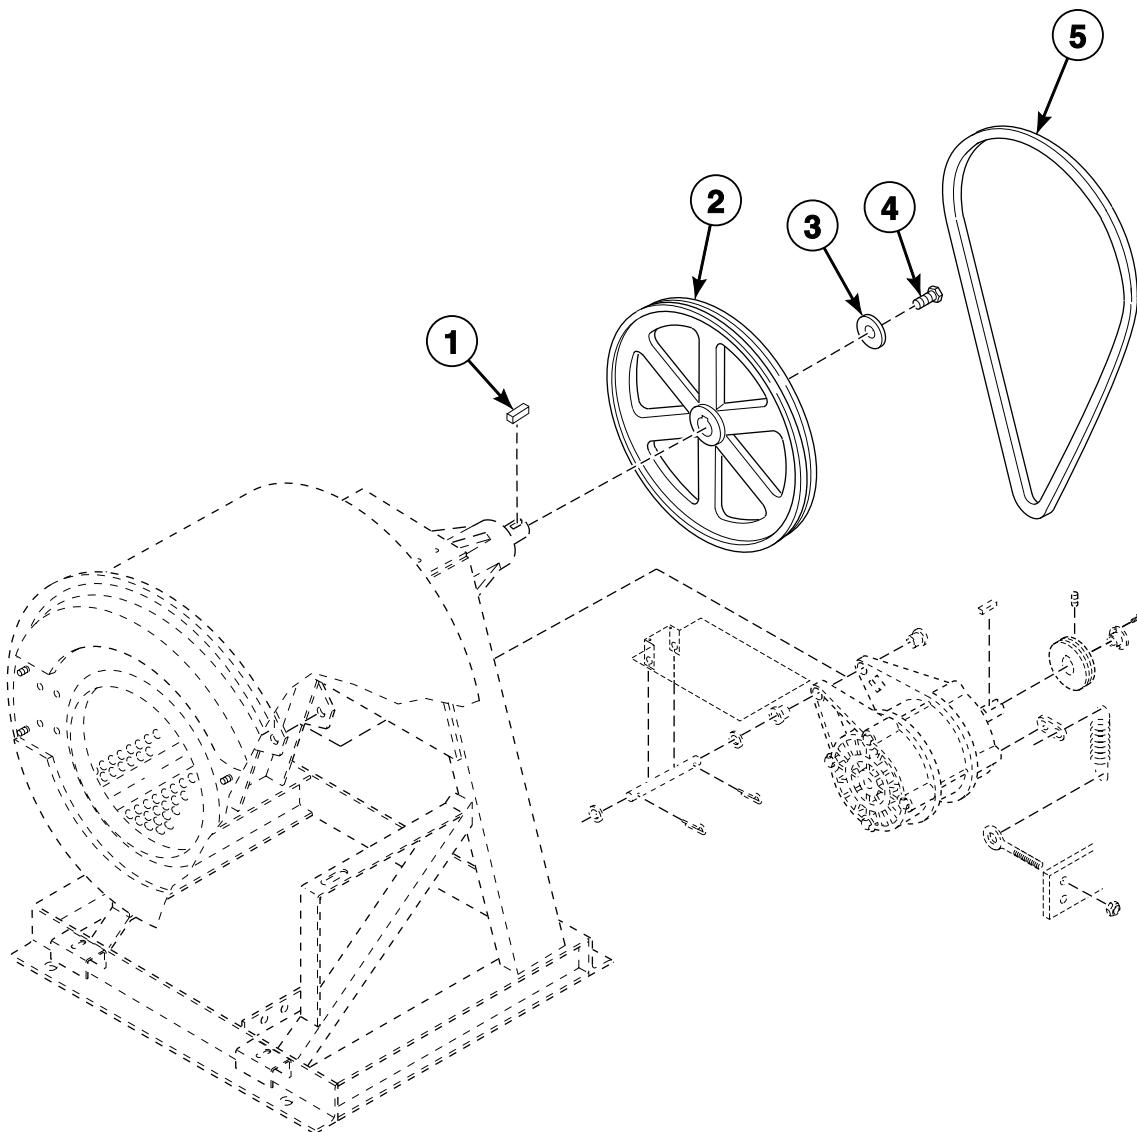


CHM3050P_F8339301

Pulley and Belt - Design 1 Models (Drawing 1 of 3)

REF	PART NO.	DESCRIPTION	COMMENTS
1	F430801	Key	
2	F280170	Sheave Pulley	20 pound models; 13V1800
	F280172	Sheave Pulley	30 pound models; 13V2200
	F280197	Pulley	40 pound models; 23V2200
	F200299700	Basket Pulley	60 pound models; X-voltage
	F280173	Pulley	60 pound models; All other voltages; 23V2400
3	F431115	Washer	
4	F430100	Screw	
5	F280343	Belt	20 pound models; C and F-voltage; 3V730
	F280337	Belt	20 pound models; B, F, O and Y-voltage; 3V710
	F280321	Belt	30 pound models; C, F, O and Y-voltage; 3V800
	F280341	Belt	40 pound models; C-voltage; 3V850
	F280342	Belt	40 pound models; F, O and Y-voltage; 3V830
	F280373	Belt	60 pound models; C-voltage; 3V90.65
	F280304	Belt	60 pound models; F and O-voltage; 3V900

Pulley and Belt - Design 1 Models (Drawing 2 of 3)

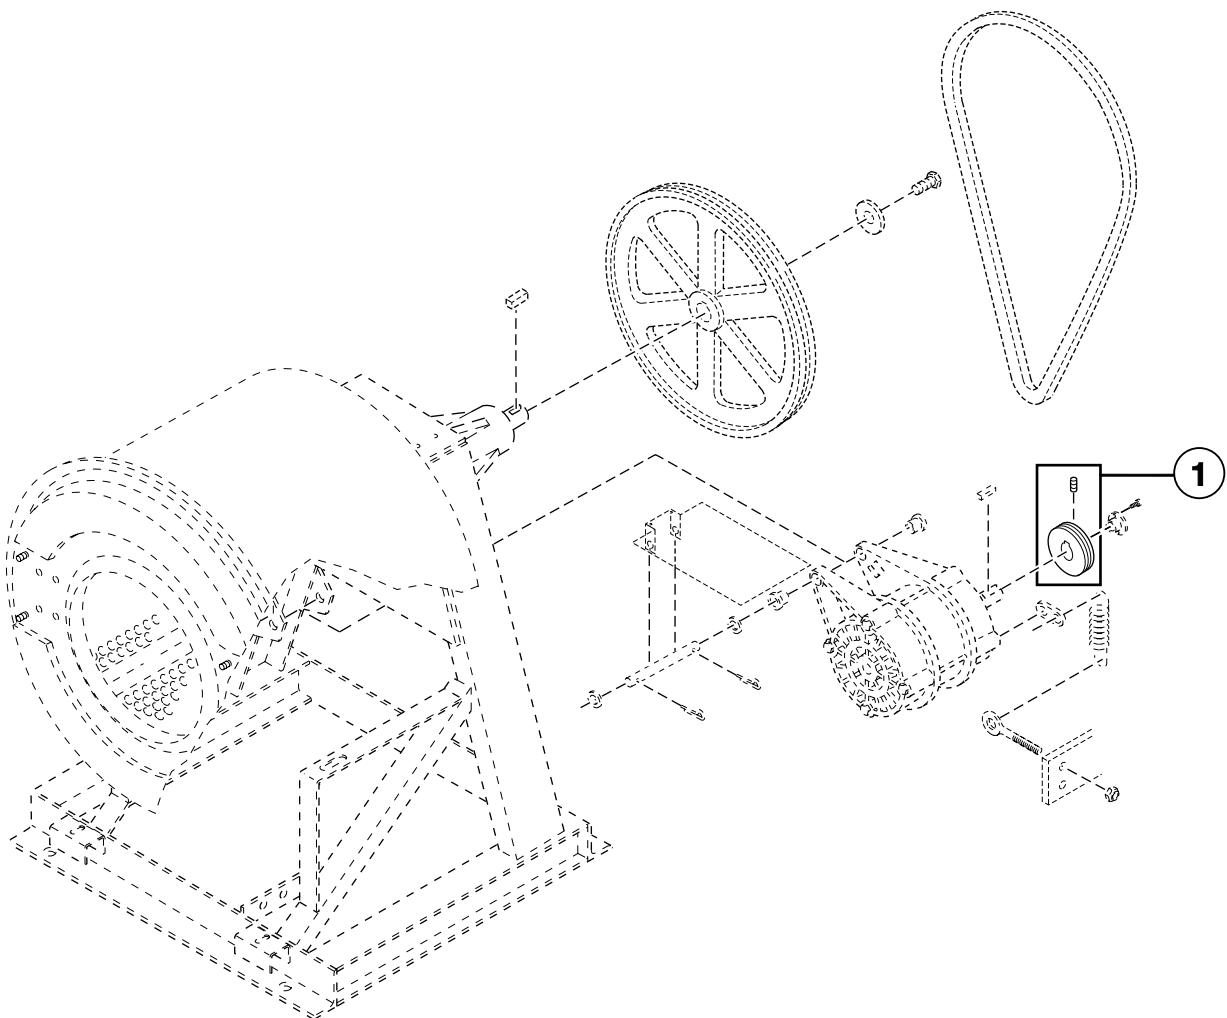


CHM3050PA_F8339301

Pulley and Belt - Design 1 Models (Drawing 2 of 3)

REF	PART NO.	DESCRIPTION	COMMENTS
1	F280427P	Pulley	20 pound models; C and J-voltage; 1GR3V3.15JA; Requires JA bushing
	F280170	Sheave Pulley	20 pound models; B, F, O and Y-voltage; 1GR3V2.65
	F280284	Pulley	30 pound models; F and O-voltage; 1GR3V2.9
	F280281	Motor Pulley	30 pound models; Y-voltage; 1GR3V3.0
	F280172	Sheave Pulley	30 pound models; C, F, J, O and Y-voltage; 1GRV3V22.00
	F280297	Pulley Bushing	40 pound models; C, F, J, O and Y-voltage; 2GRV3V22.00
	F280105P	Pulley	40 pound models; C-voltage; 2GR3V3.35SH; Requires SH bushing
	F0280385-00	Sheave	40 and 60 pound models; F, O and Y-voltage; 2GR3V3.00
	F280422P	Pulley	60 pound models; C and J-voltage; 2GR3V3.365SH; Requires SH bushing
	F280173	Pulley	60 pound models; C, F, J and O-voltage; 2GRV3V

Pulley and Belt - Design 1 Models (Drawing 3 of 3)

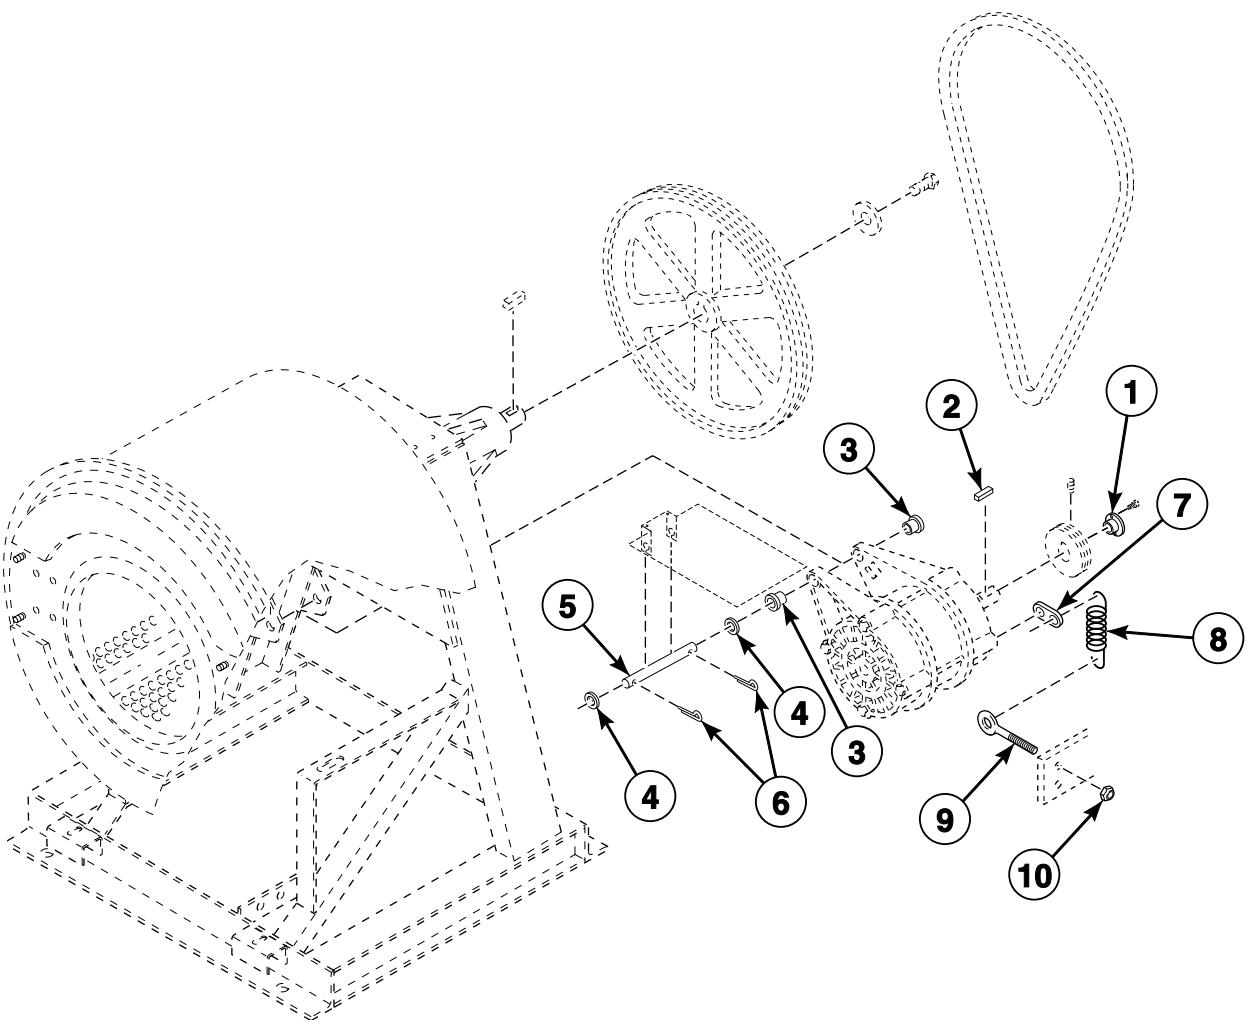


CHM3050PB_F8339301

Pulley and Belt - Design 1 Models (Drawing 3 of 3)

REF	PART NO.	DESCRIPTION	COMMENTS
1	H87529111P	Bushing	20 and 30 pound models; C and J-voltage; JA 5/8
	M412995P	Bushing	40 and 60 pound models; C and J-voltage; SH 7/8
2	F430801	Key	30 pound models
	F430802	Key	All other models
3	F200186100	Motor Support Bushing	
4	901690	Washer	
5	F602844	Motor Support Rod	20 and 30 pound models
	F603059	Motor Support Rod	40 pound models
	F603897	Motor Support Rod	60 pound models
6	F430401	Cotter Pin	
7	F633374	Spring Clip	
8	F310124	Extension Spring	
9	F430537	Screw	
10	F430218	Nut	

Pulley and Belt - Design 2 Models (Drawing 1 of 2)

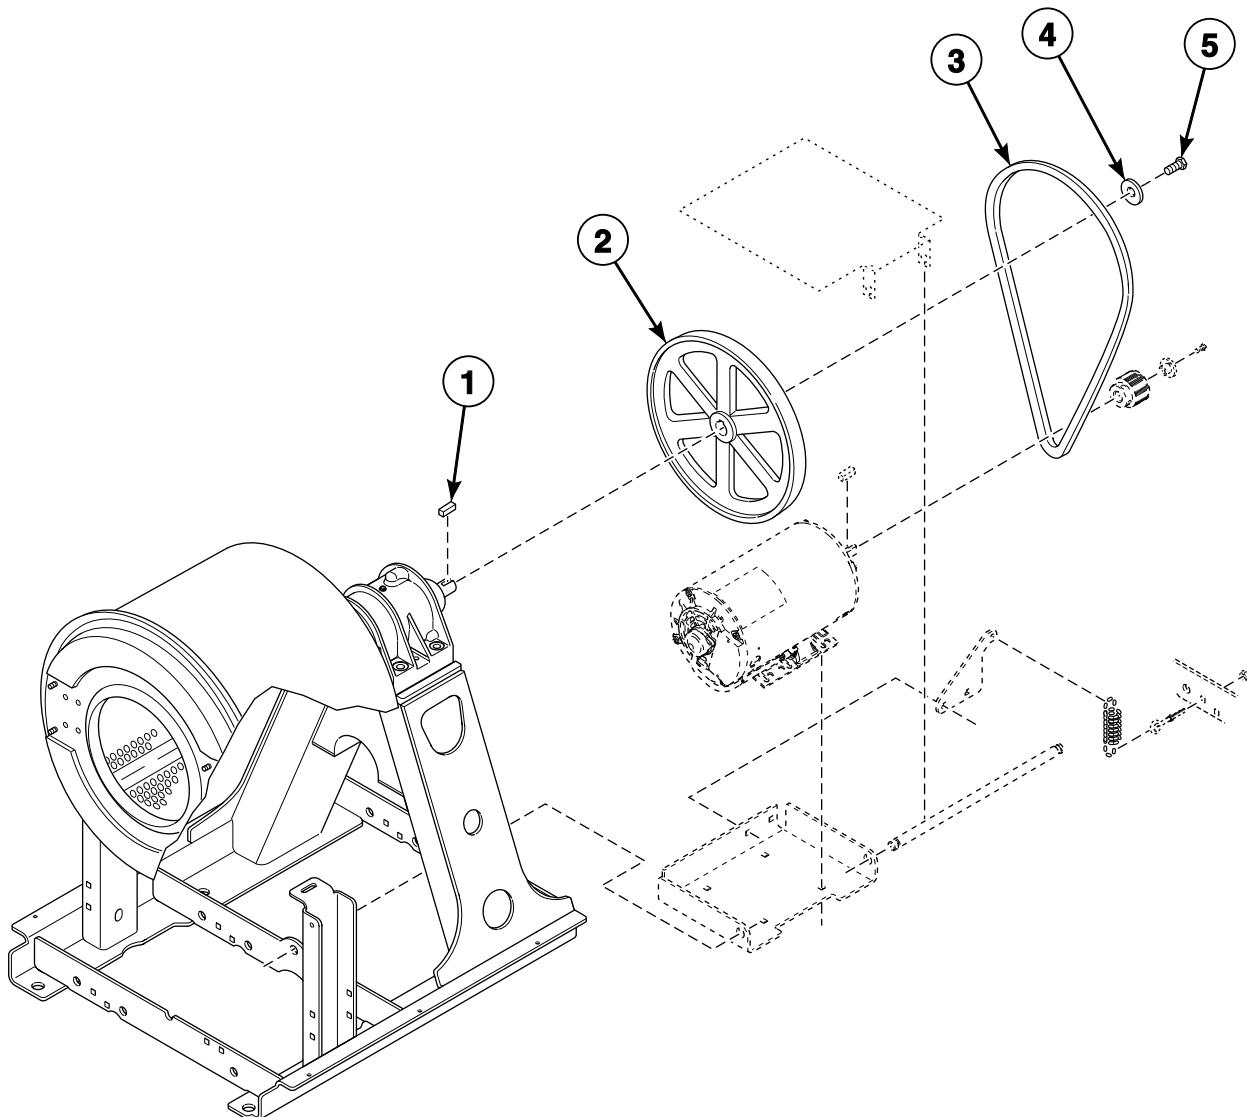


CHM3203P_F8339301

Pulley and Belt - Design 2 Models (Drawing 1 of 2)

REF	PART NO.	DESCRIPTION	COMMENTS
1	F430801	Key	
2	F150270	Basket Pulley	20 pound models
	F150269	Basket Pulley	30 and 40 pound models
	F200299700	Basket Pulley	60 pound models
3	F8382801	Belt	20 pound models; B, Q and X-voltage
	F200201700P	Belt	20 pound models; N and P-voltage
	F8382803	Belt	30 pound models
	F8382804	Belt	40 pound models
	F8382805	Belt	60 pound models
4	F431115	Washer	
5	F430100	Screw	

Pulley and Belt - Design 2 Models (Drawing 2 of 2)

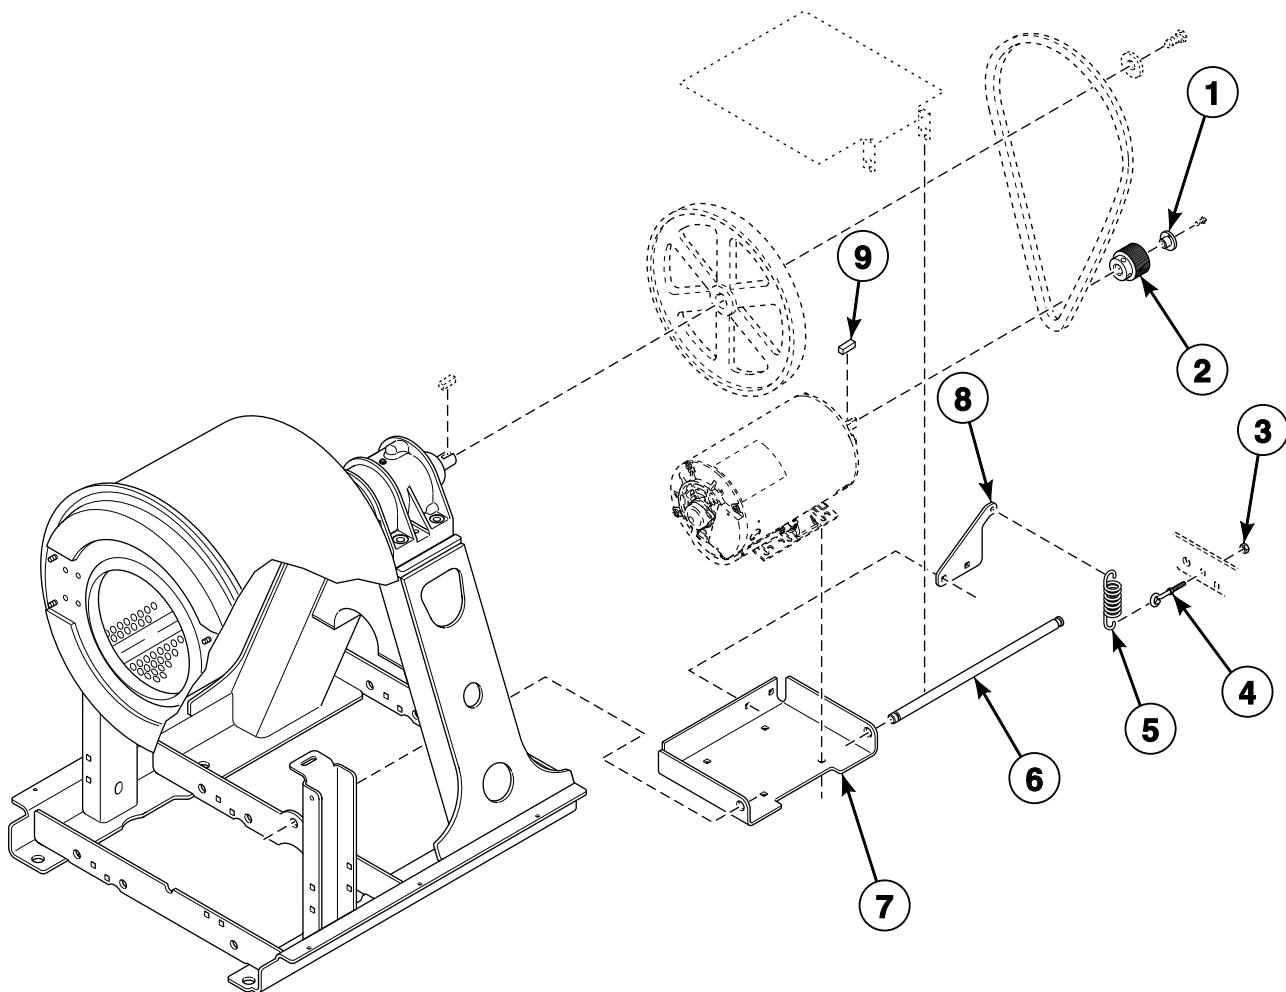


CHM3203PA_F8339301

Pulley and Belt - Design 2 Models (Drawing 2 of 2)

REF	PART NO.	DESCRIPTION	COMMENTS
1	F8333301	Flanged Bushing	
2	F8362501	Motor Pulley	20 pound models with N and P-voltage; 30, 40 and 60 pound models
3	F430218	Nut	
4	F8404501	Eye Bolt	
5	F310124	Extension Spring	
6	F8441401	Motor Support Rod	20 and 30 pound models
	F8441402	Motor Support Rod	40 and 60 pound models
7	F8247701	Motor Bracket	20 and 30 pound models
	F8247702	Motor Bracket	40 and 60 pound models
8	F8363901	Spring Plate	
9	F430801	Key	30 pound models

Motor - Design 1 Models

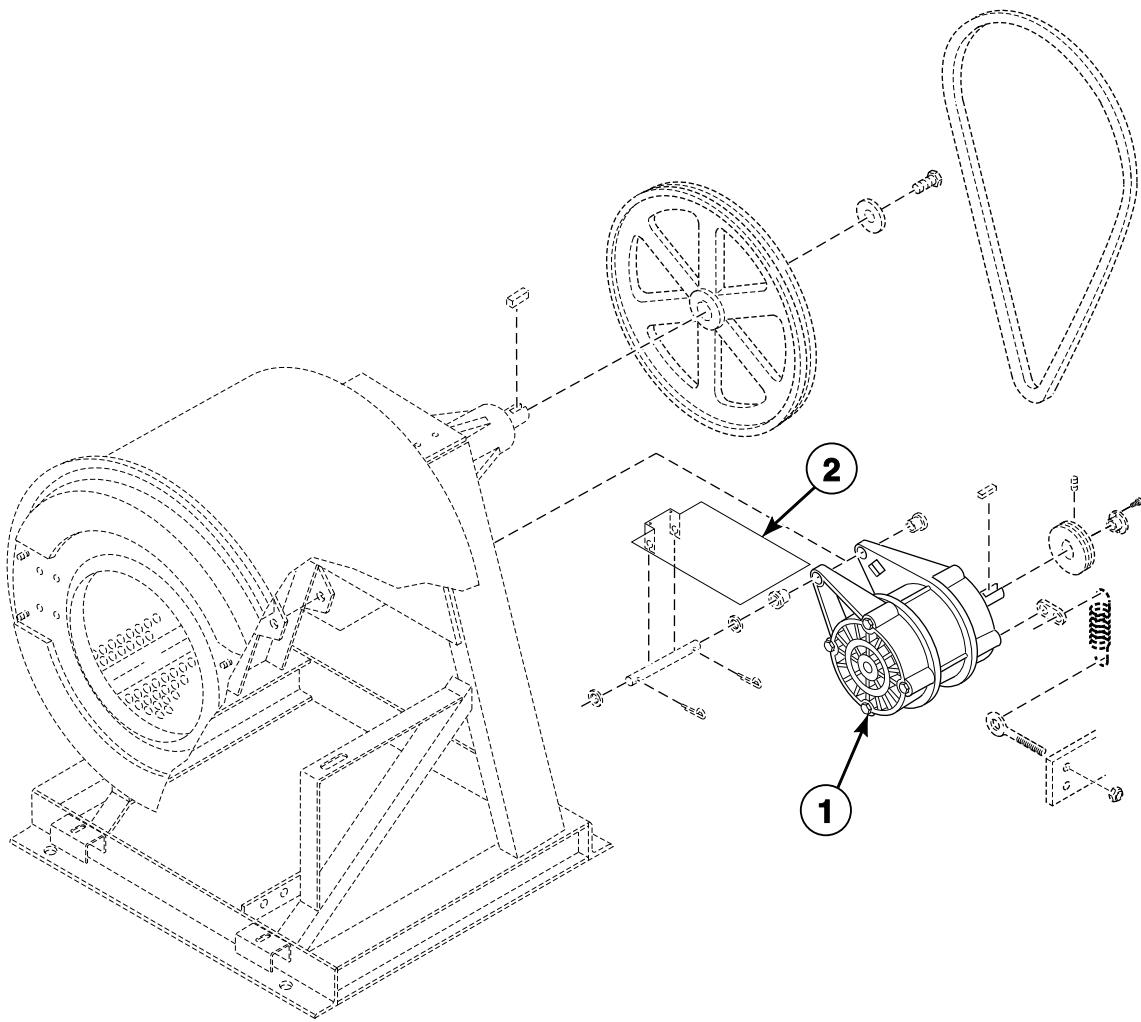


CHM3050PC_F8339301

Motor - Design 1 Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	F8329601P	Motor	20 pound models; Replaces F220110 Motor; B-voltage; Includes motor support bushing
	F8329401P	Motor	20 pound models; C and F-voltage; Replaces F022032500P and F220325-H Motors; Includes motor support bushing
	F8329301P	Motor	20 pound models; Replaces F022039600 and F220396-H Motors on models through 7/25/10; All other models starting 7/26/10; J and O-voltage; Use with F220396-H Motor; Includes motor support bushing; Order F8329301P Motor
	F022012800P	Motor	20 pound models; Y-voltage; Use with F220128-H Motor; Includes F200186100 Motor Support Bushing
	F8329801P	Motor	30 pound models; C and F-voltage; Replaces F220388-H and F022038800P Motors; Includes motor support bushing
	F8329701P	Motor	30 pound models; J and O-voltage; Replaces F220387-H and F022038700 Motors; Includes motor support bushing
	F8329901P	Motor	30 pound models; Y-voltage; Use with F220124-H Motor; Includes motor support bushing
	F8330101P	Motor	40 pound models; C and F-voltage; Replaces F022032600 and F220326-H Motors; Includes motor support bushing
	F8330001P	Motor	40 pound models; Replaces F0220321-00 Motor on models through 7/25/10; All other models starting 7/26/10; O-voltage; Includes motor support bushing
	F8330201P	Motor	40 pound models; Y-voltage; Includes motor support bushing
	F8330401P	Motor	60 pound 2 speed models; Replaces F220327P Motor; C and F-voltage; Includes motor support bushing
	F8330301P	Motor	60 pound 2 speed models; O-voltage; Replaces F022032200 Motor; Includes motor support bushing
	F8329201P	Motor Conversion Kit	60 pound F-speed models; Replaces F220234P Motor on models through 9/15/10; X-voltage; Includes motor support bushing**
	F8329201	Motor	60 pound F-speed models; Models that have been converted with F8329201P Motor Conversion Kit or models starting 9/16/10; X-voltage
2	F200216900	Motor Drip Shield	20 and 30 pound models
	F200280700	Motor Drip Shield	40 and 60 pound models

**** NOTE: AC drive parameters must be compatible with the motor and motor pulley. Please request the AC drive parameter illustration for parameter verification when ordering a motor.**

Motor - Design 2 Models

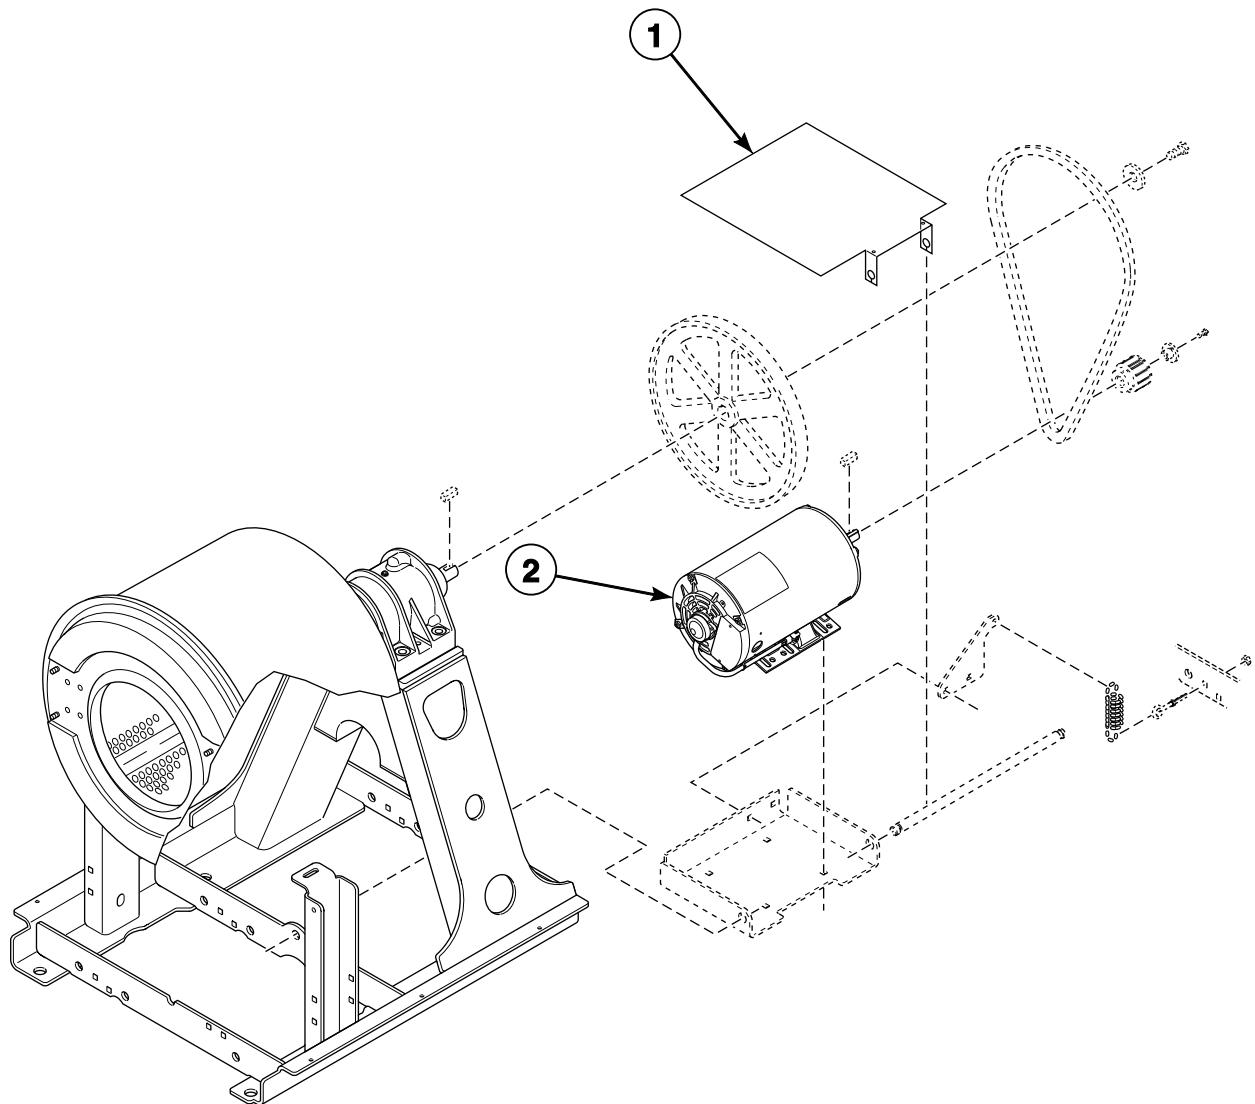


CHM3203PB_F8339301

Motor - Design 2 Models

REF	PART NO.	DESCRIPTION	COMMENTS
	52549	Washer	20 pound models
1	F200216900	Motor Drip Shield	
2	801194P	Induction Motor	20 pound models; B, Q and X-voltage
	F8335001	Motor	20 pound models N and P-voltage; 30 and 40 pound models
	F8335101	Motor	60 pound models

**** NOTE:** AC drive parameters must be compatible with the motor and motor pulley. Please request the AC drive parameter illustration for parameter verification when ordering a motor.

Electric Heat Option

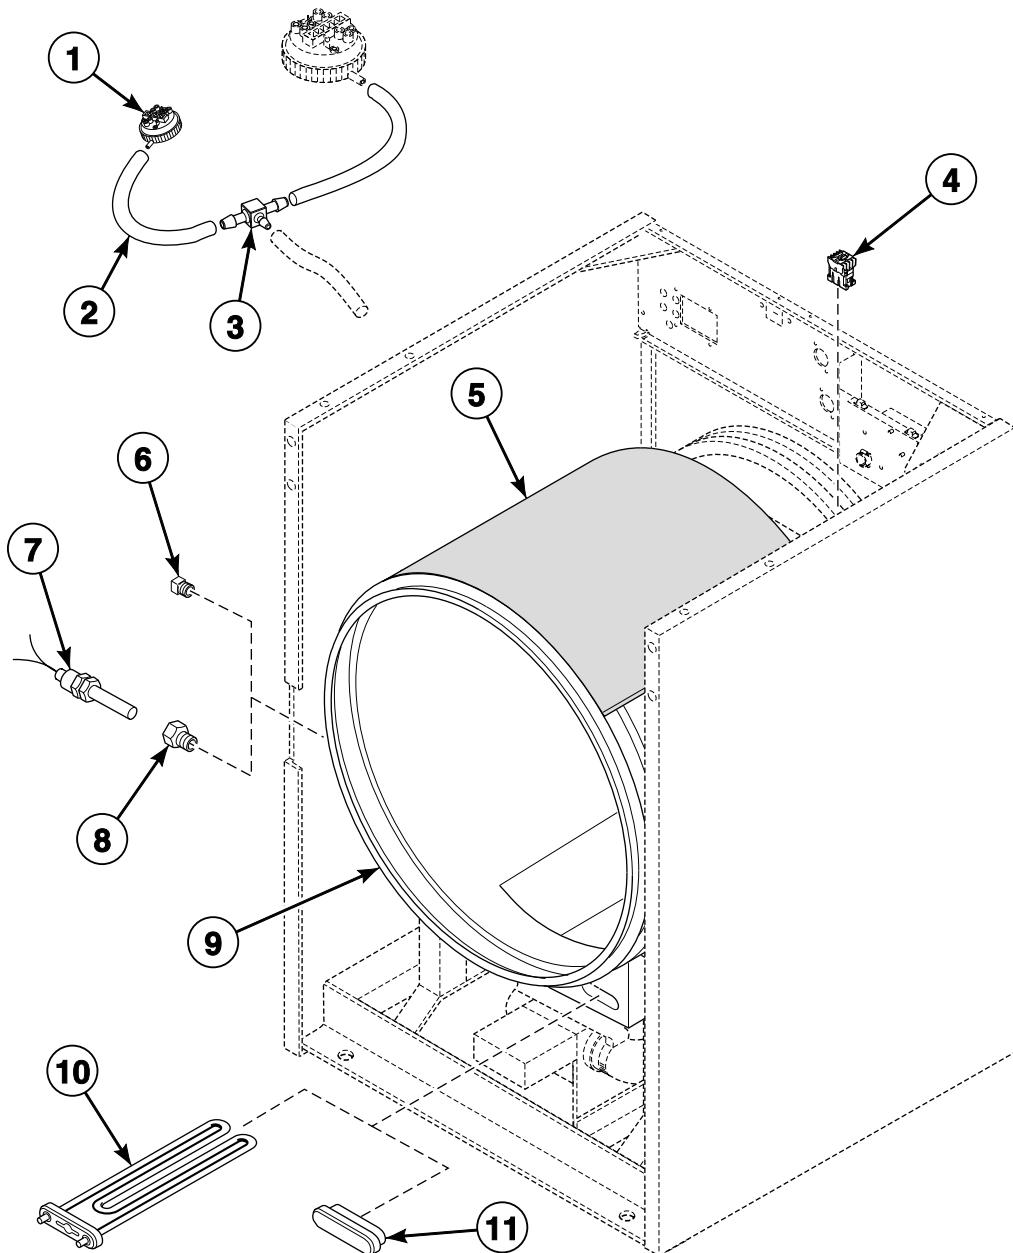


CHM3112P_F8339301

Electric Heat Option

REF	PART NO.	DESCRIPTION	COMMENTS
1	F8223001P	Water Pressure Switch	Heat Safety; Design 1 models
	F8404401	Water Pressure Switch	Design 2 models
2	F8153901	Tubing	
3	F8246601	Tee	
4	F330188P	Contactor	
5	F410300	Pipe Insulation	
6	F421507	Plug	
7	F370609	Thermistor Sensor	
8	F421936	Reducer Bushing	
9	F8179602	Shell Weldment	
10	F360205P	Element	2.6 kW; 12 used in 20 and 30 pound models; 30 used in 40 and 60 pound models
11	F360202	Heating Element Plug	

Steam Heat Option

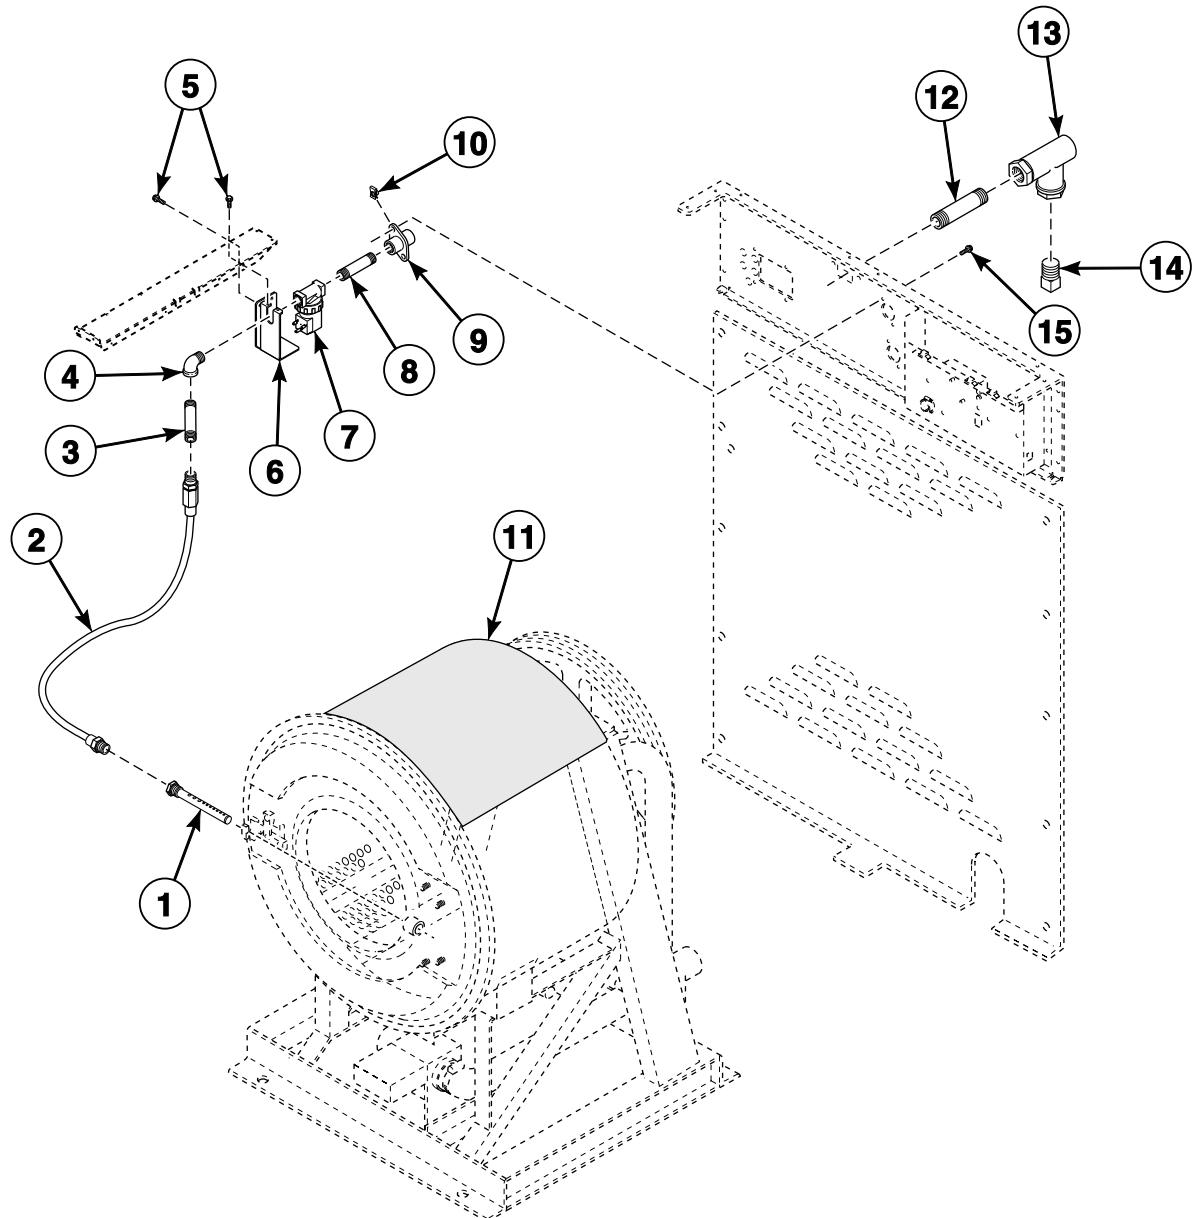

CHM3095P_F8339301

Steam Heat Option

REF	PART NO.	DESCRIPTION	COMMENTS
	F953P3	Steam Heat Kit	Includes items 1-10, 12, 14-15 and harness
	F380984P	Steam Valve Repair Kit	Use with item 7
1	F603131	Steam Injector Tube Assembly	
2	F200197	Steam Hose	60 pound models
3	F8110601	Nipple	
4	H86070034	Street Elbow	
5	430497	Screw	
6	F8212001	Steam Bracket	
7	F380787P	Steam Valve	220 Volt
8	70263801	Pipe Nipple	
9	F8154501	Coupling	
10	70030401	Nut	
11	F410300	Pipe Insulation	
12	431486	Pipe Nipple	
13	F270307	Steam Filter	
14	F420409	Plug	
15	20253	Screw	

Notes

Parts Index

A

Access Cover F8047801	71
Air Trap Hose F020014200	13, 15, 17, 19, 21
Auxiliary Control Assembly F8189401	13, 15, 17

B

Basket Assembly F8336301P	49
F8336501P	49
F8347801P	49
F8347901P	49
F8391301	55
F8391501	55
F8391701	55
F8391901	55
Basket Pulley F150269	81
F150270	81
F200299700	75, 81
Basket Rental Tool Kit 390P4	49, 55
Basket Tool Kit 389P4	49, 55
Bearing F100108	51, 57
F100123P	51, 57
F100134	51, 57
F100135	51, 57
F100136P	51, 57
F100137P	51, 57
Bearing Housing Assembly F8271601	57
F8271701	57
F8271801	57
F8271901	57
Bearing Sleeve F8221701	45
Belt F200201700P	81
F280304	75
F280321	75
F280337	75
F280341	75
F280342	75
F280343	75
F280373	75
F8382801	81
F8382803	81
F8382804	81
F8382805	81
Blind Rivet F8245101	45
Bolt F200182700	65, 67
F8230501	41
F8270701	47

Bracket

F8365401	63
F8365402	63
F8434601	63
F8434701	63

Bushing

H87529111P	79
M412995P	79

C

Capacitor

F370218P	13, 19
F370220	13, 19
F370221	13, 19
F8411701	13, 19
F8411801	13, 19
F8411901	13, 19

Capacitor Tray Assembly

F8199601	13, 19
F8199901	13, 19

Card Plate Assembly

F8201501	29
----------------	----

Card Reader and Bracket Assembly

510068P	29
---------------	----

Card Reader Harness

F141887	29
---------------	----

Card Reader Overlay

70334201	29
70334301	29

Coin Box

F160672	31
---------------	----

Coin Chute

F8170801	19, 21
----------------	--------

Coin Drawer Assembly

F8182001	31
----------------	----

Coin Drop

70256402P	25
70441601P	23

Coin Drop Assembly

210195	25
210196	25
38462P	23
38463	23
38464P	23
38472	25
38521	25
39157	25
70281102	25

Coin Drop Overlay

39564	39
-------------	----

Coin Identification Paper

38725	23, 25, 27
-------------	------------

Coin Meter

F0160737-00	25
-------------------	----

Coin Meter Assembly

F200010000P	23
F200010001	25
F200010002	25
F200010003	25
F200010004	25

N/A items do not appear in index.

F200010005	25
F200010006	23
F200010007	23
F200010008	25
F200010009	23
F200010010	25
F200010011	23
F200010012	23
F200021600	27
F200021601	27
F200021602	27
F200021603	27
F200021604	27
F200021605	27
F8238601	27
 Coin Vault Assembly	
F8182501	19
F8182601	19, 21
Contact Block Switch	
F200233401	33
Contact Switch	
F8069501	33
Contactor	
F330177P	13, 19
F330188P	89
Contactor Tray Assembly	
F8343401	13, 19
Control Assembly Kit	
F980P3	13, 15, 17, 19, 21
Control Kit	
F999P3	13, 15, 19, 21
Control Panel Assembly	
F8038502	35
F8038504	37
F8038602	35
F8038604	37
F8038702	35
F8038704	37
F8038802	35
F8038804	37
Control Panel Overlay	
F8236801	39
Control Tray Assembly	
F8205901	13
F8205902	19
F8205903	15, 19, 21
F8359701	17
F8359703	17
Control Tray Harness	
F8261501P	13, 15, 17, 19, 21
Cotter Pin	
F430401	79
Coupling	
F8154501	91
 D	
DIN Rail	
F8200101	13, 19
Dispenser Assembly	
F8047401	71
Dispenser Gasket	
F8308301	71
 Door	
Dispenser Lid	
F8048101	41
Dispenser Overflow Hose	
F8043401	71
F8043403	71
F8043404	71
Door	
F0602431-02	45
F0602837-02	45
F602842-2	45
Door Assembly	
F8187201	45
F8187203	45
F8187301	45
F8187303	45
F8187401	45
F8187403	45
Door Bezel	
F0170426-00	35, 37
F0170426-10	35, 37
F0170426-30	35, 37
F170416-1	35, 37
F170416-2	35, 37
F170416-3	35, 37
F170417-1	35, 37
F170417-2	35, 37
F170417-3	35, 37
Door Gasket	
F170124	45
F200000200	45
F200000202	45
F8111502	45
F8111601	45
F8111602	45
Door Glass	
F290208P	45
F8341701	45
F8341801P	45
F8341901	45
Door Glass Kit	
F290205P	45
F290207P	45
Door Handle	
F8199401P	45
F8199501	45
Door Handle Spacer	
F8223701	45
Door Hinge	
F190216P	45
Door Hinge Shim	
F200131000	45
Door Latch Arm Assembly	
F8221401	45
Door Lock Assembly	
F8197101	47
F8340501	47
Door Lock Catch	
F8223601	47
F8344501	47
Door Lock Cover	
F8245001	47
Door Lock Microswitch	
F200203200	47
Door Lock Plate Assembly	
F8223201	47

N/A items do not appear in index.

Door Lock Plate Shim	47
F8059701	47
F8344401	47
Door Lock Solenoid Replacement Kit	47
F977P3	47
Door Lock Splash Shield	47
F320200	47
Door Lock Switch Lever	47
F8223401	47
Door Mount	45
F150271	45
Drain Connect Tee	61, 63
F150318	61, 63
Drain Hose	
F8231901	61
F8231902	61
F8232901	61, 63
F8233001	61
F8233101	61
F8233102	61
F8261302	63
F8261303	63
F8464701	63
Drain Tee	
F150398	61, 63
Drain Valve	
F8406307	67
Drain Valve Cover	
F200133600	65, 67
Drain Valve Kit	
F200166400	67
F200166402	67
Drain Valve Motor	
F380933P	65, 67
Drain Valve Motor and Gear Box Assembly	
G159764P	65, 67
Drive Assembly	
F8204701	17
F8303601	17
F8327301	17
Drive Mounting Bracket	
F8322401	17

E

Earth Terminal Sticker	
M412096	11
Electric Shock Danger Label	
F8115501	11
Electronic Coin Drop Assembly	
70294101P	27
70294103P	27
70294104	27
70294105P	27
70294106	27
70294107	27
70294109	27
70294111	27
Electronic Coin Drop Kit	
CK095	27
CK099	27
CK100	27
CK101	27
CK103	27

CK106	27
CK109	27
CK110	27
CK500	27
Element	
F360205P	89
Emergency Stop Harness	
F8060501	15, 17
Emergency Stop Plate	
F8201301	33
Emergency Stop Pushbutton	
F200233500	33
EMI Filter	
F8053901P	15, 17, 21
F8053902	15, 17, 21
Excluder Seal	
F8336801	49, 55
F8336901	49, 55
F8337001	49, 55
F8337101	49, 55
Expansion Clip	
70030501	13, 15, 17, 19, 21
Extension Spring	
F310124	79, 83
External Door Lock Harness	
F8340001	47
External Supply Connection Decal	
F8150201	11
External Supply Harness	
F8191201P	13, 15, 17
External Supply Kit	
F937P3	13, 15, 17
Eye Bolt	
F8404501	83

F

Fill Hose	
223/00049/10P	69
Flanged Bushing	
F8333301	83
Frame Weldment	
F8195901	53
F8196001	53
F8196101	53
F8199101	53
F8247001	59
F8248001	59
F8249001	59
F8250001	59
Front Cabinet Brace	
F8173801	35, 37
F8173901	35, 37
F8174001	35, 37
Front End Control Kit	
F117P3	17
Front Panel	
F8171301	35
F8171302P	37
F8173001	35
F8173002P	37
F8173101P	35
F8173102P	37
F8173201P	35

N/A items do not appear in index.

F8173202P	37
Fuse	
802493	13, 15, 17, 19, 21

G

Gravity Drain Valve	
803292	65
Ground Decal	
F230739	11
Ground Lug Connector	
M411283	71

H

Harness	
F631973-2	29
Heating Element Plug	
F360202	89
Hose	
F606816-1	71
F8232001	71
F8232002	71
F8232004	71
Hose Clamp	
F200201	61, 63
F200213	61, 63, 71, 73
F200215	61, 63, 67
F200222	13, 15, 17, 19, 21, 71
20211	71
36801	71
Hot Surface Warning Plate	
F8211901	11

I

Induction Motor	
801194P	87
Interlock Contactor	
F330186P	13, 19

J

Jumper Configuration Assembly	
M413507	13, 15, 17, 19, 21
Jumper Harness Assembly	
M413506	13, 15, 17, 19, 21

K

Key	
F160420	31
F430801	75, 79, 81, 83
F430802	79
70155603	41

L

Left Side Panel	
F8042902P	43
F8043102P	43
F8043202P	43
F8043302P	43
F8399202	43
F8399302	43
F8399402	43
F8399502	43
Lid Clamp	
F8091701	41
Lower Cabinet Brace	
F8174101	35, 37

M

Machine Size Configuration Harness	
F8028101P	13, 19
F8028103P	13, 19
F8028104P	13, 19
F8028105P	13, 15, 17, 19, 21
Magnet	
F8390801	45
Manifold	
F8333201	71
Motor	
F022012800P	85
F8329201	85
F8329301P	85
F8329401P	85
F8329601P	85
F8329701P	85
F8329801P	85
F8329901P	85
F8330001P	85
F8330101P	85
F8330201P	85
F8330301P	85
F8330401P	85
F8335001	87
F8335101	87
Motor Bracket	
F8247701	83
F8247702	83
Motor Conversion Kit	
F8329201P	85
Motor Drip Shield	
F200216900	85, 87
F200280700	85
Motor Pulley	
F280281	77
F8362501	83
Motor Support Bushing	
F200186100	79
Motor Support Rod	
F602844	79
F603059	79
F603897	79
F8441401	83
F8441402	83
Motor Switch	
F340002	13, 19

N/A items do not appear in index.

Mount on Concrete Warning Label	
F8246401	11
Mounting Plate	
70208801	29

N

Nipple	
F8110601	91
Nut	
F430215	45, 49, 55, 61, 63
F430218	53, 59, 79, 83
F430225	47
F430232	13, 15, 17, 19, 21, 45, 47, 71
F430239	51
F430240	51
F430264	47
F431017	33
F431022	45
24205	33
685846	23, 25, 27
70030401	91

O

Opto Coupler	
200674P	23, 25
Output/Logic Harness	
F8028701	13, 15, 17, 19, 21
Overflow Hose	
F0200238-00	61
F150308	61, 63
F150417	61, 63
F8337701	61, 63
Overflow Plug	
F150352	67
Overlay	
F8218701	39
F8218702	39
F8218801	39
F8218802	39
F8218901	39
F8218902	39
F8219001	39
F8219002	39
F8219201	39
F8219301	39
F8219401	39
F8219501	39
F8219701	39
F8219801	39
F8219901	39
F8220001	39
F8293001	39
F8293002	39
F8293101	39
F8293102	39
F8293201	39
F8293202	39
F8293301	39
F8293302	39
F8293501	39
F8293601	39
F8293701	39
F8293801	39

F8443601	39
70295101	27
70295301	27
Overload Contactor	
F8176101P	13, 19

P

Panel Lock	
44089303P	41
Pipe Insulation	
F410300	89, 91
Pipe Nipple	
431486	91
70263801	91
Plug	
F420409	91
F421507	89
Pop Rivet	
70058501	13, 19, 21, 23, 25
PowerFlex 40 Drive	
F8169407	15, 21
F8169408	15, 21
F8169440	15, 21
F8169441	15, 21
Pressfit Upgrade Kit	
F935P3	49
F936P3	49
F938P3	49
F939P3	49
P-Trap Hose	
F8042201	73
F8042202	73
F8042301	73
Pulley	
F280105P	77
F280173	75, 77
F280197	75
F280284	77
F280422P	77
F280427P	77
Pulley Bushing	
F280297	77
Pulse Expander Assembly	
F8034701P	27
Pushbutton Switch	
70107001	41, 43

R

Rear Drain Hose	
F8231904	63
F8231905	63
F8365601	63
F8365602	63
Rear Panel	
F8176201P	43
F8176301	43
F8177501P	43
F8177701P	43
F8352801	43
F8362401	43
F8365201	43

N/A items do not appear in index.

F8367101	43
Reducer Bushing	
F421936	89
Reed Switch Assembly	
F8066802	45
Retaining Ring	
F8337801	51, 57
F8337901	51, 57
F8344901	51, 57
F8345001	51, 57
Right Side Panel	
F8042901P	43
F8043101P	43
F8043201P	43
F8043301P	43
F8399201	43
F8399301	43
F8399401	43
F8399501	43
Rocker Switch	
70455101	33
Rod	
F602813-2	45
F602813-3	45
S	
Screw	
F430100	75, 81
F430107	61, 63
F430174	29, 35, 37, 41
F430518	49, 55
F430536	45
F430537	79
F430903	13, 15, 17
F430909	71
F430916	45
F430942	53, 59
F430949	53, 59
F430956	47
F430976	45
F430987	53, 59
F8117601	35, 37
F8206901	13, 15, 17, 19, 21, 41, 43, 71
F8230301	71
F8230601	41
20253	91
430497	15, 17, 21, 91
503688	17
800548	73
801019	35
Shaft Seal Sleeve	
F8312001P	49
F8312004P	49
F8312006P	49
Shaft Seal Sleeve Kit	
F8343901P	49, 55
F8343904P	49, 55
F8343906P	49, 55
F8343909P	49, 55
Sheave	
F0280385-00	77
Sheave Pulley	
F280170	75, 77
F280172	75, 77
Shell Band Assembly	
F602757	49, 55
F631977	49, 55
Shell Band Gasket	
F200001600P	49, 55
Shell Band Kit	
F741701	49, 55
F741702	49, 55
Shell Front Assembly	
F8229401	49, 55
F8229501	49, 55
F8229601	49, 55
F8229701	49, 55
Shell Weldment	
F8179201	53
F8179202	53
F8179301	53
F8179302	53
F8179401	53
F8179402	53
F8179501	53
F8179502	53
F8179602	89
F8360601	59
F8360602	59
F8360603	59
F8360701	59
F8360702	59
F8360703	59
F8360801	59
F8360802	59
F8360803	59
F8360901	59
F8360902	59
F8360903	59
Siphon Cover	
F8047901	71
Snap Bushing	
44071501	13, 15, 17, 19, 21
Solenoid	
F8340101	47
Spacer	
F431901	47
Spring Clip	
F633374	79
Spring Pin	
F431222	45
Spring Plate	
F8363901	83
Steam Bracket	
F8212001	91
Steam Filter	
F270307	69, 91
F270308	69
Steam Heat Kit	
F953P3	91
Steam Hose	
F200197	91
Steam Injector Tube Assembly	
F603131	91
Steam Valve	
F380787P	91
Steam Valve Repair Kit	
F380984P	91

N/A items do not appear in index.

Street Elbow	
H86070034	91
Supply Overflow Hose	
F8043405	71
Support Bracket	
F8195803	15, 17, 21
Switch Clamp	
F0340722-00	13, 19

T

Tee	
F8246601	13, 15, 17, 19, 21, 89
Temperature Knob	
44104601	33
Temperature Selector Switch	
511711	33
Temperature Selector Switch Bracket	
70391701	33
Terminal Block	
430642	71
Terminal Tray Cover	
F8177001	71
Thermistor Sensor	
F370609	89
Top Cabinet Brace	
F8043501	41
F8043701	41
F8043801	41
F8043901	41
Top Cover	
F8017401	41
F8040201	41
F8040301	41
F8040401P	41
Top Cover Hinge	
F8258601	41
Top Cover Latch	
F8201001	35, 37
Torsion/Door Lock Spring	
F8070301	47
Transformer	
201616	13, 15, 17
803527P	13, 15, 17, 19, 21
Triple Lip Seal	
F8203801	51, 57
F8203802	51, 57
F8203803	51, 57
F8203806	51, 57
Trunnion Kit	
F747001	51
F747002	51
F747003	51
F747005	51
Tubing	
F8153901	13, 15, 17, 19, 21, 89

U

USB IR Device Assembly	
F8167901	13, 15, 17, 19, 21

Use Copper Conductors Only Caution Label	
F8242201	11

V

Vacuum Breaker Assembly	
F8048601	73
Vacuum Breaker Cover	
F8048501	73
Vacuum Breaker Hose	
F0200244-01	71
F0200244-02	71
Vacuum Supply Hose	
F8042801	71
F8042803	71
F8042804	71
F8042805	71
Valve Panel	
F8017501	71
F8039601	71
F8039801	71
F8039901	71
F8398701	71
F8398801	71
F8398901	71
F8399001	71
Valve, 3-Way	
F8286401P	73
F8286402P	73

W

Warning Label	
F8207901	11
F8233501	11
44127701	11
Washer	
F430303	53, 59
F430317	49, 55, 61, 63
F431115	75, 81
F431128	51, 53
F431131	51, 53
F431133	45
F431902	47
F431916	45
F431929	45
M400081	53, 59
52549	87
803615	69, 73
901690	79
Water Hose	
F200108P	69
F200116	69
Water Pressure Switch	
F8223001P	13, 15, 19, 21, 89
F8404401	17, 89
Water Valve Tool	
395P4	73

N/A items do not appear in index.

Notes
