


Drying Tumblers

75 Pound Capacity

Models Starting Serial No. 0904004427

Refer to Page 5 for Model Numbers

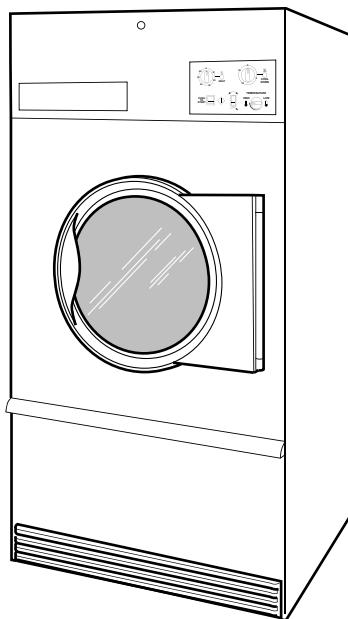

TMB795C_70421901

Table of Contents

Title	Page
Parts Ordering Information.....	3
Serial Plate Location	3
Model Identification	5
Product Overview - Heat Source and Voltage	6
Product Overview - Control Suffixes (Drawing 1 of 2).....	8
Product Overview - Control Suffixes (Drawing 2 of 2).....	10
Control Box	12
Fire Suppression System Control Box	14
Single Drop Controls	16
Dual Digital Timer Controls	18
DMP Control	20
DX4 Electronic Control.....	22
OPL Microprocessor Control.....	24
Coin Drop Components for MDC Models.....	26
Central Pay and Card Reader MDC Models.....	28
Optional Card Reader Mountings for MDC Models.....	30
Coin Drops	32
Coin Drop Kits	34
Coin Drop Components for NetMaster Models	36
Card Reader NetMaster Models	38
Coin Drop Components for Quantum Control	40
Card Reader Components for Quantum Control	42
Network Board for Quantum Control.....	44
Network Connection for Quantum.....	46
Emergency Stop Button - CE Models and Model UB075E	48
Cabinet Front Components	50
Cabinet Panels and Nameplates	52
Front Panel Assemblies	54
Lint Panel Switch Assembly	56
Lower Cabinet Front Components	58
Cabinet Limit and Thermistor Assembly	60
Cabinet Components	62
Door and Hinge Components	64
Cylinder, Trunnion and Bearing Components	66
Reversing Cylinder Drive Motor and Components	68
Drive Components for Reversing Models	70
Drive Components for Nonreversing Models	72
Idler Housing Assembly for Reversing Models	74
Idler Assembly for Nonreversing Models	76
Fan Components	78
Fan Motors	80

© Copyright 2011, Alliance Laundry Systems LLC

All rights reserved. No part of the contents of this book may be reproduced or transmitted in any form or by any means without the expressed written consent of the publisher.

Fan Components and Motor for STF, UB and UTF Models.....	82
Gas Heater Components	84
Burner Orifices for Non-CE Models	86
Electric Heater Components	88
Airflow Switch Assembly	90
Steam Heater and Valve	92
Rotation Sensor	94
Duct and Damper Assembly	96
Rear Panel Assembly	98
Control Tray Wrap Components	100
Control Tray Fuses	102
Control Tray Harnesses for Gas and Steam Models	104
Control Tray Components for Gas Models	106
Control Tray Components for Steam Models.....	108
Control Tray Harnesses for Electric Models.....	110
Control Tray Components for Non-CE Electric Models.....	112
Control Tray Components for CE Electric Models	114
Parts Index.....	117

Parts Ordering Information

If literature or replacement parts are required, contact the source from whom the machine was purchased or contact Alliance Laundry Systems at (920) 748-3950 for the name and address of the nearest authorized parts distributor.


For technical assistance, call either of the numbers listed below:

(920) 748-3121 Ripon, Wisconsin

+32 56 41 20 54 Wevelgem, Belgium

Serial Plate Location

When calling or writing about your product, be sure to mention model and serial numbers. Model and serial numbers are located on serial plate(s) as shown.

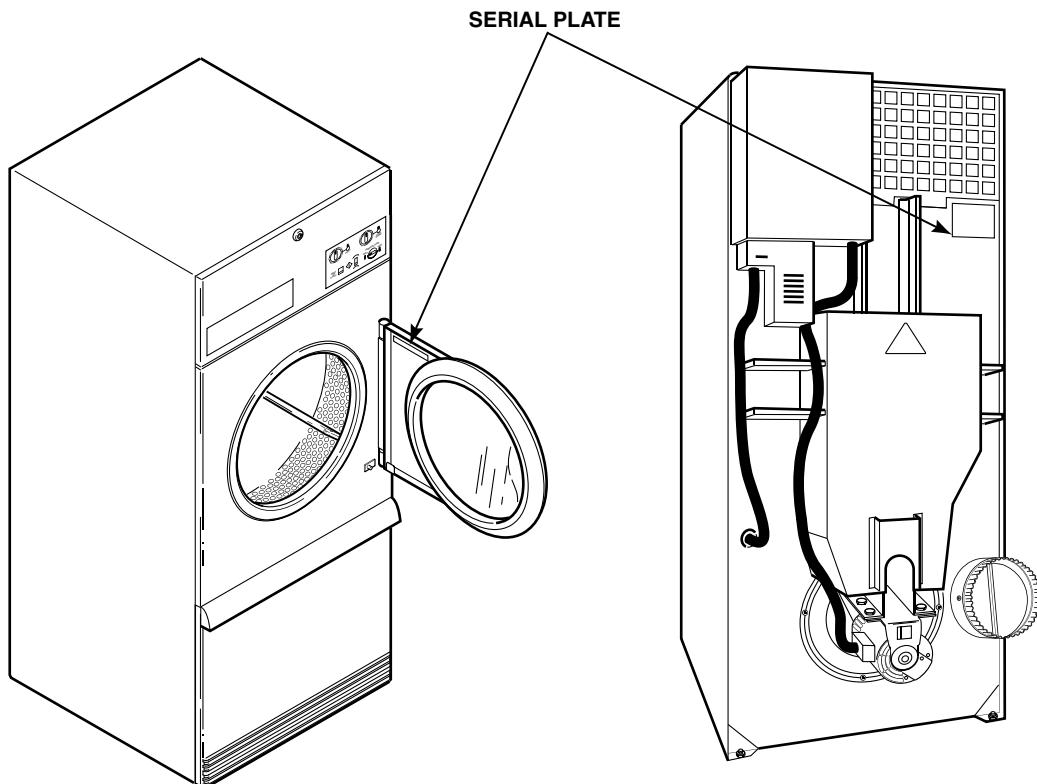

TMB2235N_70421901

Notes

Model Identification


Information in this manual is applicable to these tumbler models:

CA075L	GA075L	KA075L	PA075L	UA075L
CA075N	GA075N	KA075N	PA075N	UA075N
CT075E	GT075E	KT075E	PT075E	UB075E
CT075L	GT075L	KT075L	PT075L	UT075E
CT075N	GT075N	KT075N	PT075N	UT075L
CT075S	GT075S	KT075S	PT075S	UT075N
CT075T	GT075T	KT075T	PT075T	UT075S
CU075E	GU075E	KU075E	PU075E	UT075T
CU075L	GU075L	KU075L	PU075L	UTF75L
CU075N	GU075N	KU075N	PU075N	UTF75N
CU075S	GU075S	KU075S	PU075S	UU075E
CU075T	GU075T	KU075T	PU075T	UU075L
DR80E2-BT075E	HA075L	LA075L	SA075L	UU075N
DR80E2-BU075E	HA075N	LA075N	SA075N	UU075S
DR80G2-BA075L	HT075D	LT075E	ST075D	UU075T
DR80G2-BA075N	HT075E	LT075L	ST075E	YT075E
DR80G2-BT075D	HT075L	LT075N	ST075L	YT075L
DR80G2-BT075L	HT075N	LT075S	ST075N	YT075N
DR80G2-BT075N	HT075S	LT075T	ST075S	YT075S
DR80G2-BU075L	HT075T	LU075E	ST075T	YT075T
DR80G2-BU075N	HU075E	LU075L	STF75L	YU075E
DR80S2-BT075S	HU075L	LU075N	STF75N	YU075S
DR80S2-BT075T	HU075N	LU075S	SU075E	YU075T
DR80S2-BU075S	HU075S	LU075T	SU075L	
DR80S2-BU075T	HU075T		SU075N	
IPD75E2-IT075E			SU075S	
IPD75G2-IT075L			SU075T	
IPD75G2-IT075N				
IPD75S2-IT075S				
IPD75S2-IT075T				

Control Suffixes (7th and 8th characters):

3O - DX4 OPL	LC - network adaptable coin	R3 - reversing DX4 OPL
3V - DX4 vended	LX - network adaptable, prep for coin	RD - reversing DMP OPL
3X - DX4 prep for coin	LY - network adaptable, prep for card	RM - reversing OPL Micro
BC - basic electronic, coin	NC - NetMaster coin	RQ - reversing dual digital timer
BG - basic electronic, OPL mode	NX - NetMaster, prep for coin	SD - single drop
BL - basic electronic, central pay	NY - NetMaster, prep for card	SX - single drop, prep for coin
BX - basic electronic, prep for coin	OM - OPL Micro	WC - network ready coin
BY - basic electronic, prep for card	QT - dual digital timer	WX - network ready, prep for coin
DO - DMP OPL		WY - network ready, prep for card
DV - DMP vended		
DX - DMP prep for coin		

Product Overview - Heat Source and Voltage

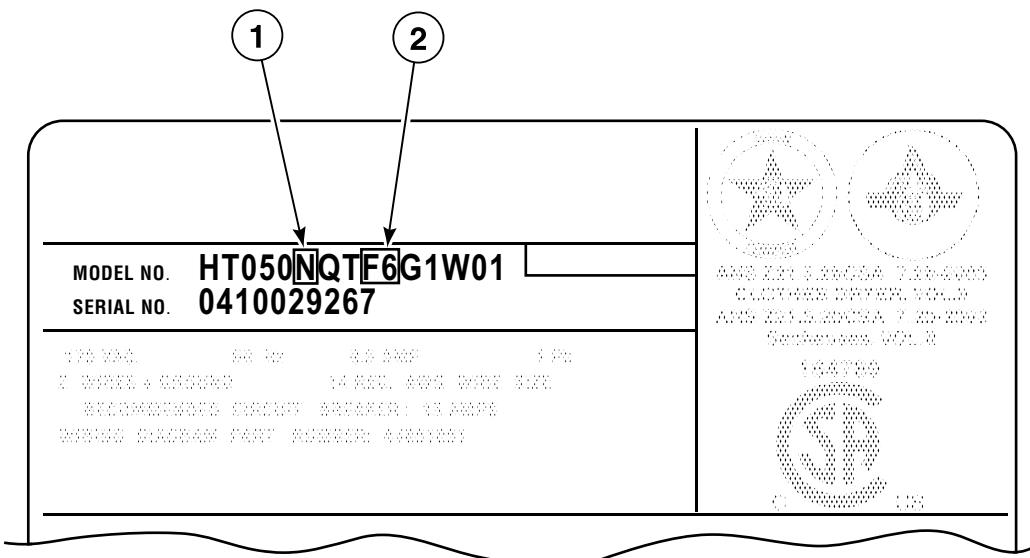


TMB2730P_70421901

Product Overview - Heat Source and Voltage

REF	PART NO.	DESCRIPTION	COMMENTS
1	-	Heat Source	D: Liquid Petroleum Gas (L.P.) E: Electric L: Liquid Petroleum Gas (L.P.) N: Natural Gas (N.G.) S: Steam T: Thermal Oil
2	-	Voltage	B1: 120 Volt/60 Hertz/1 Phase F3: 200-208 or 240 Volt/60 Hertz/1 Phase F4: 200 Volt/50 Hertz/3 Phase F5: 200-208 Volt/60 Hertz/3 Phase F6: 200-208 or 240 Volt/60 Hertz/3 Phase J1: 230 Volt/50 Hertz/1 Phase J2: 230-240 Volt/50 Hertz/1 Phase J3: 240 Volt/50 Hertz/1 Phase J5: 230 Volt/50 Hertz/3 Phase J6: 230-240 Volt/50 Hertz/3 Phase J7: 240 Volt/50 Hertz/3 Phase J8: 240 Volt/60 Hertz/3 Phase M1: 380 Volt/50 Hertz/3 Phase M2: 380 or 400-415 Volt/50 Hertz/3 Phase M3: 380 Volt/60 Hertz/3 Phase N1: 400-415 Volt/50 Hertz/3 Phase P1: 440 Volt/60 Hertz/3 Phase Q1: 460-480 Volt/60 Hertz/3 Phase Q2: 480 Volt/60 Hertz/3 Phase

Product Overview - Control Suffixes (Drawing 1 of 2)

All Models Except G and K Models

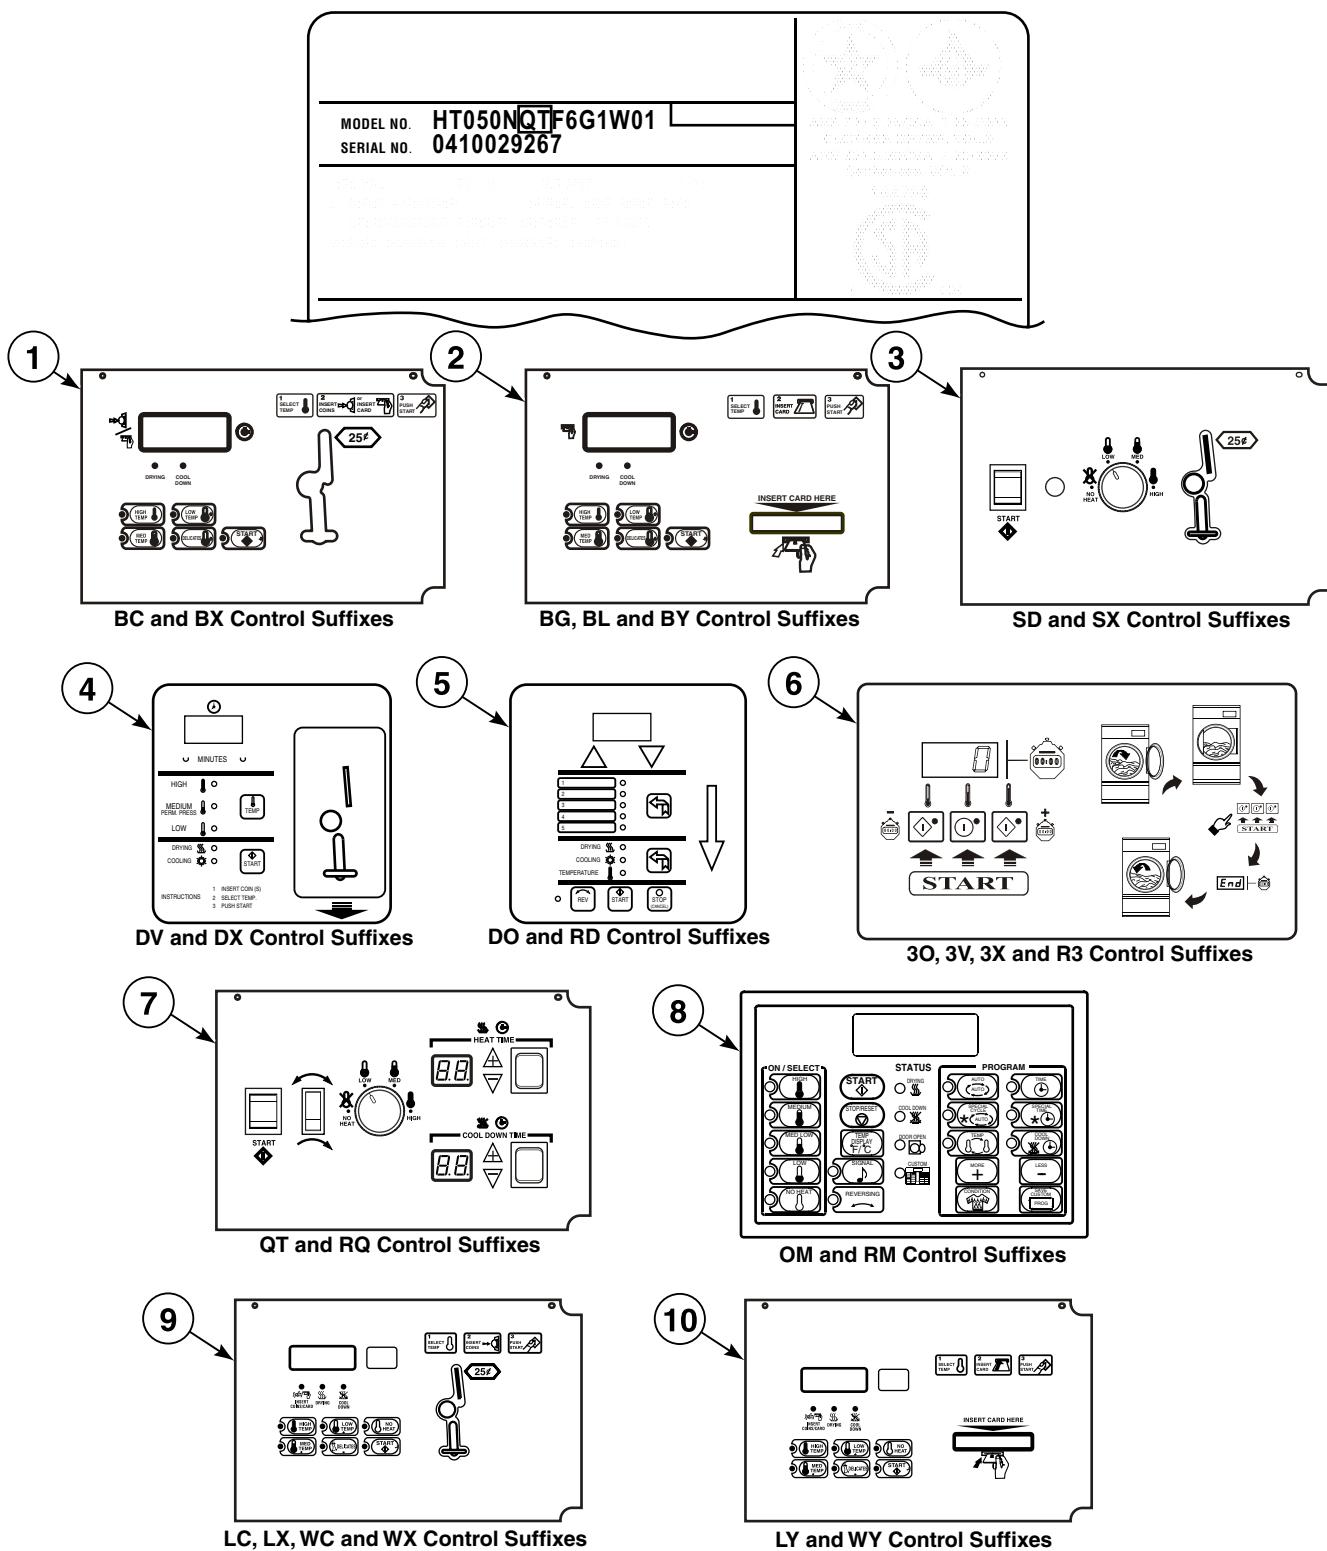

TMB2936P_70421901

Product Overview - Control Suffixes (Drawing 1 of 2)



REF	PART NO.	DESCRIPTION	COMMENTS
1	-	Control - Nonreversing	BC: basic electronic, coin BX: basic electronic, prep for coin
2	-	Control - Nonreversing	BG: basic electronic, OPL mode BL: basic electronic, central pay BY: basic electronic, prep for card
3	-	Control - Nonreversing	SD: single drop SX: single drop, prep for coin
4	-	Control - Nonreversing	DV: DMP vended DX: DMP prep for coin
5	-	Control - Nonreversing	DO: DMP OPL
	-	Control - Reversing	RD: reversing DMP OPL
6	-	Control - Nonreversing	3O: DX4 OPL 3V: DX4 vended 3X: DX4 prep for coin
	-	Control - Reversing	R3: reversing DX4 OPL
7	-	Control - Nonreversing	QT: dual digital timer
	-	Control - Reversing	RQ: reversing dual digital timer
8	-	Control - Nonreversing	OM: OPL micro
	-	Control - Reversing	RM: reversing OPL micro
9	-	Control - Nonreversing	LC: network adaptable coin LX: network adaptable, prep for coin WC: network ready coin WX: network ready, prep for coin
10	-	Control - Nonreversing	LY: network adaptable, prep for card WY: network ready, prep for card

NOTE: Coin models have the following control suffixes: 3V, 3X, BC, BX, DV, DX, LC, LX, SD, SX, WC and WX.


NOTE: OPL models have the following control suffixes: 3O, BG, BL, BY, DO, LY, OM, QT, R3, RD, RM, RQ and WY.

Product Overview - Control Suffixes (Drawing 2 of 2)


G and K Models

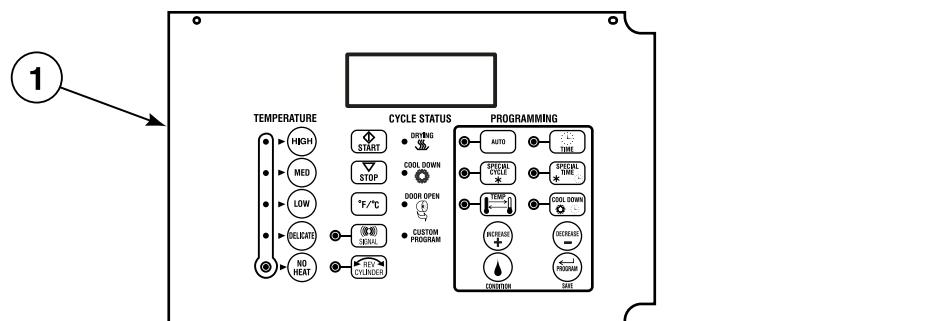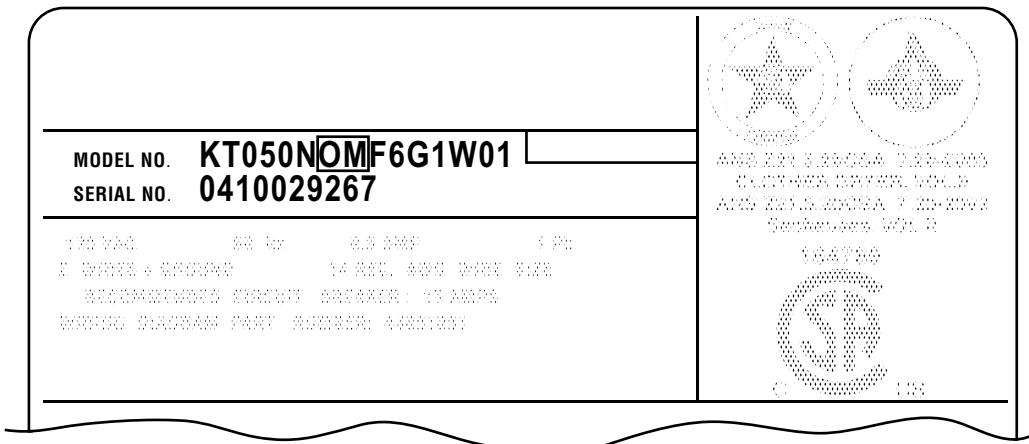

OM and RM Control Suffixes

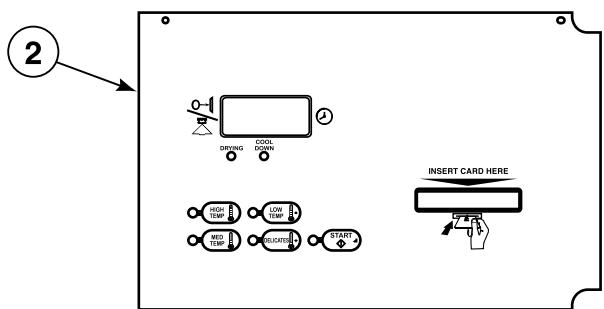

BG and BL Control Suffixes

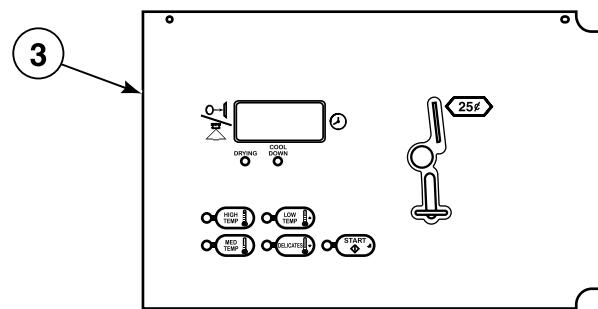

BC and BX Control Suffixes

TMB2937P_70421901


Product Overview - Control Suffixes (Drawing 2 of 2)

REF	PART NO.	DESCRIPTION	COMMENTS
1	-	Control - Nonreversing	OM: OPL micro
	-	Control - Reversing	RM: reversing OPL micro
2	-	Control - Nonreversing	BG: basic electronic, OPL mode BL: basic electronic, central pay
3	-	Control - Nonreversing	BC: basic electronic, coin BX: basic electronic, prep for coin

NOTE: Coin models have the following control suffixes: BC and BX.

NOTE: OPL models have the following control suffixes: BG, BL, OM and RM.

Control Box

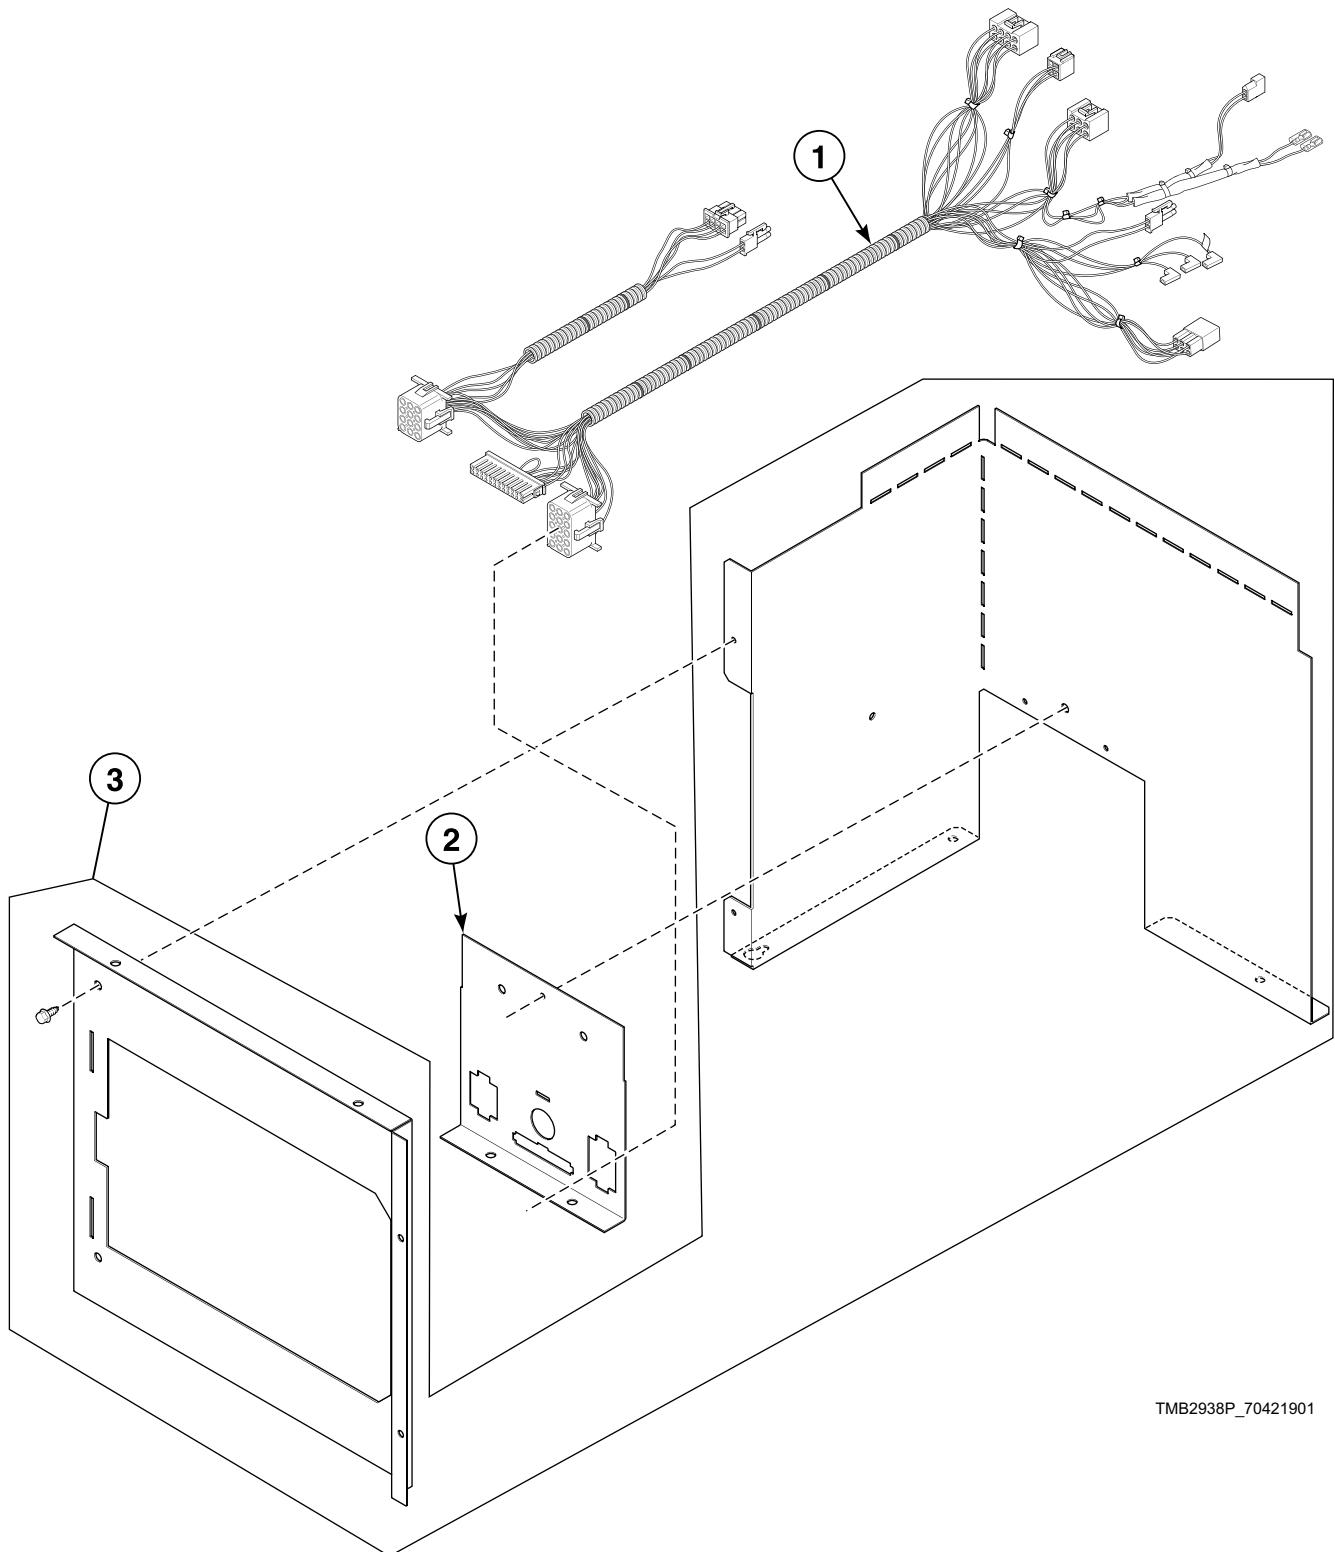


TMB2938P_70421901

Control Box

REF	PART NO.	DESCRIPTION	COMMENTS
1	44137401P	Main Harness	
2	70307002	Control Housing Cover	WC, WX and WY control suffixes and machines with rotation sensor
	70307001	Control Housing Cover	All other control suffixes
3	44180101	Control Box Assembly	

Fire Suppression System Control Box

C, D, G, H, I, K, S and U Gas and Steam Models
Models with a F, K, L, T or U in the 11th character (ST075NLCF6K1W01)

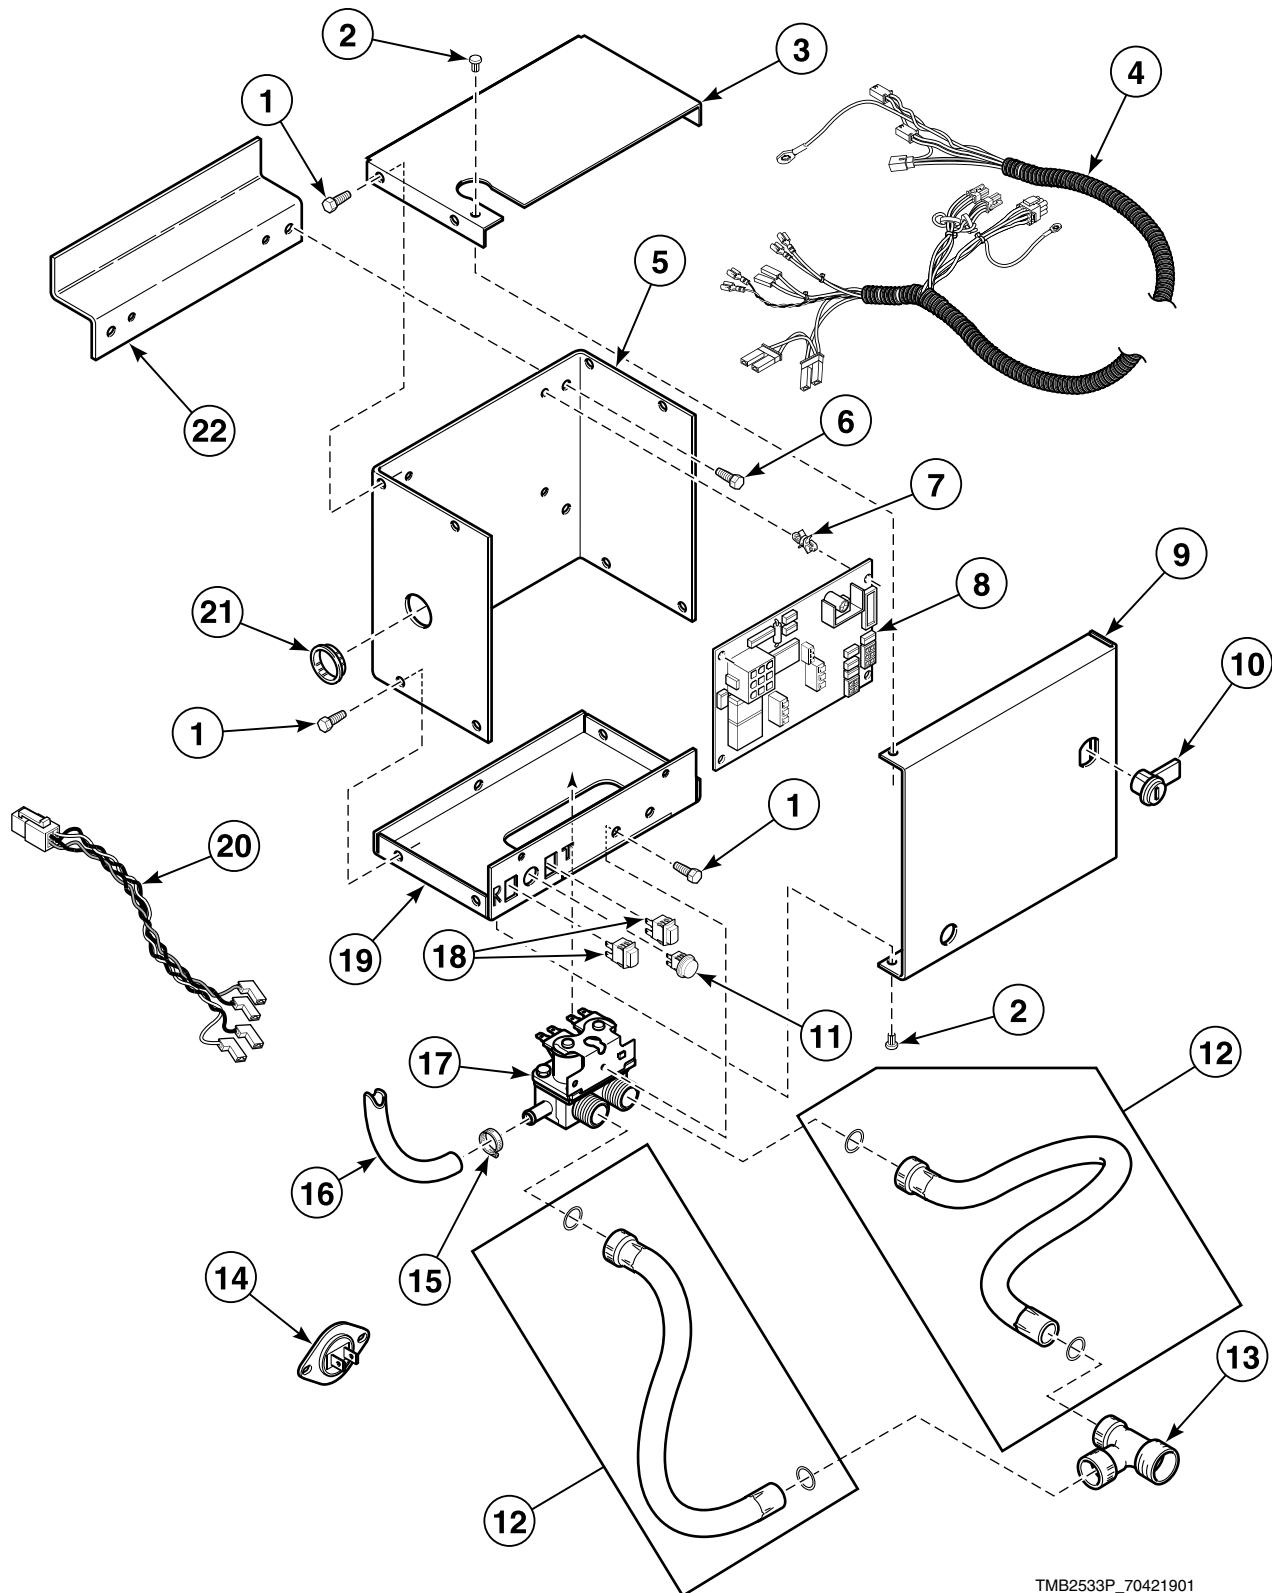


TMB2533P_70421901

Fire Suppression System Control Box

REF	PART NO.	DESCRIPTION	COMMENTS
1	430497	Screw	
2	M400713	Drive Rivet	
3	44065401	Control Box Top	
4	44141601P	Control Harness Assembly	
5	44065101	Control Box Housing	
6	51780	Screw	
7	501523	Circuit Board Support	4 required
8	44063801P	Control	
9	44065201	Control Box Cover	
10	44089301P	Lock, Key and Nut Kit	RL001 key code; Optional if same key is to be used for control lock
	70155601	Key	RL001
11	801432	Light	
12	28330P	Fill Hose Kit	2 required
13	44069101	Hose Fitting	
14	44064701	Thermistor	2 required
15	36801	Hose Clamp	
16	44073301	Hose	39 inches; Outlet hose
17	36958P	Mixing Valve	
18	801434W	Push-to-Start Switch	2 required
19	44065301	Control Box Base	
20	44141701P	Sensor Harness Assembly	
21	70178701	Snap Bushing	
22	44065901	Bracket	For mounting fire suppression system box to machine

Single Drop Controls

C, H, I and S Models Except HT075D, ST075D, STF Models and Thermal Oil Models
Models with SD and SX Control Suffixes

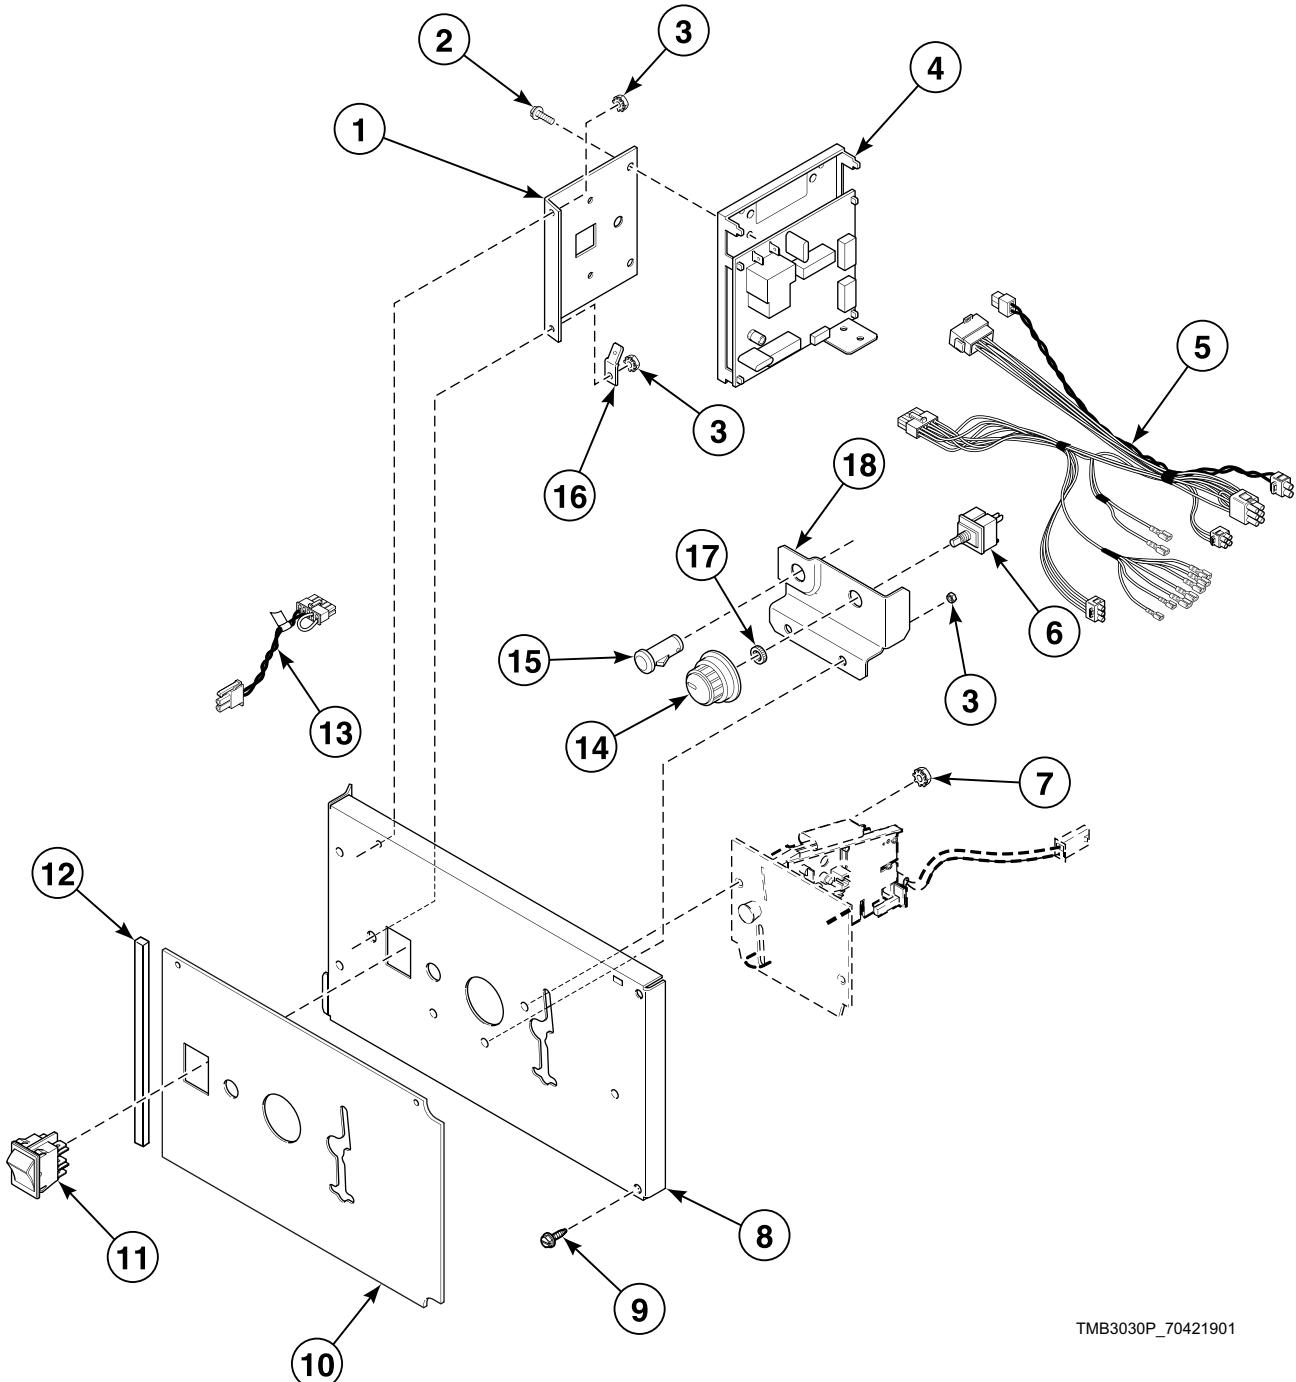


TMB3030P_70421901

Single Drop Controls

REF	PART NO.	DESCRIPTION	COMMENTS
1	70357901	Control Chassis Mounting Bracket	
2	501524	Screw	
3	70054	Nut	
4	513139P	Control Assembly	
5	70369001	Control Panel Harness	Non-CE and non-Australian models
	70398401	Control Panel Harness	CE and Australian models
6	511711	Temperature Selector Switch	
7	29786	Nut	
8	70363401	Control Door Assembly	
9	70069901	Screw	
10	70362901	Overlay	C, I and S models
	70363001	Overlay	H models
11	70365901	Rocker Switch	Start switch
12	70414101	Foam Gasket	
13	70324604	Jumper Calibration Wire	
14	44104601	Temperature Knob	
15	801431	Light	
16	00177	Male Tab Terminal	
17	24205	Nut	
18	70350201	Temperature Selector Bracket	

Dual Digital Timer Controls

C, H, I, P, S, U and Y Models Except STF, UB and UTF Models
Models with QT and RQ Control Suffixes

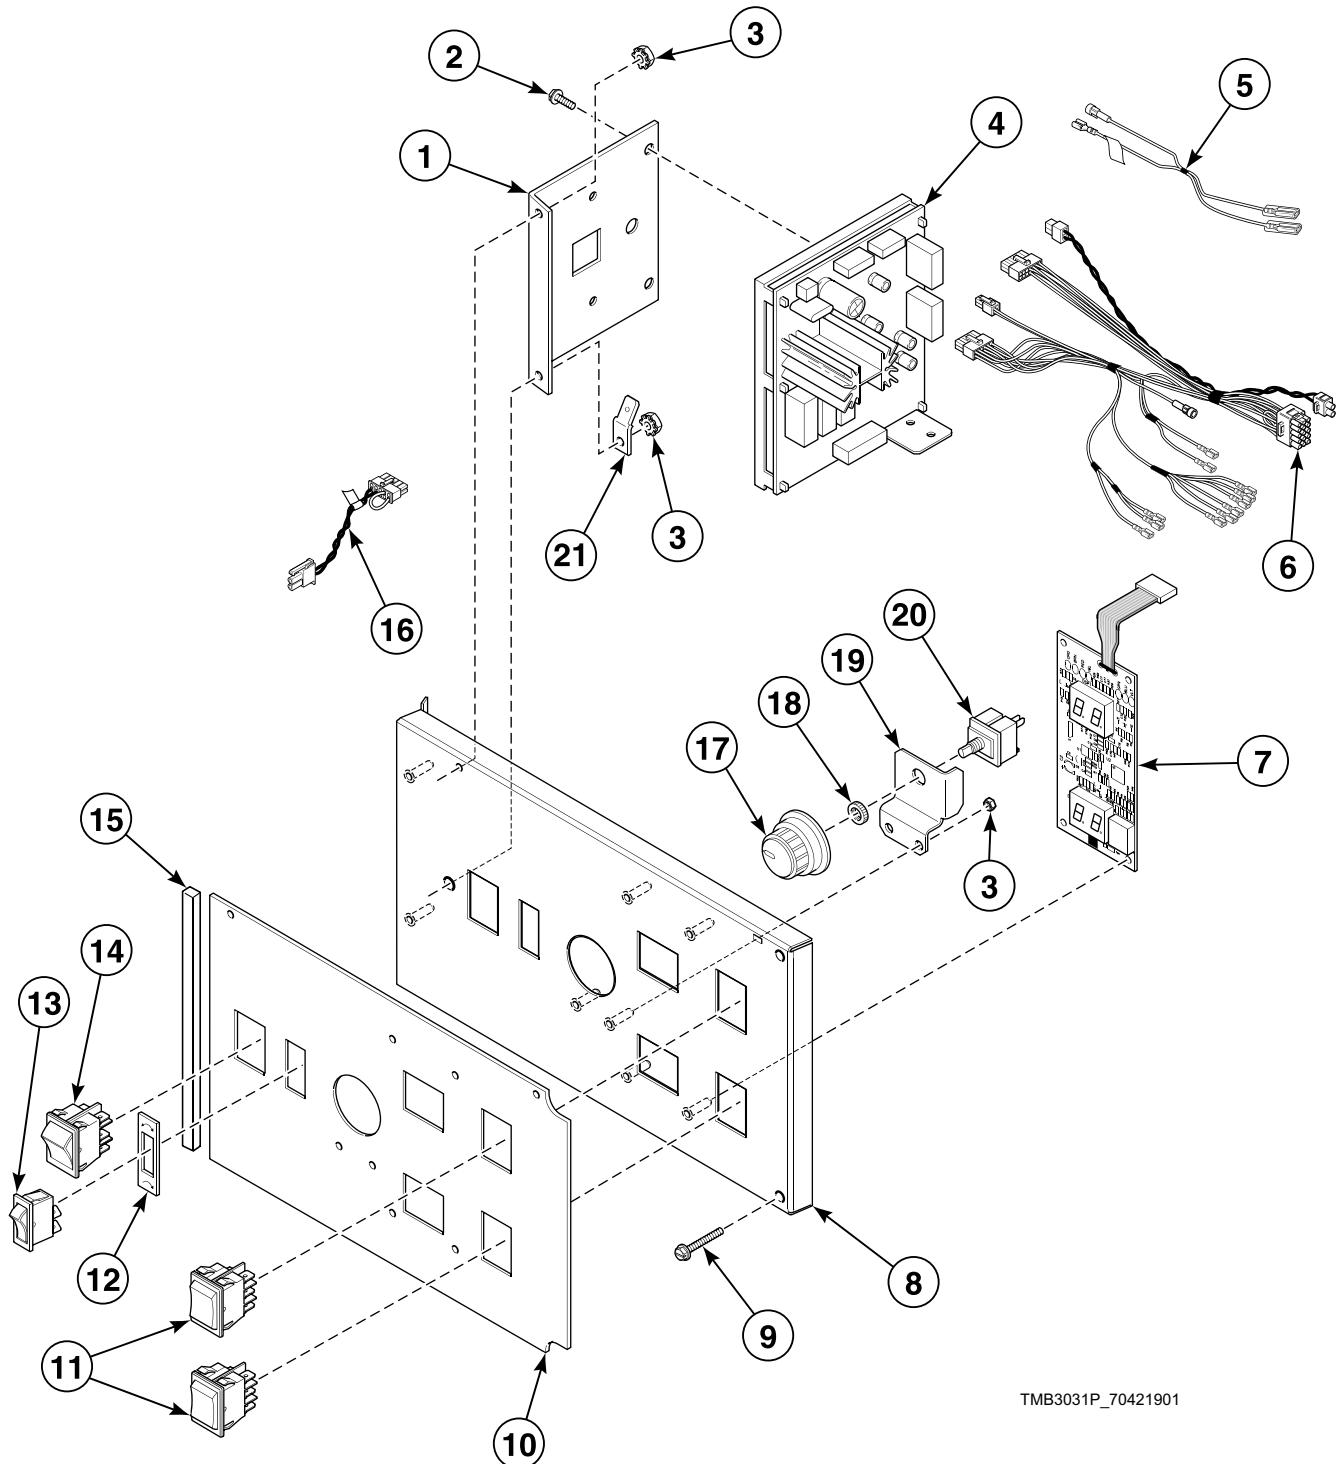


TMB3031P_70421901

Dual Digital Timer Controls

REF	PART NO.	DESCRIPTION	COMMENTS
1	70357901	Control Chassis Mounting Bracket	
2	501524	Screw	
3	70054	Nut	
4	512202P	Control Assembly	
5	44100101P	Control Harness	Reversing; Use in addition to item 6
6	70367001P	Control Panel Harness	
7	512218P	Display Assembly	
8	70360601	Control Plate Assembly	
9	70069901	Screw	
10	70362201	Overlay	C, I, S, U and Y models; Nonreversing
	70362202	Overlay	C, I, S, U and Y models; Reversing
	70362501	Overlay	H models; Nonreversing
	70362502	Overlay	H models; Reversing
	70362401	Overlay	P models; Nonreversing
	70362402	Overlay	P models; Reversing
11	70360801	Rocker Switch	
12	M413236	Switch Plate	Reversing
13	44099601	Rocker Switch	Reversing
14	70365901	Rocker Switch	Start switch
15	70414101	Foam Gasket	
16	70324604	Jumper Calibration Wire	
17	44104601	Temperature Knob	
18	24205	Nut	
19	70391701	Temperature Selector Switch Bracket	
20	511711	Temperature Selector Switch	
21	00177	Male Tab Terminal	

DMP Control

C and I Models
Models with DO, DV, DX and RD Control Suffixes

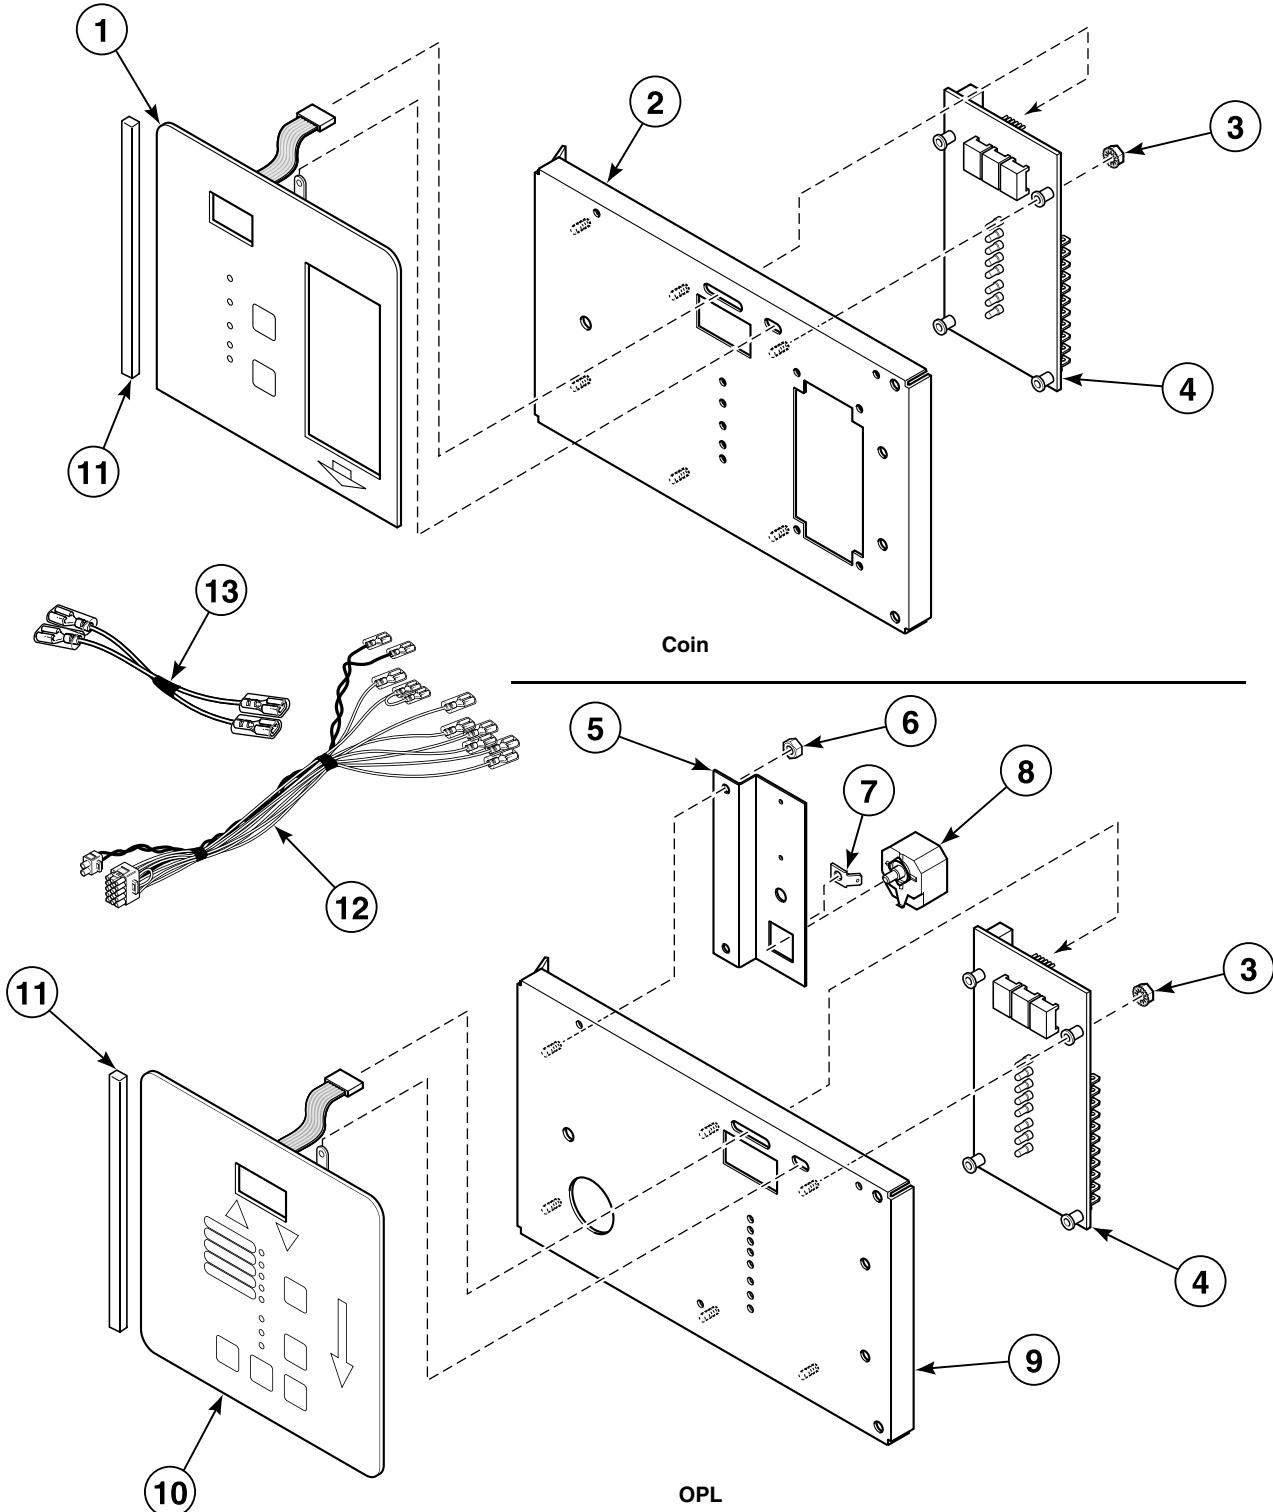


TMB3032P_70421901

DMP Control

REF	PART NO.	DESCRIPTION	COMMENTS
	M4797P3	Control Conversion Kit	C models except CT075T and CU075T; DV and DX control suffixes
1	44039402P	Membrane Switch	Coin
2	44041001	Control Plate Assembly	Coin; Includes studs
3	29787	Nut	
4	44037801P	Electronic Control	
5	44041701	Relay/Buzzer Bracket	
6	70054	Nut	
7	00177	Male Tab Terminal	
8	505447	Adjustable Buzzer	
9	44040901	Control Plate Assembly	OPL; Includes studs
10	44037902P	Membrane Switch	OPL
11	70414101	Foam Gasket	
12	70341801P	Control Panel Harness Assembly	Non-CE models
	70341901P	Control Panel Harness	CE models; Coin
	70342001P	Control Panel Harness	CE models; OPL
13	44042701	Jumper Set Assembly	Coin; Use in addition to item 12
	44042801	Jumper Set Assembly	OPL; Buzzer; Use in addition to item 12

DX4 Electronic Control

D and I Models
Models with 3O, 3V, 3X and R3 Control Suffixes

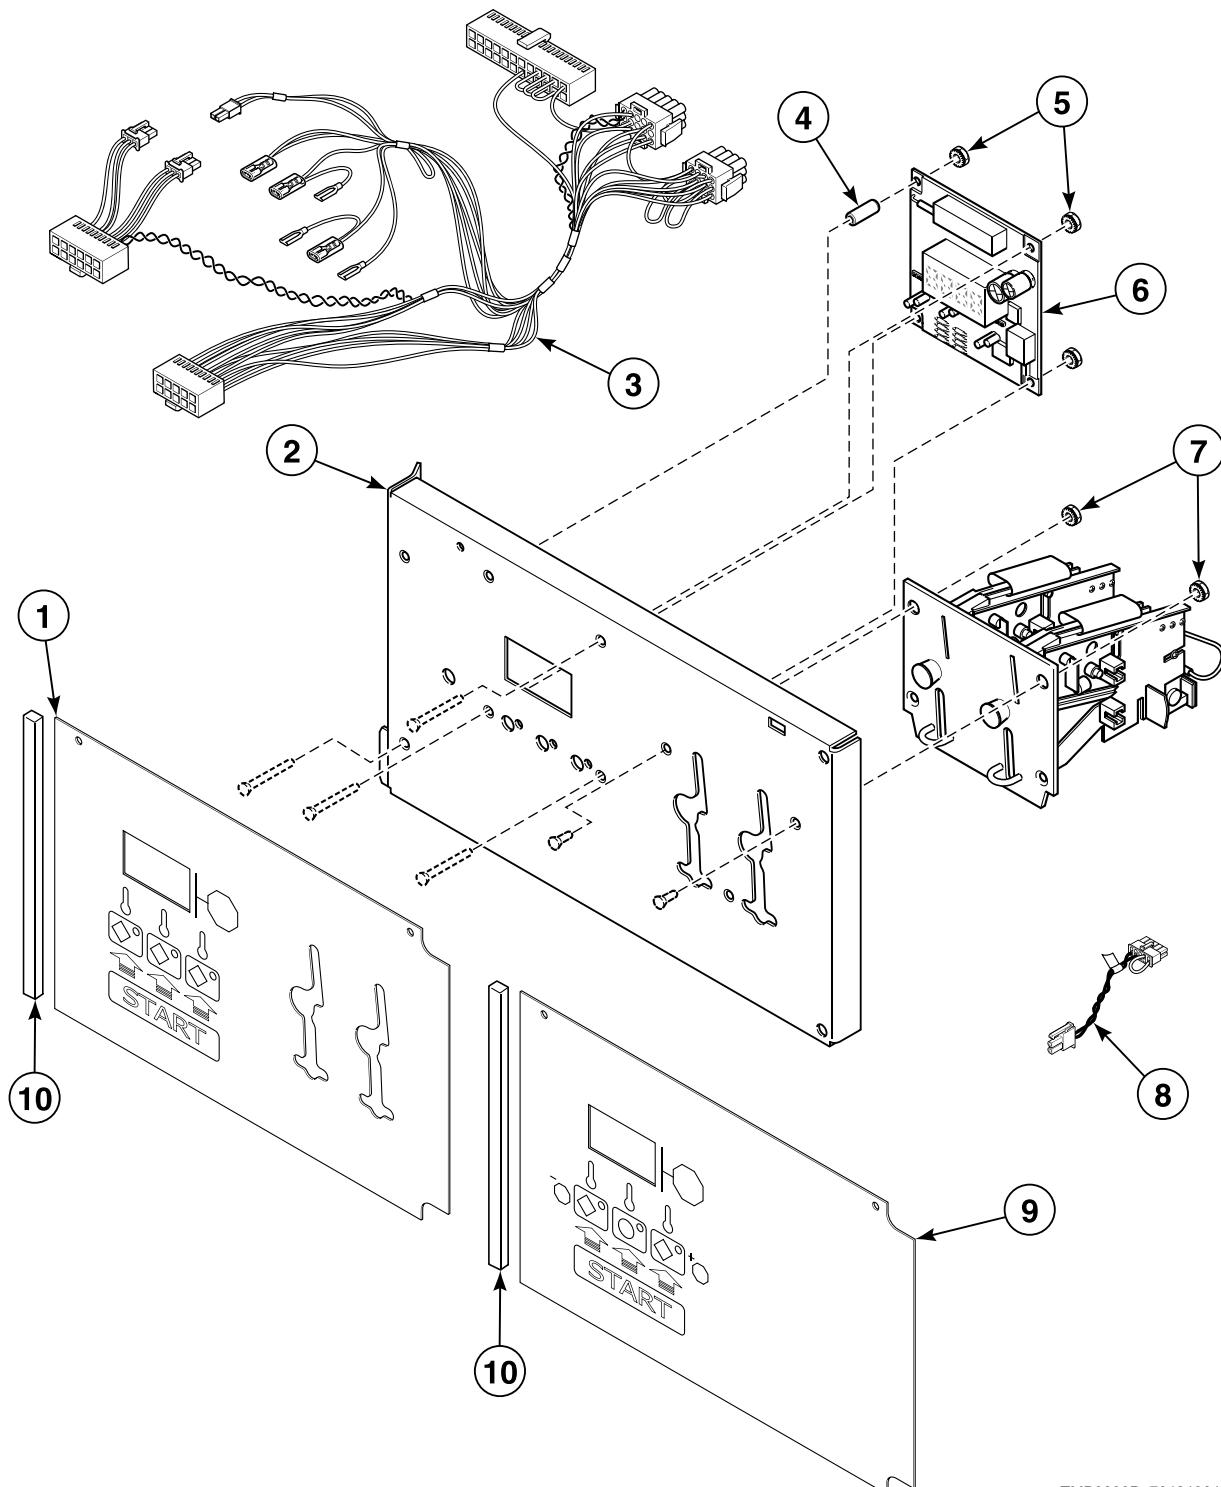


TMB3033P_70421901

DX4 Electronic Control

REF	PART NO.	DESCRIPTION	COMMENTS
1	44050502	Graphic Overlay	Dual; Coin (shown)
	44050501	Graphic Overlay	Single; Coin
2	44050701P	Control Plate Kit	Includes studs
3	70315601P	Control Panel Harness	Non-CE and non-Australian models
	70315701	Control Panel Harness Assembly	CE and Australian models
4	44050601	Sleeve	4 required
5	29787	Nut	
6	70402019P	Control Assembly	Gas models; 3O control suffix
	70402020P	Control Assembly	Steam models; 3O control suffix
	70402021P	Control Assembly	Electric models; 3O control suffix
	70402022P	Control Assembly	Gas models; R3 control suffix
	70402023P	Control Assembly	Steam models; R3 control suffix
	70402024P	Control Assembly	Electric models; R3 control suffix
	70402108P	Control Assembly	Gas models; 3V and 3X control suffixes
	70402120P	Control Assembly	Steam models; 3V and 3X control suffixes
	70402121P	Control Assembly	Electric models; 3V and 3X control suffixes
7	29786	Nut	2 required
8	70324604	Jumper Calibration Wire	
9	44050401	Graphic Overlay	OPL
10	70414101	Foam Gasket	

OPL Microprocessor Control

G, H, K, L, P, S and U Models
Models with OM and RM Control Suffixes

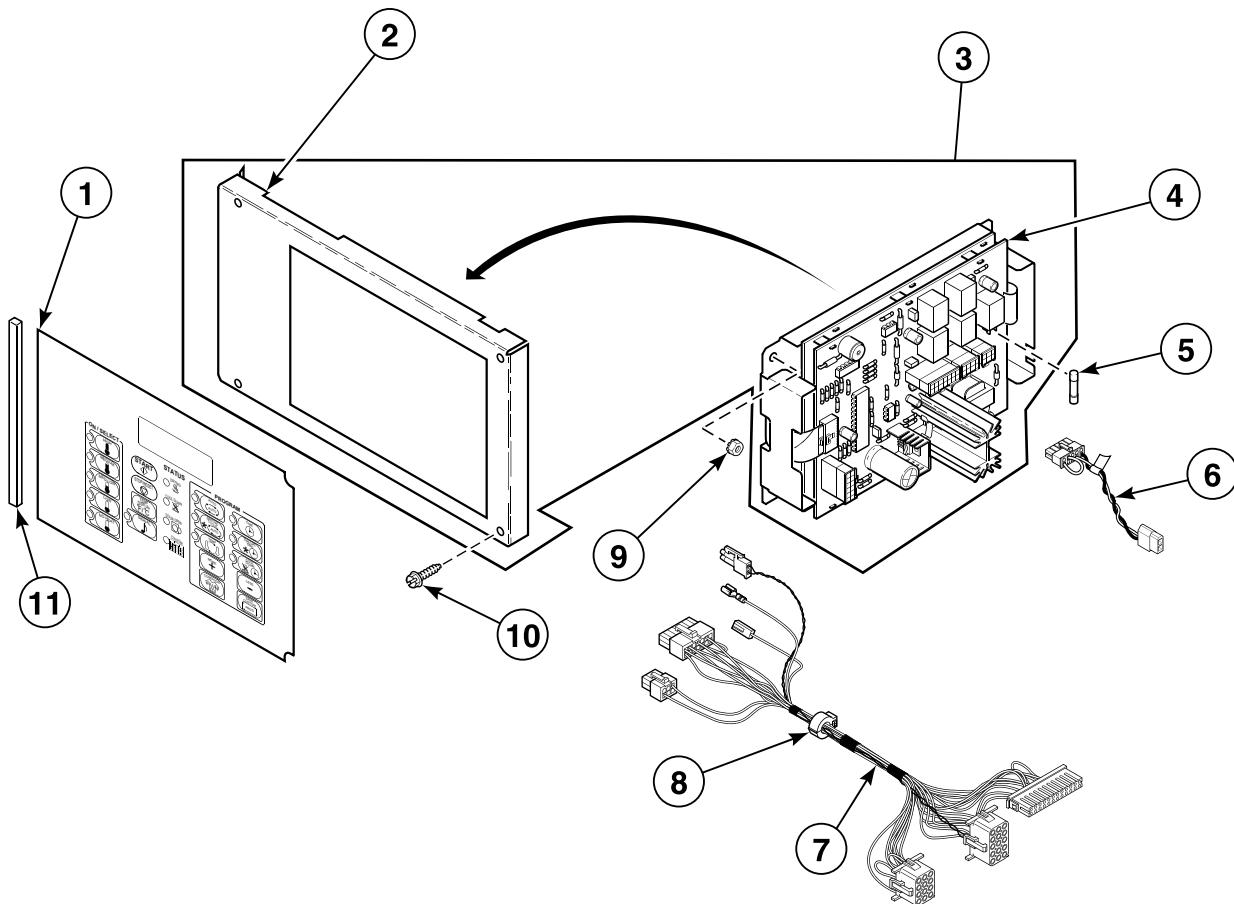


TMB3034P_70421901

OPL Microprocessor Control

REF	PART NO.	DESCRIPTION	COMMENTS
1	70115801	Overlay	L, S and U models; Nonreversing; Text and icon
	70128401	Overlay	L, S and U models; Reversing; Text and icon
	70130401	Overlay	S and U models; Nonreversing; Icon
	70130501	Overlay	S and U models; Reversing; Icon
	70128701	Overlay	H models; Nonreversing; Text and icon
	70128601	Overlay	H models; Reversing; Text and icon
	70130601	Overlay	H models; Nonreversing; Icon
	70130701	Overlay	H models; Reversing; Icon
	70130301	Overlay	P models; Nonreversing; Text and icon
	70135301	Overlay	P models; Reversing; Text and icon
44130002	Overlay	G and K models; Nonreversing; Text and icon	
	44130001	Overlay	G and K models; Reversing; Text and icon
2	70175805	Control Plate Assembly	
3	44013601P	Control Assembly	Does not include overlay or control panel harness
4	70228401P	Control Kit	With tape
5	70406501	Fuse	
6	70084304	Jumper Calibration Wire	OM control suffix
	70084305	Jumper Calibration Wire	RM control suffix
7	70335301P	Control Panel Harness	Non-CE models
	70382701P	Control Panel Harness	CE models
8	M413930P	Ferrite Core Assembly	
9	70054	Nut	4 required
10	70069901	Screw	2 required
11	70414101	Foam Gasket	

Coin Drop Components for MDC Models

G, H, K, L, P and S Models Except STF Models and Thermal Oil Models
Models with BC, BL and BX Control Suffixes

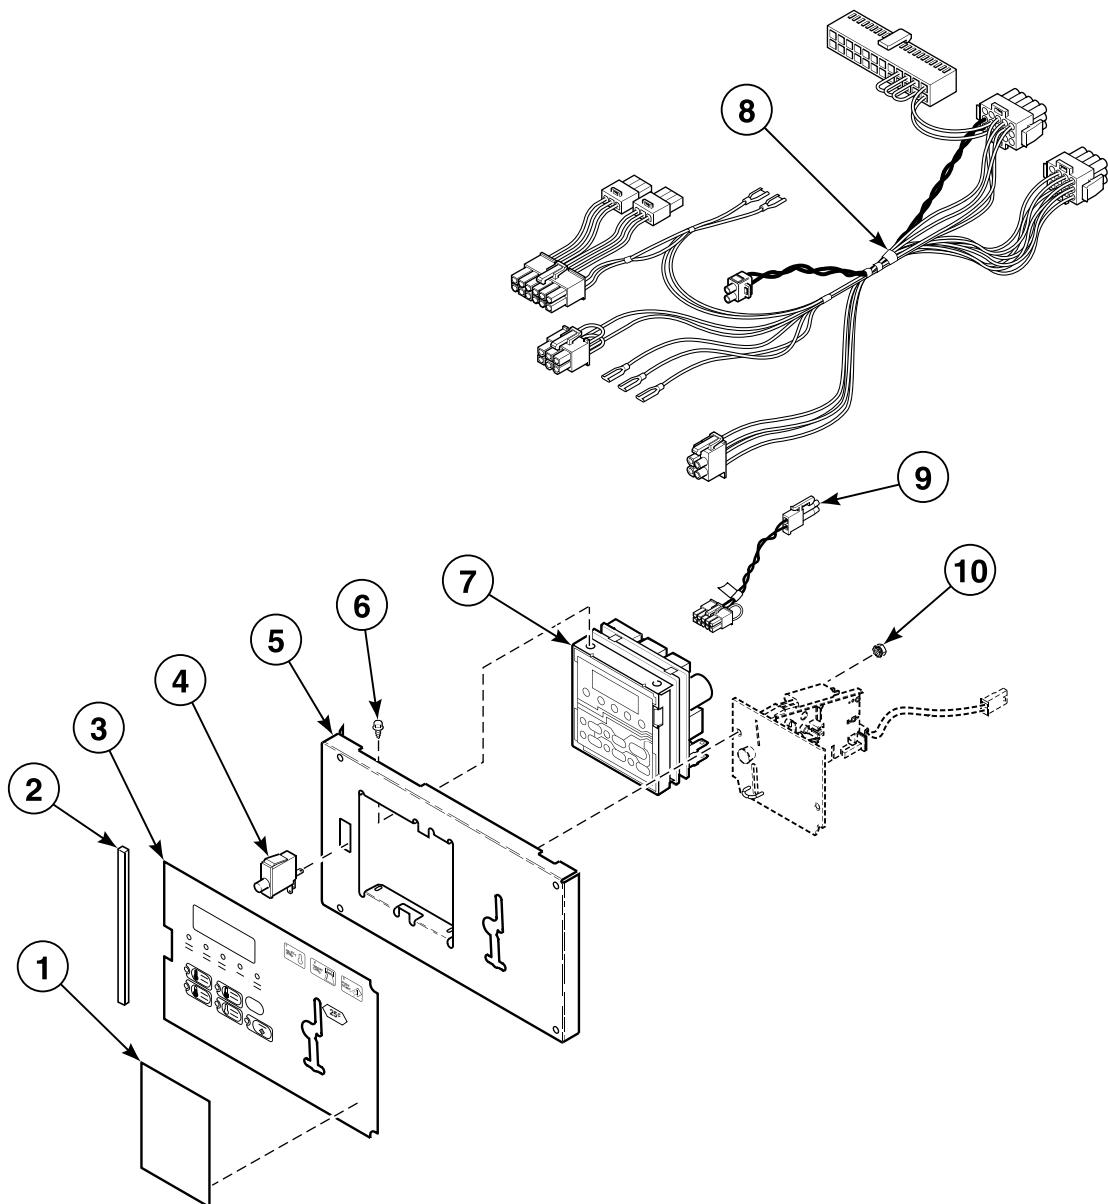

TMB3035P_70421901

Coin Drop Components for MDC Models


REF	PART NO.	DESCRIPTION	COMMENTS
	70321201	Coin Drop Overlay Kit	P models
1	39564	Coin Drop Overlay	S models with BL** control suffix; Cover
	70246301	Coin Cover Overlay	L models with BL** control suffix; Cover
	70286701	Overlay	P models with BL** control suffix; Cover
	70275401	Overlay	H models with BL** control suffix; Cover
2	70414101	Foam Gasket	
3	70257701	Overlay	L and S models with BC, BL** and BX control suffixes; Text; Single drop
	70261001	Overlay	L and S models with BC, BL** and BX control suffixes; Icon; Single drop
	70257702	Overlay	L and S models with BC and BX control suffixes; Dual drop
	70261002	Overlay	L and S models with BC and BX control suffixes; Dual drop
	70258001	Overlay	H models with BC, BL** and BX control suffixes; Text; Single drop
	70261201	Overlay	H models with BC, BL** and BX control suffixes; Icon; Single drop
	70258002	Overlay	H models with BC and BX control suffixes; Dual drop
	70261202	Overlay	H models with BC and BX control suffixes; Icon; Dual drop
	70129501	Overlay	P models with BC* and BX* control suffixes; Single drop
4	70129601	Overlay	P models with BC* and BX* control suffixes; Dual drop
	70321001	Overlay	P models with BC* and BX* control suffixes; World drop
5	70259001	Overlay	P models with BC* and BX* control suffixes
	70453001	Overlay	G and K models; Text; Single drop
6	70453002	Overlay	G and K models; Text; Dual drop
	70107001	Pushbutton Switch	
	70291001P	Control Plate Kit	
	501524	Screw	4 required for mounting control
	511867P	Control Assembly	
	70429101P	Control Panel Harness	Non-CE models
	70429201P	Control Panel Harness	CE models
	70324604	Jumper Calibration Wire	
	29786	Nut	3 required

* NOTE: P models with BC or BX control suffixes require an overlay and coin drop overlay.

** NOTE: BL control suffix requires an overlay and overlay cover specific to model.

Central Pay and Card Reader MDC Models

G, H, K, L, P and S Models Except STF Models and Thermal Oil Models
Models with BG, BL and BY Control Suffixes

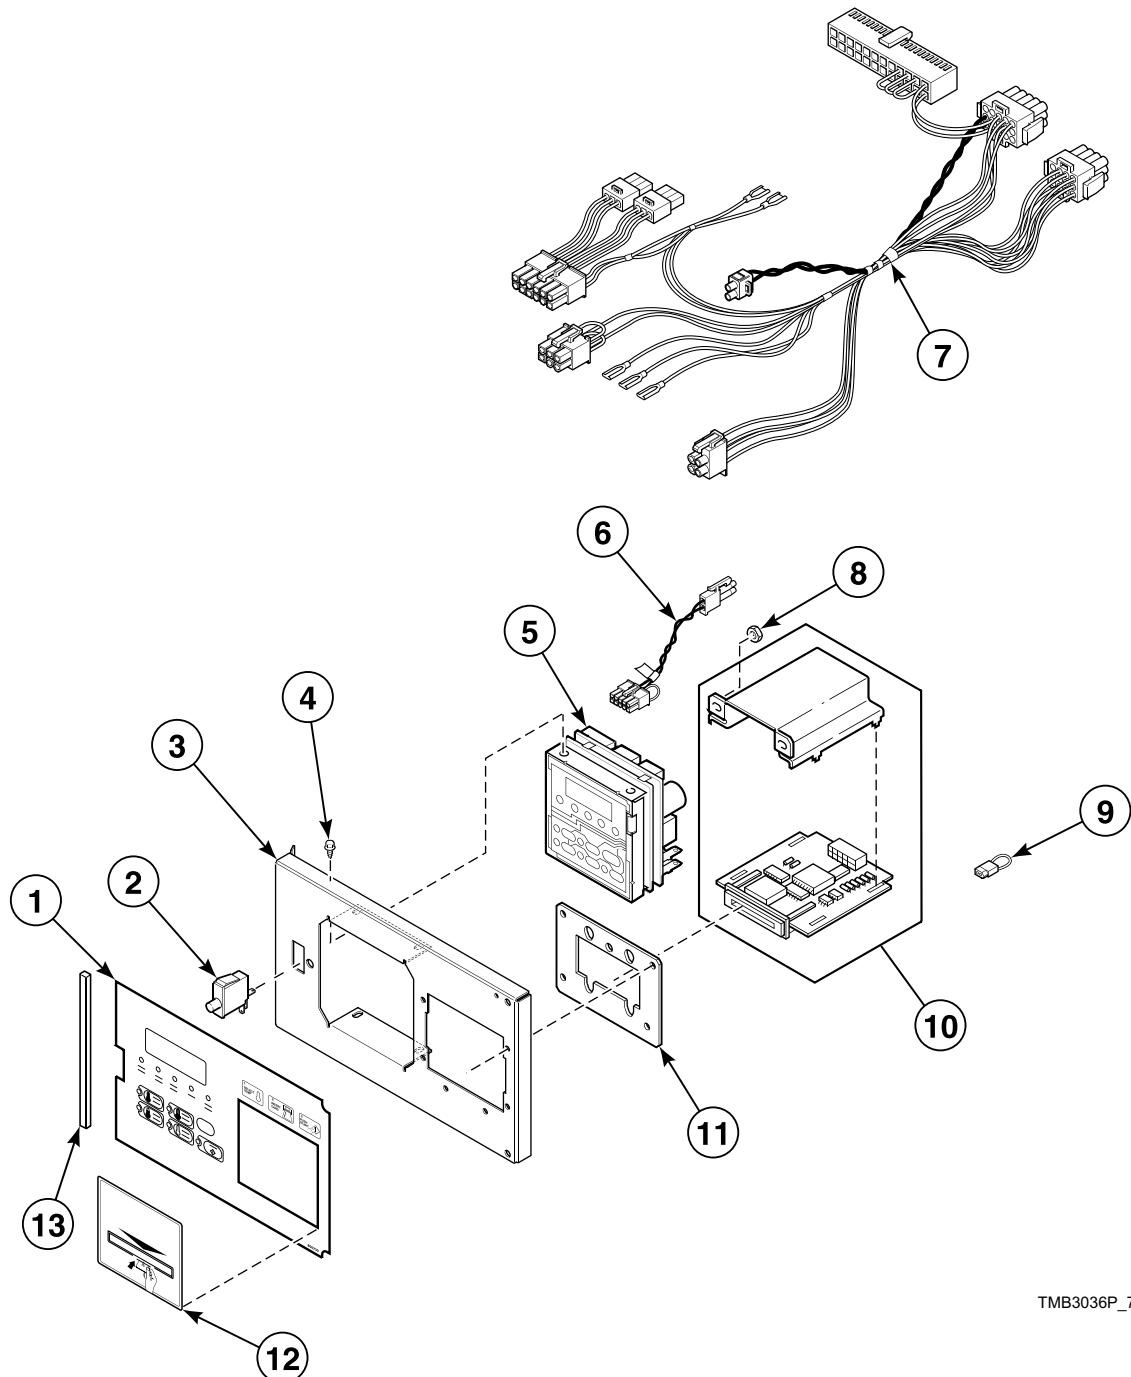

TMB3036P_70421901

Central Pay and Card Reader MDC Models


REF	PART NO.	DESCRIPTION	COMMENTS
1	70266701	Overlay	L and S models with BY control suffix; Text
	N/A	Overlay	L and S models with BY control suffix; Icon
	70257703	Overlay	L and S models except model ST075D with BY control suffix; Text
	70261003	Overlay	L and S models except model ST075D with BY control suffix; Icon
	70259001	Overlay	P models with BL* control suffix
	70266801	Overlay	H models with BY control suffix; Text
	70258003	Overlay	H models except model HT075D with BY control suffix; Text
	70453101	Overlay	G and K models with BG and BY control suffixes; Text
2	70107001	Pushbutton Switch	
3	70348801	Control Plate Assembly	H, P and S models except models HT075D and ST075D with BY control suffix
	70291001P	Control Plate Kit	H, L, P and S models with BL control suffix
4	501524	Screw	
5	511867P	Control Assembly	
6	70324604	Jumper Calibration Wire	
7	70429101P	Control Panel Harness	Non-CE models
	70358701	Control Panel Harness	CE models
8	70054	Nut	
9	N/A	Bypass Jumper Wire	
10	510068P	Card Reader and Bracket Assembly	
11	70208801	Mounting Plate	H, P and S models except models HT075D and ST075D with BY control suffix
12	70334201	Card Reader Overlay	S models; Black
	70334301	Card Reader Overlay	H models; Gray
	70246301	Coin Cover Overlay	G, K and L models
13	70414101	Foam Gasket	

N/A = Part no longer available

* NOTE: BL control suffix requires an overlay and overlay cover specific to model.

Optional Card Reader Mountings for MDC Models

H, K, L and S Models Except STF Models and Thermal Oil Models
Models with BY Control Suffix

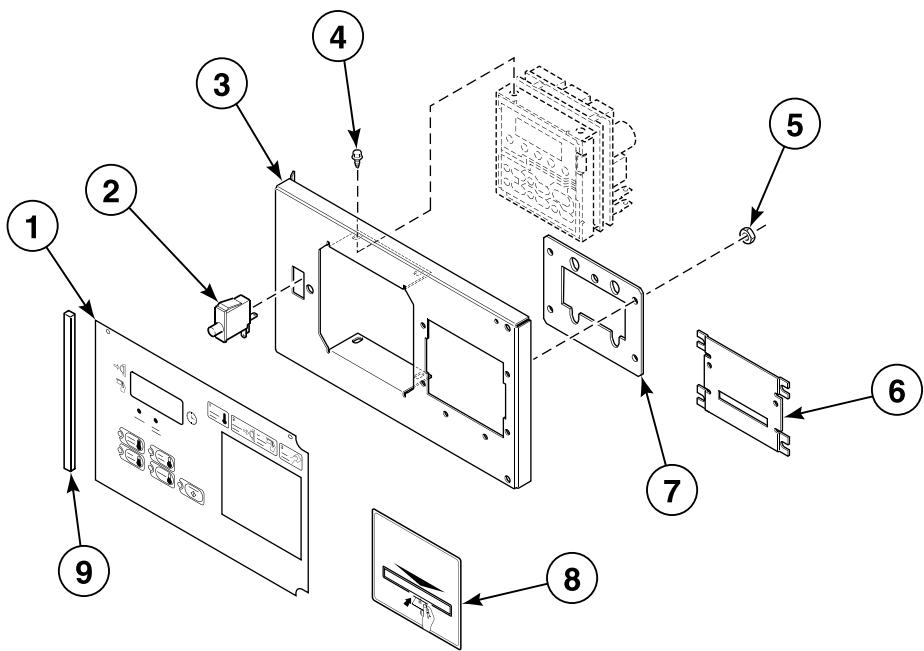


TMB3037P_70421901

Optional Card Reader Mountings for MDC Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	70257703	Overlay	L and S models; Text and icon
	70258003	Overlay	H models; Text and icon
	70453101	Overlay	K models
2	70107001	Pushbutton Switch	
3	70348801	Control Plate Assembly	
4	501524	Screw	4 required
5	70054	Nut	4 required
6	44089501	Slot Card Plate Assembly	Included in literature packet
7	70208801	Mounting Plate	
8	70334201	Card Reader Overlay	Black; Included in literature packet
	70334301	Card Reader Overlay	Gray; Included in literature packet
9	70414101	Foam Gasket	

Coin Drops

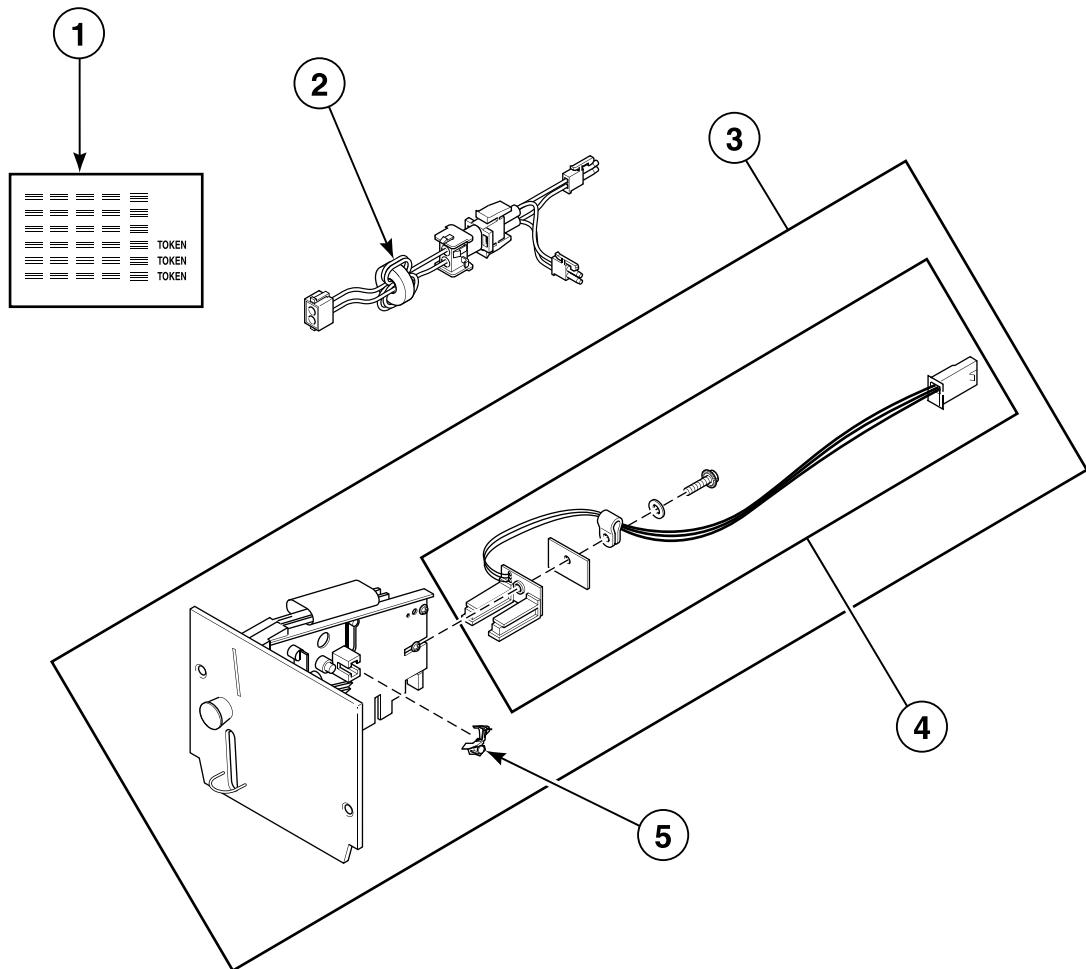


TMB2921P_70421901

Coin Drops

REF	PART NO.	DESCRIPTION	COMMENTS
1	38725	Coin Identification Paper	
2	44065801	Electronic Coin Drop Harness	Included in CK502 Electronic Coin Drop Kit
3	70294101P	Electronic Coin Drop Assembly	USA (default), Canada, Japan and Taiwan
	70294103P	Electronic Coin Drop Assembly	United Kingdom (default) and Europe
	70294104	Electronic Coin Drop Assembly	Euro (default), Denmark and Norway
	70294105P	Electronic Coin Drop Assembly	Australian (default), New Zealand, Hong Kong, South Korea and Malaysia
	70294106	Electronic Coin Drop Assembly	Mexico (default), Ecuador and USA dollar
	70294109	Electronic Coin Drop Assembly	Malaysia (default), China, Russia and Singapore
	70294107	Electronic Coin Drop Assembly	Lithuania (default), Latvia and Europe
	38479P	Coin Drop	USA; \$.25; Single
	70256402P	Coin Drop	USA; \$.25 and \$1.00; Dual
	70429001	Coin Drop	D models; USA
	38475	Coin Drop Assembly	Japan; 100 yen
	38519	Coin Drop Assembly	Japan; 100 and 500 yen
	38467	Coin Drop Assembly	Australia; .20 and 1.00
	70447301	Coin Drop Assembly	Australia; 1.00 and 2.00
	39748	Coin Drop	Token; Jeton; CE models
	210195	Coin Drop Assembly	Euro; .20 and 1.00
	210196	Coin Drop Assembly	Euro; .50 and 1.00
	70283102	Coin Drop Assembly	Euro; .20 and .50
	70294111	Electronic Coin Drop Assembly	Euro; .10, .20, .50, 1.00 and 2.00
	38462P	Coin Drop Assembly	Token; 118-1
	38463	Coin Drop Assembly	Token; 118-5
	38464P	Coin Drop Assembly	Canada; .25
	200578P	Coin Drop Assembly	Canada; .25 and 1.00
	38472	Coin Drop Assembly	England; 20 pence and 1 pound
	38521	Coin Drop Assembly	Korea; 100 and 500 won
	38963P	Coin Drop	Token; 118-16
	39157	Coin Drop Assembly	Israel; Shekel
	CK077	Coin Drop Kit	Taiwan; 10 NT
	70281102	Coin Drop Assembly	Taiwan; Dual drop
	44039701P	Coin Drop Assembly	USA; \$.25; DO, DV, DX and RD control suffixes
	44039702	Coin Drop Assembly	Mexico; 2 peso; DO, DV, DX and RD control suffixes
	44039703	Coin Drop Assembly	Token; .880; DO, DV, DX and RD control suffixes
	44039704	Coin Drop Assembly	Japan; 100 yen; DO, DV, DX and RD control suffixes
	44039705	Coin Drop Assembly	England; 20 pence; DO, DV, DX and RD control suffixes
	44039706	Coin Drop Assembly	Token; .800; DO, DV, DX and RD control suffixes
	44039707	Coin Drop Assembly	England; 50 pence; DO, DV, DX and RD control suffixes
	N/A	Coin Drop Assembly	5 and 10 krone
4	200674P	Opto Coupler	
5	201595P	Wire Guard	

N/A = Part no longer available

Coin Drop Kits

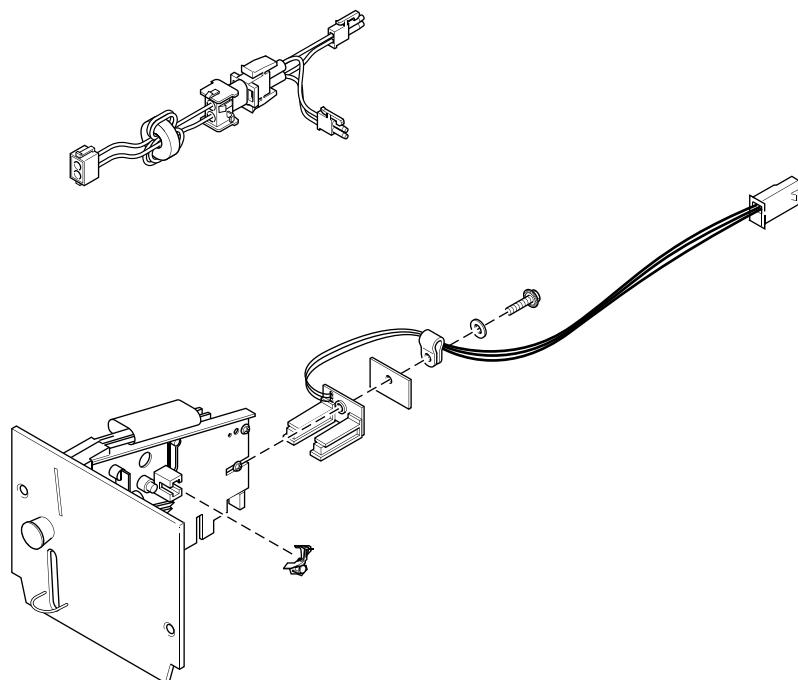


TMB2738PA_70421901

Coin Drop Kits

REF	PART NO.	DESCRIPTION	COMMENTS
CK502	Electronic Coin Drop Kit		Includes 44065801 Electronic Coin Drop Harness and wiring diagram supplement
CK095	Electronic Coin Drop Kit		USA (default), Canada, Japan and Taiwan; In addition to this kit, order CK502 Electronic Coin Drop Kit
CK099	Electronic Coin Drop Kit		Australia (default), New Zealand, Hong Kong, South Korea and Malaysia; In addition to this kit, order CK502 Electronic Coin Drop Kit
CK100	Electronic Coin Drop Kit		United Kingdom (default) and Europe; In addition to this kit, order CK502 Electronic Coin Drop Kit
CK101	Electronic Coin Drop Kit		Euro (default), Denmark and Norway; In addition to this kit, order CK502 Electronic Coin Drop Kit
CK103	Electronic Coin Drop Kit		Lithuania (default), Latvia and Europe; In addition to this kit, order CK502 Electronic Coin Drop Kit
CK106	Electronic Coin Drop Kit		Malaysia (default), China, Russia and Singapore; In addition to this kit, order CK502 Electronic Coin Drop Kit
CK108	Electronic Coin Drop Kit		South Africa; In addition to this kit, order CK502 Electronic Coin Drop Kit
CK109	Electronic Coin Drop Kit		Euro; In addition to this kit, order CK502 Electronic Coin Drop Kit

Coin Drop Components for NetMaster Models

KT Models Through Serial No. 0904002963
Models with NC and NX Control Suffixes

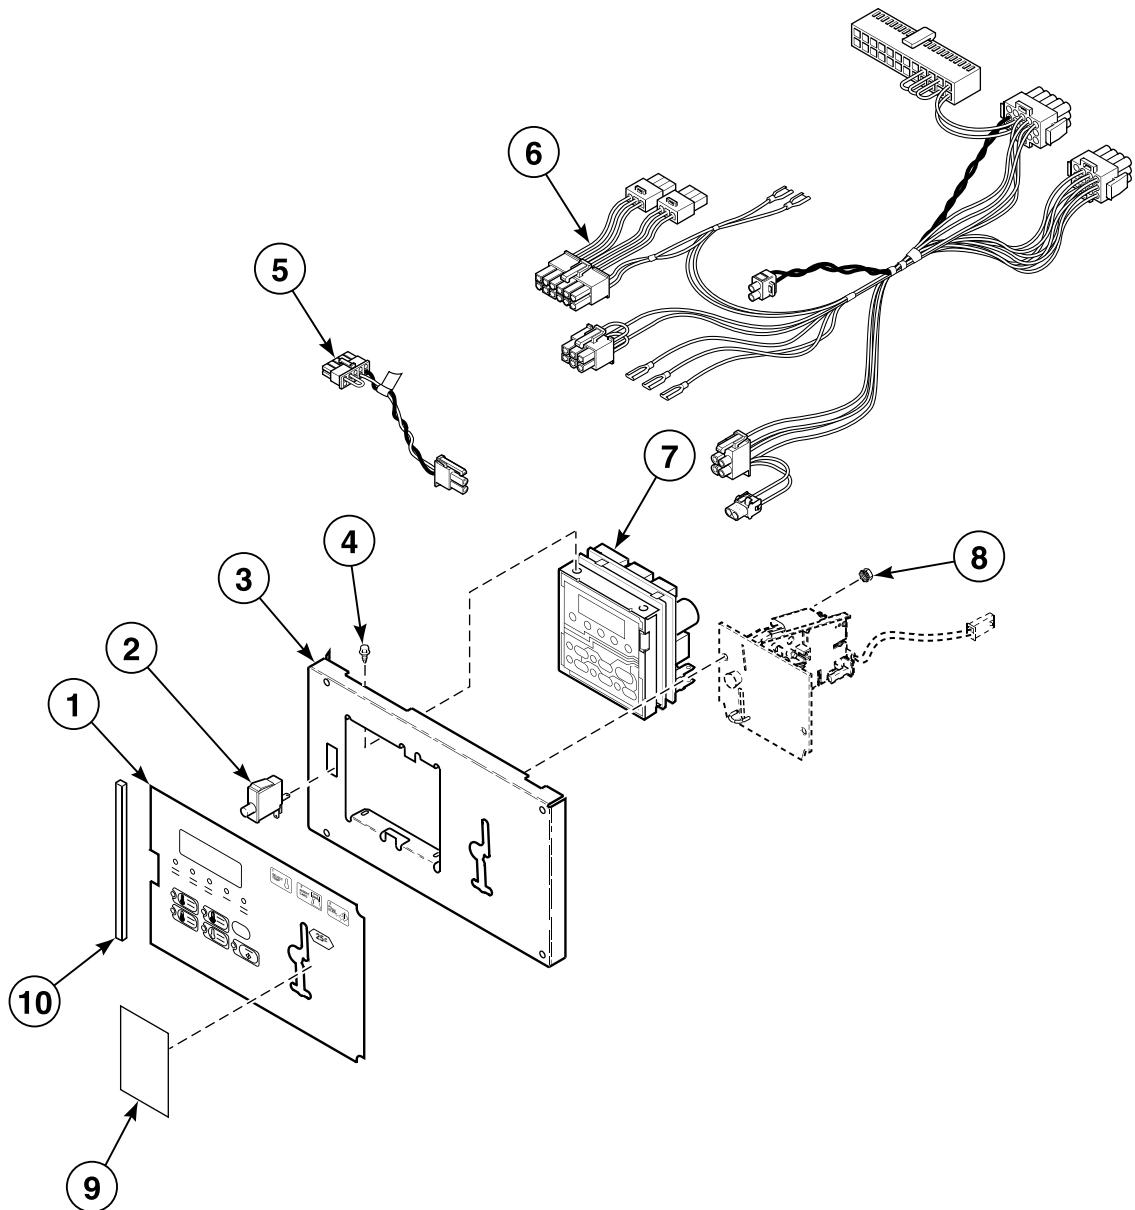


TMB3041P_70421901

Coin Drop Components for NetMaster Models

REF	PART NO.	DESCRIPTION	COMMENTS
	70291001P	Control Plate Kit	Includes item 3, 29786 Nut and 70292801 Washer
1	44144301	Overlay	Single drop
	44144302	Overlay	Dual drop
2	70107001	Pushbutton Switch	
3	70419701	Control Plate Assembly	
4	501524	Screw	For mounting control
5	70324604	Jumper Calibration Wire	
6	70368001P	Control Panel Harness	
7	505905P	Control Kit	
8	70054	Nut	
9	44147801	Overlay	
10	70414101	Foam Gasket	

Card Reader NetMaster Models

KT Models Through Serial No. 0904002963
Models with NY Control Suffix

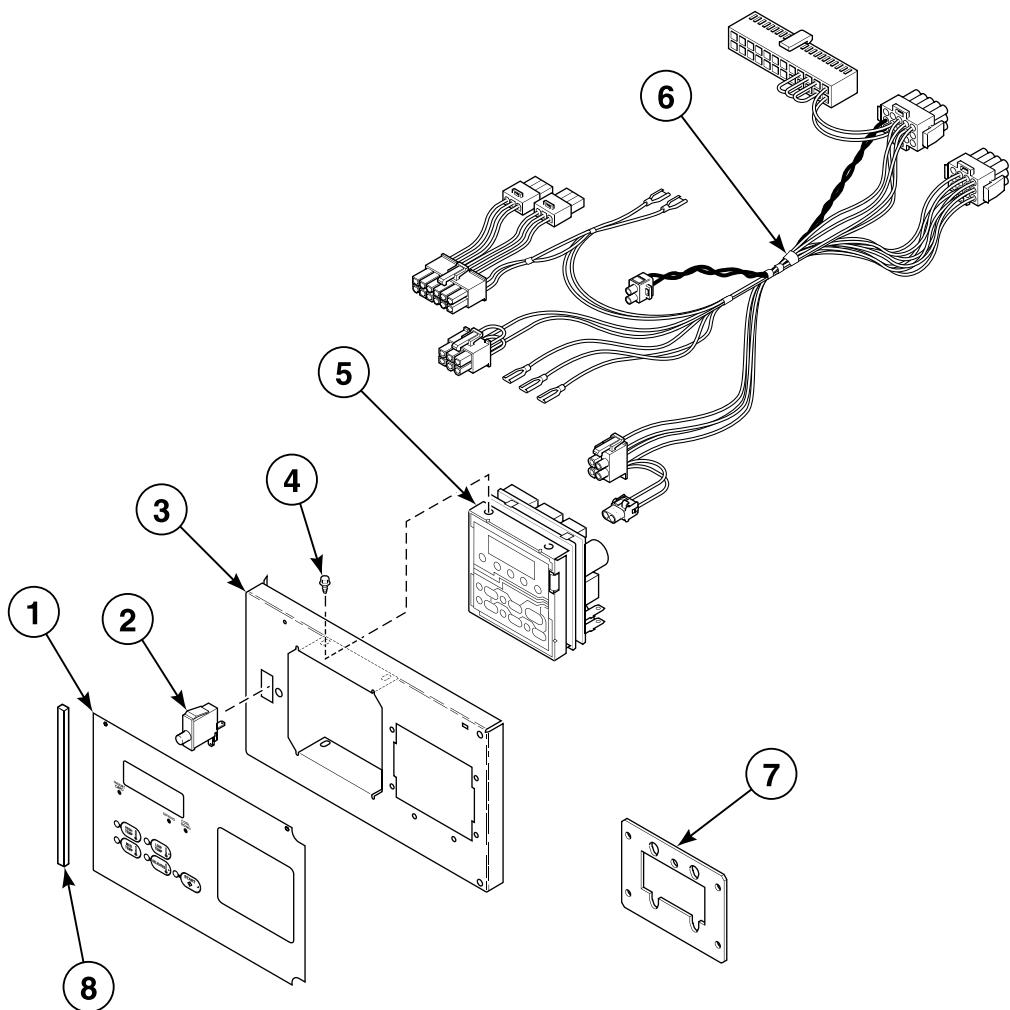


TMB3042P_70421901

Card Reader NetMaster Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	44149301	Overlay	
2	70107001	Pushbutton Switch	
3	70348801	Control Plate Assembly	
4	501524	Screw	4 required
5	505905P	Control Kit	Includes tape
6	70368001P	Control Panel Harness	
7	70208801	Mounting Plate	
8	70414101	Foam Gasket	

Coin Drop Components for Quantum Control

SA and ST Models
Models with LC, LX, WC and WX Control Suffixes

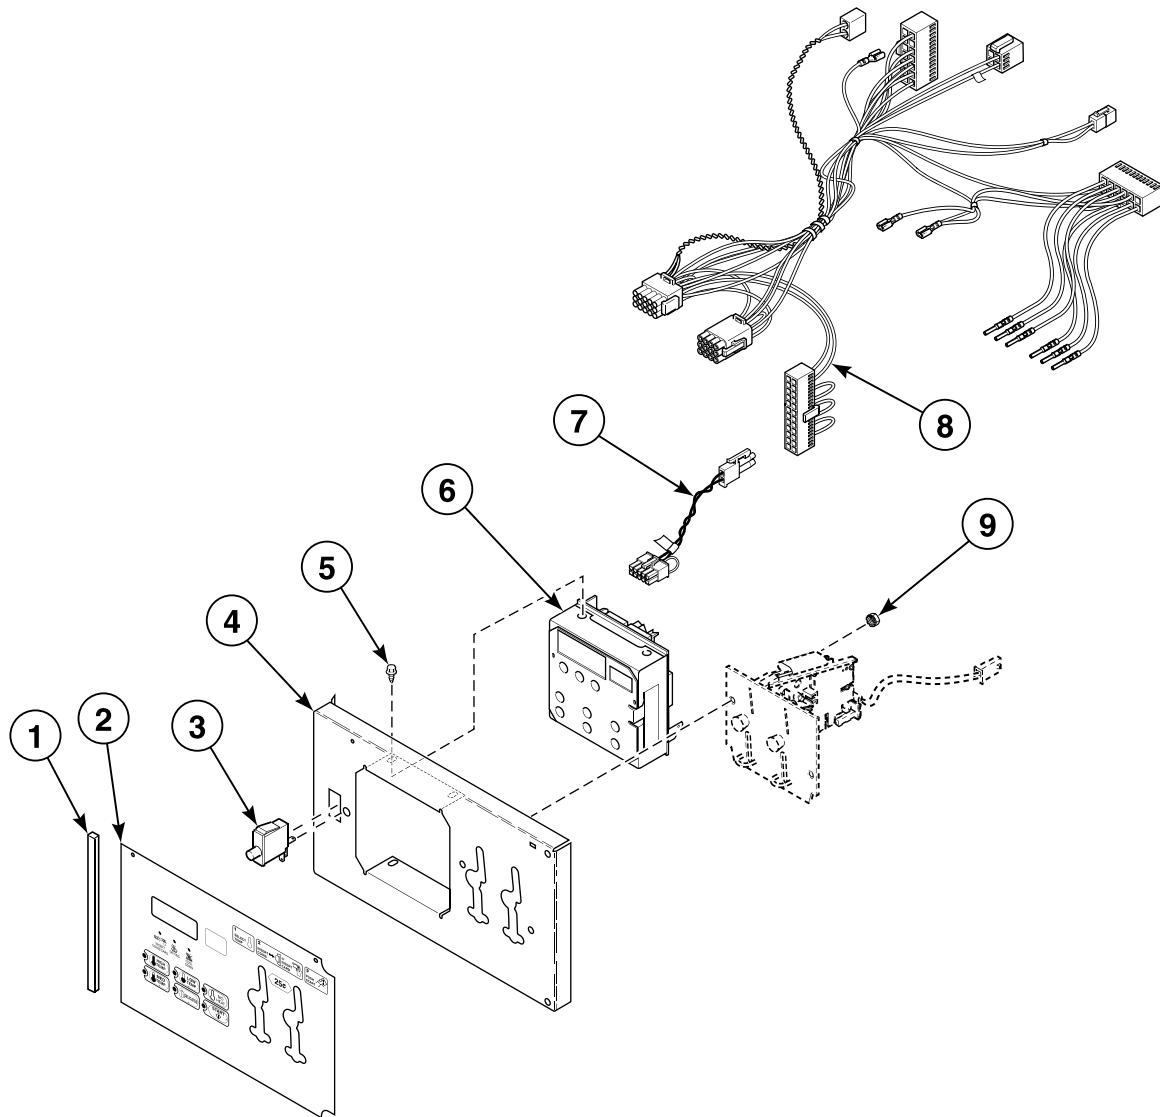


TMB3038P_70421901

Coin Drop Components for Quantum Control

REF	PART NO.	DESCRIPTION	COMMENTS
	NK208	Network Retrofit Kit	LC and LX control suffixes
	NK220	Network Controller Kit	LC and LX control suffixes
1	70414101	Foam Gasket	
2	44194801	Control Overlay	Model ST075D
	70449501	Control Overlay	Model ST075D
	70410001	Control Overlay	Single drop; All models except ST075D
	70410002	Control Overlay	Dual drop; All models except ST075D
3	70107001	Pushbutton Switch	
4	70291001P	Control Plate Kit	
5	501524	Screw	4 required for mounting control
6	512858P	Control Kit	
7	70324604	Jumper Calibration Wire	
8	70410401P	Control Panel Harness	
9	29786	Nut	2 required

Card Reader Components for Quantum Control

SA and ST Models
Models with LY and WY Control Suffixes

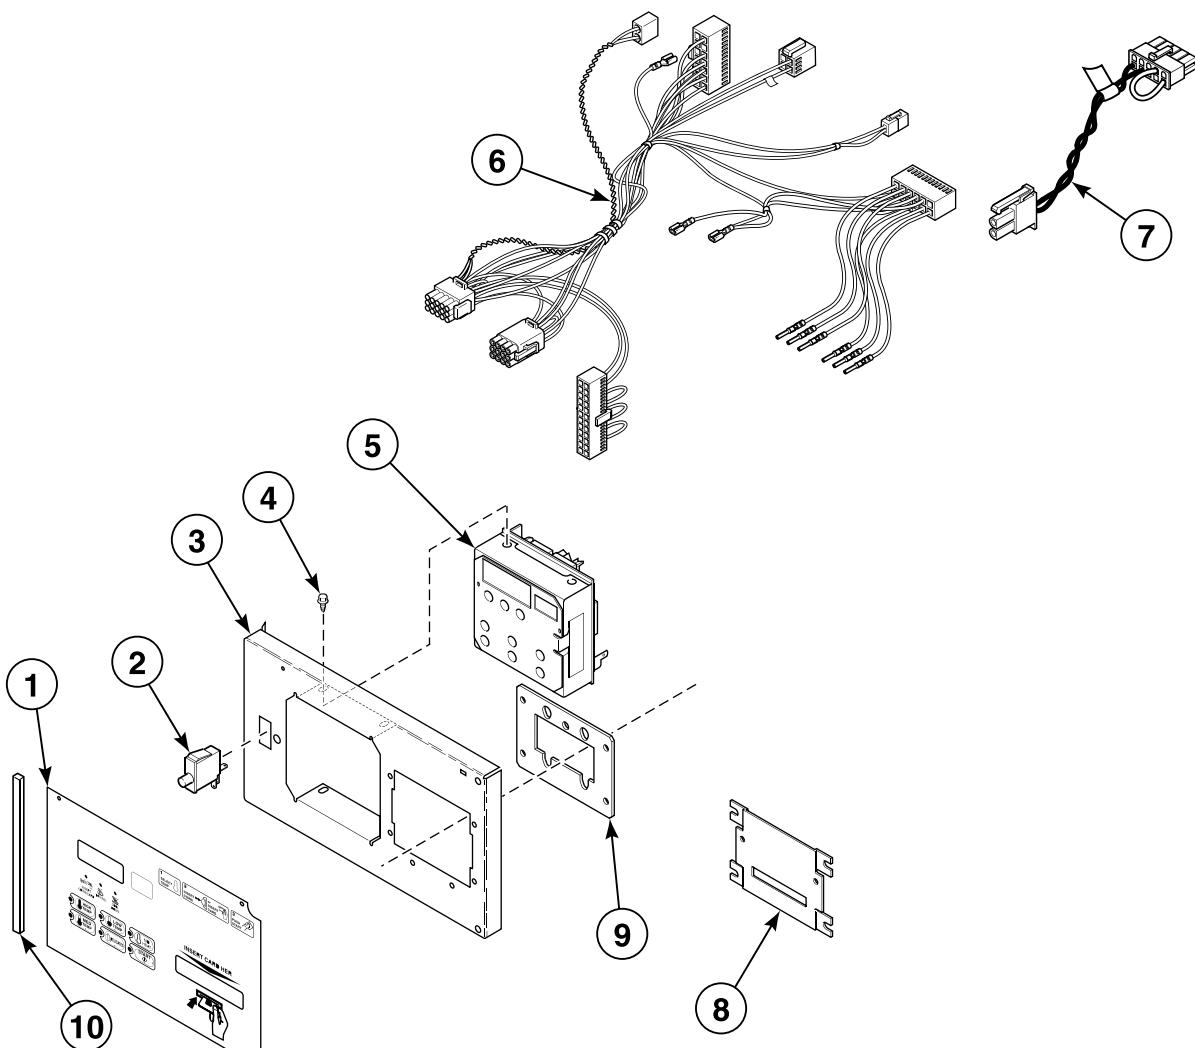


TMB3039P_70421901

Card Reader Components for Quantum Control

REF	PART NO.	DESCRIPTION	COMMENTS
	NK208	Network Retrofit Kit	LY control suffix
	NK220	Network Controller Kit	LY control suffix
1	70410003	Overlay	
2	70107001	Pushbutton Switch	
3	70348801	Control Plate Assembly	
4	501524	Screw	4 required
5	512858P	Control Kit	
6	70410401P	Control Panel Harness	
7	70324604	Jumper Calibration Wire	
8	44089501	Slot Card Plate Assembly	
9	70208801	Mounting Plate	
10	70414101	Foam Gasket	

Network Board for Quantum Control

SA and ST Models
Models with WC, WX and WY Control Suffixes

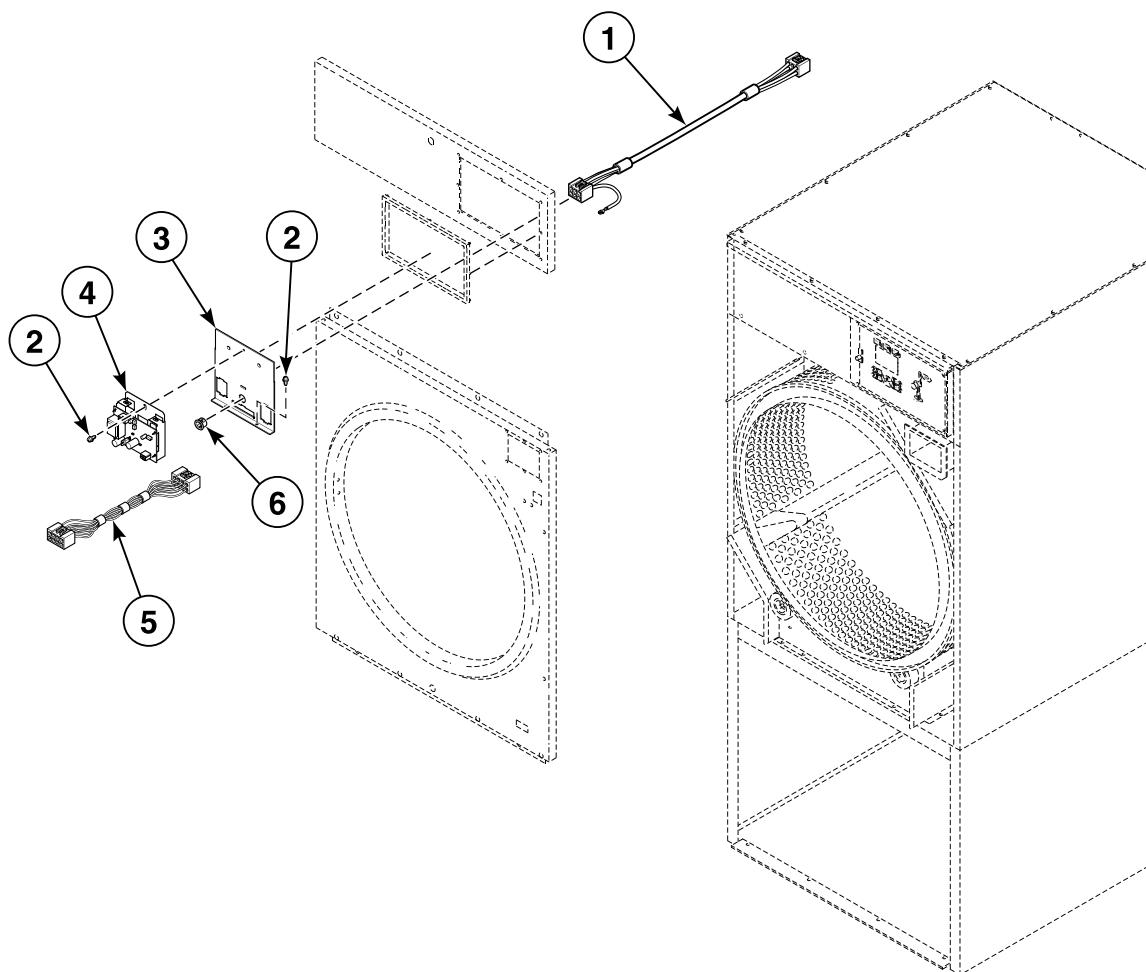


TMB2954P_70421901

Network Board for Quantum Control

REF	PART NO.	DESCRIPTION	COMMENTS
	800246	Communication Wire Harness Assembly	
1	44141801P	Network Harness	
2	430497	Screw	
3	70307002	Control Housing Cover	
4	201341	Network Board Assembly	
5	44088501P	Network Wire Harness Assembly	
6	M400770	Snap Bushing	

Network Connection for Quantum

SA and ST Models
Models with WC, WX and WY Control Suffixes

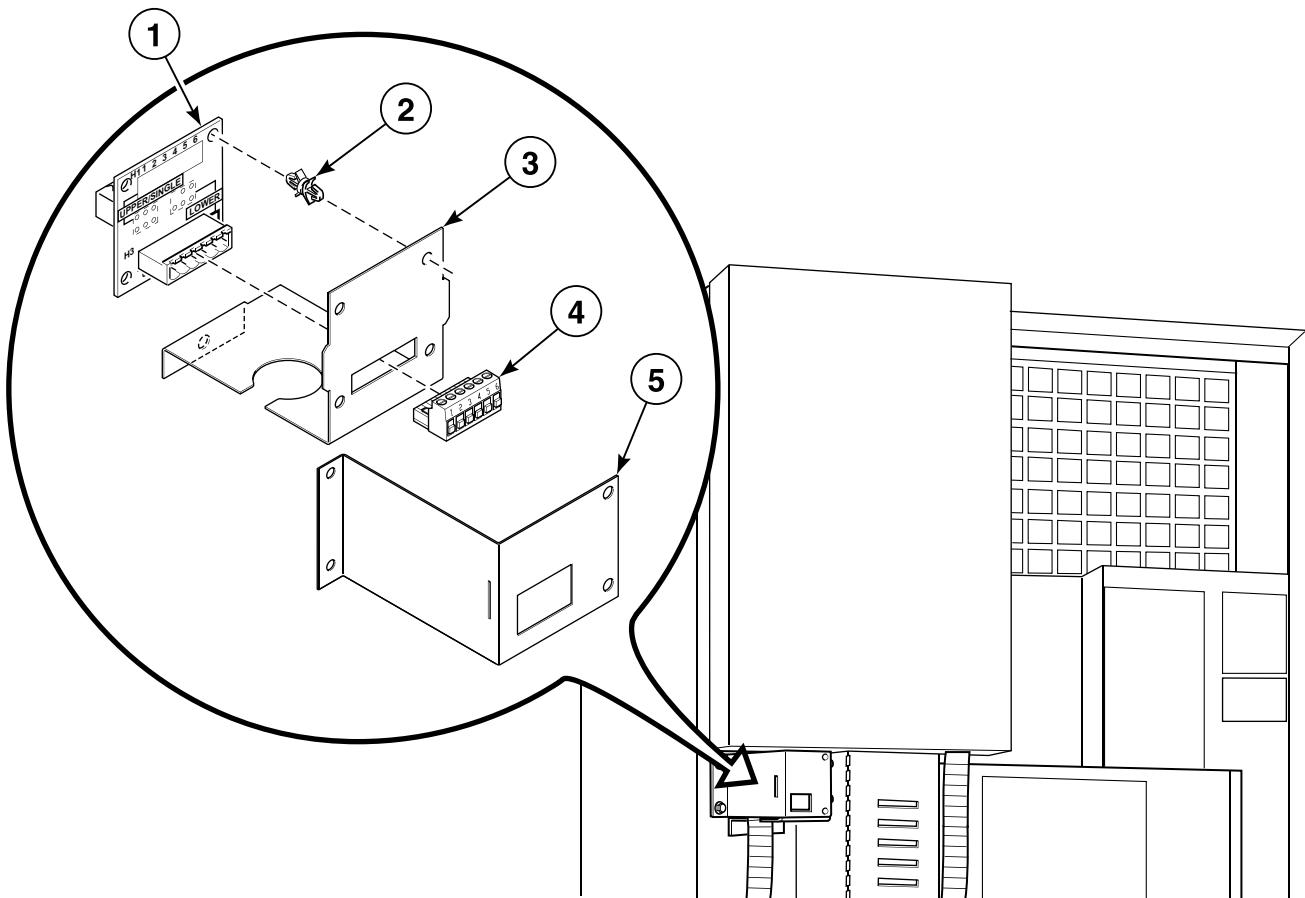


TMB2955P_70421901

Network Connection for Quantum

REF	PART NO.	DESCRIPTION	COMMENTS
	201341	Network Board Assembly	
1	210095P	Communication Board	
2	210098	PC Board Standoff	4 required
3	44143601	Network Board Bracket	
4	210099	Communication Connector	
5	44143701	Network Board Cover	

Emergency Stop Button - CE Models and Model UB075E

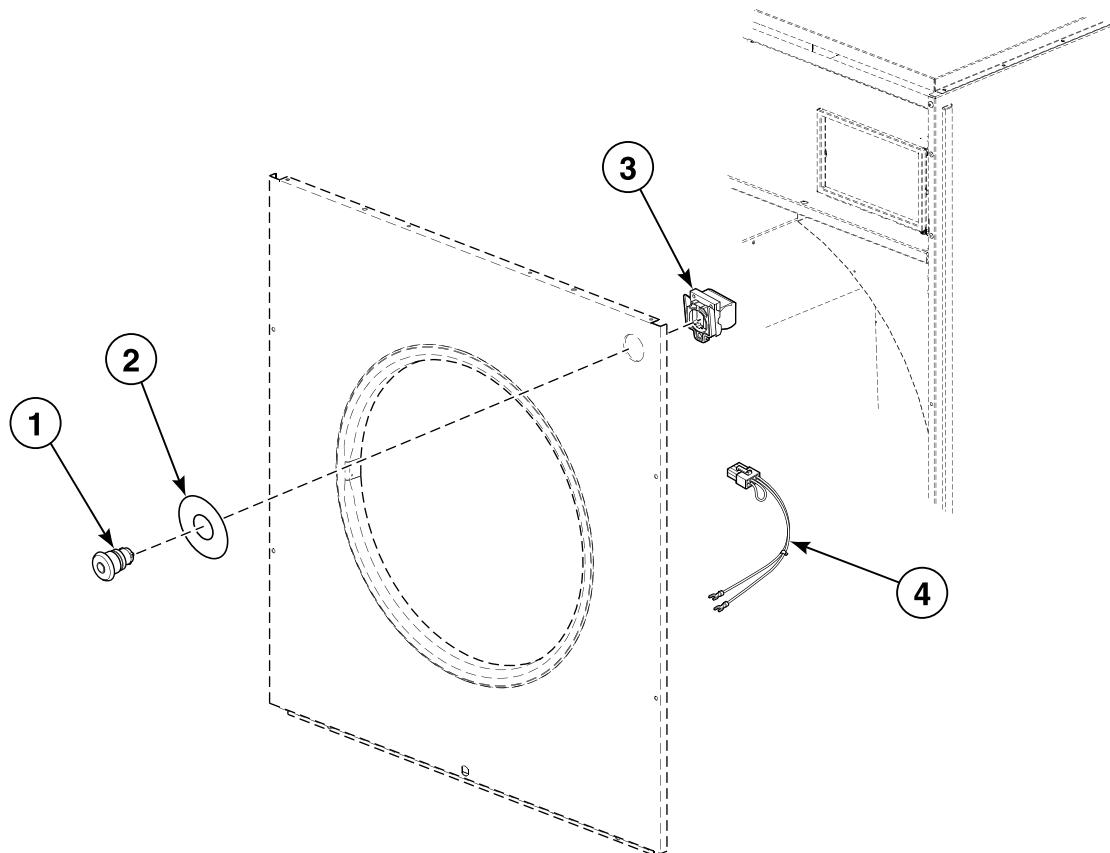


TMB2386P_70421901

Emergency Stop Button - CE Models and Model UB075E

REF	PART NO.	DESCRIPTION	COMMENTS
1	F200233500	Emergency Stop Pushbutton	
2	M412235	Emergency Stop Label	CE models
	44012901	Emergency Stop Label	Model UB075E
3	F200233401	Contact Block Switch	
	F8069501	Contact Switch	CE models
4	70364105P	Emergency Stop Contact Harness	1 contact
	70364106P	Emergency Stop Harness	2 contacts; CE models

Cabinet Front Components

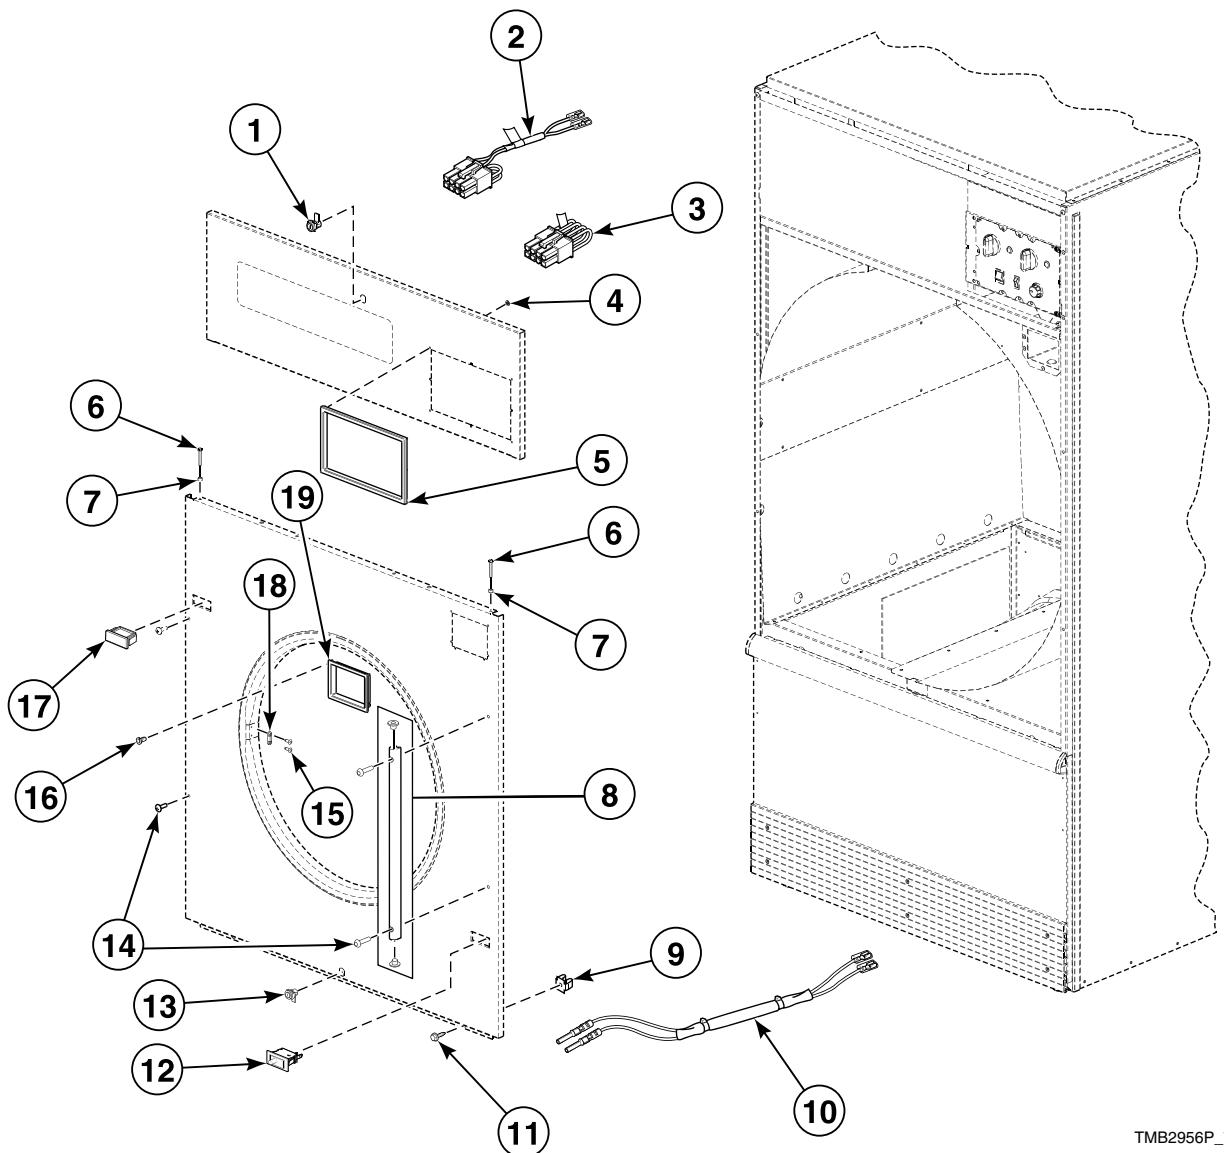


TMB2956P_70421901

Cabinet Front Components

REF	PART NO.	DESCRIPTION	COMMENTS
	M4379P4	Tumbler Dolly Kit	
1	44089301P	Lock, Key and Nut Kit	RL001 key code; Control panel; Optional if same key is to be used for control lock
	70155601	Key	RL001
2	70364104P	Coin Vault Switch Harness	BC, BX, LC, LX, NC, NX, WC and WX control suffixes
3	70364103	Bypass Harness	OPL; 3O, 3V, 3X, BG, BL, BY, DO, DV, DX, LY, NY, OM, QT, R3, RD, RM, RQ, SD, SX and WY control suffixes
4	M400977	Nut	8 required per control trim
5	44016301	Control Trim	H models
	44016401	Control Trim	G, K, L, P, S, U and Y models
6	70275801	Screw	4 required
7	56079	Panel Locator	2 required
8	44035001	Door Hinge Lug Assembly	
9	70030501	Expansion Clip	
10	44137601	Door Switch Harness	
11	M411072	Screw	4 required; Front panel; Bottom
12	70107001	Pushbutton Switch	Door switch
13	44089301P	Lock, Key and Nut Kit	RL001 key code; Lint panel; Optional if same key is to be used for control lock
	70155601	Key	RL001
	44089302P	Lock, Key and Nut Kit	RL002 key code; Lint panel; Standard coin and card models
	70155602	Key	RL002
14	70033502	Screw	4 required for painted panels; 2 required for stainless steel panels in addition to 2 of 70182601 Screw
	70182601	Screw	2 required for stainless steel panels in addition to 2 of 70033502 Screw
15	M400003	Pop Rivet	2 per door latch; 1/8 inch
16	M400972	Shadow Box Clip	6 required
17	44057801W	Switch Hole Plug	White
	44057801Q	Switch Hole Plug	Bisque
	44057801B	Switch Hole Plug	Black; For stainless steel and turquoise models
18	M401223	Door Latch	2 required
19	70117501	Coin Vault Trim	H models; Gray
	70117502	Coin Vault Trim	G, K, L, P, S, U and Y models; Black

Cabinet Panels and Nameplates

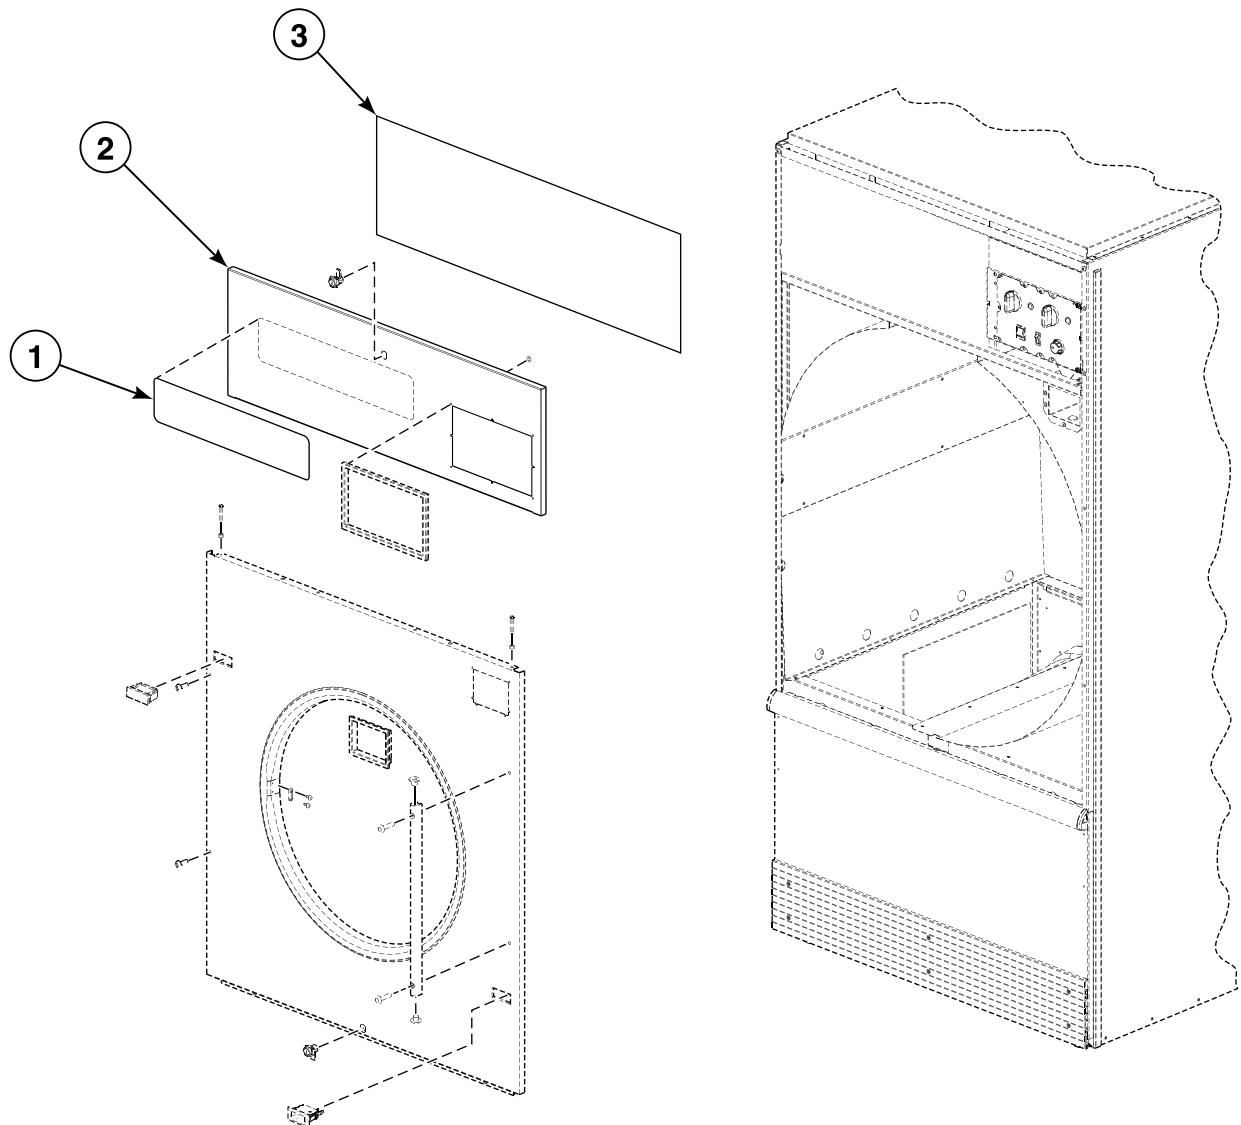


TMB2554P_70421901

Cabinet Panels and Nameplates

REF	PART NO.	DESCRIPTION	COMMENTS
1	44010401	Nameplate	H models
	44010601	Nameplate	S models
	M412963	Nameplate Overlay	U models
	44046801	Nameplate	D and I models
	44062901	Nameplate	C models
	70380701	Nameplate Overlay	P models
	70243901	Nameplate	L models
	70410201	Nameplate Overlay	G models; OPL
	44130601	Nameplate Overlay	K models; OPL
	70304501	Nameplate Overlay	Y models
2	44040001*P	Control Panel	C, D and I models; 3O, 3V, 3X, and R3 control suffixes; Manual
	44040002	Control Panel	C, D and I models; 3O, 3V, 3X, and R3 control suffixes; Manual; Stainless steel
	44040003*	Control Panel	C and I models; DO, DV and RD control suffixes; Electronic
	44040004	Control Panel	C and I models; DO, DV and RD control suffixes; Electronic; Stainless steel
	44040005*	Control Panel	G and K models
	44040006	Control Panel	G and K models; Stainless steel
	44000117BP	Control Panel	L models
	44000117*P	Control Panel	H, P, S, U and Y models
	44000118P	Control Panel	H, P, S, U and Y models; Stainless steel
3	44020601	Insulation	Used inside access panel

* Add Letter To Designate Color. Q - Bisque W - White

Front Panel Assemblies

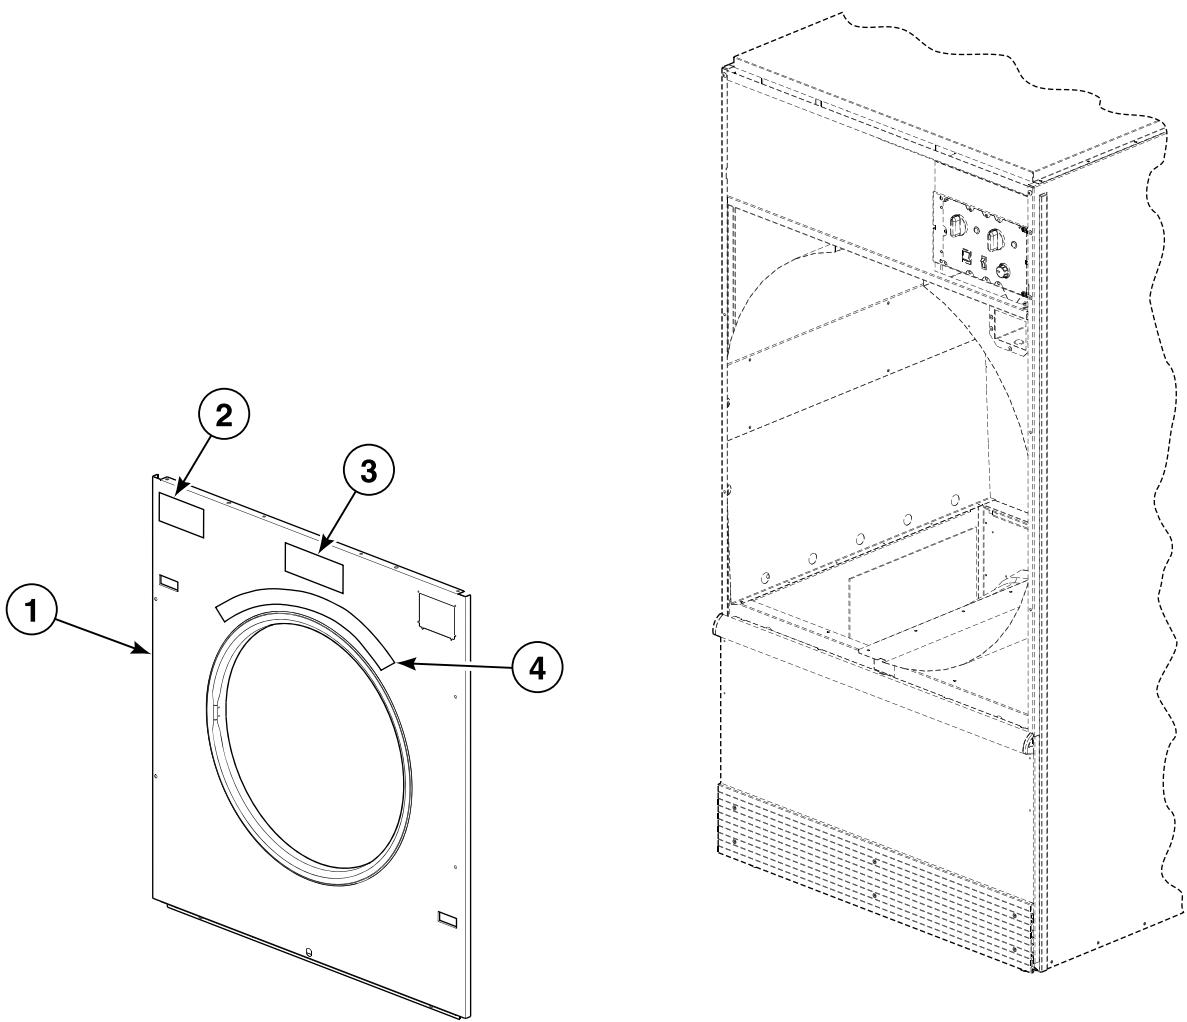

TMB3090P_70421901


Front Panel Assemblies

REF	PART NO.	DESCRIPTION	COMMENTS
1	44052507W	Front Panel	Model UB075E
	44077901*P	Front Panel Assembly	All models except UB075E; BC, BX, LC, LX, NC, NX, SD, SX, WC and WX control suffixes
	44077902P	Front Panel Assembly	All models except UB075E; BC, BX, LC, LX, NC, NX, SD, SX, WC and WX control suffixes; Stainless steel
	44077903*	Front Panel Assembly	All models except UB075E; BL, BY, NY and WY control suffixes
	44077904P	Front Panel Assembly	All models except UB075E; BL, BY, NY and WY control suffixes; Stainless steel
	44077905*P	Front Panel Assembly	Non-CE models except model UB075E; OM, QT, RM and RQ control suffixes
	44077906P	Front Panel Assembly	Non-CE models except model UB075E; OM, QT, RM and RQ control suffixes; Stainless steel
	44077907*P	Front Panel Assembly	CE models; 3O, OM, QT, R3, RM and RQ control suffixes
	44077908	Front Panel Assembly	CE models; 3O, OM, QT, R3, RM and RQ control suffixes; Stainless steel
2	70414001	Label	G and K models; Coin
3	44128901	Fire Suppression System Label	G and K models
4	M410892	Warning Label	

* Add Letter To Designate Color. Q - Bisque W - White

NOTE: All front panel assemblies include M401223 Door Latch and 2 of M400003 Pop Rivet

Lint Panel Switch Assembly

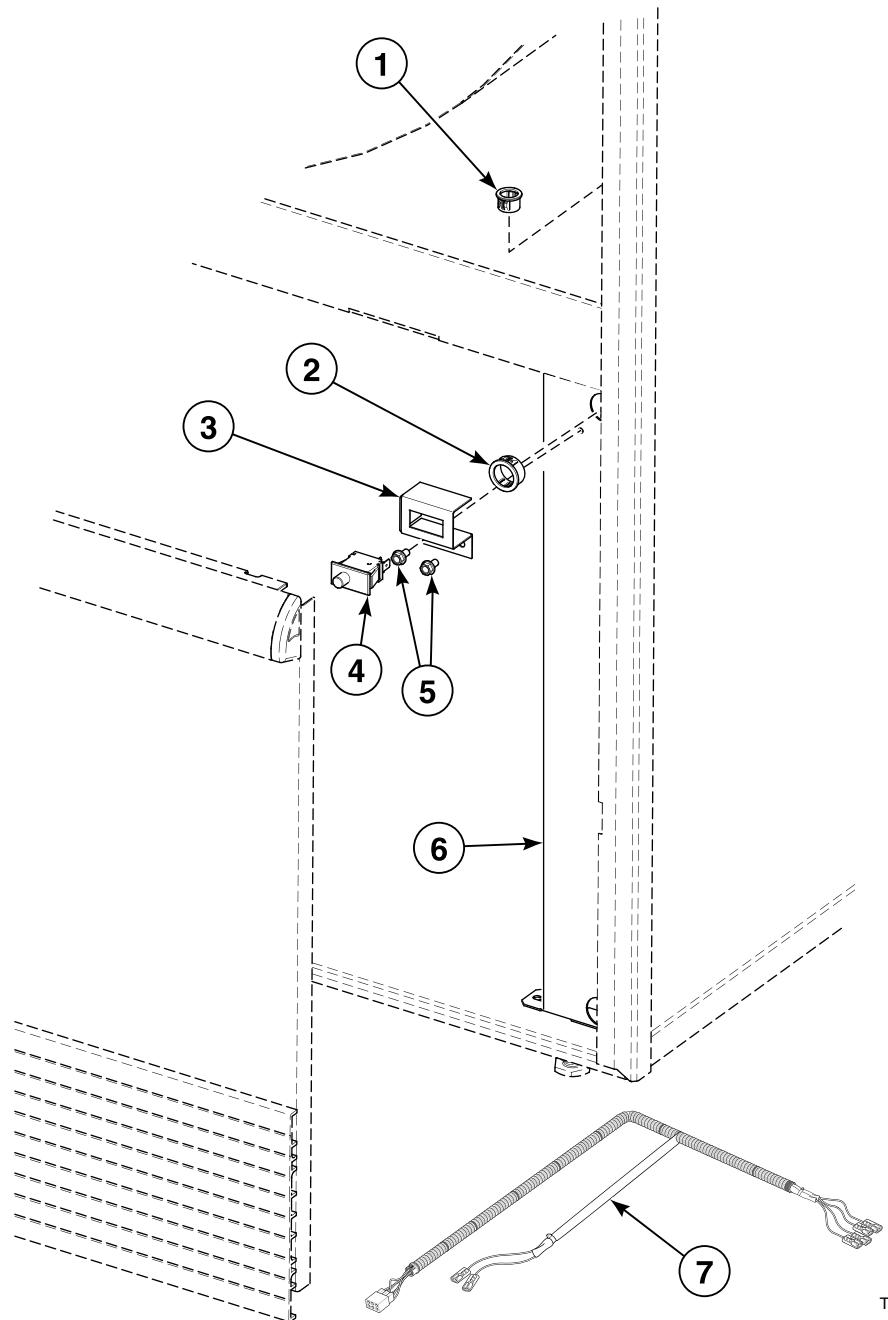


TMB2945P_70421901

Lint Panel Switch Assembly

REF	PART NO.	DESCRIPTION	COMMENTS
1	M411826	Snap Bushing	
2	M400770	Snap Bushing	
3	44118601	Lint Panel Switch Bracket	
4	70107001	Pushbutton Switch	
5	430497	Screw	
6	44001201	Front Pillar	
7	44137501P	Base Harness Assembly	

Lower Cabinet Front Components

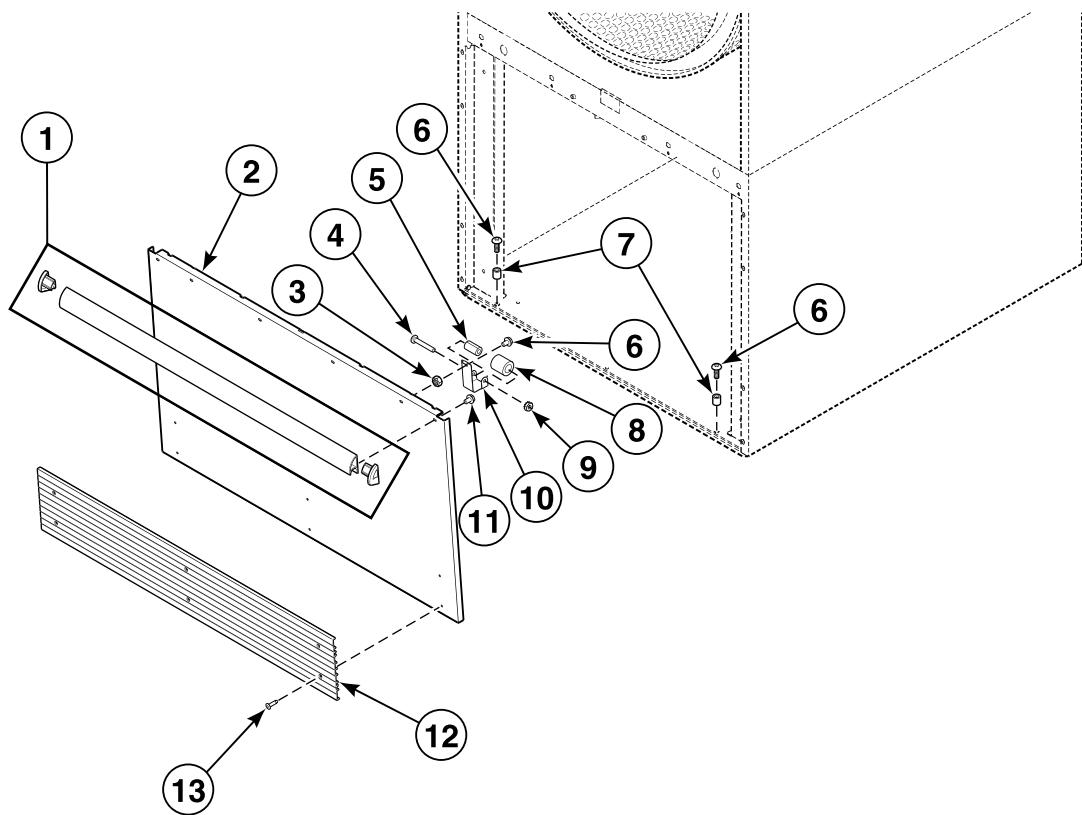


TMB2057P_70421901

Lower Cabinet Front Components

REF	PART NO.	DESCRIPTION	COMMENTS
1	70154405	Handle and Caps Assembly	C, D, I, L, P, S, U and Y models; Black; Includes endcaps
	70154406	Handle and Caps Assembly	H models; Gray; Includes endcaps
	70407202	Handle Bumper	G and K models; Black and blue; Does not include endcaps
2	44000001*P	Lint Panel	
	44000002P	Lint Panel	Stainless steel
3	51236	Nut	
4	70072801	Screw	
5	70030201	Roller Catch Spacer	
6	70132301	Screw	
7	56079	Panel Locator	
8	70297601	Roller Catch Wheel	
9	23951	Nut	
10	70030301	Roller Catch Arm	
11	430757	Screw	4 required
12	70117608	Kickplate	H models; Gray
	70117607	Kickplate	All other models; Black
13	70126401	Pop Rivet	H models; Gray; 6 required
	70126301	Pop Rivet	All other models; Black; 6 required

* Add Letter To Designate Color. Q - Bisque W - White

Cabinet Limit and Thermistor Assembly

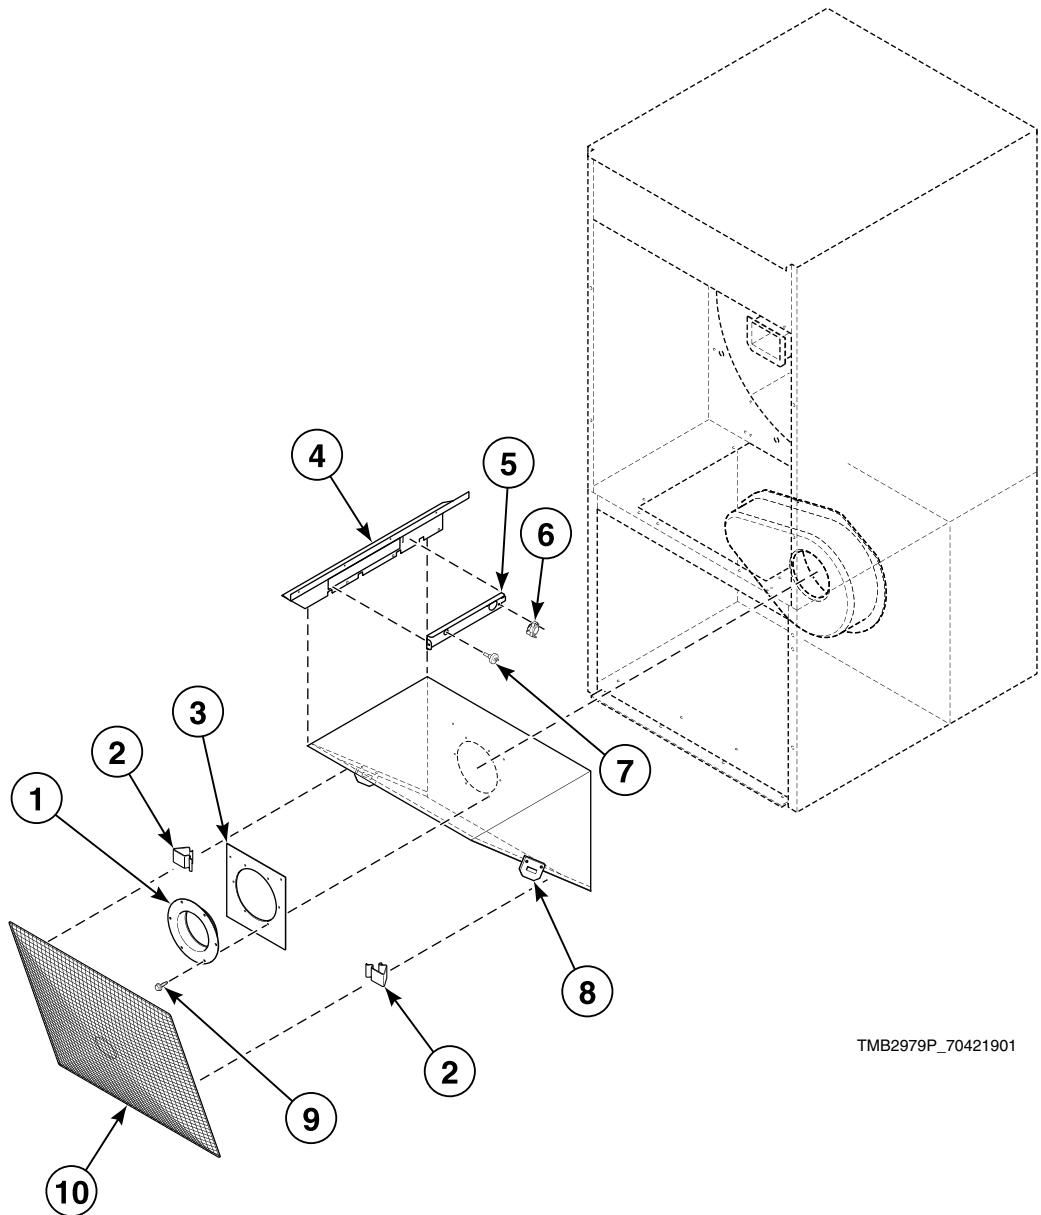


TMB2979P_70421901

Cabinet Limit and Thermistor Assembly

REF	PART NO.	DESCRIPTION	COMMENTS
1	70014101	Blower Inlet Cone	Gas and steam 60 Hertz; Electric 60 Hertz/3 Phase
2	35865	Hold-Down Clip	2 required
3	44150201	Cone Plate	Gas and steam 60 Hertz; Electric 60 Hertz/3 Phase
4	44162201	Lint Screen Deflector	
5	44162301	Deflector Cover	
6	M411813	Limit Thermostat	Electric models
	M410542	Limit Thermostat	Non-CE and non-Australian gas models and all steam models
	M411941	Manual Reset Thermostat	CE and Australian gas models
7	M414704	Thermistor	
8	44140201	Lint Clip Bracket	
9	430497	Screw	Gas and steam 60 Hertz; Electric 60 Hertz/3 Phase; 6 required
10	44063601	Lint Screen	

Cabinet Components

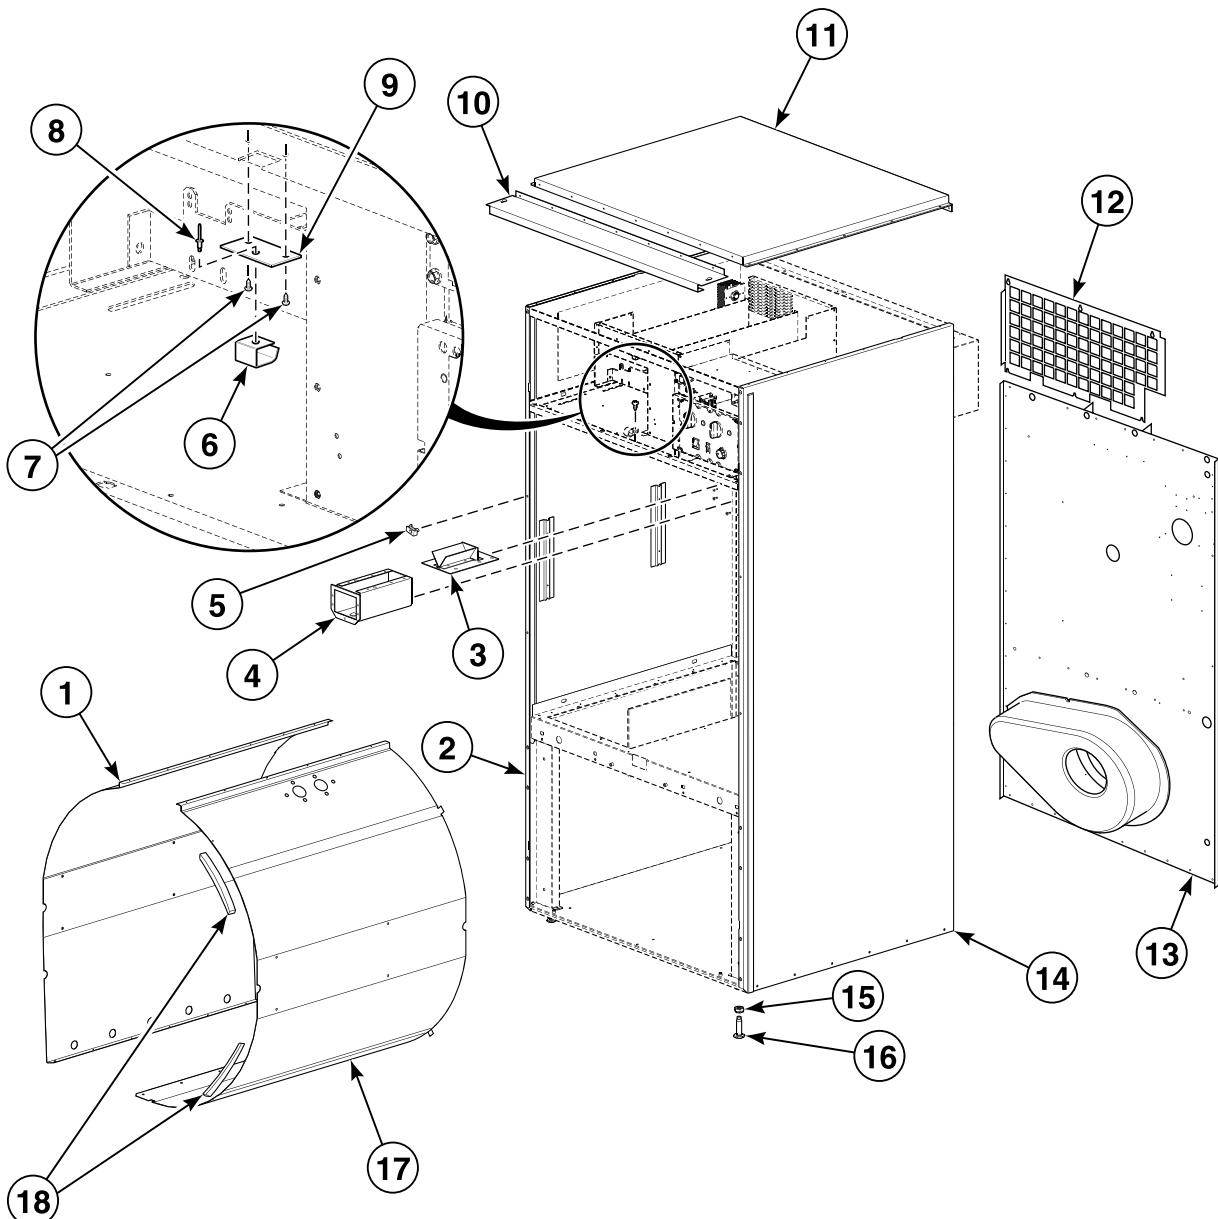


TMB2947P_70421901

Cabinet Components

REF	PART NO.	DESCRIPTION	COMMENTS
	298P4P	Spray Paint	White
	122P4P	Porcelain Touch-Up Paint	White
	370P4P	Porcelain Touch-Up Paint	Bisque
1	44005301P	Baffle	Left
2	44056802*	Side Panel and Bracket Assembly	Left
3	70296401	Coin Chute Assembly	Wide; Includes 6 of 70058502 Pop Rivet
4	70180101	Coin Vault Assembly	Includes 5 of 70058502 Pop Rivet
5	70030401	Nut	U-clip
6	431318	Control Door Latch	
7	431287	Screw	
8	M400003	Pop Rivet	
9	44003201	Latch Mounting Bracket	
10	44129401	Top Panel Bracket	Gas and electric models
11	44129301P	Top Cover Pan	Gas and electric models
	44138801	Top Cover	Steam models
12	44176201	Top Rear Panel	Gas and steam models
	44170501	Top Rear Panel	Electric models
13	44171301	Rear Panel Assembly	STF and UTF models
	44171201	Rear Panel Assembly	All other models
14	44056702*	Side Panel and Bracket Assembly	
15	21899	Nut	Right
16	70247701	Screw	Leveling leg
17	44005001P	Baffle	Right
	44065601P	Baffle	Right; Models equipped with fire suppression system
18	70015701	Baffle Gasket	

* Add Letter To Designate Color. Q - Bisque W - White

Door and Hinge Components

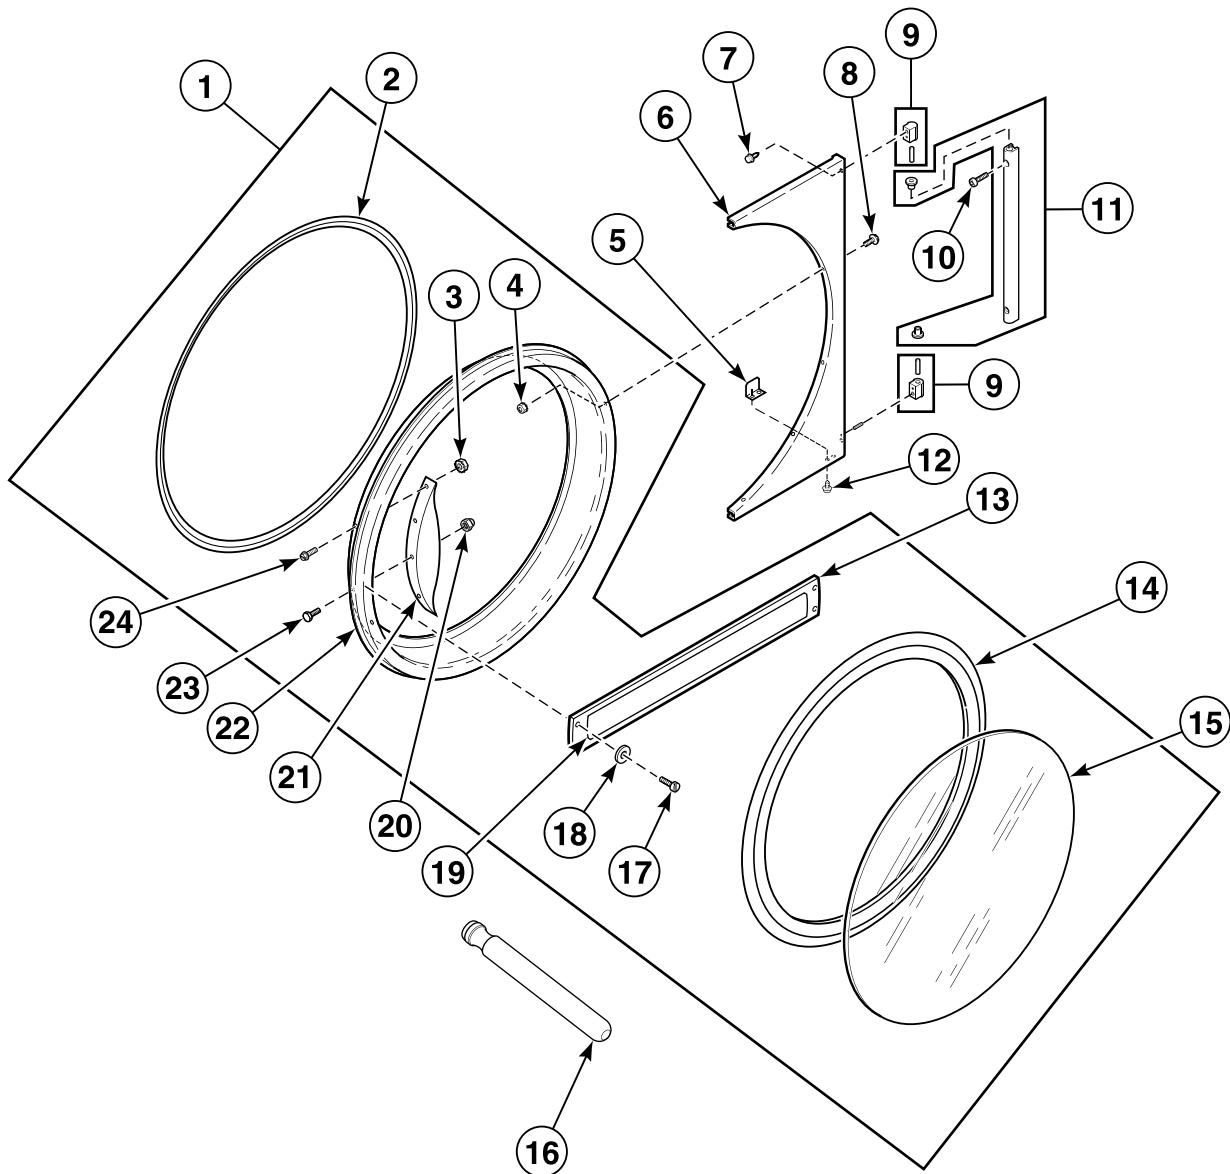


TMB3091P_70421901

Door and Hinge Components

REF	PART NO.	DESCRIPTION	COMMENTS
1	44058102P	Door Assembly	H models
	44028902P	Door Assembly	S and U models
	44112101	Door Assembly	C, D and I models
	44029101	Door Assembly	L and P models
	70407401	Door Assembly	G and K models
2	44008201P	Door Ring Gasket	
3	44071201	Nut	H, S and U models; 4 required
4	23951	Nut	6 required
5	70215001P	Door Switch Actuator Kit	
6	44075208B	Door Hinge Assembly	G and K models
	44075203*	Door Hinge Assembly	All other models
	44075204	Door Hinge Assembly	All other models; Stainless steel
7	70442101	Screw	3 required
8	M400044	Screw	6 required
9	M4773P3	Cam and Hinge Kit	G and K models
	M4772P3	Cam and Hinge Kit	All other models
10	70407301	Screw	G and K models; 2 required
	70033502	Screw	All other models; 2 required
11	44035002	Door Hinge Lug Assembly	G and K models
	44035001	Door Hinge Lug Assembly	All other models; Includes bushings
12	70058501	Pop Rivet	2 required
13	70399501B	Handle Bar	G and K models
14	70211902P	Door Seal Kit	
15	44008402P	Door Glass	H models
	44008401P	Door Glass	All other models
16	M4221P4	Door Glass Installation Tool	
17	70126301	Pop Rivet	G and K models; 4 required
18	70409301	Washer	G and K models; 2 required
19	70411401	Nameplate Overlay	G models; Coin
	44144401	Nameplate Overlay	K models; Coin
20	M414215	Nut	
21	44057702	Door Handle	H models
	44007901	Door Handle	S and U models
22	44007702	Door Ring Assembly	H, L, P, S and U models
	44112001	Door Ring and Handle Assembly	C, D and I models
	44007703B	Door Ring	G and K models
23	M400661	Screw	Door strike
24	61199	Screw	H, S and U models; 4 required

* Add Letter To Designate Color. Q - Bisque W - White

Cylinder, Trunnion and Bearing Components

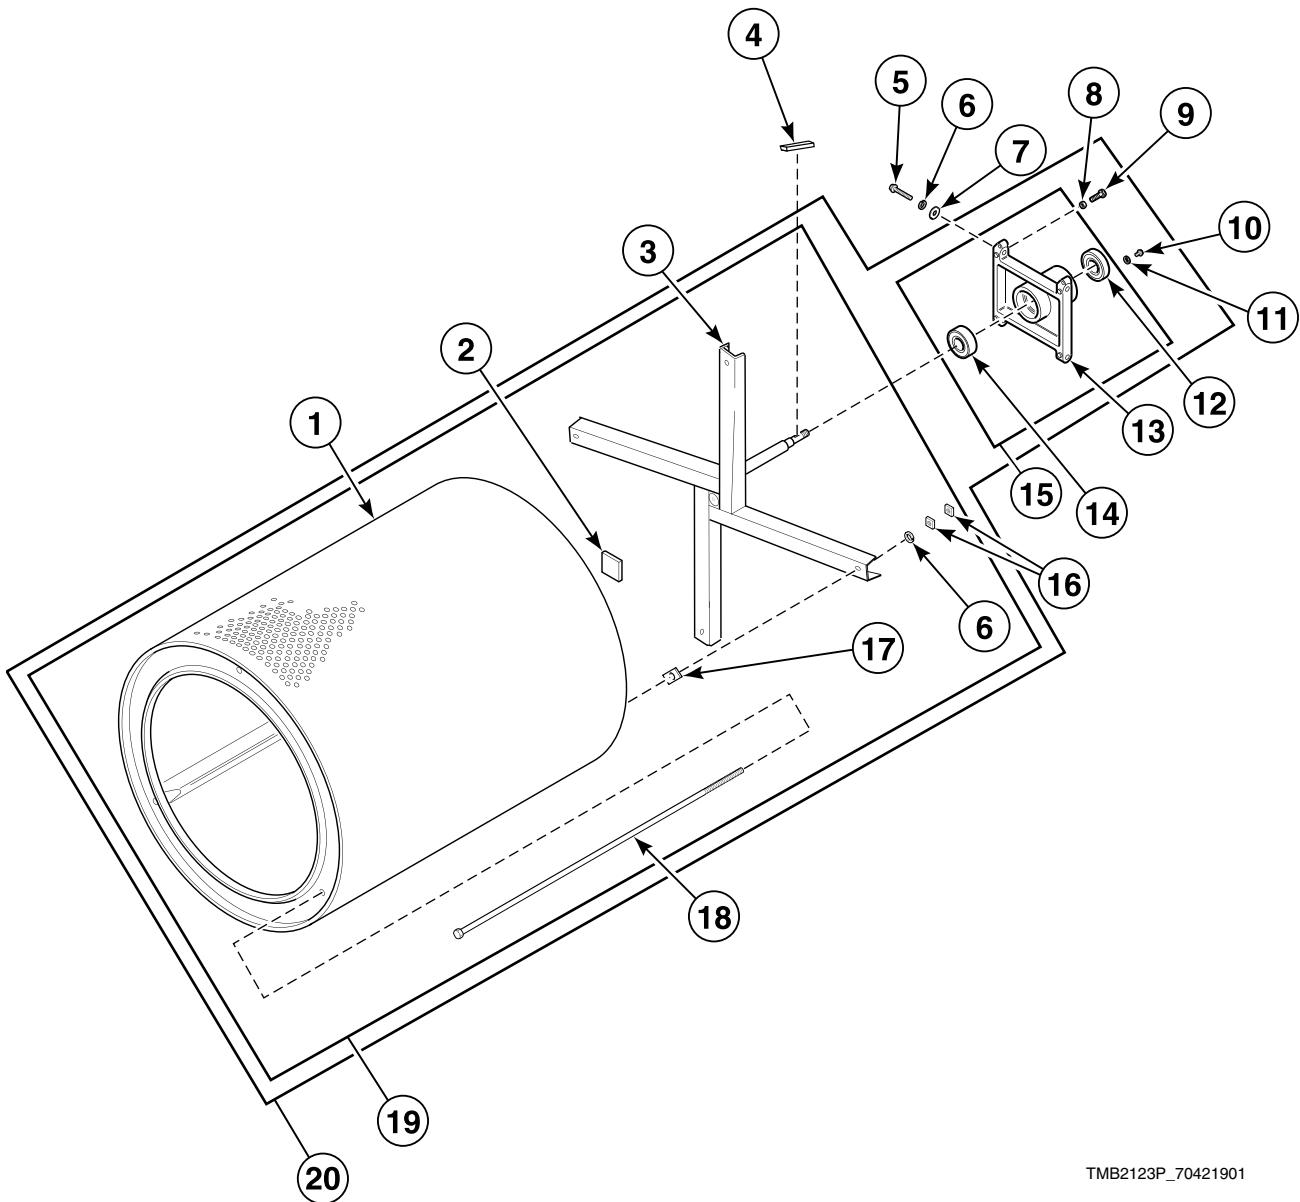


TMB2123P_70421901

Cylinder, Trunnion and Bearing Components

REF	PART NO.	DESCRIPTION	COMMENTS
	M4640P3	Trunnion and Bearing Assembly	Nonreversing
	M4641P3	Trunnion and Bearing Assembly	Reversing
	M4644P3	Housing and Trunnion Assembly	Includes bearing; Nonreversing
	M4645P3	Housing and Trunnion Assembly	Includes bearing; Reversing
1	44057201P	Cylinder Kit	Galvanized; C, D, H, I, L, P, S and U models
	44057301P	Cylinder Kit	Stainless steel; C, D, H, I, L, P, S and U models
	44130701	Cylinder Assembly	G and K models
	44079901P	Cylinder Assembly	Stainless steel; U models with the 11th character of R
2	M402144	Felt Pad	
3	M413835P	Trunnion Kit	Spider; Nonreversing
	M413836	Trunnion Assembly	Spider; Reversing
4	M400008	Key	Half moon; Nonreversing
	M405232	Key	Straight; Reversing
5	M400063	Screw	4 required
6	91200	Washer	4 required
7	70261401	Washer	4 required
8	M400026	Nut	4 required
9	M400650	Bolt	2 required
10	70187201	Screw	4 required
11	20103	Washer	4 required
12	F100136P	Bearing	
13	M413826	Trunnion Housing	
14	44041901P	Ball Bearing	
15	M413832	Trunnion Housing Assembly	Includes bearing
16	M404993	Nut	
17	M401402	Spacer	Adjustment between cylinder and trunnion
18	M404992	Rib Rod	
19	44057501P	Cylinder and Trunnion Assembly	Galvanized; Nonreversing; C, D, H, I, L, P, S and U models
	44057502	Cylinder and Trunnion Assembly	Stainless steel; Nonreversing; C, D, H, I, L, P, S and U models
	44057503P	Cylinder and Trunnion Assembly	Galvanized; Reversing; C, D, H, I, L, P, S and U models
	44057504	Cylinder and Trunnion Assembly	Stainless steel; Reversing; C, D, H, I, L, P, S and U models
	44131302	Cylinder and Trunnion Assembly	Reversing; G and K models
	44131402	Cylinder and Trunnion Assembly	Nonreversing; G and K models
	44080001	Cylinder and Trunnion Assembly	Stainless steel; U models with the 11th character of R
20	M4818P3	Cylinder, Trunnion and Bearing Housing Kit	Nonreversing; C, D and I models

Reversing Cylinder Drive Motor and Components

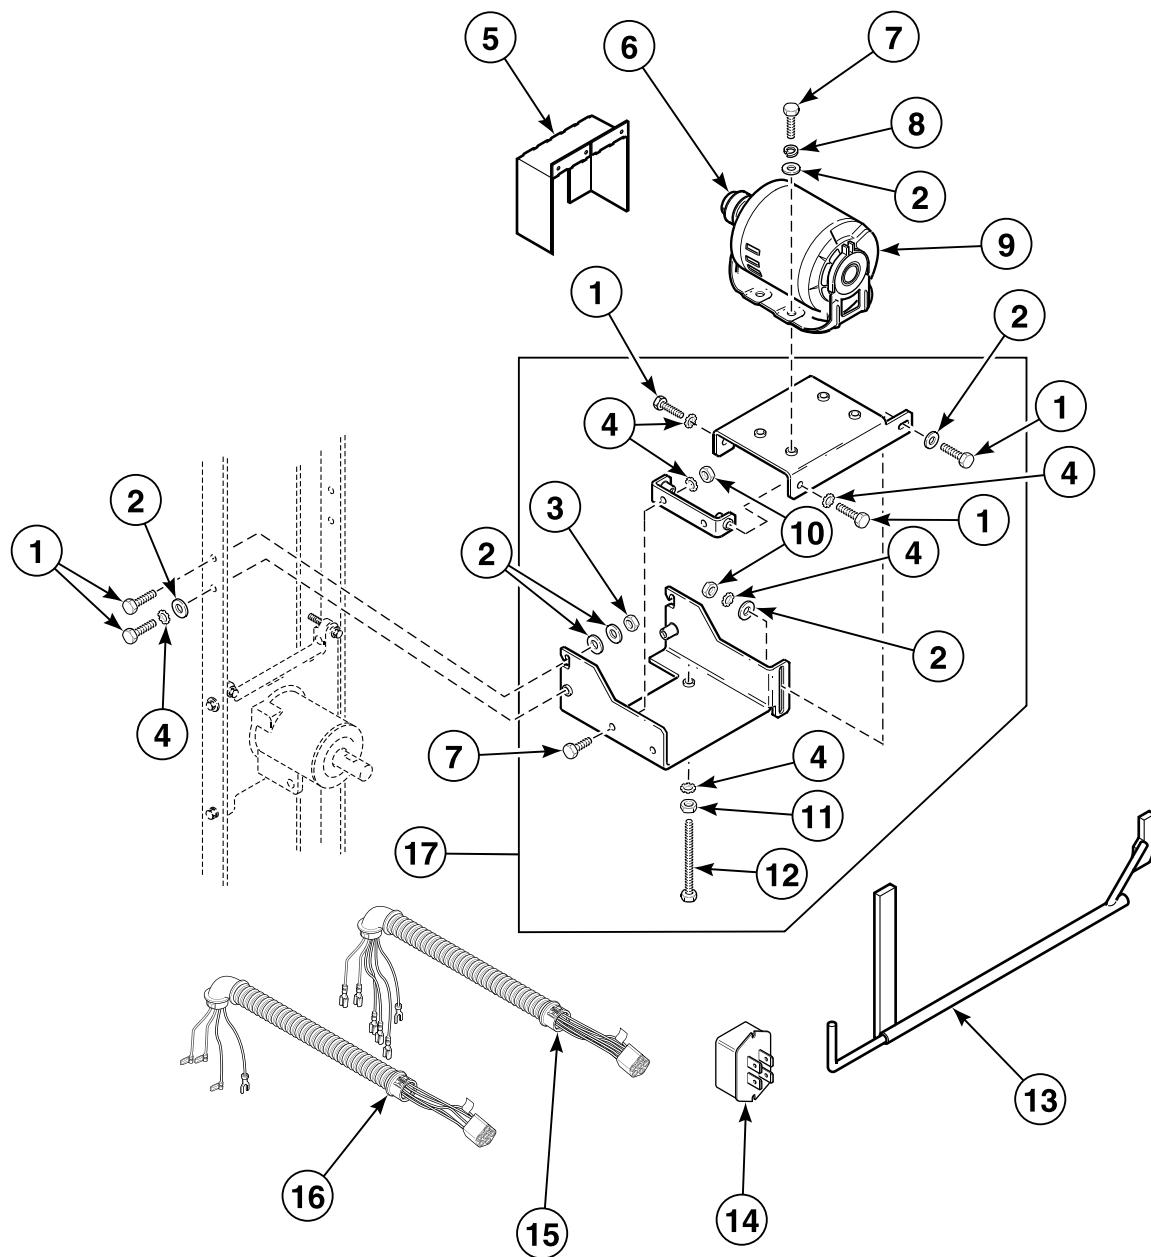


TMB3087P_70421901

Reversing Cylinder Drive Motor and Components

REF	PART NO.	DESCRIPTION	COMMENTS
1	M400056	Screw	7 required
2	M400080	Washer	10 required
3	M412986	Nut	2 required
4	02834	Washer	8 required
5	M413541	Belt Guard	Upper
6	M414565	Pulley	60 Hertz
	M414567	Pulley	50 Hertz
7	M400057	Screw	6 required
8	M400013	Washer	4 required
9	M412519P	Motor Kit	Gas and steam models with: 200-208 or 240 Volt/60 Hertz/3 Phase, 460-480 Volt/60 Hertz/3 Phase, 200 Volt/50 Hertz/3 Phase, 230 or 240 Volt/50 Hertz/3 Phase and 380 or 400-415 Volt/50 Hertz/3 Phase; Electric models with: 200-208 Volt/60 Hertz/3 Phase, 240 Volt/50 or 60 Hertz/3 Phase, 480 Volt/60 Hertz/3 Phase, 200 Volt/50 Hertz/3 Phase, 380 Volt/50 Hertz/3 Phase and 400-415/50 Hertz/3 Phase
	M412520P	Motor Kit	Gas and steam models with: 230-240 Volt/50 Hertz/1 Phase
10	70142	Nut	3 required
11	02428	Nut	
12	M413565	Screw	
13	M4853P3	Belt Tension Tool Kit	
14	M414563	Motor Switch	1 Phase
15	44139701P	Cylinder Motor Harness	1 Phase
16	44137101P	Cylinder Motor Harness	3 Phase
17	M413617	Motor Mount Assembly	Includes items 2-4, 7 and 10-12

Drive Components for Reversing Models

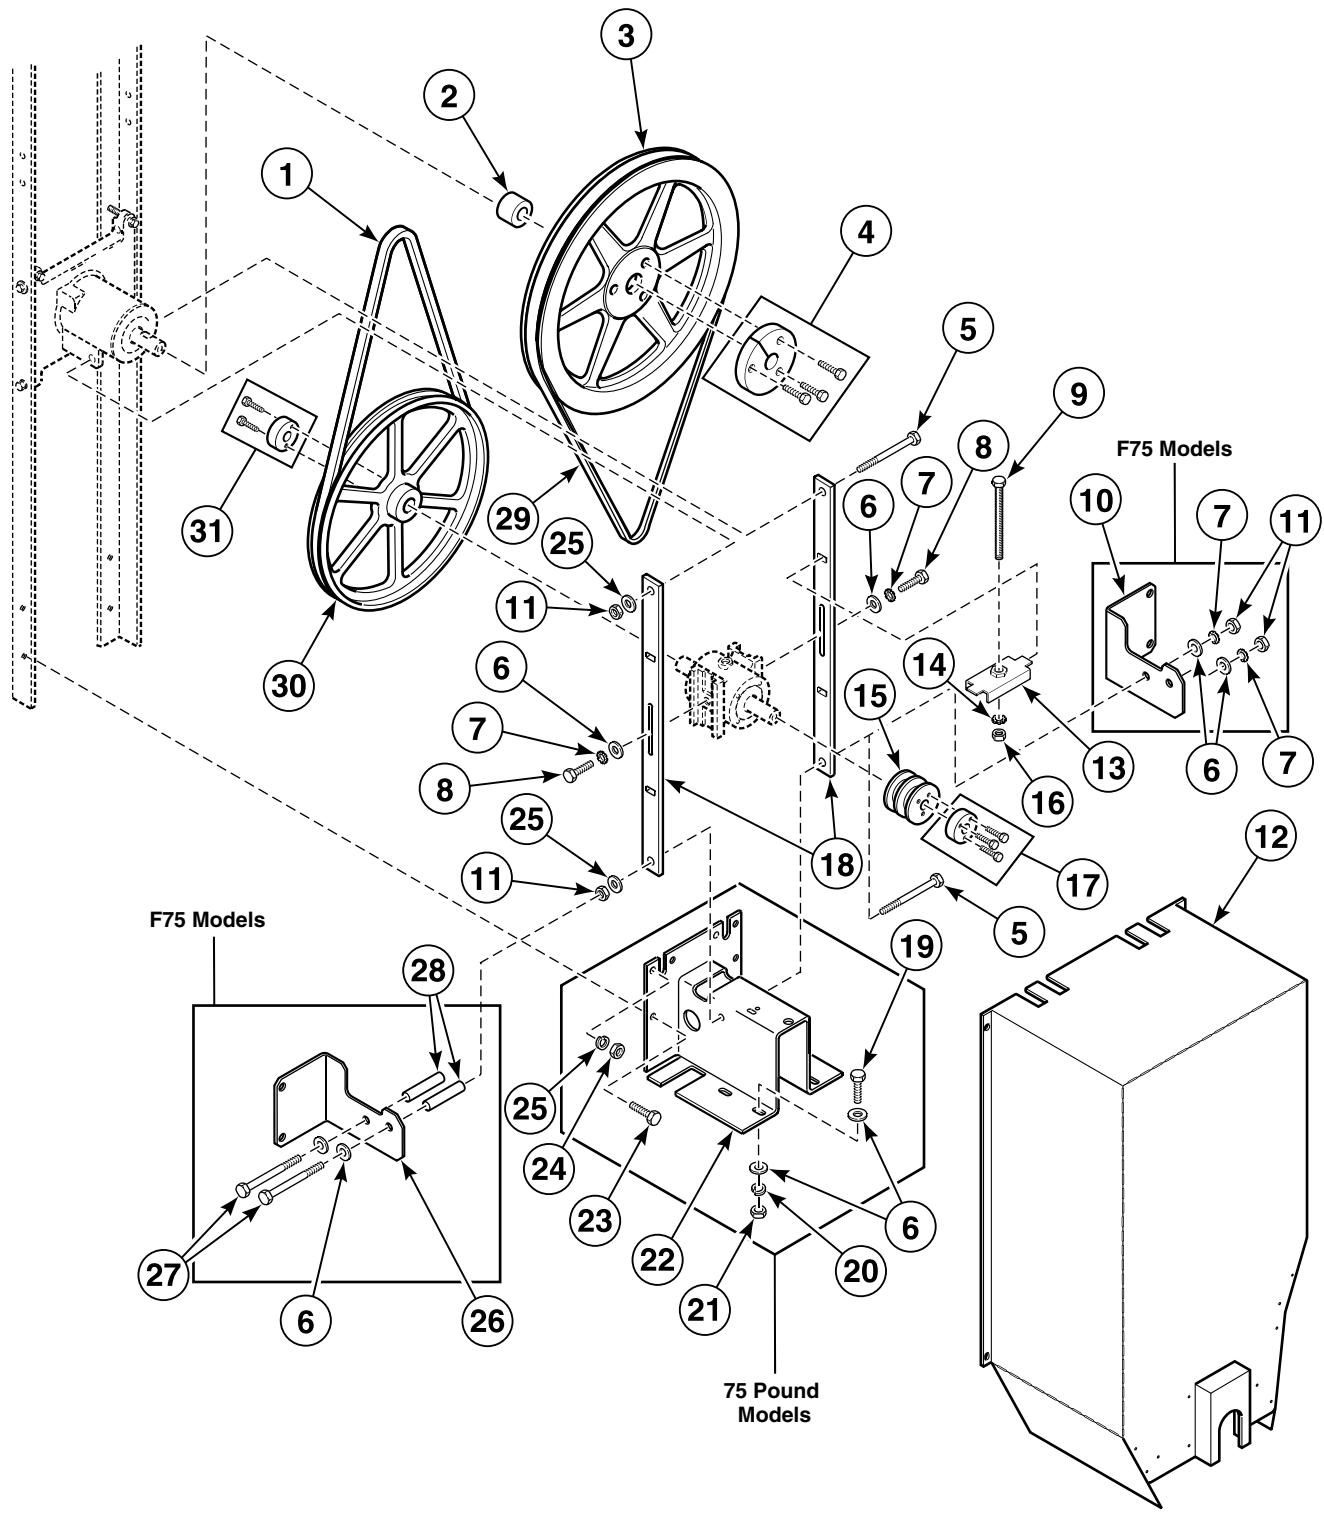


TMB2637P_70421901

Drive Components for Reversing Models

REF	PART NO.	DESCRIPTION	COMMENTS
	M4853P3	Belt Tension Tool Kit	
1	M412981	Belt	Drive
2	44024001	Spacer	
3	M412916	Double V Sheave	
4	M412086P	Bushing	Includes M400013 Washer, 44048902 Screw and 44079203 Screw
5	M400061	Screw	
6	M400080	Washer	
7	M403958	Washer	
8	M400043	Screw	
9	M412627	Screw	
10	M413268	Guide Rail Support	STF and UTF models; Right
11	M400026	Nut	STF and UTF models; 2 required
12	44132407	Belt Guard Assembly	STF and UTF models
	44132404	Belt Guard Assembly	All other models
13	M414405	Tension Plate Assembly	
14	M412188	Washer	
15	M412884	Pulley	
16	H88412101	Nut	
17	M412917P	Bushing	Includes 56552 Washer, 44048901 Screw and 44079301 Screw
18	M412476	Guide Rail	
19	M400057	Screw	All models except STF and UTF models
20	M400013	Washer	All models except STF and UTF models; 4 required
21	02428	Nut	All models except STF and UTF models; 4 required
22	44117201	Motor Bracket	
23	M401393	Bolt	All models except STF and UTF models; 2 required
24	20274	Nut	All models except STF and UTF models
25	M400014	Washer	
26	M413267	Guide Rail Support	STF and UTF models; Left
27	M405525	Screw	STF and UTF models
28	M413269	Guide Rail Spacer	STF and UTF models
29	M412090	Belt	2 required; Cylinder
30	M412931	Single V Sheave	
31	M412885P	Bushing	Includes 03189 Washer and 44079201 Screw

Drive Components for Nonreversing Models

All Models Except STF75L, STF75N, UB075E, UTF75L and UTF75N

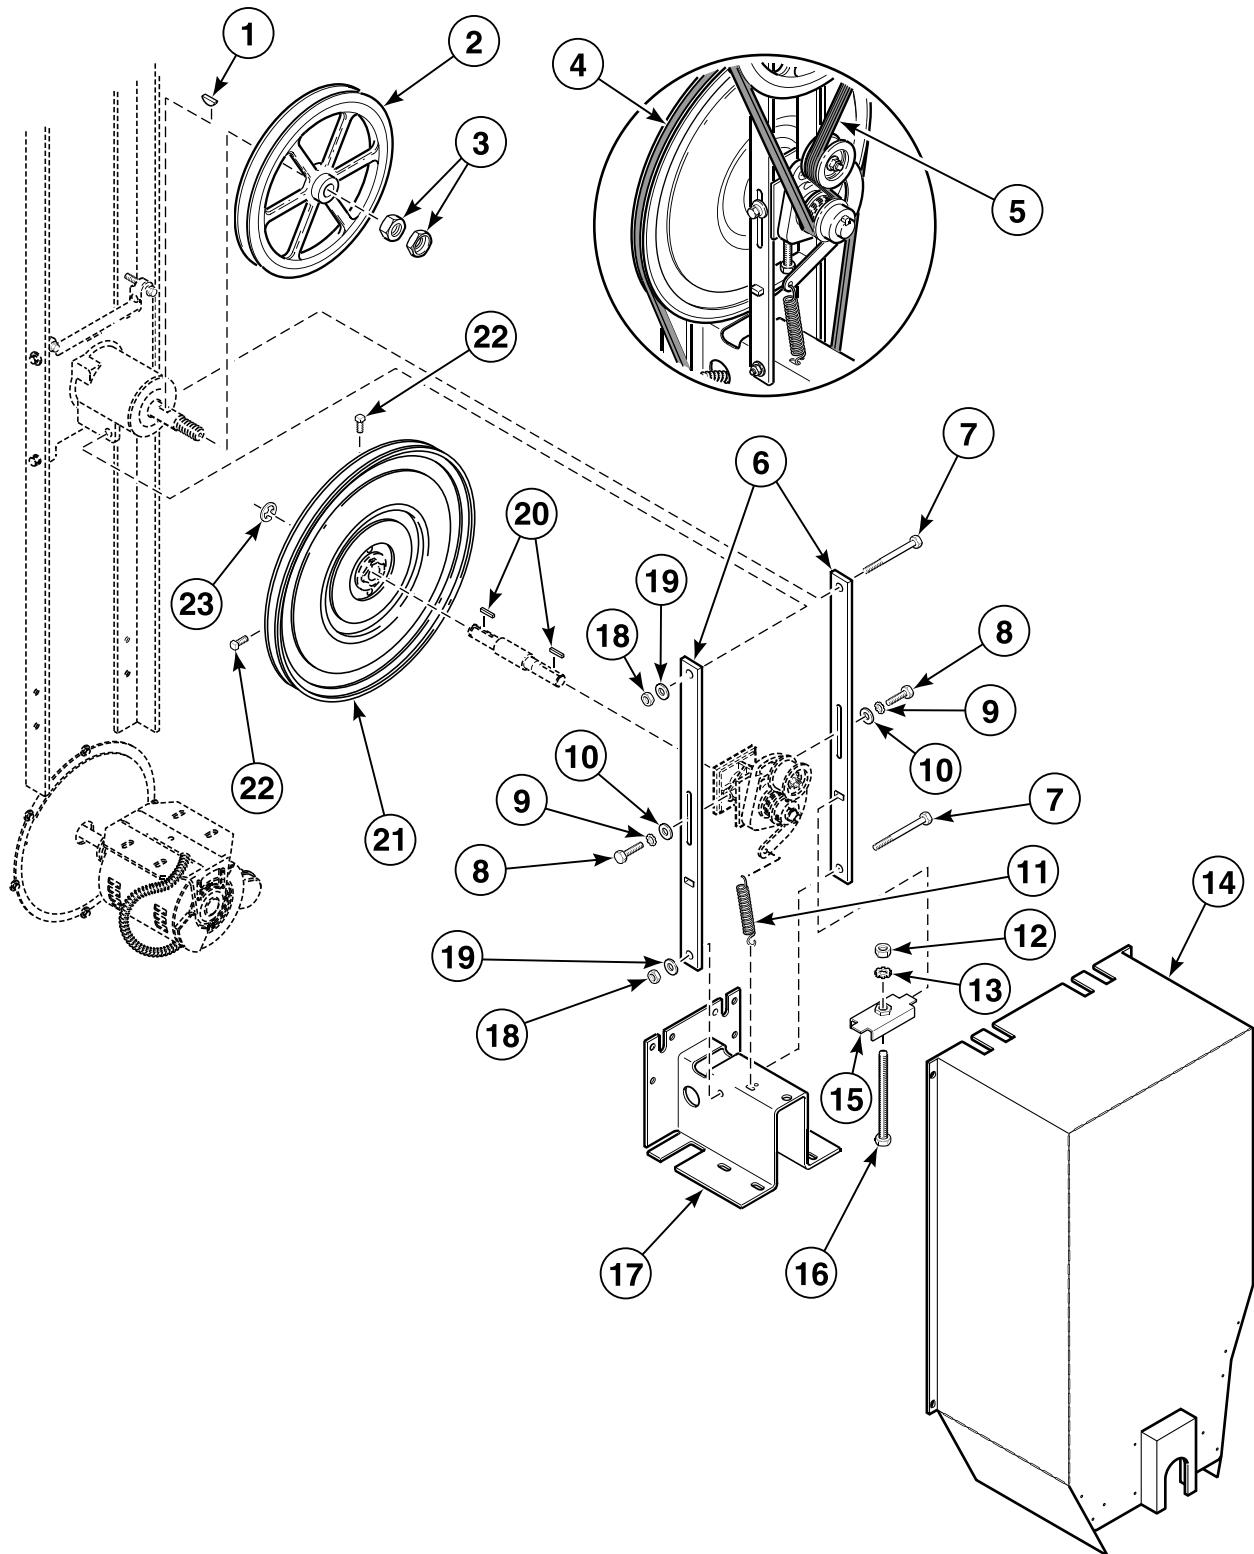


TMB2560P_70421901

Drive Components for Nonreversing Models

REF	PART NO.	DESCRIPTION	COMMENTS
	M4853P3	Belt Tension Tool Kit	
1	M400008	Key	
2	M412156	Micro V Sheave	
3	M400035	Nut	
4	M401182P	Belt	
5	M411425P	Micro V Belt	
6	M412476	Guide Rail	
7	M400061	Screw	
8	M400043	Screw	
9	M403958	Washer	
10	M400080	Washer	
11	M412120	Extension Spring	
12	H88412101	Nut	
13	M412188	Washer	
14	44132405	Belt Guard Assembly	
15	M414405	Tension Plate Assembly	
16	M412627	Screw	
17	44117201	Motor Bracket	
18	M400026	Nut	
19	M400014	Washer	
20	M401327	Key	
21	M400092P	Sheave	Includes item 20 and 2 of item 22
22	M400065	Screw	
23	M400399	Ring	

NOTE: On nonreversing models, there is only one motor that functions as the drive motor and fan motor. Refer to *Fan Motors* section for motor part numbers.

Idler Housing Assembly for Reversing Models

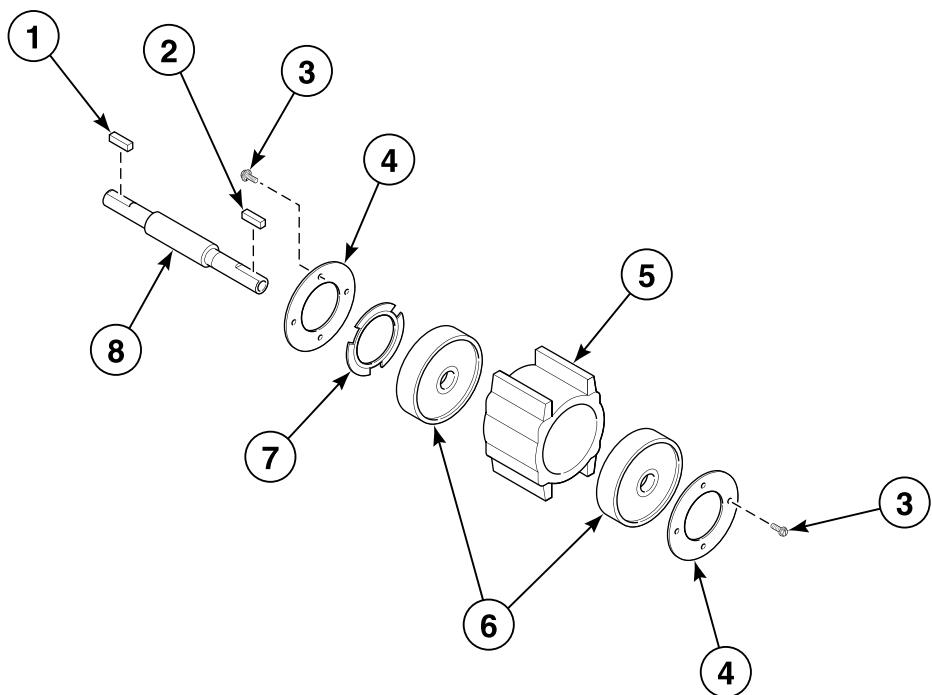


TMB2160P_70421901

Idler Housing Assembly for Reversing Models

REF	PART NO.	DESCRIPTION	COMMENTS
	917P3	Idler Housing Kit	Includes items 1-4, 7 and M412476 Guide Rail, M412630 Idler Housing Assembly and 614P3 Idler Assembly Components Kit
1	M401327	Key	
2	M400993	Key	
3	70187201	Screw	8 required
4	M401370	Bearing Retainer	
5	M412612	Idler Housing	
6	M401375P	Ball Bearing	
7	M400401	Loading Spring	
8	M414241	Idler Shaft	

Idler Assembly for Nonreversing Models

All Models Except STF75L, STF75N, UB075E, UTF75L and UTF75N

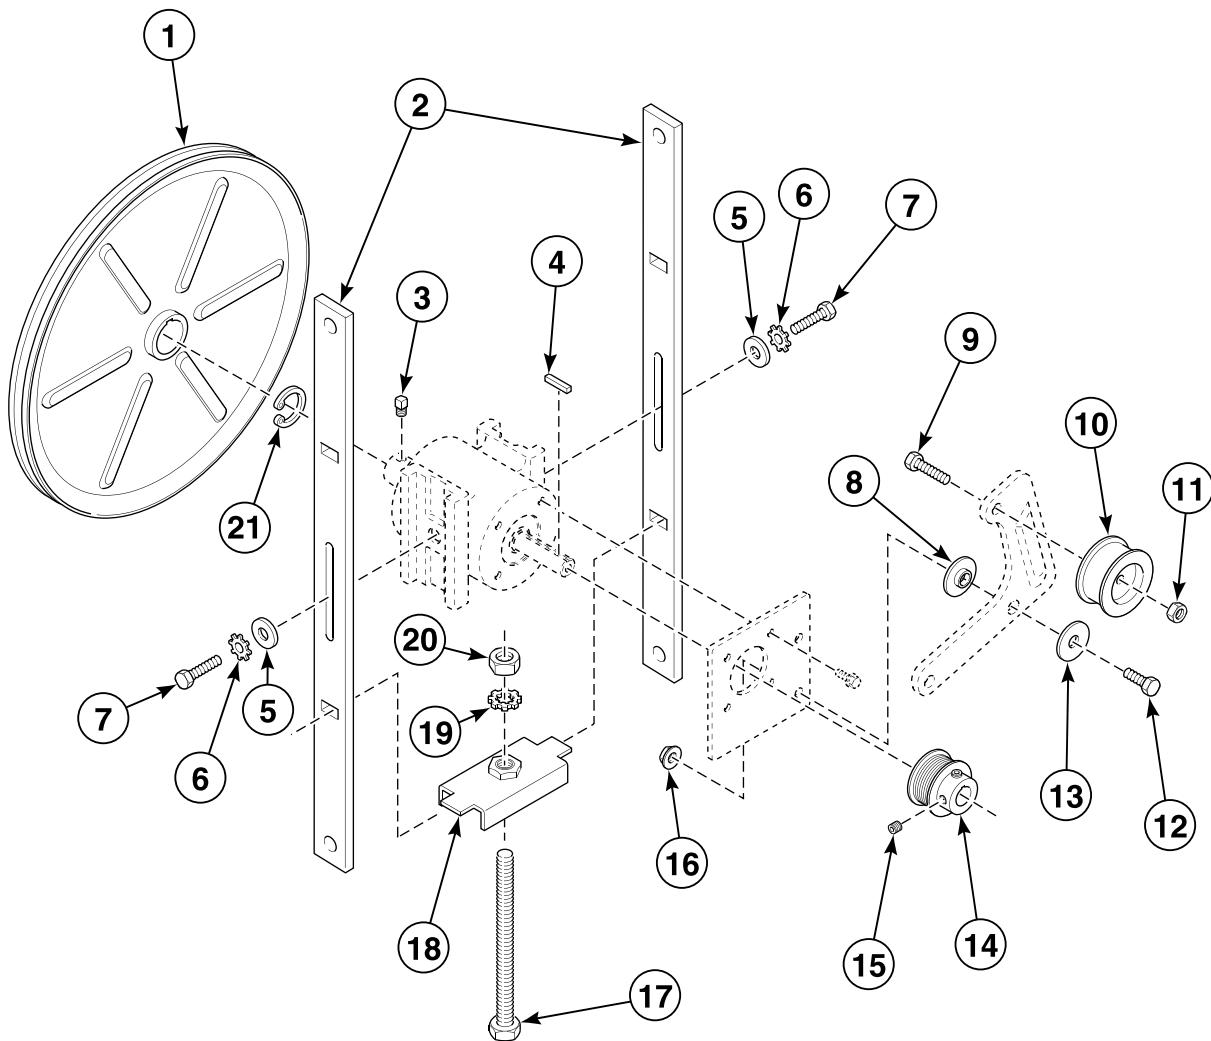


TMB2791P_70421901

Idler Assembly for Nonreversing Models

REF	PART NO.	DESCRIPTION	COMMENTS
	942P3P	Idler/Belt Assembly Kit	Use to replace whole assembly
	943P3P	Idler Housing Kit	
1	M400092P	Sheave	
2	M412476	Guide Rail	2 required
3	M400065	Screw	2 required
4	M401327	Key	2 required
5	M400080	Washer	2 required
6	M403958	Washer	2 required
7	M400043	Screw	2 required
8	70265901	Washer	
9	430648	Screw	
10	430619	Drum Idler Wheel Assembly	
11	56156	Nut	
12	M400056	Screw	
13	70270301	Washer	
14	M411466P	Micro V Pulley	
15	M400077	Screw	2 required
16	44087201	Nut	
17	M412627	Screw	
18	M414405	Tension Plate Assembly	
19	M412188	Washer	
20	H88412101	Nut	
21	M400399	Ring	

Fan Components

All Models Except STF75L, STF75N, UB075E, UTF75L and UTF75N

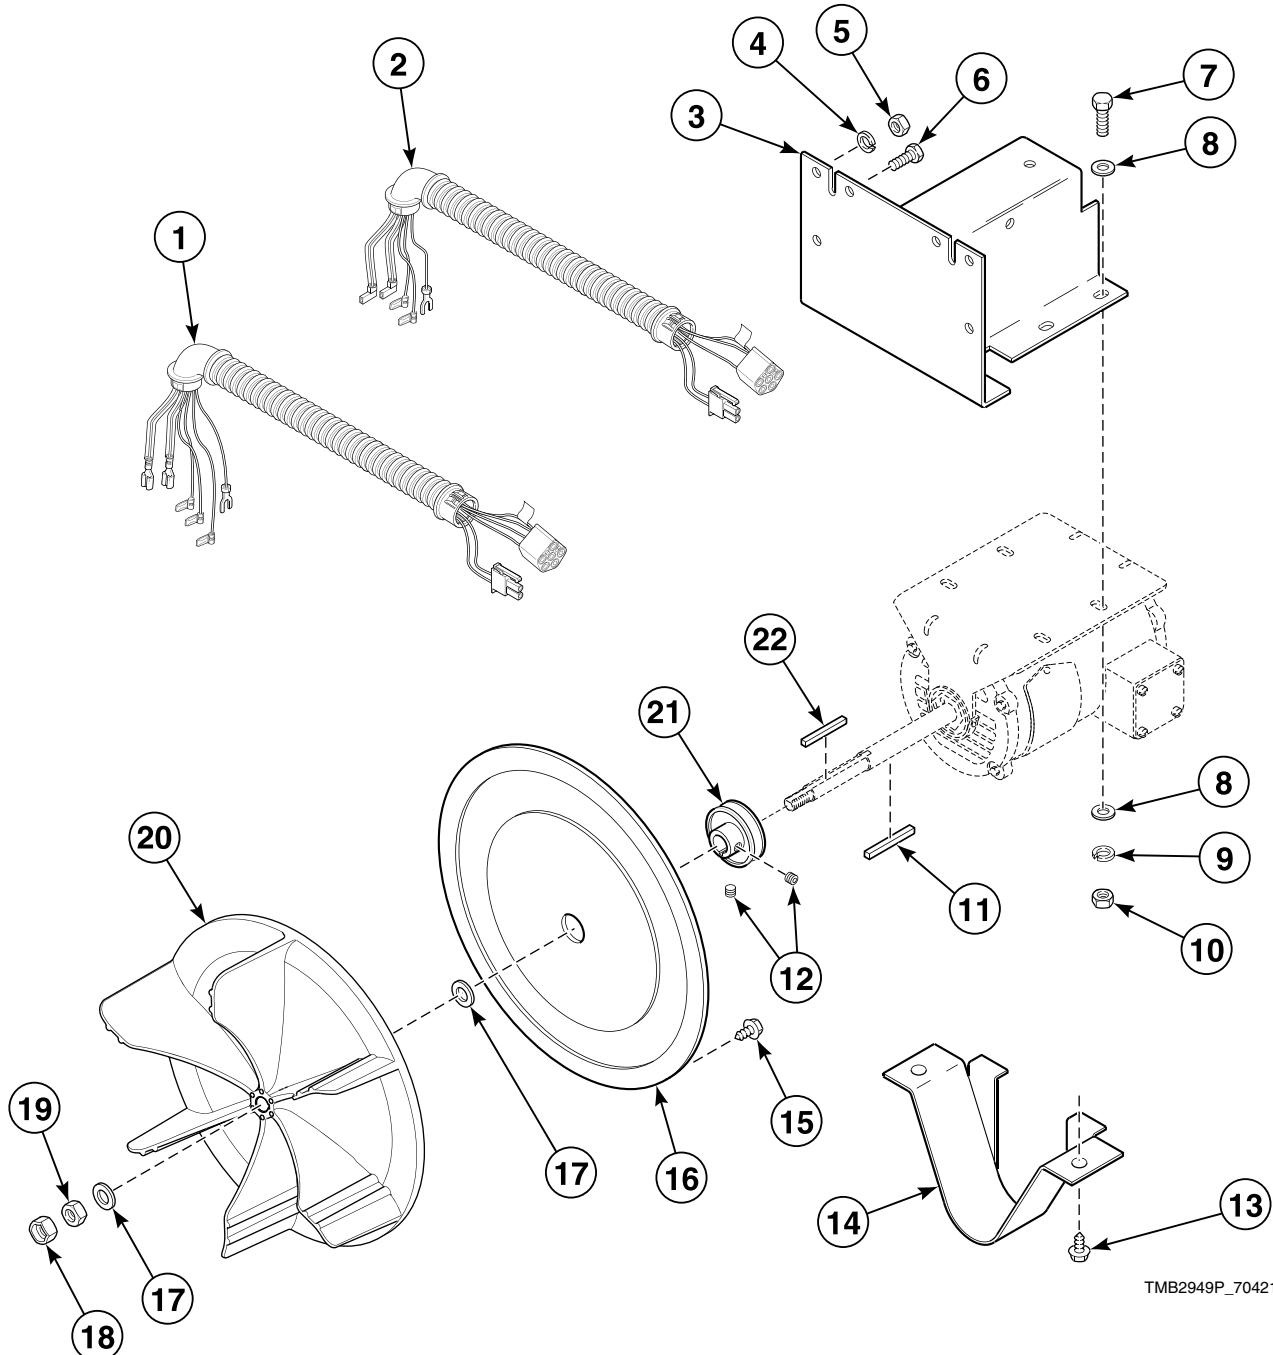


TMB2949P_70421901

Fan Components

REF	PART NO.	DESCRIPTION	COMMENTS
	M4426P3	Motor Hardware Kit	Includes items 11, 17-19 and 22
	M4525P3P	Resilient Ring Kit	2 per package
1	44169901	Fan Motor Harness	3 Phase
2	44137201P	Fan Motor Harness	1 Phase
3	44117201	Motor Bracket	
4	M400014	Washer	
5	20274	Nut	
6	M401393	Bolt	2 required
7	M400057	Screw	
8	M400080	Washer	
9	M400013	Washer	
10	02428	Nut	
11	44132301	Key	Nonreversing; All models: 120 Volt/60 Hertz/1 Phase or 200-208 or 240 Volt/60 Hertz/1 Phase; Electric models: 200-208 Volt/60 Hertz/3 Phase or 240 Volt/60 Hertz/3 Phase
	M400993	Key	All other voltages
12	M400077	Screw	Supplied with pulley
13	430497	Screw	
14	M413008	Belt Guard	
15	M410059	Screw	7 required
16	M401362	Cover Plate	
17	M400991	Washer	
18	M400034	Nut	
19	M400022	Nut	
20	44127401P	Blower	
21	M414564	Pulley	60 Hertz; Nonreversing
	M414566	Pulley	50 Hertz; Nonreversing
22	M400994	Key	

Fan Motors

All Models Except STF75L, STF75N, UB075E, UTF75L and UTF75N

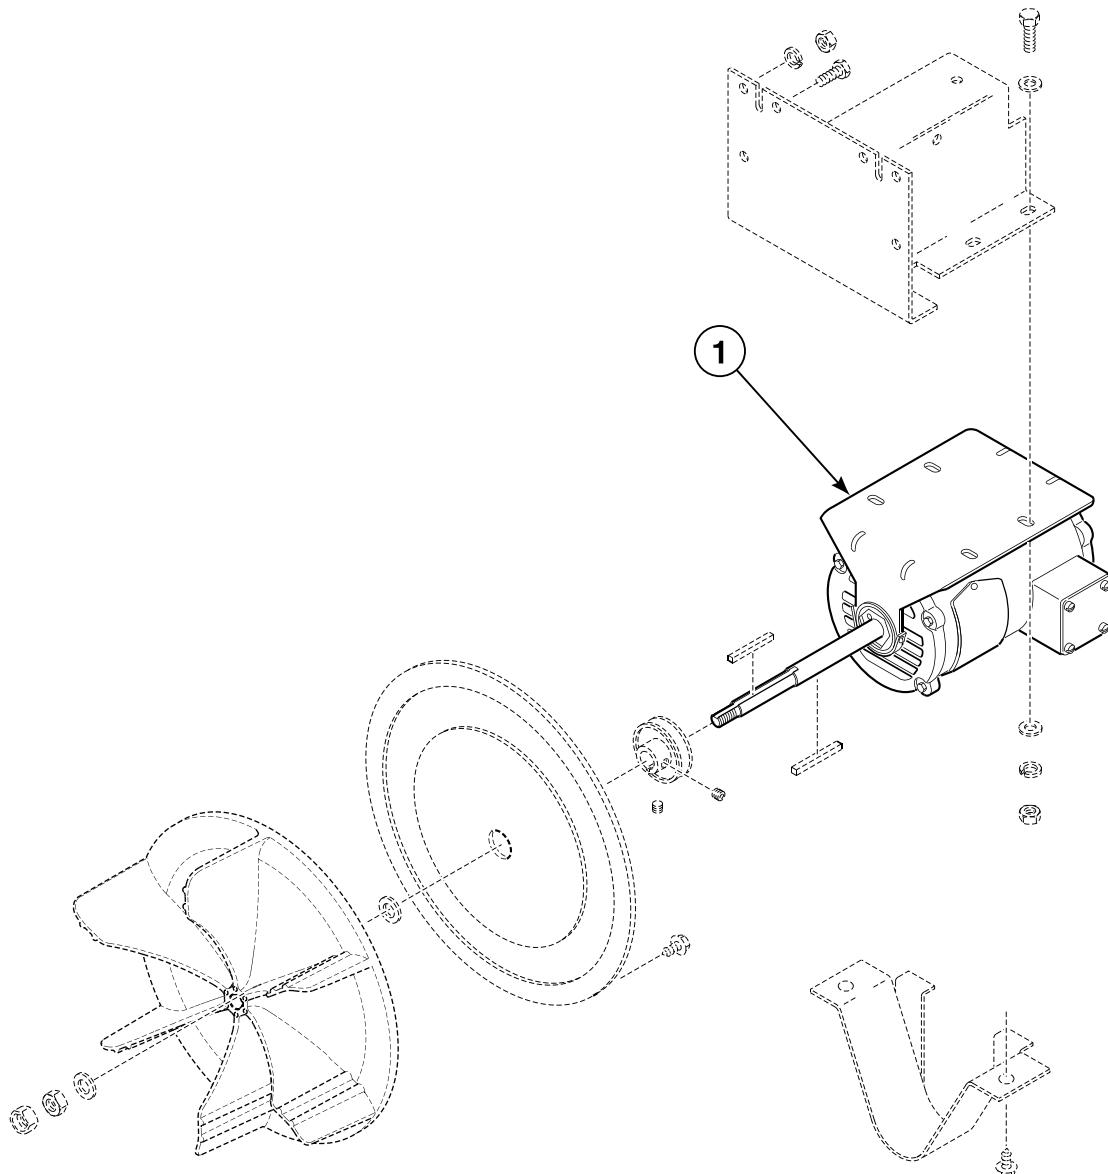


TMB2968P_70421901

Fan Motors

REF	PART NO.	DESCRIPTION	COMMENTS
1	44048601P	Motor	Use M410298 Motor Capacitor; Nonreversing; Gas and steam models with: 120 Volt/60 Hertz/1 Phase and 200-208 or 240 Volt/60 Hertz/1 Phase; Electric models with: 200-208 Volt/60 Hertz/3 Phase and 240 Volt/60 Hertz/3 Phase
	44046201P	Motor	3/4 horsepower; Gas and steam nonreversing models with: 200-208 or 240 Volt/60 Hertz/3 Phase, 460-480 Volt/60 Hertz/3 Phase, 200 Volt/50 Hertz/3 Phase, 230-240 Volt/50 Hertz/3 Phase and 380 or 400-415 Volt/50 Hertz/3 Phase; Electric nonreversing models with: 480 Volt/60 Hertz/3 Phase, 200 Volt/50 Hertz/3 Phase, 380 Volt/50 Hertz/3 Phase and 400-415 Volt/50 Hertz/3 Phase; Gas and steam reversing models with: 200-208 or 240 Volt/60 Hertz/3 Phase and 460-480 Volt/60 Hertz/3 Phase
	44048801P	Motor	Use M410300 Motor Capacitor; Nonreversing; Gas and steam models with: 230-240 Volt/50 Hertz/1 Phase; Electric models with: 240 Volt/50 Hertz/3 Phase
	44046001P	Fan Motor	1/3 horsepower; Reversing; Gas and steam models with: 200 Volt/50 or 60 Hertz/3 Phase, 230-240 Volt/50 or 60 Hertz/3 Phase and 380 or 400-415 Volt/50 or 60 Hertz/3 Phase; Electric models with: 480 Volt/50 or 60 Hertz/3 Phase, 380 Volt/50 Hertz/3 Phase and 400-415 Volt/50 or 60 Hertz/3 Phase
	44045901P	Fan Motor	Use M410301 Motor Capacitor; Reversing; Gas and steam models with: 230-240 Volt/50 Hertz/1 Phase; Electric models with: 240 Volt/50 Hertz/1 or 3 Phase and 200 Volt/50 Hertz/3 Phase
	44045701P	Motor	Use M410296 Motor Capacitor; Reversing; Electric models with: 200-208 Volt/60 Hertz/3 Phase and 240 Volt/60 Hertz/3 Phase

NOTE: Nonreversing motors listed above function as the fan motor and the drive motor.

Fan Components and Motor for STF, UB and UTF Models

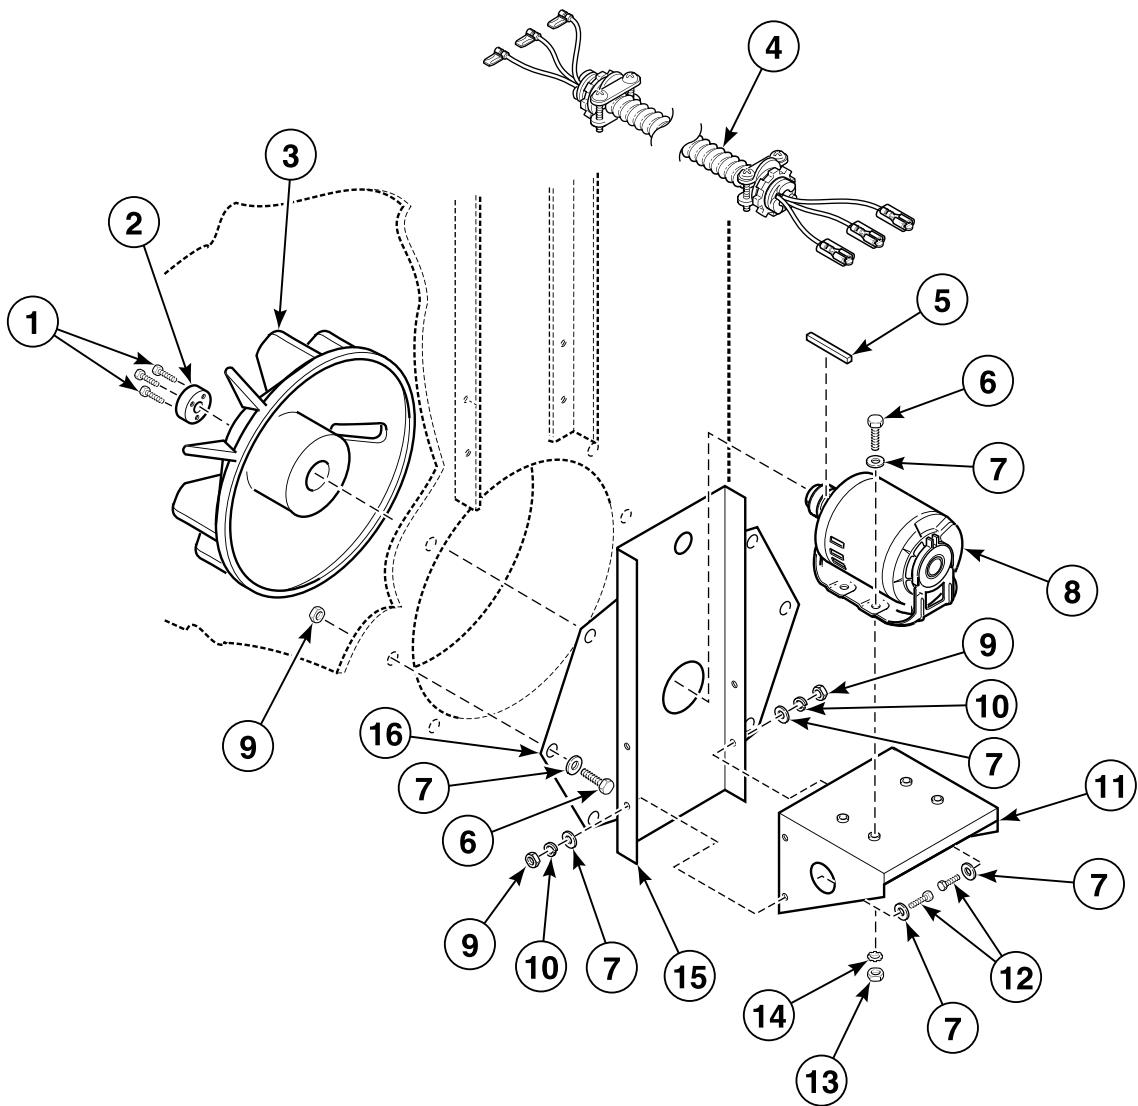


TMB2638P_70421901

Fan Components and Motor for STF, UB and UTF Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	H8800901H	Screw	
2	H87529111P	Bushing	
3	M414546	Fan and Bushing Assembly	
4	44169901	Fan Motor Harness	
5	H8752006H	Key	
6	M400057	Screw	
7	M400080	Washer	
8	44046301P	Motor	
9	20274	Nut	
10	M400014	Washer	4 required
11	M413391	Motor Base	
12	22688	Screw	4 required
13	02428	Nut	4 required
14	M400013	Washer	4 required
15	N/A	Motor Channel	
16	M413399	Blower Cover	

N/A = Part no longer available

Gas Heater Components

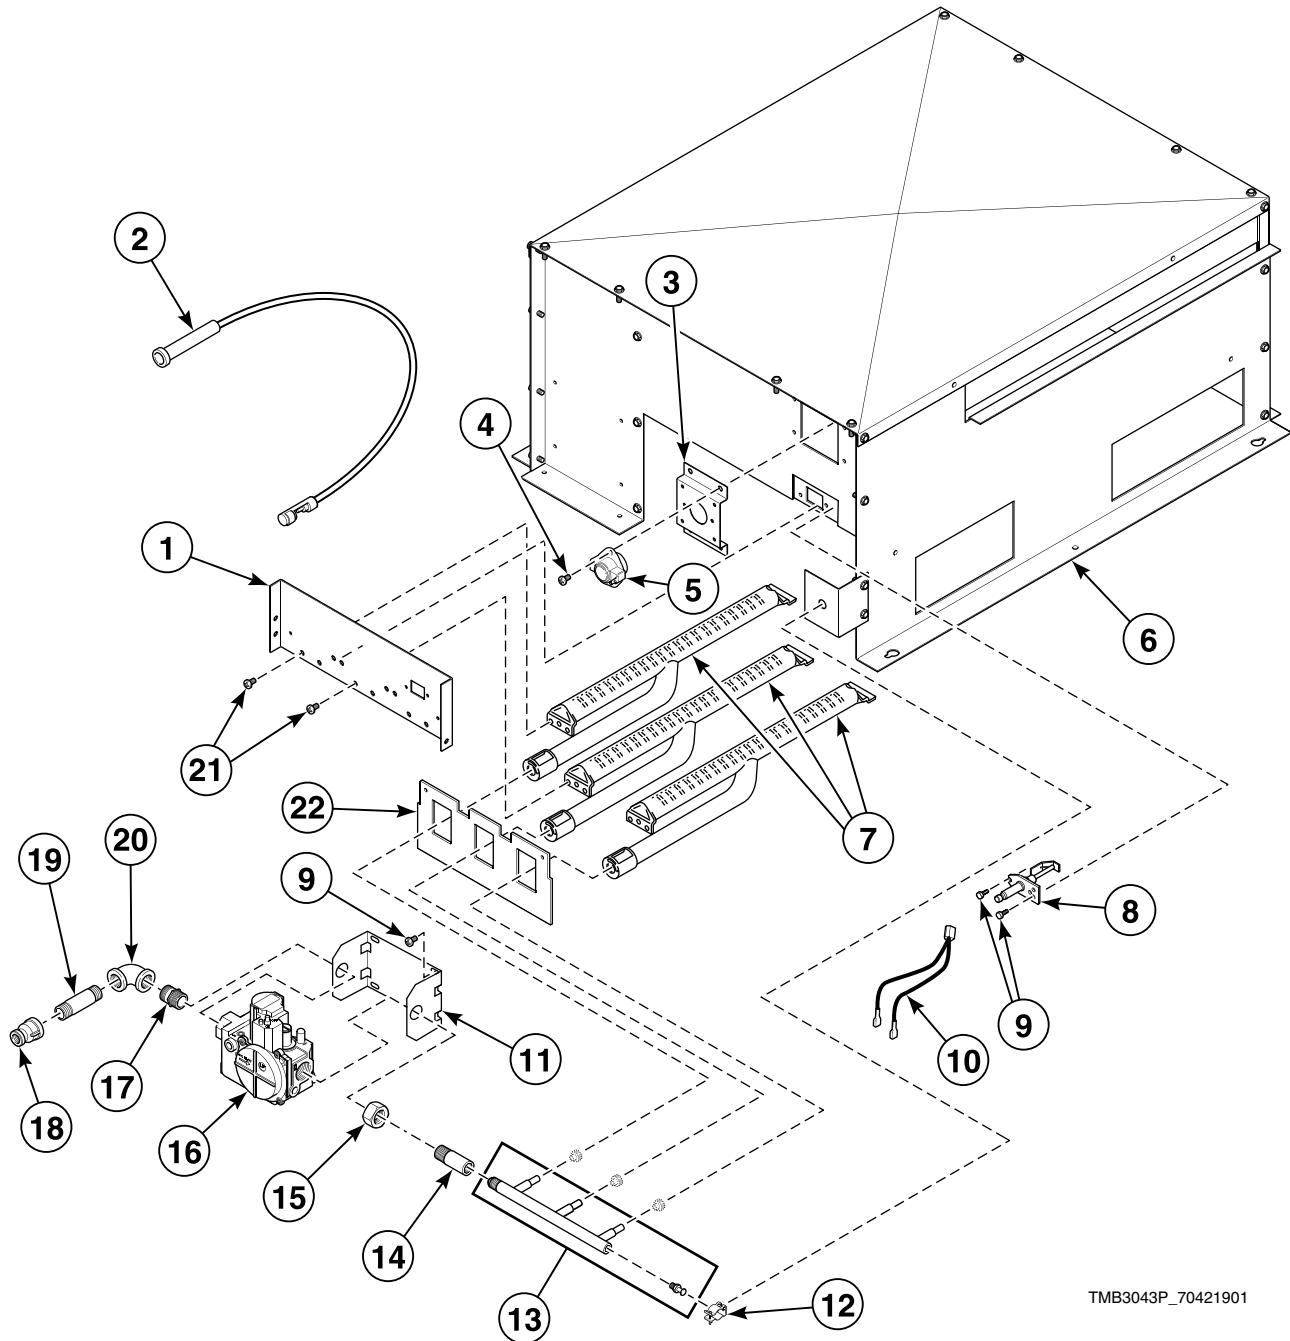


TMB3043P_70421901

Gas Heater Components

REF	PART NO.	DESCRIPTION	COMMENTS
	M4545P3	L.P. Conversion Kit	Natural Gas (N.G.) to Liquid Petroleum Gas (L.P.); CE and Australian models
	M4454P3	L.P. Conversion Kit	N.G. to L.P.; Non-CE and non-Australian models except STF and UTF models
	M4609P3	L.P. Conversion Kit	N.G. to L.P.; Fast Dry; STF and UTF models
	M4897P3	L.P. Gas Valve Kit	Non-CE and non-Australian models
	M413468P	Gas Valve	N.G.; Non-CE and non-Australian models
	M4908P3	Valve Replacement Kit	N.G.; CE models; Use to replace valves through 11/30/09
	M4909P3	Valve Replacement Kit	L.P.; CE models; Use to replace valves through 11/30/09
1	44110301	Burner Support	
2	44061603	High Temperature Lead	
3	70356301	Switch Bracket	
4	M402797	Screw	2 required
5	M401404	Limit Thermostat	Non-CE and non-Australian models except STF and UTF models
	M411943	Manual Reset Thermostat	CE and Australian models
	M410220	Limit Thermostat	STF and UTF models
6	44135601	Gas Stove Assembly	Includes item 6
7	M410541	Burner Assembly	3 required
8	M406934P	Spark Igniter	
9	56693	Screw	2 required
10	M412997	Harness Assembly	Non-CE and non-Australian models
	M413650	Gas Valve Harness Assembly	CE and Australian models
11	44175701	Gas Valve Bracket	
12	44155201	Pipe Clamp	Includes screw
13	M406810	Spud Holder Assembly	
14	44040501	Manifold Pipe	C, D and I non-CE and non-Australian models
	M406681	Manifold Pipe Assembly	All other models
15	M401548	Nut	
16	44181601P	Gas Valve	N.G.; Australian models
	44181602	Gas Valve	L.P.; Australian models
	44178301P	Gas Valve	N.G.; CE models; Use to replace valves starting 12/1/09
	44178302P	Gas Valve	L.P.; CE models; Use to replace valves starting 12/1/09
	44154501P	Gas Valve	N.G.; Non-CE and non-Australian models
	44154502P	Gas Valve	L.P.; Non-CE and non-Australian models
17	431486	Pipe Nipple	
18	M413453	Reducer	STF and UTF models
19	70210201	Pipe Nipple	
20	70079601	Elbow	
21	70240301	Screw	6 required
22	44135201	Rear Access Plate	

NOTE: For CE gas and orifice information, refer to Installation Manual.

Burner Orifices for Non-CE Models

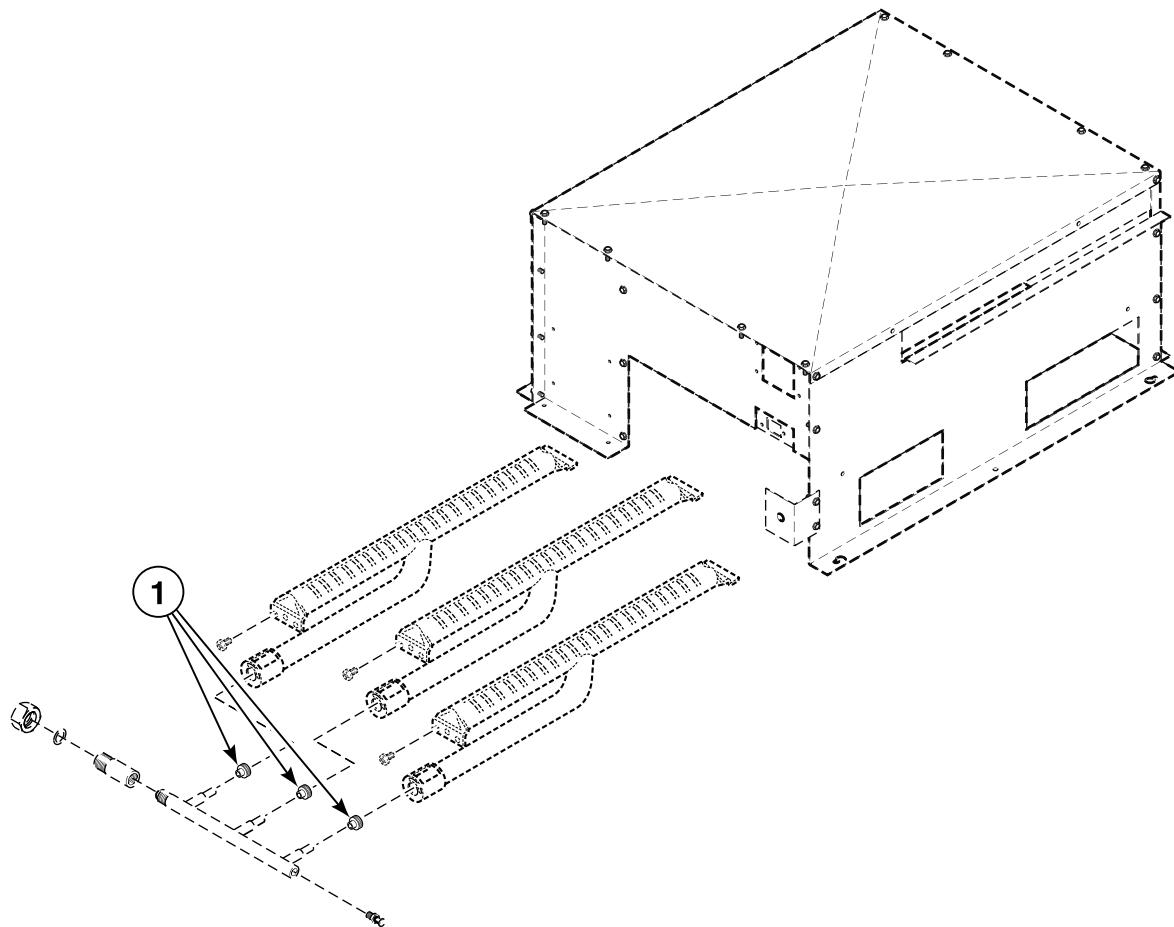


TMB2981P_70421901

Burner Orifices for Non-CE Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	M406361	Burner Orifice	STF and UTF models; Liquid Petroleum Gas (L.P.); Drill no. 40 (2.5 mm); 0-2,000 feet; 3 required
	M401015	Burner Orifice	STF and UTF models; L.P.; Drill no. 41 (2.4 mm); 2,001-4,000 feet; 3 required
	M403017	Burner Orifice	STF and UTF models; L.P.; Drill no. 42 (2.4 mm); 4,001-6,000 feet; 3 required
	M406184	Burner Orifice	STF and UTF models; L.P.; Drill no. 43 (2.3 mm); 6,001-8,000 feet; 3 required
	M401011	Burner Orifice	STF and UTF models; L.P.; Drill no. 44 (2.2 mm); 8,001-10,000 feet; 3 required
	M401002	Burner Orifice	STF and UTF models; Natural Gas (N.G.); Drill no. 20 (4.1 mm); 0-2,000 feet; 3 required
	M402996	Burner Orifice	STF and UTF models; N.G.; Drill no. 22 (4.0 mm); 2,001-4,000 feet; 3 required
	M402980	Burner Orifice	STF and UTF models; N.G.; Drill no. 24 (3.9 mm); 4,001-6,000 feet; 3 required
	M401000	Burner Orifice	STF and UTF models; N.G.; Drill no. 26 (3.7 mm); 6,001-8,000 feet; 3 required
	M401014	Burner Orifice	STF and UTF models; N.G.; Drill no. 28 (3.6 mm); 8,001-10,000 feet; 3 required
	M401011	Burner Orifice	All models except DR80G2-BT075D, HT075D, ST075D, STF and UTF; L.P.; Drill no. 44 (2.2 mm); 0-2,000 feet; 3 required
	M401027	Burner Orifice	Models DR80G2-BT075D, HT075D and ST075D 0-2,000 feet; All other models 2,001-4,000 feet; L.P.; Drill no. 45 (2.1 mm); 3 required
	M400999	Burner Orifice	All models except STF and UTF; L.P.; Drill no. 47 (2.0 mm); 4,001-8,000 feet; 3 required
	M401001	Burner Orifice	All models except STF and UTF; L.P.; Drill no. 48 (1.9 mm); 8,001-10,000 feet; 3 required
	M401014	Burner Orifice	All models except STF and UTF; N.G.; Drill no. 28 (3.6 mm); 0-2,000 feet; 3 required
	M400997	Burner Orifice	All models except STF and UTF; N.G.; Drill no. 29 (3.4 mm); 2,001-4,000 feet; 3 required
	M401021	Burner Orifice	All models except STF and UTF; N.G.; Drill no. 30 (3.3 mm); 4,001-6,000 feet; 3 required
	M402489	Burner Orifice	All models except STF and UTF; N.G.; Drill no. 1/8 (3.2 mm); 6,001-8,000 feet; 3 required
	M401017	Burner Orifice	All models except STF and UTF; N.G.; Drill no. 31 (3.0 mm); 8,001-10,000 feet; 3 required

NOTE: For CE gas and orifice information, refer to Installation Manual.

Electric Heater Components

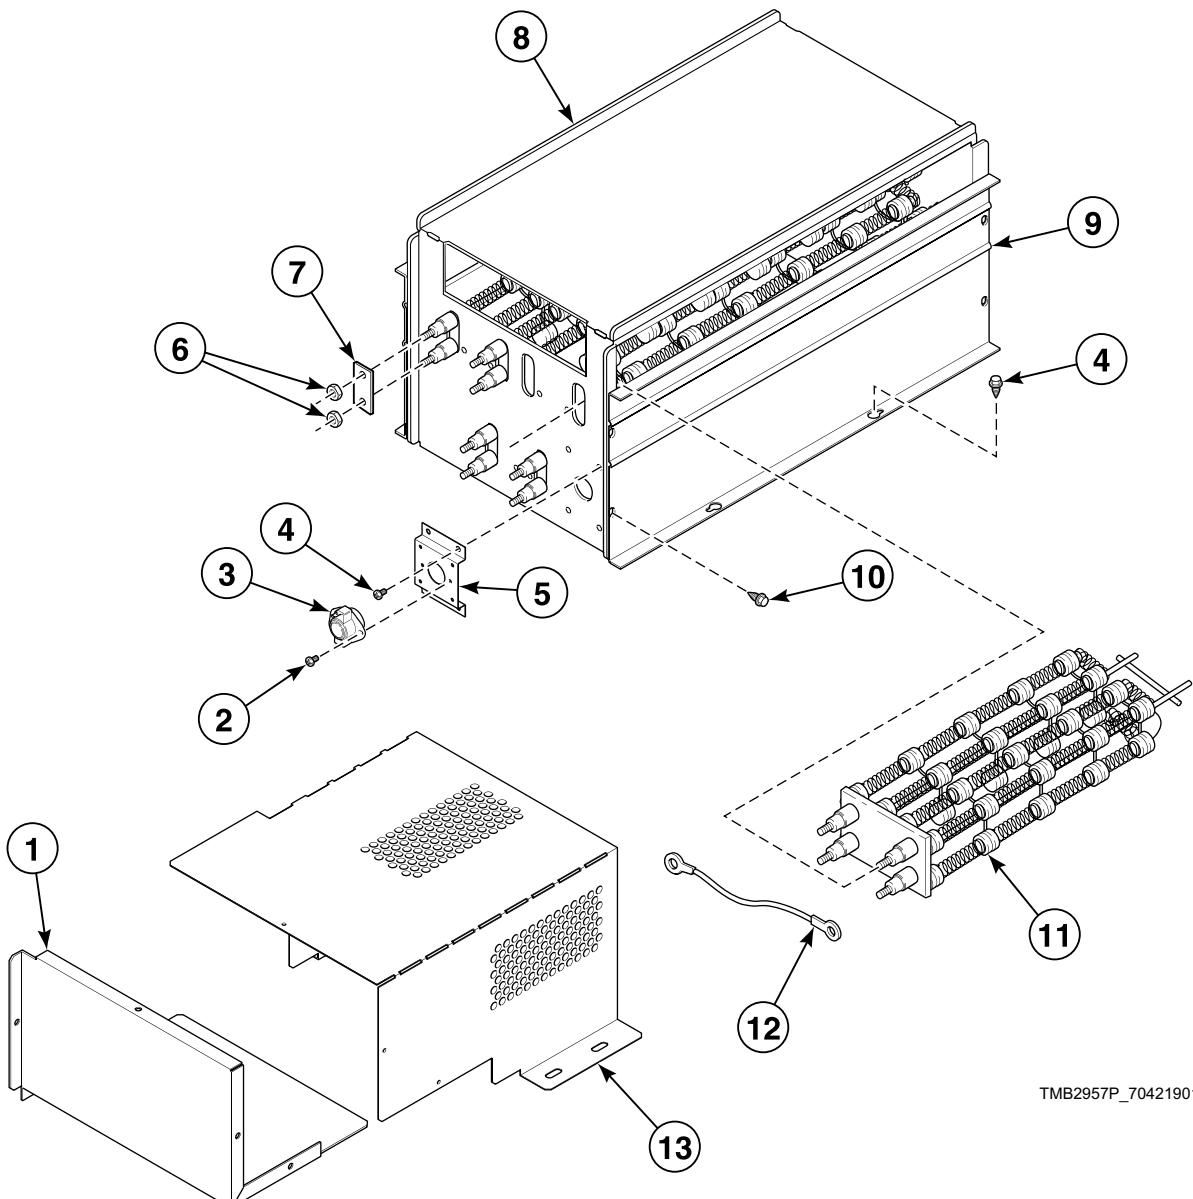


TMB2957P_70421901

Electric Heater Components

REF	PART NO.	DESCRIPTION	COMMENTS
1	44154901	Electric Accessory Box Cover	
2	33562	Screw	
3	M409433	Limit Thermostat	
4	430497	Screw	
5	70356301	Switch Bracket	
6	70054	Nut	
7	M400866	Jumper Bar	380 Volt/50 Hertz/3 Phase, 400-415 Volt/50 Hertz/3 Phase and 480 Volt/60 Hertz/3 Phase
	M400869	Jumper Strip	3 required for 480 Volt/60 Hertz/3 Phase; 6 required for all others
8	44153301	Heater Box Cover	
9	44154801	Heater Side	
10	70240301	Screw	
11	M410939P	Heater Element	10 kW; 240 Volt; 3 required for 230 or 240 Volt/60 Hertz/3 Phase, 400-415 Volt/50 Hertz/3 Phase and 480 Volt/60 Hertz/3 Phase
	M410940P	Heater Element	Non-CE models; 10 kW; 208 Volt; 3 required for 200 Volt/50 Hertz/3 Phase and 200-208 Volt/60 Hertz/3 Phase
	M410941P	Heater Element	10 kW; 220 Volt; 3 required for 380 Volt/50 Hertz/3 Phase
12	M412287	Jumper Wire Assembly	1 required for 380 Volt/50 Hertz/3 Phase and 400-415 Volt/50 Hertz/3 Phase; 2 required for 480 Volt/60 Hertz/3 Phase
13	44154701	Electric Accessory Box Wrap	

Airflow Switch Assembly

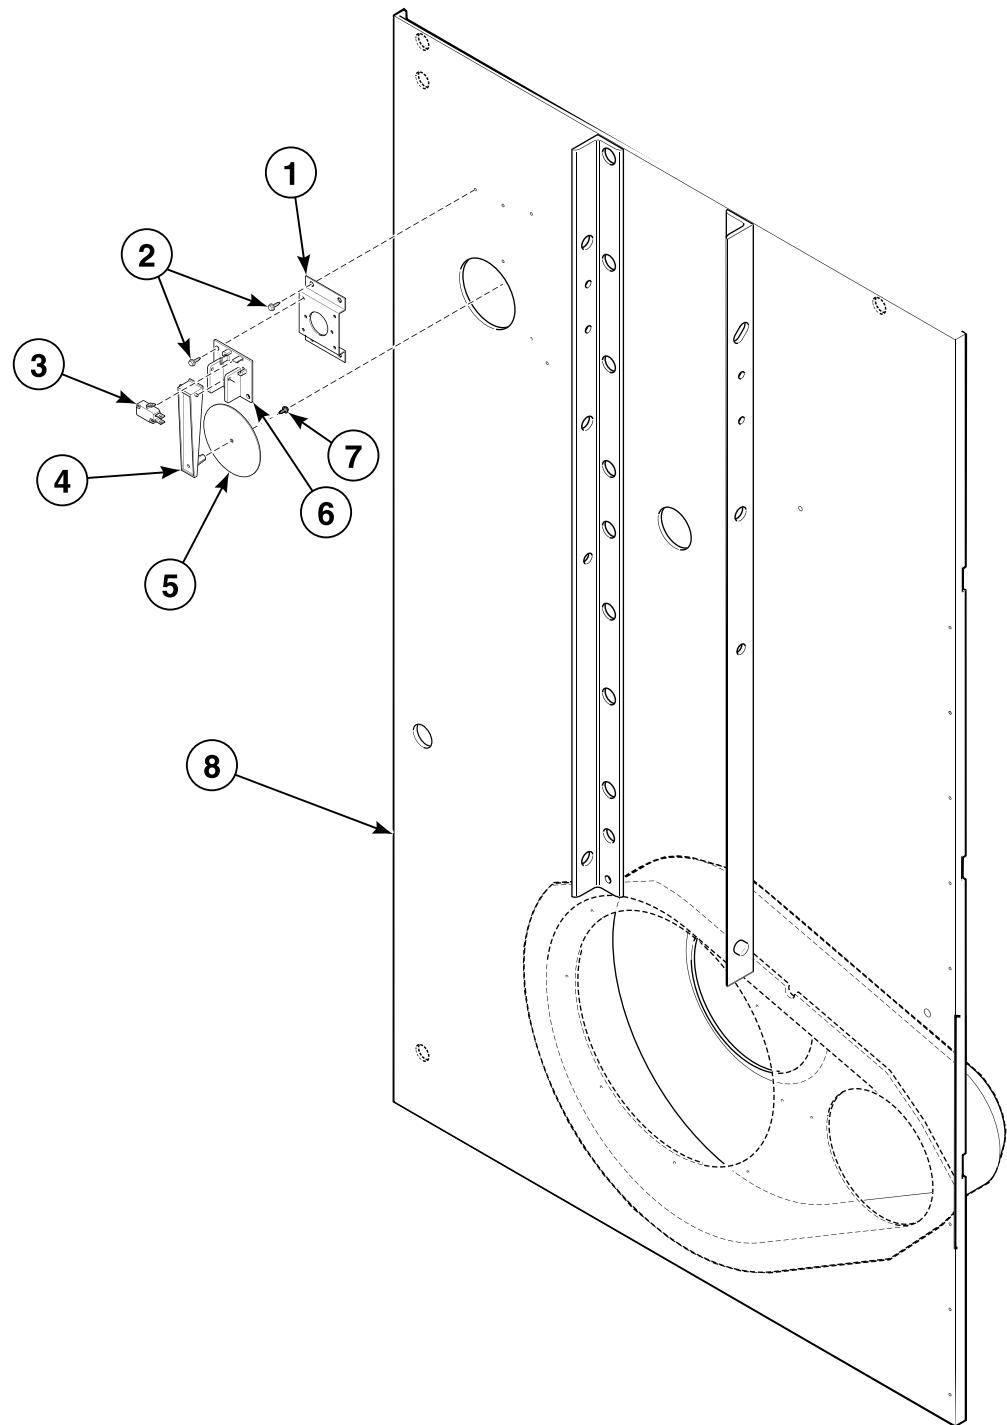


TMB2958P_70421901

Airflow Switch Assembly

REF	PART NO.	DESCRIPTION	COMMENTS
	44142901	Airflow Switch Assembly	Includes items 1-7
1	70356301	Switch Bracket	
2	430497	Screw	6 required
3	70411901	Switch	
4	70319401	Airflow Switch Arm	
5	70319202	Airflow Switch Vane	
6	70319601	Airflow Switch and Arm Bracket	
7	430757	Screw	
8	44171301	Rear Panel Assembly	STF and UTF models
	44171201	Rear Panel Assembly	All other models

Steam Heater and Valve

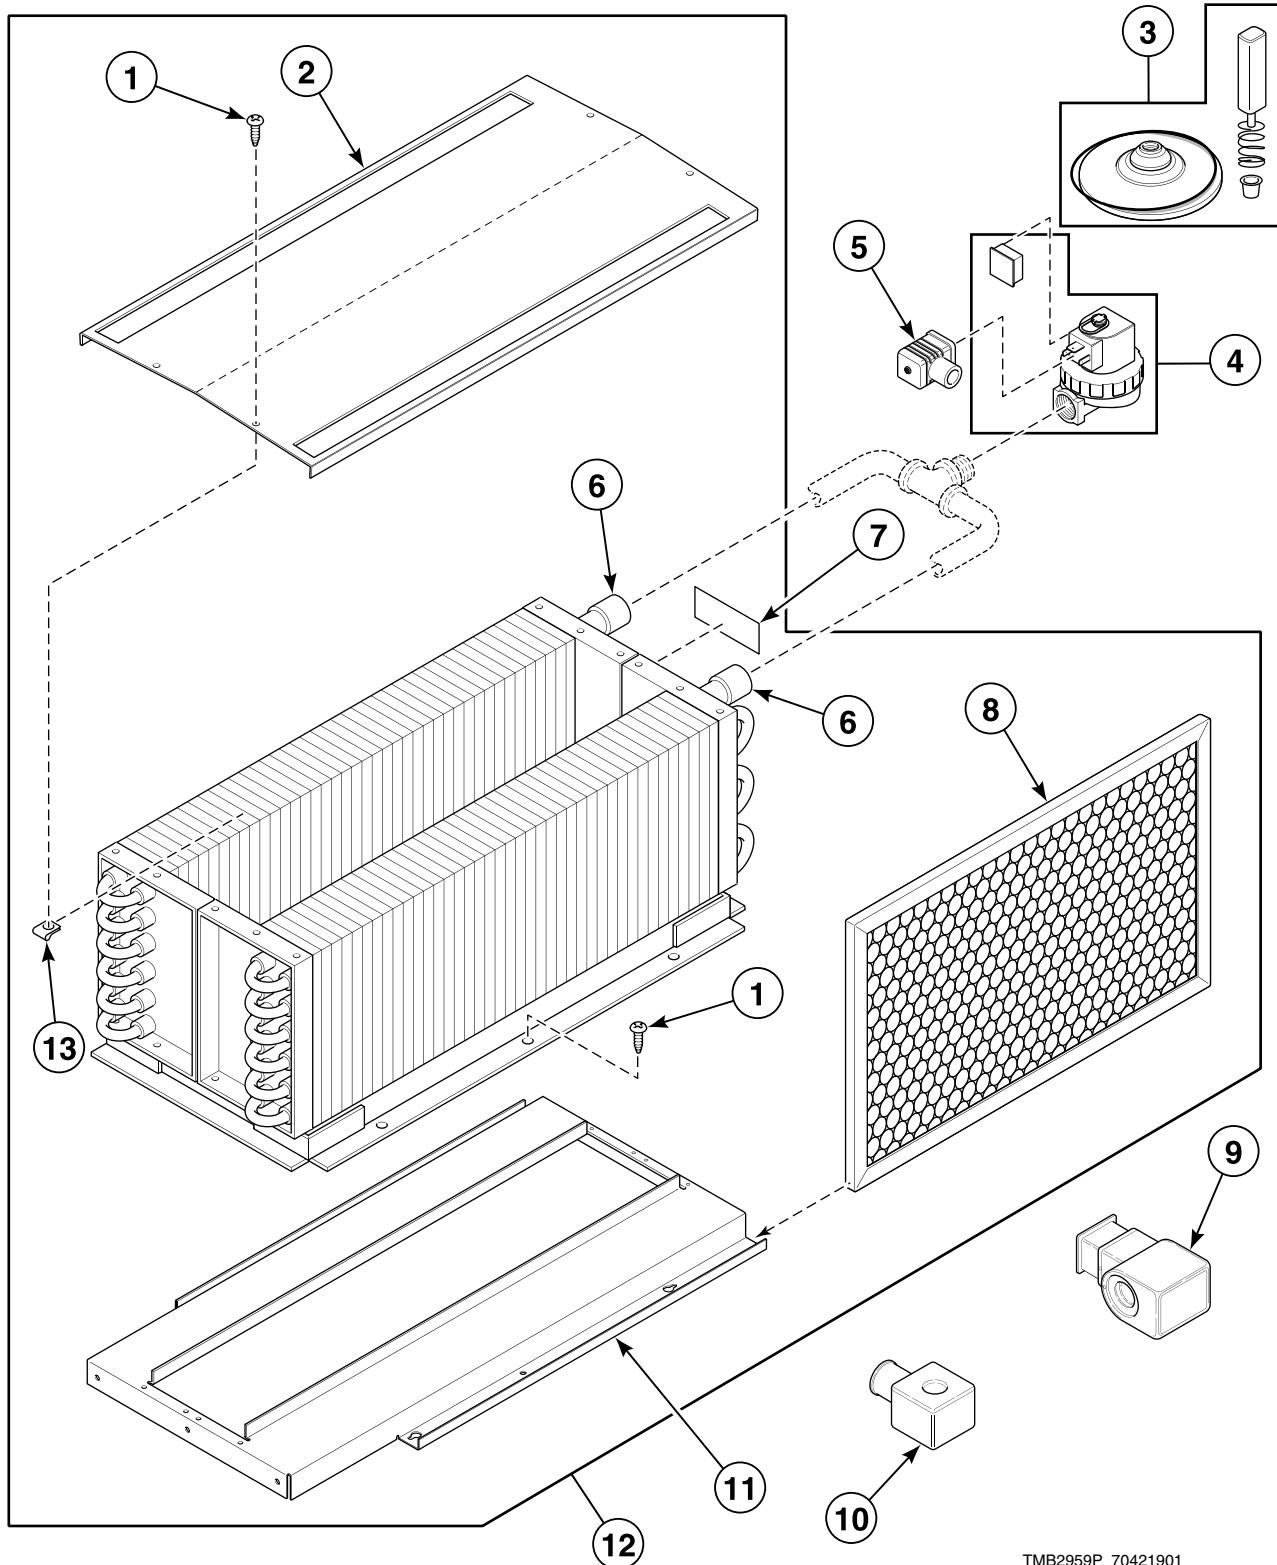


TMB2959P_70421901

Steam Heater and Valve

REF	PART NO.	DESCRIPTION	COMMENTS
	M405188	Screw	Thermal oil models; 8 required
	33562	Screw	Thermal oil models; 4 required
	M414760	Top Cover	Thermal oil models
	M412997	Harness Assembly	
1	430497	Screw	
2	M400828	Low Pressure Steam Cover	
3	70351021P	Steam Valve Rebuild Kit	All models except thermal oil models
4	70351002P	Steam Valve	All models except thermal oil models; 50 Hertz
	70351001P	Steam Valve	All models except thermal oil models; 60 Hertz
5	70370301P	Solenoid Valve DIN Connector	All models except thermal oil models
6	M400637P	Steam Coil	2 required; All models except thermal oil models
7	902303	Steam Pressure Label	All models except thermal oil models; Near inlet to indicate maximum steam pressure
8	44172001	Filter	2 required; CE models
	44104201	Air Filter	2 required; All other models
9	70351012	Steam Solenoid	All models except thermal oil models; 50 Hertz
10	70351011P	Steam Solenoid	All models except thermal oil models; 60 Hertz
11	44007501	Steam Stand Box	
12	44020401P	Steam Heater Assembly	All models except thermal oil models
13	M400974	Clip	

Rotation Sensor

C, D and I Models

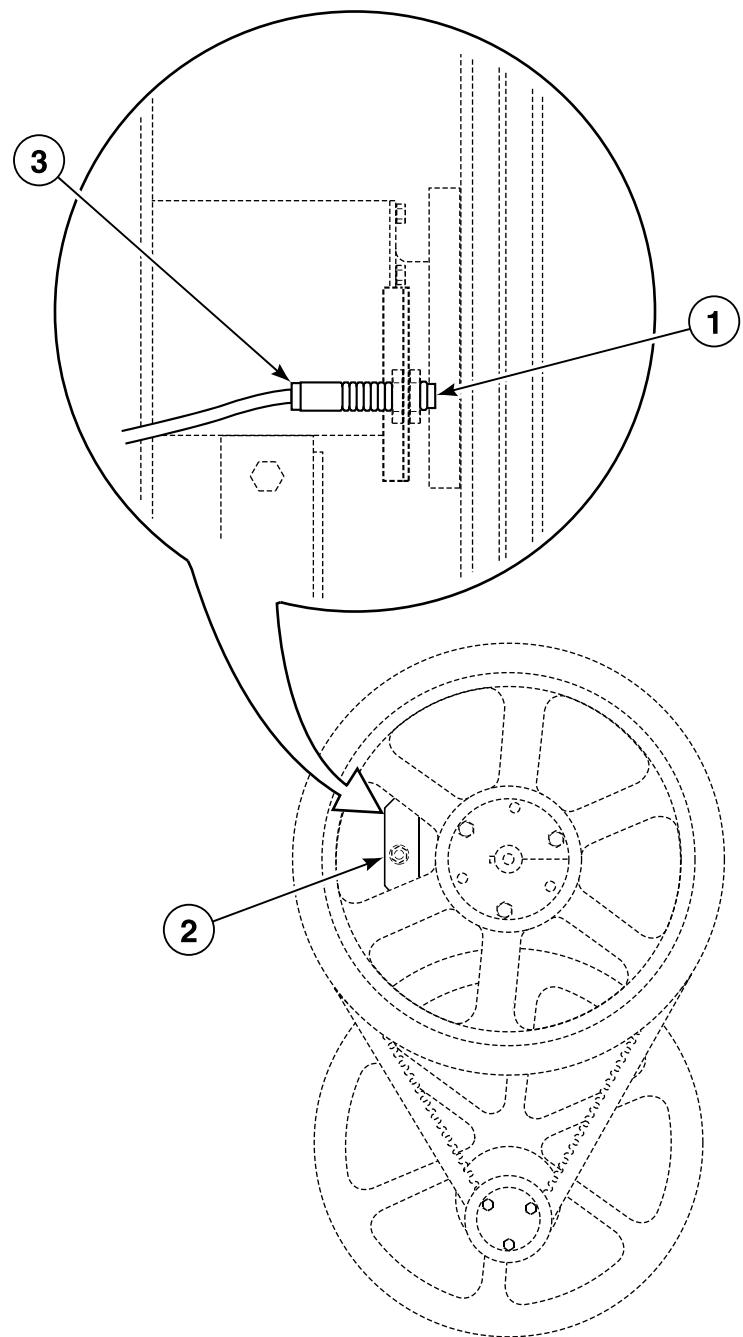


TMB2009P_70421901

Rotation Sensor

REF	PART NO.	DESCRIPTION	COMMENTS
1	70274001P	Rotation Sensor	Includes plug; C and I models
	70417401P	Rotation Sensor Assembly	Includes plug; D models
2	44044501	Proximity Bracket	
3	70274102P	Rotation Sensor Cable Assembly	Includes connector

Duct and Damper Assembly

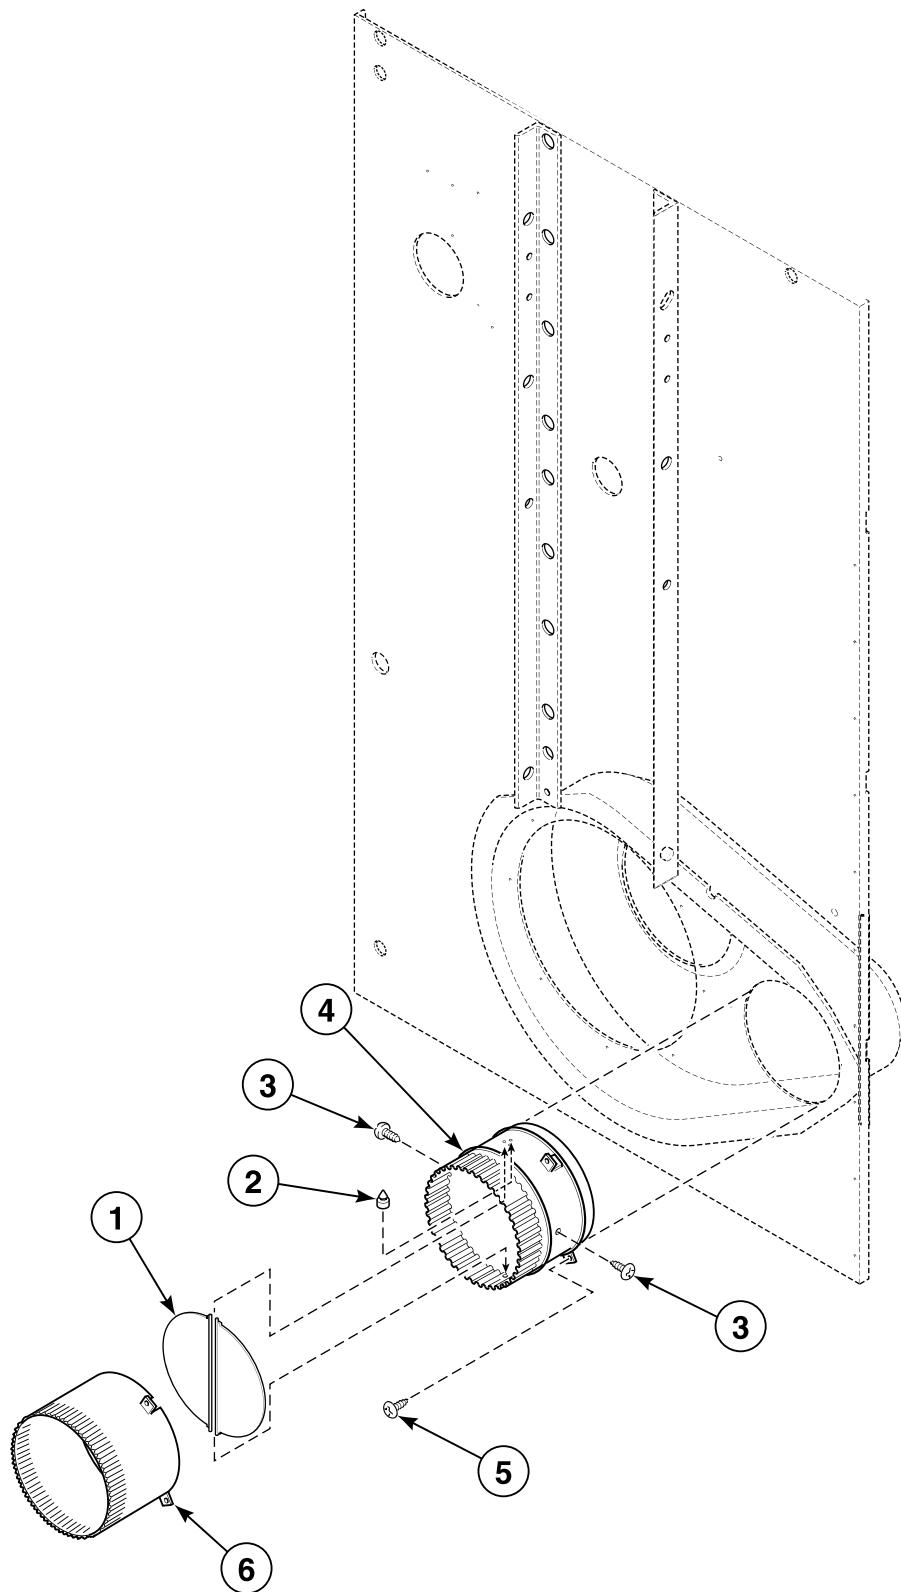


TMB2983P_70421901

Duct and Damper Assembly

REF	PART NO.	DESCRIPTION	COMMENTS
1	M413382	Thimble Vane Assembly	STF and UTF models; 2 required
	M400503	Thimble Vane Assembly	All other models; 2 required
2	M400795	Bumper	
3	M405188	Screw	2 required
4	M412288	Exhaust Thimble Assembly	All models except STF and UTF models
5	M411072	Screw	3 required
6	M413173	Exhaust Thimble	STF and UTF models

Rear Panel Assembly

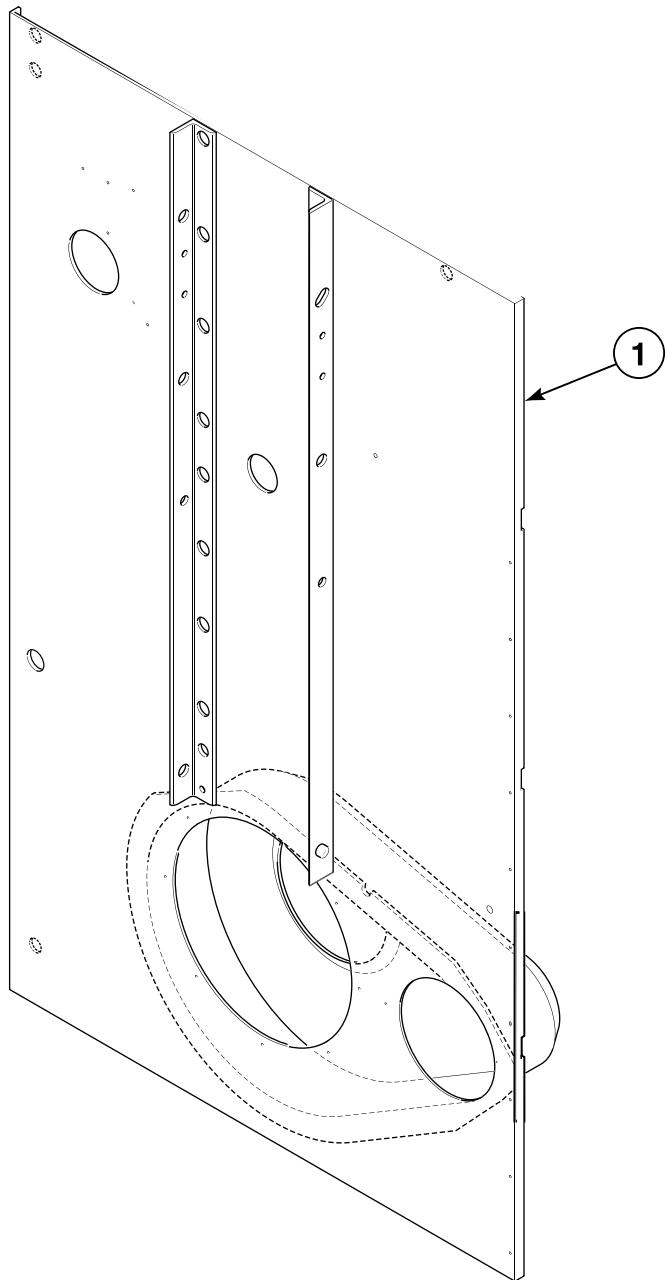


TMB2984P_70421901

Rear Panel Assembly

REF	PART NO.	DESCRIPTION	COMMENTS
1	44171301	Rear Panel Assembly	STF and UTF models
	44171201	Rear Panel Assembly	All other models

Control Tray Wrap Components

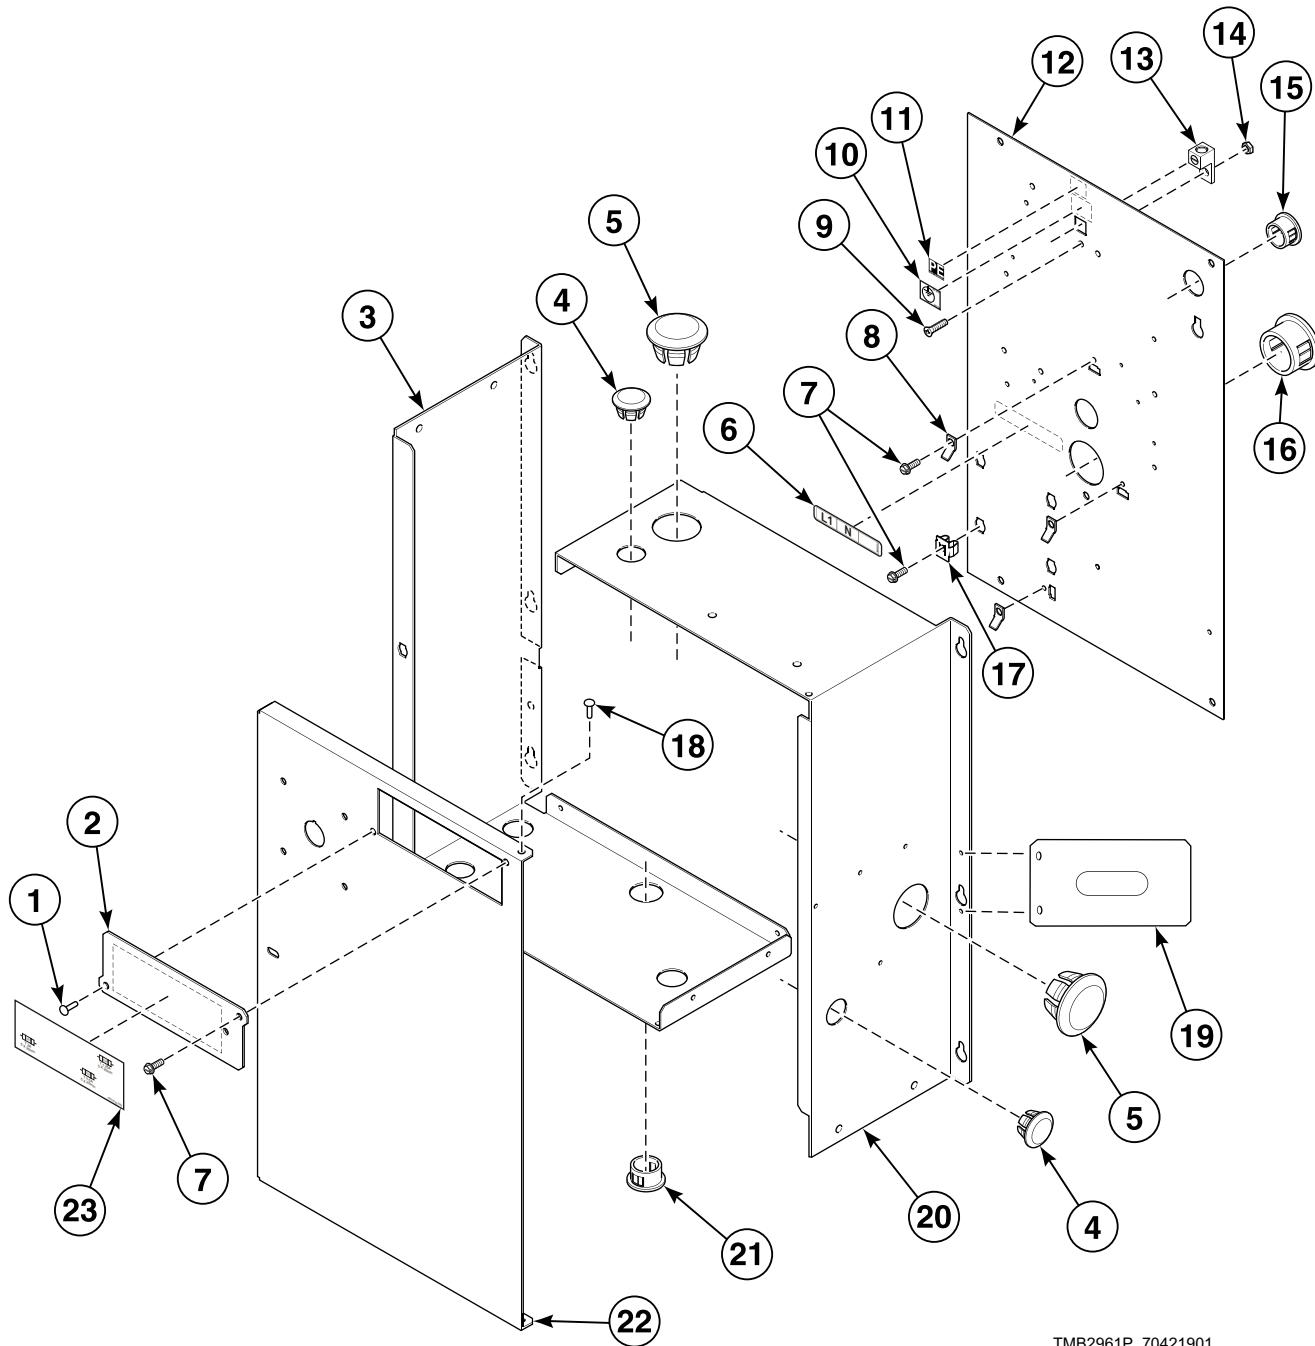


TMB2961P_70421901

Control Tray Wrap Components


REF	PART NO.	DESCRIPTION	COMMENTS
1	70058501	Pop Rivet	
2	70313301	Fuse Cover	
3	44159001	Contactor Box Side	
4	M400985	Plug	Gas models nonreversing 2 required, reversing 1 required; Steam and electric models nonreversing 3 required, reversing 2 required
5	F8223801	Hole Plug	Gas and steam models 2 required; Electric models 1 required
6	70218801	Wire Label	L1, N
	70218701	Wire Label	L1, L2, L3
	70219001	Wire Label	L1, N, L2; Gas and steam models
7	F8206901	Screw	4 required
8	00177	Male Tab Terminal	3 required
9	F430909	Screw	
10	F230739	Ground Decal	
11	M412096	Earth Terminal Sticker	
12	44133701	Contactor Box Base	
13	M411283	Ground Lug Connector	
14	F430232	Nut	
15	44071501	Snap Bushing	Gas models
16	M405340	Snap Bushing	Electric models 2 required; Gas and steam models 1 required
17	70030501	Expansion Clip	5 required
18	70058502	Pop Rivet	2 required
19	44175801	Pipe Bracket	
20	44158901	Contactor Box Side	
21	70178701	Snap Bushing	
22	44134001	Contactor Box Cover	Gas and steam Non-CE models
	44134002	Contactor Box Cover	Gas and steam CE models
	44134003	Contactor Box Cover	Electric models
23	70337301	Fuse Label	3 fuses
	70337201	Fuse Label	4 fuses; Models with less than 380 Volts
	70337401	Fuse Label	4 fuses; Models with 380 Volts or higher

Control Tray Fuses


MODELS WITH LESS THAN 380 VOLTS/1 PHASE

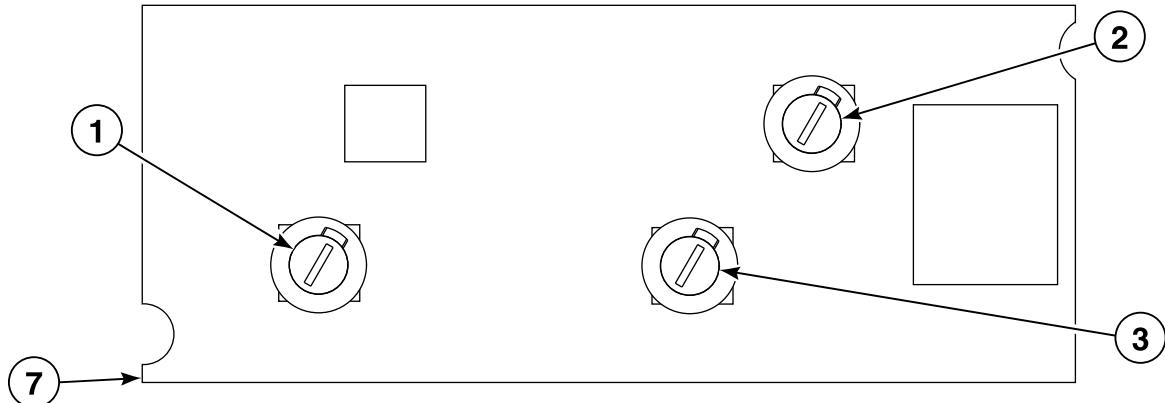

MODELS WITH LESS THAN 380 VOLTS/3 PHASE

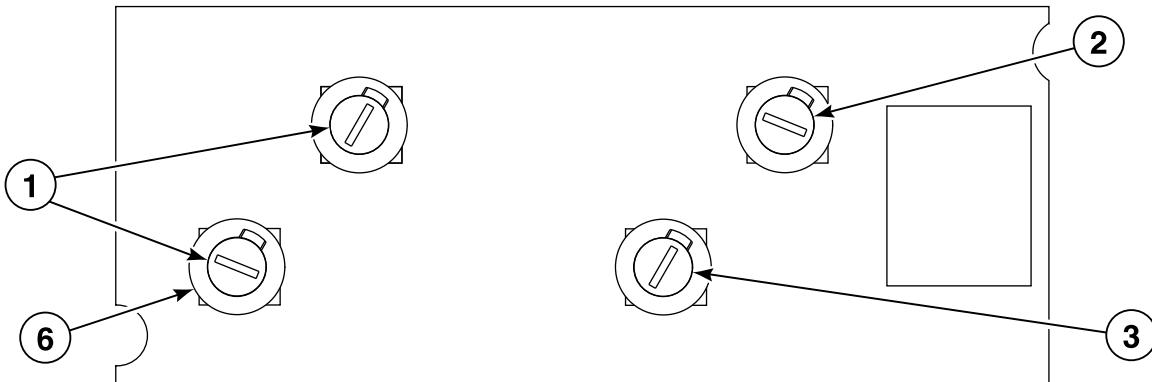

MODELS WITH 380 VOLTS OR HIGHER/3 PHASE

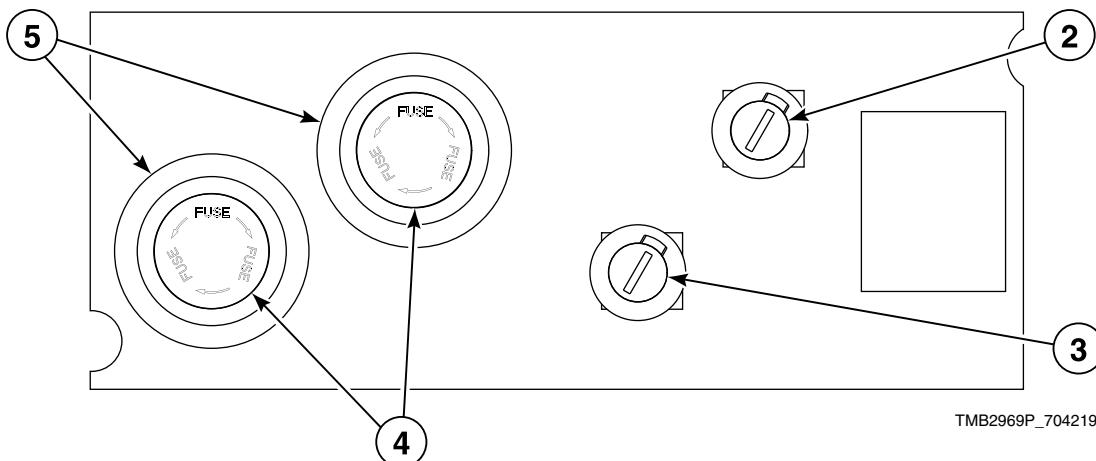


TMB2969P_70421901

Control Tray Fuses

REF	PART NO.	DESCRIPTION	COMMENTS
1	70406701	Fuse	2 Amp
2	70406501	Fuse	1.25 Amp
3	70406601	Fuse	3.5 Amp
4	M413621	Fuse	.5 Amp
5	44155601	Fuse Holder	
6	70329401P	Fuse Holder Body	
	70329501	Fuse Holder Cap	
7	70313602	Fuse Bracket	Models with 380 Volts or higher
	70306901	Fuse Bracket	Models with less than 380 Volts

Control Tray Harnesses for Gas and Steam Models

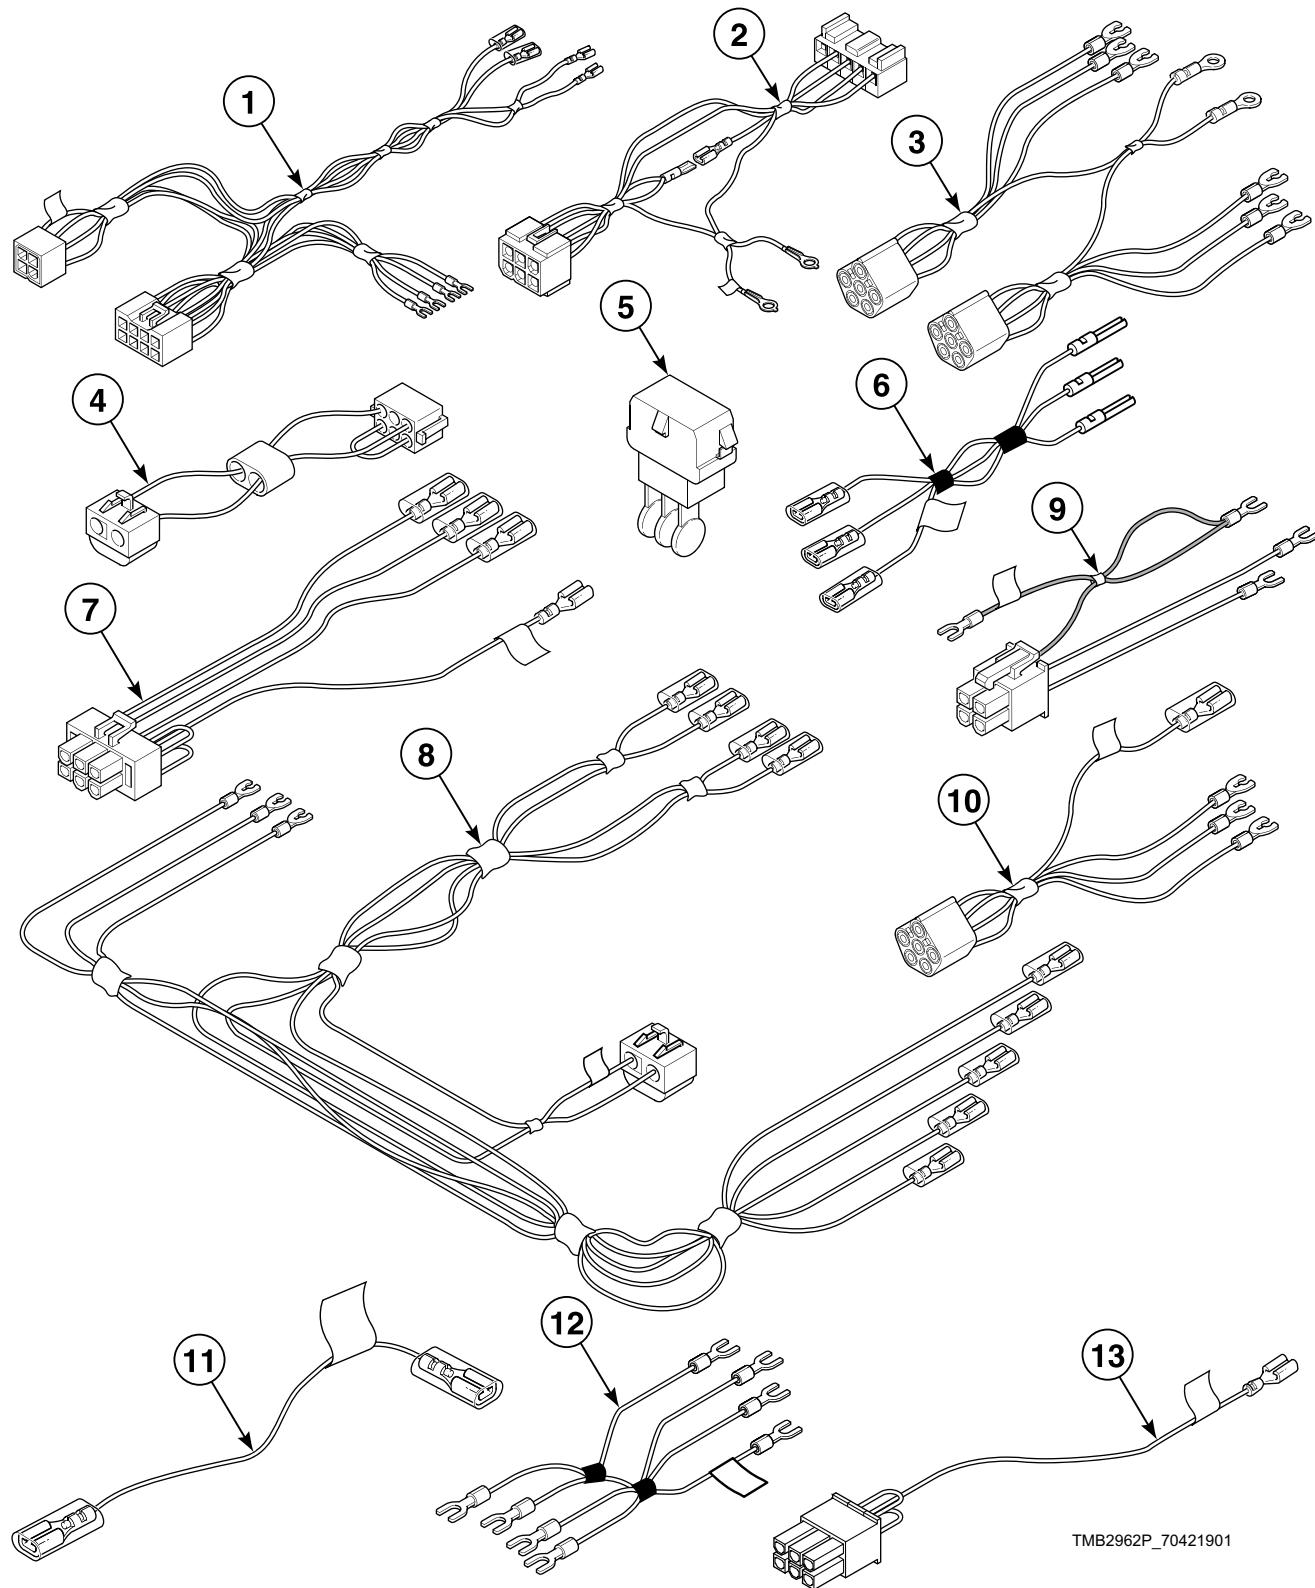


TMB2962P_70421901

Control Tray Harnesses for Gas and Steam Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	44136701P	Junction Box Harness	
2	44186701	Ignition Control Harness	Non-CE gas models
	44136601P	Ignition Control Harness	CE gas models
3	44139901P	Motor Contactor Harness	1 Phase; Reversing
	44142601P	Motor Contactor Harness	3 Phase; Reversing
4	M413506	Jumper Harness Assembly	208 Volt
	M413507	Jumper Configuration Assembly	240 Volt
	M413508	Jumper Harness Assembly	380 Volt
	M413510	Jumper Configuration Assembly	480 Volt
5	M413863	Network Capacitor Assembly	
6	70342101	Gas Disconnect Harness	CE models
7	44143401P	Network Capacitor Harness Assembly	
8	44136201P	Power Harness	3 Phase models with 380 Volts or higher
	44136301P	Power Harness	3 Phase models with less than 380 Volts
	44139801P	Power Harness	1 Phase
9	44139601P	Reversing Contactor Harness	
10	44137001P	Motor Contactor Harness	3 Phase
	44136401	Motor Contactor Harness	1 Phase
11	70389901	Steam Stove Limit Bypass Harness	Steam models
12	44157401	Reversing Contactor Jumper Wire	1 Phase; Upper
	44139501	Reversing Contactor Jumper	1 Phase; Lower
	44136801	Reversing Contactor Jumper Assembly	Upper
	44136901	Reversing Contactor Jumper Assembly	Lower
13	44142801	Steam Configuration Harness	Steam models

Control Tray Components for Gas Models

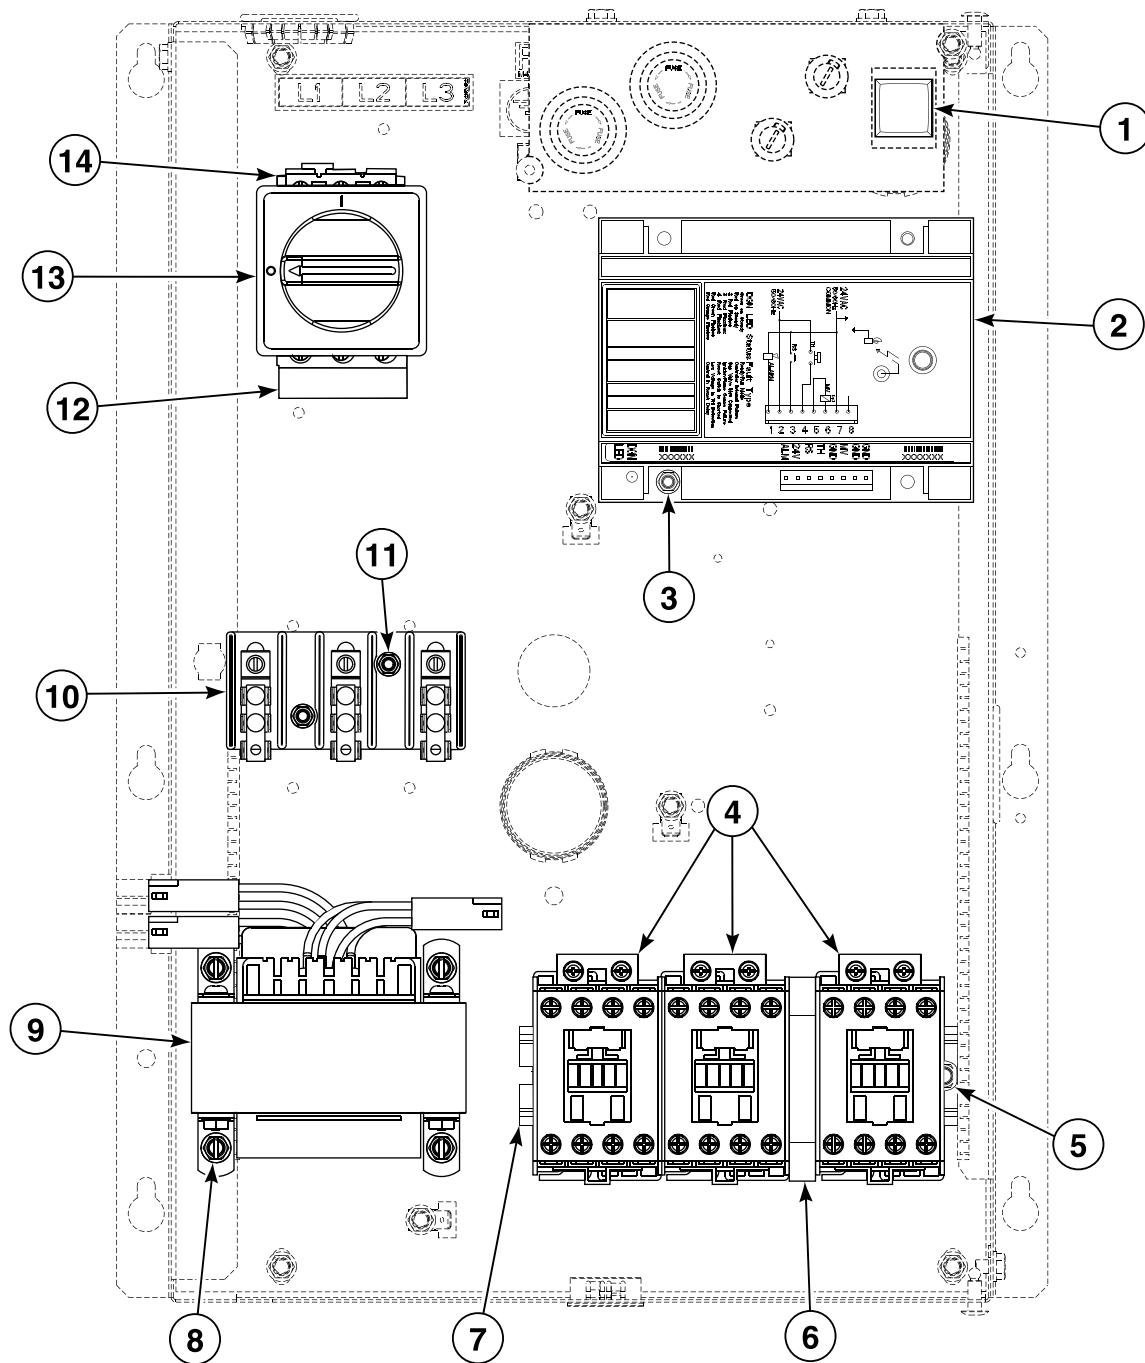


TMB2964P_70421901

Control Tray Components for Gas Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	M413431	Pushbutton Switch	CE and Australian models
2	70367301P	Ignition Control	Non-CE and non-Australian models
	70367401P	Ignition Control	CE and Australian models
3	38272	Screw	
4	70323701P	Contactor	Nonreversing 1 required, reversing 3 required
5	430497	Screw	2 required
6	F330186P	Interlock Contactor	Reversing
7	M412693	Din Rail	
8	M411072	Screw	4 required
9	M414228P	Transformer	Multitap; 100-240 Volt
	M414229P	Transformer	Multitap; 380-480 Volt
	44074401	Transformer	Dual secondary; 440 Volt
	M414230P	Transformer	Single secondary; 120 Volt
	M414312P	Transformer	Dual secondary; 120 Volt
10	430642	Terminal Block	Use 70333001 Terminal Block Shield to protect terminal block
11	44083001	Screw	2 required
12	M412366	Finger Guard	CE models
13	M412208	Handle	CE models; 44160701 Extension Handle attaches to operator handle; M412368 Interlock Door mounts under operator handle
14	M412187P	Mounting Switch Base	CE models; Use 51782 Screw to attach

Control Tray Components for Steam Models

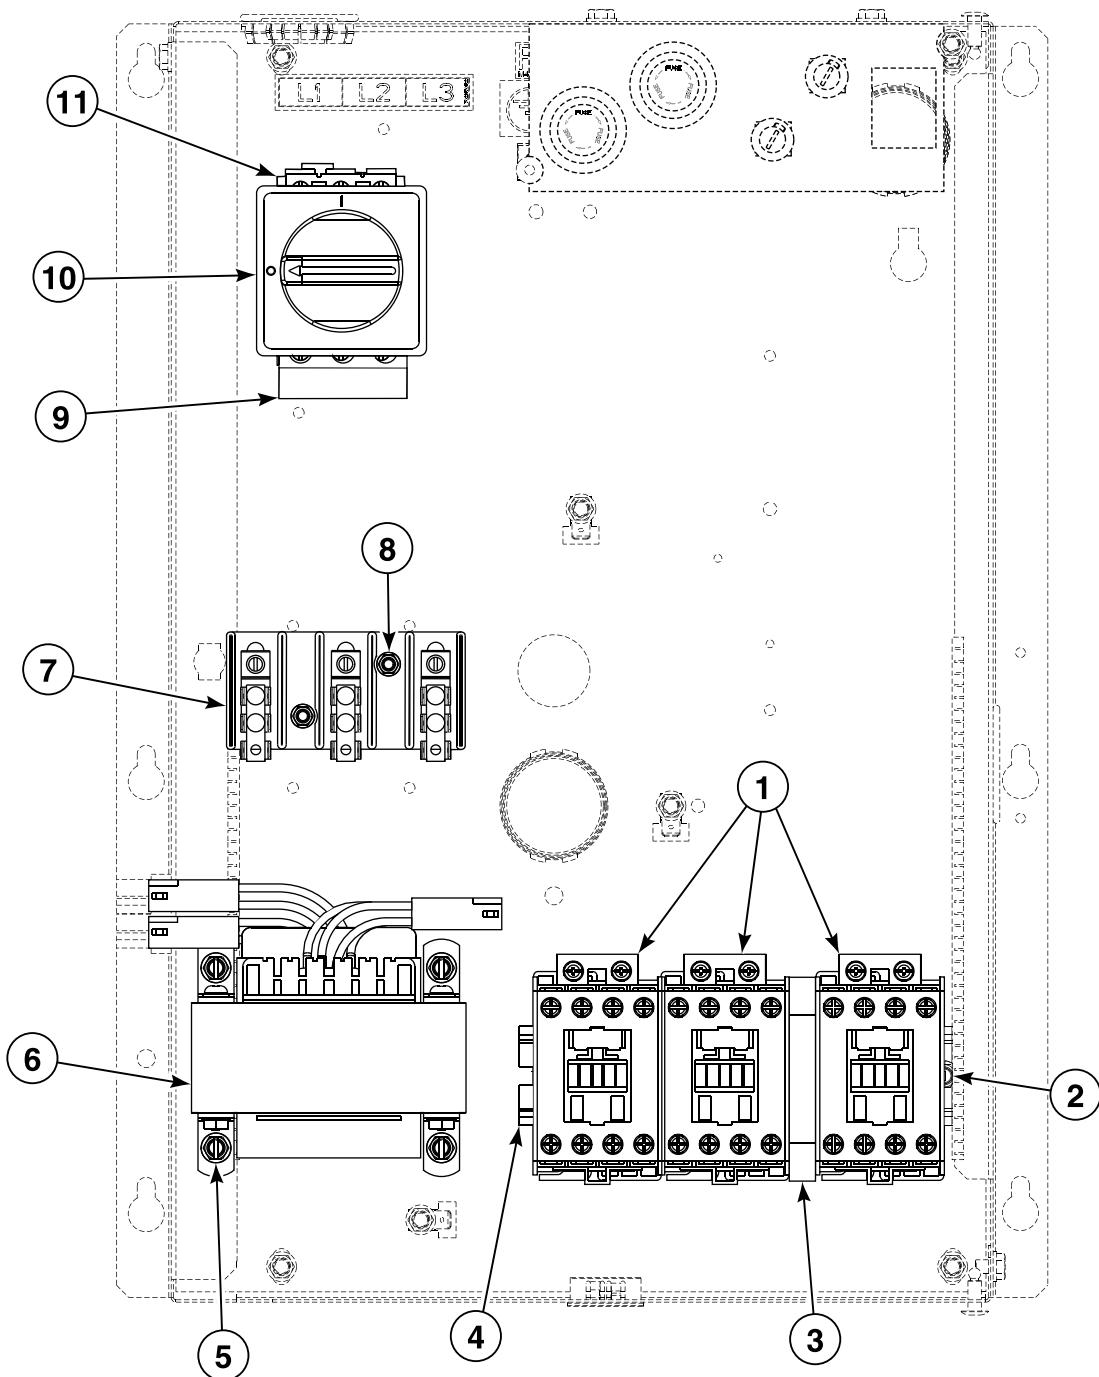


TMB2965P_70421901

Control Tray Components for Steam Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	70323701P	Contactor	Nonreversing 1 required, reversing 3 required
2	430497	Screw	2 required
3	F330186P	Interlock Contactor	Reversing
4	M412693	Din Rail	
5	M411072	Screw	4 required
6	M414228P	Transformer	Multitap; 100-240 Volt
	M414229P	Transformer	Multitap; 380-480 Volt
	44074401	Transformer	Dual secondary; 440 Volt
	M414230P	Transformer	Single secondary; 120 Volt
	M414312P	Transformer	Dual secondary; 120 Volt
7	430642	Terminal Block	Use 70333001 Terminal Block Shield to protect terminal block
8	44083001	Screw	2 required
9	M412366	Finger Guard	CE models
10	M412208	Handle	CE models; 44160701 Extension Handle attaches to operator handle; M412368 Interlock Door mounts under operator handle
11	M412187P	Mounting Switch Base	CE models; Use 51782 Screw to attach

Control Tray Harnesses for Electric Models

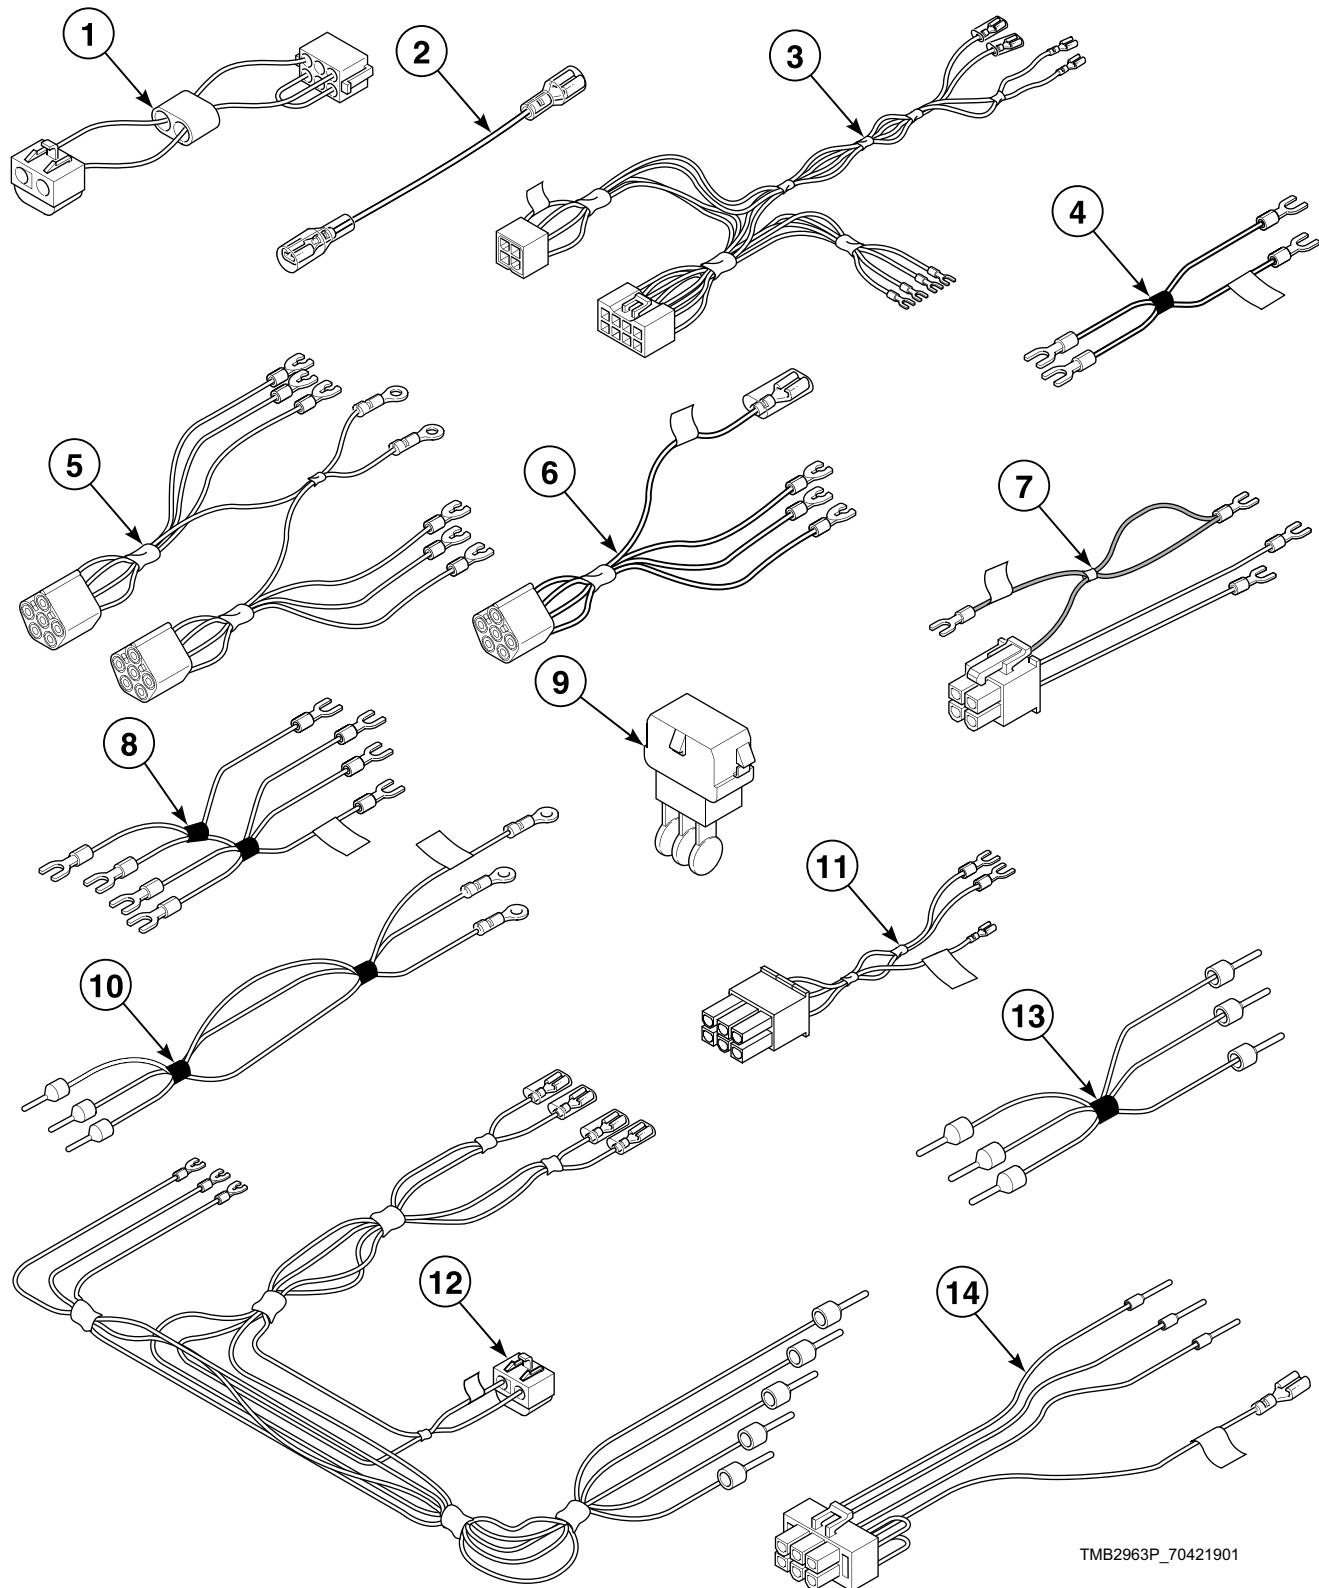


TMB2963P_70421901

Control Tray Harnesses for Electric Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	M413506	Jumper Harness Assembly	208 Volt
	M413507	Jumper Configuration Assembly	240 Volt
	M413508	Jumper Harness Assembly	380 Volt
	M413509	Jumper Harness Assembly	415 Volt
	M413510	Jumper Configuration Assembly	480 Volt
2	44014501	Jumper Wire	6 gauge; 4.5 inches
3	44136701P	Junction Box Harness	
4	70355801P	Electric Contactor Jumper Set Harness	
5	44139901P	Motor Contactor Harness	1 Phase; Reversing
	44142601P	Motor Contactor Harness	3 Phase; Reversing
6	44137001P	Motor Contactor Harness	3 Phase
	44136401	Motor Contactor Harness	1 Phase
7	44139601P	Reversing Contactor Harness	
8	44157401	Reversing Contactor Jumper Wire	1 Phase; Upper
	44139501	Reversing Contactor Jumper	1 Phase; Lower
	44136801	Reversing Contactor Jumper Assembly	Upper
	44136901	Reversing Contactor Jumper Assembly	Lower
9	M413863	Network Capacitor Assembly	
10	44151801P	Heater Cable Set	H1-H3
	44151901P	Heater Cable Set	H4-H6
11	44150701P	Electric Configuration Harness	
12	44150901	Power Harness	3 Phase models with less than 380 Volts
	44151001	Power Harness	3 Phase models with 380 Volts or higher
	44139801P	Power Harness	1 Phase
13	44151101	Cable Set	CB1 Power; CE models
	44151201	Cable Set Assembly	CB2 Power; CE models
	44151301	Cable Set Assembly	CB3 Power; CE models
	44151401	Cable Set Assembly	CB2 to HC2
	44151601	Cable Set	PDB to HC1
	44151701	Cable Set	PDB to HC2
	44155301	Cable Set Assembly	CB3 to HC1
14	44152001	Network Capacitor Harness Assembly	

Control Tray Components for Non-CE Electric Models

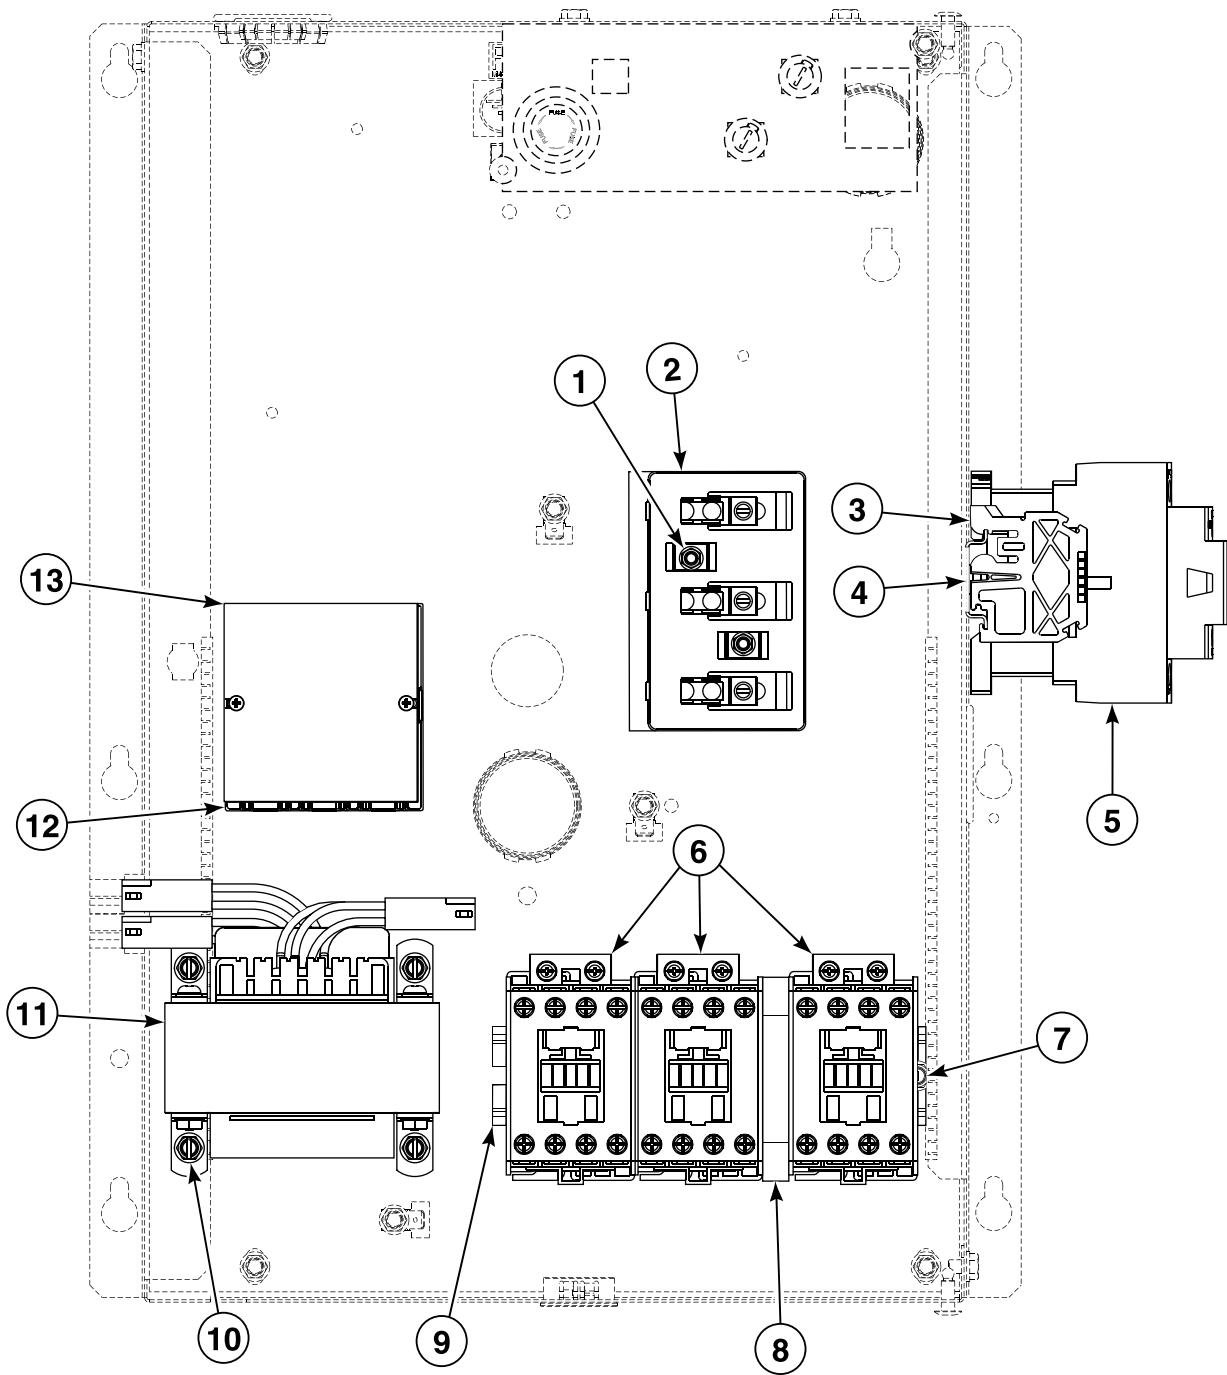


TMB2966P_70421901

Control Tray Components for Non-CE Electric Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	44083001	Screw	240 Volt/50 Hertz/1 Phase; 2 required
2	430642	Terminal Block	240 Volt/50 Hertz/1 Phase; Use 70333001 Terminal Block Shield to protect terminal block
3	70121001	End Stop	2 required
4	M412690	Din Rail	
5	70343301P	Contactor	Models with 380 Volts or higher 1 required; models with less than 380 Volts 2 required
6	70323701P	Contactor	Nonreversing 1 required; reversing 3 required
7	430497	Screw	2 required
8	F330186P	Interlock Contactor	Reversing
9	M412693	Din Rail	
10	M411072	Screw	4 required
11	M414228P	Transformer	Multitap; 100-240 Volt
	M414229P	Transformer	Multitap; 380-480 Volt
	44074401	Transformer	Dual secondary; 440 Volt
12	M413865	Terminal Block	Use 39733 Screw to attach
13	44014901P	Power Distribution Block Cover	Mounts over top of item 12 for protection

Control Tray Components for CE Electric Models

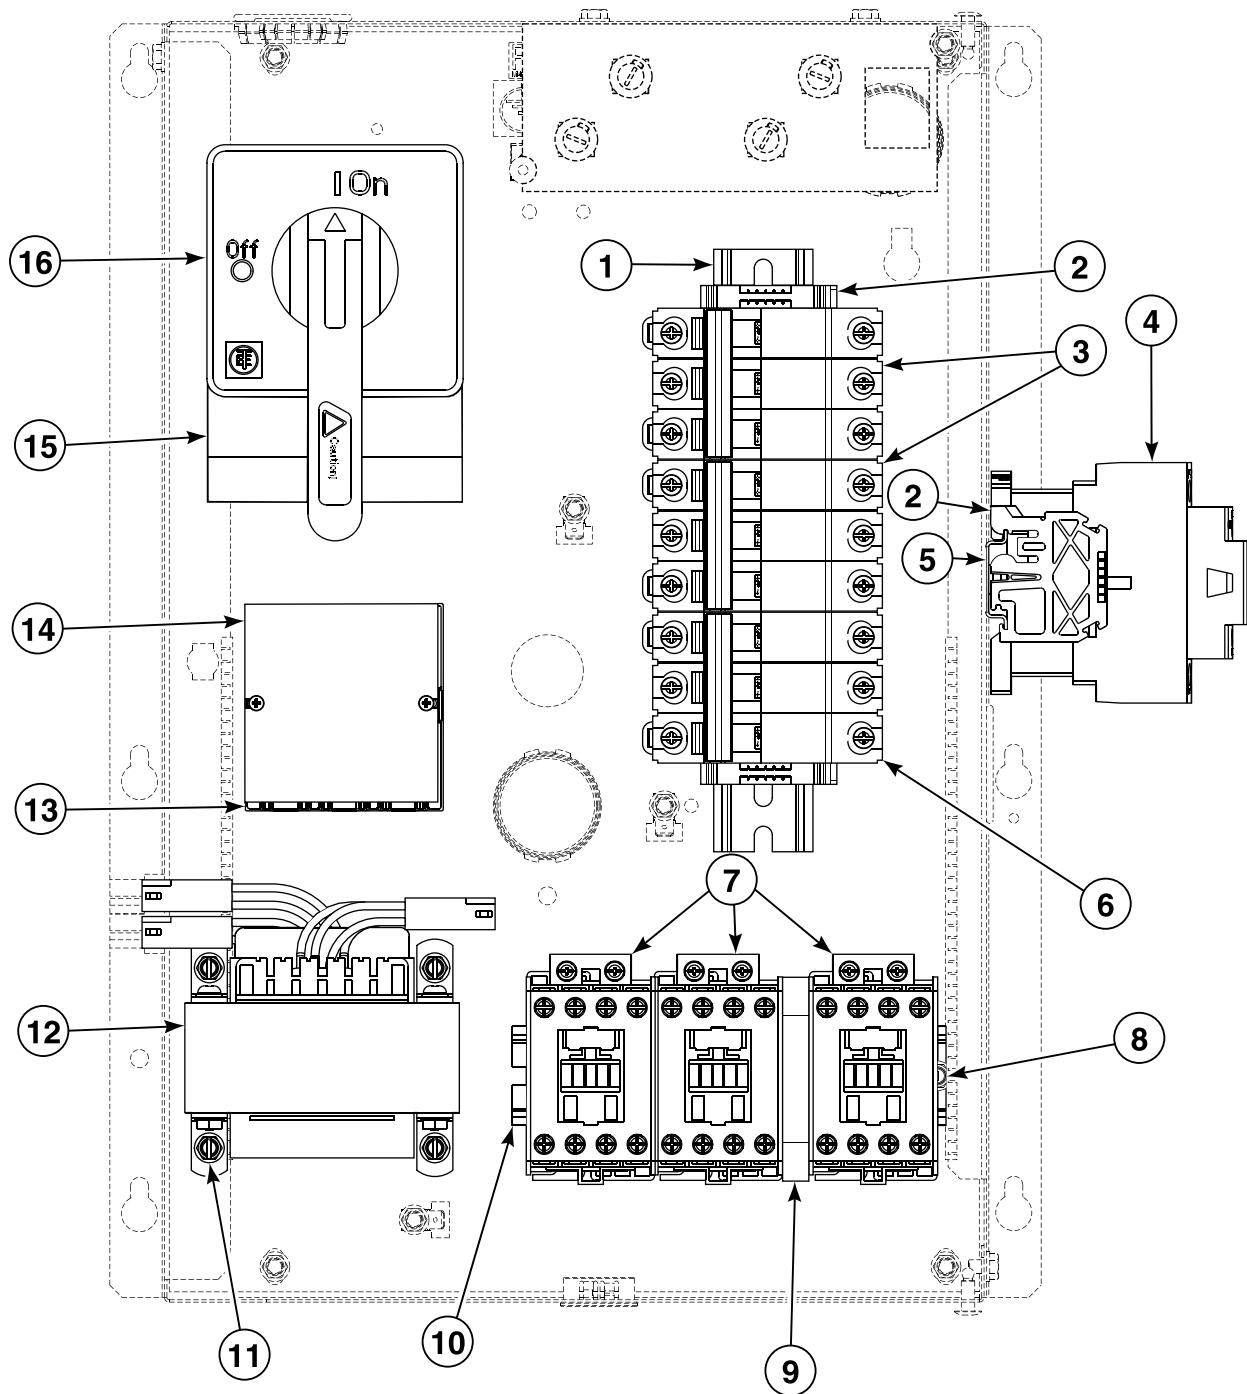

TMB2967P_70421901

Control Tray Components for CE Electric Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	N/A	Din Rail	Use 2 of 430497 Screw to attach
2	70121001	End Stop	3 required
3	M412408P	Circuit Breaker	2 required for 230 Volt/50 Hertz/3 Phase
4	70343301P	Contactor	Models with 380 Volts or higher 1 required; models with less than 380 Volts 2 required
5	M412690	Din Rail	Use 2 of 430497 Screw to attach
6	M412407P	Circuit Breaker	
7	70323701P	Contactor	Nonreversing 1 required; reversing 3 required
8	430497	Screw	2 required
9	F330186P	Interlock Contactor	Reversing
10	M412693	Din Rail	Use 2 of 430497 Screw to attach
11	M411072	Screw	4 required
12	M414228P	Transformer	Multitap; 100-240 Volt
	M414229P	Transformer	Multitap; 380-480 Volt
	44074401	Transformer	Dual secondary; 440 Volt
13	M413865	Terminal Block	Use 39733 Screw to attach
14	44014901P	Power Distribution Block Cover	Mounts over top of item 13 for protection
15	M412367	Finger Guard	
16	70268001	Handle	44160801 Extension Handle attaches to operator handle; M412369 Interlock Door mounts under operator handle; Whole assembly mounts to M412186 Mounting Base which is attached with 2 of 33562 Screw

N/A = Part no longer available

Notes

Parts Index

A

Adjustable Buzzer 505447	21
Air Filter 44104201	93
Airflow Switch and Arm Bracket 70319601	91
Airflow Switch Arm 70319401	91
Airflow Switch Assembly 44142901	91
Airflow Switch Vane 70319202	91

B

Baffle 44005001P	63
44005301P	63
44065601P	63
Baffle Gasket 70015701	63
Ball Bearing M401375P	75
44041901P	67
Base Harness Assembly 44137501P	57
Bearing F100136P	67
Bearing Retainer M401370	75
Belt M401182P	73
M412090	71
M412981	71
Belt Guard M413008	79
M413541	69
Belt Guard Assembly 44132404	71
44132405	73
44132407	71
Belt Tension Tool Kit M4853P3	69, 71, 73
Blower 44127401P	79
Blower Cover M413399	83
Blower Inlet Cone 70014101	61
Bolt M400650	67
M401393	71, 79
Bracket 44065901	15
Bumper M400795	97

Burner Assembly M410541	85
Burner Orifice M400997	87
M400999	87
M401000	87
M401001	87
M401002	87
M401011	87
M401014	87
M401015	87
M401017	87
M401021	87
M401027	87
M402489	87
M402980	87
M402996	87
M403017	87
M406184	87
M406361	87

Burner Support 44110301	85
----------------------------------	----

Bushing H87529111P	83
M412086P	71
M412885P	71
M412917P	71

Bypass Harness 70364103	51
----------------------------------	----

C

Cable Set 44151101	111
44151601	111
44151701	111
Cable Set Assembly 44151201	111
44151301	111
44151401	111
44155301	111
Cam and Hinge Kit M4772P3	65
M4773P3	65
Card Reader and Bracket Assembly 510068P	29
Card Reader Overlay 70334201	29, 31
70334301	29, 31
Circuit Board Support 501523	15
Circuit Breaker M412407P	115
M412408P	115
Clip M400974	93
Coin Chute Assembly 70296401	63
Coin Cover Overlay 70246301	27, 29
Coin Drop 38479P	33

N/A items do not appear in index.

38963P	33
39748	33
70256402P	33
70429001	33
Coin Drop Assembly	
200578P	33
210195	33
210196	33
38462P	33
38463	33
38464P	33
38467	33
38472	33
38475	33
38519	33
38521	33
39157	33
44039701P	33
44039702	33
44039703	33
44039704	33
44039705	33
44039706	33
44039707	33
70281102	33
70283102	33
70447301	33
Coin Drop Kit	
CK077	33
Coin Drop Overlay	
39564	27
Coin Drop Overlay Kit	
70321201	27
Coin Identification Paper	
38725	33
Coin Vault Assembly	
70180101	63
Coin Vault Switch Harness	
70364104P	51
Coin Vault Trim	
70117501	51
70117502	51
Communication Board	
210095P	47
Communication Connector	
210099	47
Communication Wire Harness Assembly	
800246	45
Cone Plate	
44150201	61
Contact Block Switch	
F200233401	49
Contact Switch	
F8069501	49
Contactor	
70323701P	107, 109, 113, 115
70343301P	113, 115
Contactor Box Base	
44133701	101
Contactor Box Cover	
44134001	101
44134002	101
44134003	101
Contactor Box Side	
44158901	101
44159001	101
Control	
44063801P	15
Control Assembly	
44013601P	25
511867P	27, 29
512202P	19
513139P	17
70402019P	23
70402020P	23
70402021P	23
70402022P	23
70402023P	23
70402024P	23
70402108P	23
70402120P	23
70402121P	23
Control Box Assembly	
44180101	13
Control Box Base	
44065301	15
Control Box Cover	
44065201	15
Control Box Housing	
44065101	15
Control Box Top	
44065401	15
Control Chassis Mounting Bracket	
70357901	17, 19
Control Conversion Kit	
M4797P3	21
Control Door Assembly	
70363401	17
Control Door Latch	
431318	63
Control Harness	
44100101P	19
Control Harness Assembly	
44141601P	15
Control Housing Cover	
70307001	13
70307002	13, 45
Control Kit	
505905P	37, 39
512858P	41, 43
70228401P	25
Control Overlay	
44194801	41
70410001	41
70410002	41
70449501	41
Control Panel	
44000117BP	53
44000117*P	53
44000118P	53
4404001*P	53
44040002	53
44040003*	53
44040004	53
44040005*	53
44040006	53
Control Panel Harness	
70315601P	23
70335301P	25
70341901P	21
70342001P	21
70358701	29

N/A items do not appear in index.

70367001P.....	19
70368001P.....	37, 39
70369001	17
70382701P.....	25
70398401	17
70410401P.....	41, 43
70429101P.....	27, 29
70429201P.....	27
Control Panel Harness Assembly	
70315701	23
70341801P.....	21
Control Plate Assembly	
44040901	21
44041001	21
70175805	25
70348801	29, 31, 39, 43
70360601	19
70419701	37
Control Plate Kit	
44050701P.....	23
70291001P.....	27, 29, 37, 41
Control Trim	
44016301	51
44016401	51
Cover Plate	
M401362	79
Cylinder and Trunnion Assembly	
44057501P.....	67
44057502	67
44057503P.....	67
44057504	67
44080001	67
44131302	67
44131402	67
Cylinder Assembly	
44079901P.....	67
44130701	67
Cylinder Kit	
44057201P.....	67
44057301P.....	67
Cylinder Motor Harness	
44137101P.....	69
44139701P.....	69
Cylinder, Trunnion and Bearing Housing Kit	
M4818P3.....	67
<hr/>	
D	
Deflector Cover	
44162301	61
Din Rail	
M412690	113, 115
M412693	107, 109, 113, 115
Display Assembly	
512218P.....	19
Door Assembly	
44028902P.....	65
44029101	65
44058102P.....	65
44112101	65
70407401	65
Door Glass	
44008401P.....	65
44008402P.....	65
Door Glass Installation Tool	
M4221P4	65
Door Handle	
44007901	65
44057702	65
Door Hinge Assembly	
44075203*	65
44075204	65
44075208B	65
Door Hinge Lug Assembly	
44035001	51, 65
44035002	65
Door Latch	
M401223	51
Door Ring	
44007703B	65
Door Ring and Handle Assembly	
44112001	65
Door Ring Assembly	
44007702	65
Door Ring Gasket	
44008201P	65
Door Seal Kit	
70211902P	65
Door Switch Actuator Kit	
70215001P	65
Door Switch Harness	
44137601	51
Double V Sheave	
M412916	71
Drive Rivet	
M400713	15
Drum Idler Wheel Assembly	
430619	77
<hr/>	
E	
Earth Terminal Sticker	
M412096	101
Elbow	
70079601	85
Electric Accessory Box Cover	
44154901	89
Electric Accessory Box Wrap	
44154701	89
Electric Configuration Harness	
44150701P	111
Electric Contactor Jumper Set Harness	
70355801P	111
Electronic Coin Drop Assembly	
70294101P	33
70294103P	33
70294104	33
70294105P	33
70294106	33
70294107	33
70294109	33
70294111	33
Electronic Coin Drop Harness	
44065801	33
Electronic Coin Drop Kit	
CK095	35
CK099	35

N/A items do not appear in index.

CK100	35
CK101	35
CK103	35
CK106	35
CK108	35
CK109	35
CK502	35
Electronic Control 44037801P.....	21
Emergency Stop Contact Harness 70364105P.....	49
Emergency Stop Harness 70364106P.....	49
Emergency Stop Label M412235	49
44012901	49
Emergency Stop Pushbutton F200233500.....	49
End Stop 70121001	113, 115
Exhaust Thimble M413173	97
Exhaust Thimble Assembly M412288	97
Expansion Clip 70030501	51, 101
Extension Spring M412120	73

Front Pillar 44001201	57
Fuse M413621	103
70406501	25, 103
70406601	103
70406701	103
Fuse Bracket 70306901	103
70313602	103
Fuse Cover 70313301	101
Fuse Holder 44155601	103
Fuse Holder Body 70329401P	103
Fuse Holder Cap 70329501	103
Fuse Label 70337201	101
70337301	101
70337401	101

F

Fan and Bushing Assembly M414546	83
Fan Motor 44045901P.....	81
44046001P.....	81
Fan Motor Harness 44137201P.....	79
44169901	79, 83
Felt Pad M402144	67
Ferrite Core Assembly M413930P	25
Fill Hose Kit 28330P.....	15
Filter 44172001	93
Finger Guard M412366	107, 109
M412367	115
Fire Suppression System Label 44128901	55
Foam Gasket 70414101	17, 19, 21, 23, 25, 27, 29, 31, 37, 39, 41, 43
Front Panel 44052507W.....	55
Front Panel Assembly 44077901*P	55
44077902P.....	55
44077903*	55
44077904P.....	55
44077905*P	55

N/A items do not appear in index.

G

Gas Disconnect Harness 70342101	105
Gas Stove Assembly 44135601	85
Gas Valve M413469P	85
44154501P	85
44154502P	85
44178301P	85
44178302P	85
44181601P	85
44181602	85
Gas Valve Bracket 44175701	85
Gas Valve Harness Assembly M413650	85
Graphic Overlay 44050401	23
44050501	23
44050502	23
Ground Decal F230739	101
Ground Lug Connector M411283	101
Guide Rail M412476	71, 73, 77
Guide Rail Spacer M413269	71
Guide Rail Support M413267	71
M413268	71

H

Handle	
M412208	107, 109
70268001	115
Handle and Caps Assembly	
70154405	59
70154406	59
Handle Bar	
70399501B.....	65
Handle Bumper	
70407202	59
Harness Assembly	
M412997	85, 93
Heater Box Cover	
44153301	89
Heater Cable Set	
44151801P.....	111
44151901P.....	111
Heater Element	
M410939P.....	89
M410940P.....	89
M410941P.....	89
Heater Side	
44154801	89
High Temperature Lead	
44061603	85
Hold-Down Clip	
35865	61
Hole Plug	
F8223801	101
Hose	
44073301	15
Hose Clamp	
36801	15
Hose Fitting	
44069101	15
Housing and Trunnion Assembly	
M4644P3.....	67
M4645P3.....	67

I

Idler Housing	
M412612	75
Idler Housing Kit	
917P3.....	75
943P3P	77
Idler Shaft	
M414241	75
Idler/Belt Assembly Kit	
942P3P	77
Ignition Control	
70367301P.....	107
70367401P.....	107
Ignition Control Harness	
44136601P.....	105
44186701	105
Insulation	
44020601	53
Interlock Contactor	
F330186P	107, 109, 113, 115

J

Jumper Bar	
M400866	89
Jumper Calibration Wire	
70084304	25
70084305	25
70324604	17, 19, 23, 27, 29, 37, 41, 43
Jumper Configuration Assembly	
M413507	105, 111
M413510	105, 111
Jumper Harness Assembly	
M413506	105, 111
M413508	105, 111
M413509	111
Jumper Set Assembly	
44042701	21
44042801	21
Jumper Strip	
M400869	89
Jumper Wire	
44014501	111
Jumper Wire Assembly	
M412287	89
Junction Box Harness	
44136701P	105, 111

K

Key	
H8752006H	83
M400008	67, 73
M400993	75, 79
M400994	79
M401327	73, 75, 77
M405232	67
44132301	79
70155601	15, 51
70155602	51
Kickplate	
70117607	59
70117608	59

L

Label	
70414001	55
Latch Mounting Bracket	
44003201	63
Light	
801431	17
801432	15
Limit Thermostat	
M401404	85
M409433	89
M410220	85
M410542	61
M411813	61
Lint Clip Bracket	
44140201	61
Lint Panel	
44000001*P	59

N/A items do not appear in index.

440000002P.....	59
Lint Panel Switch Bracket 44118601	57
Lint Screen 44063601	61
Lint Screen Deflector 44162201	61
Loading Spring M400401	75
Lock, Key and Nut Kit 44089301P.....	15, 51
44089302P.....	51
Low Pressure Steam Cover M400828	93
L.P. Conversion Kit M4454P3.....	85
M4545P3.....	85
M4609P3.....	85
L.P. Gas Valve Kit M4897P3.....	85

M

Main Harness 44137401P.....	13
Male Tab Terminal 00177	17, 19, 21, 101
Manifold Pipe 44040501	85
Manifold Pipe Assembly M406681	85
Manual Reset Thermostat M411941	61
M411943	85
Membrane Switch 44037902P.....	21
44039402P.....	21
Micro V Belt M411425P.....	73
Micro V Pulley M411466P.....	77
Micro V Sheave M412156.....	73
Mixing Valve 36958P.....	15
Motor 44045701P.....	81
44046201P.....	81
44046301P.....	83
44048601P.....	81
44048801P.....	81
Motor Base M413391	83
Motor Bracket 44117201	71, 73, 79
Motor Contactor Harness 44136401	105, 111
44137001P.....	105, 111
44139901P.....	105, 111
44142601P.....	105, 111
Motor Hardware Kit M4426P3.....	79

N/A items do not appear in index.

Motor Kit M412519P	69
M412520P	69
Motor Mount Assembly M413617	69
Motor Switch M414563	69
Mounting Plate 70208801	29, 31, 39, 43
Mounting Switch Base M412187P	107, 109

N

Nameplate 44010401	53
44010601	53
44046801	53
44062901	53
70243901	53
Nameplate Overlay M412963	53
44130601	53
44144401	65
70304501	53
70380701	53
70410201	53
70411401	65
Network Board Assembly 201341	45, 47
Network Board Bracket 44143601	47
Network Board Cover 44143701	47
Network Capacitor Assembly M413863	105, 111
Network Capacitor Harness Assembly 44143401P	105
44152001	111
Network Controller Kit NK220	41, 43
Network Harness 44141801P	45
Network Retrofit Kit NK208	41, 43
Network Wire Harness Assembly 44088501P	45
Nut F430232	101
H88412101	71, 73, 77
M400022	79
M400026	67, 71, 73
M400034	79
M400035	73
M400977	51
M401548	85
M404993	67
M412986	69
M414215	65
02428	69, 71, 79, 83
20274	71, 79, 83
21899	63
23951	59, 65
24205	17, 19
29786	17, 23, 27, 41

29787	21, 23
44071201	65
44087201	77
51236	59
56156	77
70030401	63
70054	17, 19, 21, 25, 29, 31, 37, 89
70142	69

O

Opto Coupler 200674P	33
Overlay 44130001	25
44130002	25
44144301	37
44144302	37
44147801	37
44149301	39
70115801	25
70128401	25
70128601	25
70128701	25
70129501	27
70129601	27
70130301	25
70130401	25
70130501	25
70130601	25
70130701	25
70135301	25
70257701	27
70257702	27
70257703	29, 31
70258001	27
70258002	27
70258003	29, 31
70259001	27, 29
70261001	27
70261002	27
70261003	29
70261201	27
70261202	27
70266701	29
70266801	29
70275401	27
70286701	27
70321001	27
70362201	19
70362202	19
70362401	19
70362402	19
70362501	19
70362502	19
70362901	17
70363001	17
70410003	43
70453001	27
70453002	27
70453101	29, 31

P

Panel Locator 56079	51, 59
------------------------------	--------

PC Board Standoff 210098	47
Pipe Bracket 44175801	101
Pipe Clamp 44155201	85
Pipe Nipple 431486	85
70210201	85
Plug M400985	101
Pop Rivet M400003	51, 63
70058501	65, 101
70058502	101
70126301	59, 65
70126401	59
Porcelain Touch-Up Paint 122P4P	63
370P4P	63
Power Distribution Block Cover 44014901P	113, 115
Power Harness 44136201P	105
44136301P	105
44139801P	105, 111
44150901	111
44151001	111
Proximity Bracket 44044501	95
Pulley M412884	71
M414564	79
M414565	69
M414566	79
M414567	69
Pushbutton Switch M413431	107
70107001	27, 29, 31, 37, 39, 41, 43, 51, 57
Push-to-Start Switch 801434W	15

R

Rear Access Plate 44135201	85
Rear Panel Assembly 44171201	63, 91, 99
44171301	63, 91, 99
Reducer M413453	85
Relay/Buzzer Bracket 44041701	21
Resilient Ring Kit M4525P3P	79
Reversing Contactor Harness 44139601P	105, 111
Reversing Contactor Jumper 44139501	105, 111
Reversing Contactor Jumper Assembly 44136801	105, 111
44136901	105, 111
Reversing Contactor Jumper Wire 44157401	105, 111

N/A items do not appear in index.

Rib Rod		65
M404992	67	
Ring		15
M400399	73, 77	
Rocker Switch		51
44099601	19	
70360801	19	
70365901	17, 19	
Roller Catch Arm		73, 77
70030301	59	
Roller Catch Spacer		71
70030201	59	
Roller Catch Wheel		23
70297601	59	
Rotation Sensor		31, 43
70274001P	95	
Rotation Sensor Assembly		93
70417401P	95	
Rotation Sensor Cable Assembly		93
70274102P	95	
S		
Screw		
F430909	101	
F8206901	101	
H8800901H	83	
M400043	71, 73, 77	
M400044	65	
M400056	69, 77	
M400057	69, 71, 79, 83	
M400061	71, 73	
M400063	67	
M400065	73, 77	
M400077	77, 79	
M400661	65	
M402797	85	
M405188	93, 97	
M405525	71	
M410059	79	
M411072	51, 97, 107, 109, 113, 115	
M412627	71, 73, 77	
M413565	69	
22688	83	
33562	89, 93	
38272	107	
430497	15, 45, 57, 61, 79, 89, 91, 93, 107, 109, 113, 115	
430648	77	
430757	59, 91	
431287	63	
44083001	107, 109, 113	
501524	17, 19, 27, 29, 31, 37, 39, 41, 43	
51780	15	
56693	85	
61199	65	
70033502	51, 65	
70069901	17, 19, 25	
70072801	59	
70132301	59	
70182601	51	
70187201	67, 75	
70240301	85, 89	
70247701	63	
70275801	51	
70407301	65	
Sensor Harness Assembly		
44141701P	15	
Shadow Box Clip		
M400972	51	
Sheave		
M400092P	73, 77	
Side Panel and Bracket Assembly		
44056702*	63	
44056802*	63	
Single V Sheave		
M412931	71	
Sleeve		
44050601	23	
Slot Card Plate Assembly		
44089501	31, 43	
Snap Bushing		
M400770	45, 57	
M405340	101	
M411826	57	
44071501	101	
70178701	15, 101	
Solenoid Valve DIN Connector		
70370301P	93	
Spacer		
M401402	67	
44024001	71	
Spark Igniter		
M406934P	85	
Spray Paint		
298P4P	63	
Spud Holder Assembly		
M406810	85	
Steam Coil		
M400637P	93	
Steam Configuration Harness		
44142801	105	
Steam Heater Assembly		
44020401P	93	
Steam Pressure Label		
902303	93	
Steam Solenoid		
70351011P	93	
70351012	93	
Steam Stand Box		
44007501	93	
Steam Stove Limit Bypass Harness		
70389901	105	
Steam Valve		
70351001P	93	
70351002P	93	
Steam Valve Rebuild Kit		
70351021P	93	
Switch		
70411901	91	
Switch Bracket		
70356301	85, 89, 91	
Switch Hole Plug		
44057801B	51	
44057801Q	51	
44057801W	51	
Switch Plate		
M413236	19	

N/A items do not appear in index.

T

Temperature Knob	
44104601	17, 19
Temperature Selector Bracket	
70350201	17
Temperature Selector Switch	
511711	17, 19
Temperature Selector Switch Bracket	
70391701	19
Tension Plate Assembly	
M414405	71, 73, 77
Terminal Block	
M413865	113, 115
430642	107, 109, 113
Thermistor	
M414704	61
44064701	15
Thimble Vane Assembly	
M400503	97
M413382	97
Top Cover	
M414760	93
44138801	63
Top Cover Pan	
44129301P	63
Top Panel Bracket	
44129401	63
Top Rear Panel	
44170501	63
44176201	63
Transformer	
M414228P	107, 109, 113, 115
M414229P	107, 109, 113, 115
M414230P	107, 109
M414312P	107, 109
44074401	107, 109, 113, 115
Trunnion and Bearing Assembly	
M4640P3	67
M4641P3	67
Trunnion Assembly	
M413836	67
Trunnion Housing	
M413826	67
Trunnion Housing Assembly	
M413832	67
Trunnion Kit	
M413835P	67
Tumbler Dolly Kit	
M4379P4	51

V

Valve Replacement Kit	
M4908P3	85
M4909P3	85

W

Warning Label	
M410892	55

Washer

M400013	69, 71, 79, 83
M400014	71, 73, 79, 83
M400080	69, 71, 73, 77, 79, 83
M400991	79
M403958	71, 73, 77
M412188	71, 73, 77
02834	69
20103	67
70261401	67
70265901	77
70270301	77
70409301	65
91200	67
Wire Guard	
201595P	33
Wire Label	
70218701	101
70218801	101
70219001	101

N/A items do not appear in index.

Notes