


# Washer-Extractor

Cabinet Hardmount

Refer to Page 3 for Model Numbers

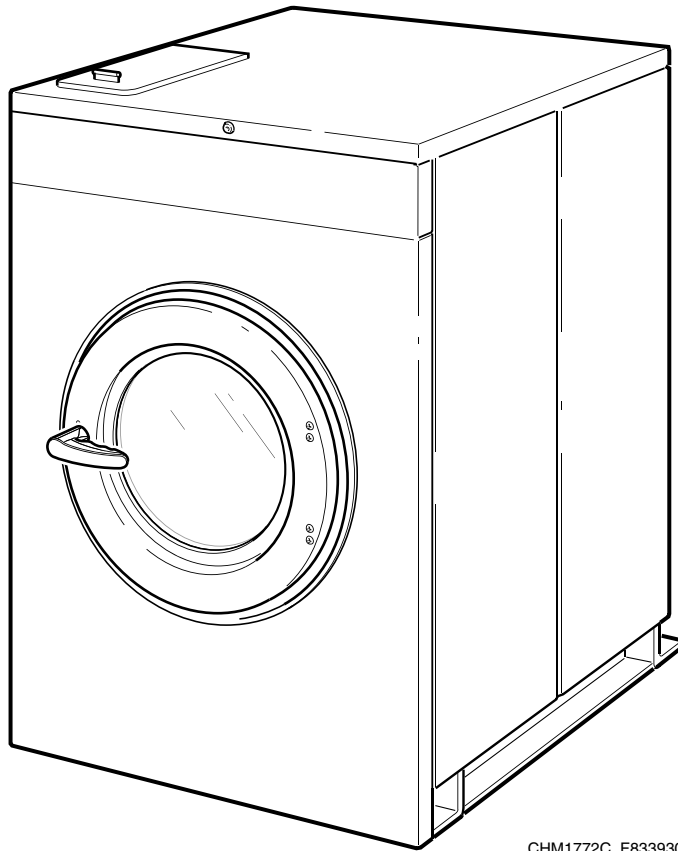

CHM1772C\_F8339301



# Table of Contents

| Title                                                                                         | Page |
|-----------------------------------------------------------------------------------------------|------|
| Parts Ordering Information.....                                                               | 2    |
| Nameplate Location .....                                                                      | 2    |
| Model Identification .....                                                                    | 3    |
| Product Overview - M4, M30, Galaxy 400, Galaxy 600, Quantum Standard and Quantum Silver ..... | 4    |
| Product Overview - M9, Galaxy 200 and Quantum Gold .....                                      | 6    |
| Decals .....                                                                                  | 8    |
| Control Module - 2 Speed OPL Models .....                                                     | 10   |
| Control Module - F-Speed OPL Models .....                                                     | 12   |
| Control Module - 2 Speed Coin Models .....                                                    | 14   |
| Control Module - F-Speed Coin Models .....                                                    | 16   |
| Flush Mount Coin Meter Assembly (Drawing 1 of 2).....                                         | 18   |
| Flush Mount Coin Meter Assembly (Drawing 2 of 2).....                                         | 20   |
| Electronic Coin Meter Assembly .....                                                          | 22   |
| Card Reader - GY Models .....                                                                 | 24   |
| Optional Coin Box .....                                                                       | 26   |
| Rocker Switch, Temperature Knob and Emergency Stop Button - GN Models .....                   | 28   |
| Front Panels and Control Panel - Coin Models .....                                            | 30   |
| Front Panel and Control Panel - GN and GY Models .....                                        | 32   |
| Control Panel Overlays .....                                                                  | 34   |
| Panels (Drawing 1 of 2) .....                                                                 | 36   |
| Panels (Drawing 2 of 2) .....                                                                 | 38   |
| Door .....                                                                                    | 40   |
| Door Lock.....                                                                                | 42   |
| Basket, Shell, Frame and Trunnion (Drawing 1 of 3).....                                       | 44   |
| Basket, Shell, Frame and Trunnion (Drawing 2 of 3).....                                       | 46   |
| Basket, Shell, Frame and Trunnion (Drawing 3 of 3).....                                       | 48   |
| Drain Plumbing .....                                                                          | 50   |
| Drain Valve Assembly - 20 and 30 Pound Models.....                                            | 52   |
| Drain Valve Assembly - 40 and 60 Pound Models.....                                            | 54   |
| Filter (Optional) and Water Supply Hose .....                                                 | 56   |
| Fill Plumbing Assembly (Drawing 1 of 2) .....                                                 | 58   |
| Fill Plumbing Assembly (Drawing 2 of 2) .....                                                 | 60   |
| Pulley and Belt (Drawing 1 of 3) .....                                                        | 62   |
| Pulley and Belt (Drawing 2 of 3) .....                                                        | 64   |
| Pulley and Belt (Drawing 3 of 3) .....                                                        | 66   |
| Motor and Capacitors.....                                                                     | 68   |
| Electric Heat Option .....                                                                    | 70   |
| Steam Heat Option .....                                                                       | 72   |
| Parts Index.....                                                                              | 75   |

© Copyright 2011, Alliance Laundry Systems LLC

All rights reserved. No part of the contents of this book may be reproduced or transmitted in any form or by any means without the expressed written consent of the publisher.

## Parts Ordering Information


If literature or replacement parts are required, contact the source from whom the machine was purchased or contact Alliance Laundry Systems at (920) 748-3950 for the name and address of the nearest authorized parts distributor.

For technical assistance, call either of the numbers listed below:

(920) 748-3121 Ripon, Wisconsin  
+32 56 41 20 54 Wevelgem, Belgium

## Nameplate Location

When calling or writing about your product, be sure to mention model and serial numbers. Model and serial numbers are located on nameplate(s) as shown.

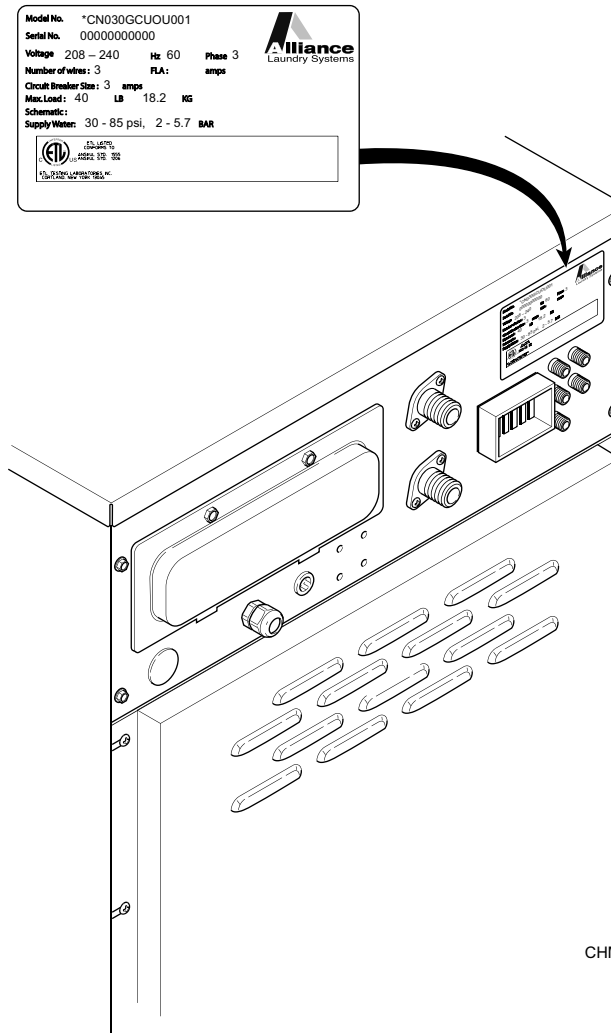



CHM3025P\_F8339301

## Model Identification


Information in this manual is applicable to these washer-extractor models:

|           |           |           |           |           |
|-----------|-----------|-----------|-----------|-----------|
| HCD020GD2 | HCU020GC2 | SCD030GD2 | SCU020GC2 | UCL020GN2 |
| HCL020GD2 | HCU020GD2 | SCD040GD2 | SCU020GD2 | UCL030GN2 |
| HCL020GN2 | HCU020GE2 | SCD060GD2 | SCU020GE2 | UCL040GN2 |
| HCL030GN2 | HCU020GL2 | SCL020GC2 | SCU020GL2 | UCL060GN2 |
| HCL040GN2 | HCU020GN2 | SCL020GN2 | SCU020GN2 | UCN020GN2 |
| HCL060GN2 | HCU020GX2 | SCL030GC2 | SCU020GX2 | UCN030GN2 |
| HCL060GNF | HCU020GY2 | SCL030GN2 | SCU020GY2 | UCN040GN2 |
| HCN020GC2 | HCU030GC2 | SCL040GC2 | SCU030GC2 | UCN060GN2 |
| HCN020GD2 | HCU030GD2 | SCL040GN2 | SCU030GD2 | UCU020GN2 |
| HCN020GE2 | HCU030GE2 | SCL060GC2 | SCU030GE2 | UCU030GN2 |
| HCN020GN2 | HCU030GL2 | SCL060GN2 | SCU030GL2 | UCU040GN2 |
| HCN020GX2 | HCU030GN2 | SCN020GC2 | SCU030GN2 | UCU060GN2 |
| HCN020GY2 | HCU030GX2 | SCN020GD2 | SCU030GX2 | UCZ020GN2 |
| HCN030GC2 | HCU030GY2 | SCN020GE2 | SCU030GY2 | UCZ030GN2 |
| HCN030GD2 | HCU040GC2 | SCN020GN2 | SCU040GC2 | VCU030GN2 |
| HCN030GE2 | HCU040GD2 | SCN020GX2 | SCU040GD2 | VCU040GN2 |
| HCN030GN2 | HCU040GE2 | SCN020GY2 | SCU040GE2 | VCU060GN2 |
| HCN030GX2 | HCU040GL2 | SCN030GC2 | SCU040GL2 |           |
| HCN030GY2 | HCU040GN2 | SCN030GD2 | SCU040GN2 |           |
| HCN040GC2 | HCU040GX2 | SCN030GE2 | SCU040GX2 |           |
| HCN040GD2 | HCU040GY2 | SCN030GN2 | SCU040GY2 |           |
| HCN040GE2 | HCU060GC2 | SCN030GX2 | SCU060GC2 |           |
| HCN040GN2 | HCU060GD2 | SCN030GY2 | SCU060GD2 |           |
| HCN040GX2 | HCU060GE2 | SCN040GC2 | SCU060GE2 |           |
| HCN040GY2 | HCU060GL2 | SCN040GD2 | SCU060GL2 |           |
| HCN060GC2 | HCU060GN2 | SCN040GE2 | SCU060GN2 |           |
| HCN060GCF | HCU060GX2 | SCN040GN2 | SCU060GX2 |           |
| HCN060GD2 | HCU060GY2 | SCN040GX2 | SCU060GY2 |           |
| HCN060GE2 | HCZ020GN2 | SCN040GY2 |           |           |
| HCN060GN2 | HCZ030GN2 | SCN060GC2 |           |           |
| HCN060GNF |           | SCN060GCF |           |           |
| HCN060GX2 |           | SCN060GD2 |           |           |
| HCN060GY2 |           | SCN060GE2 |           |           |
|           |           | SCN060GN2 |           |           |
|           |           | SCN060GNF |           |           |
|           |           | SCN060GX2 |           |           |
|           |           | SCN060GY2 |           |           |


# Product Overview - M4, M30, Galaxy 400, Galaxy 600, Quantum Standard and Quantum Silver

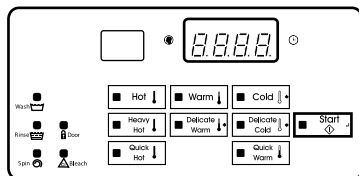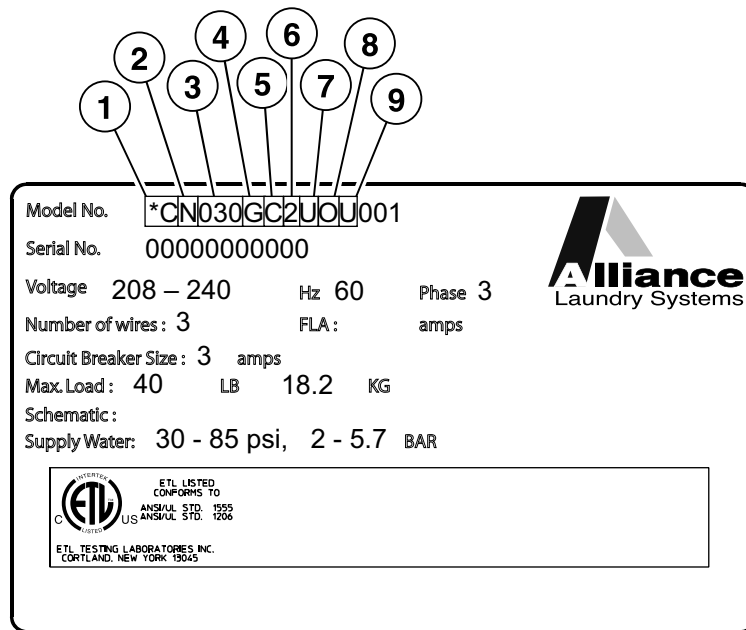


Galaxy 400 Coin

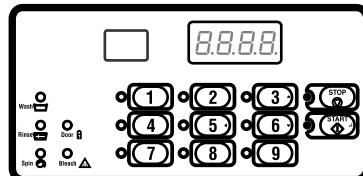


M9/Galaxy 400 OPL/Quantum Silver OPL

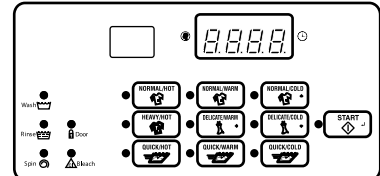


Quantum Silver Coin (Domestic)

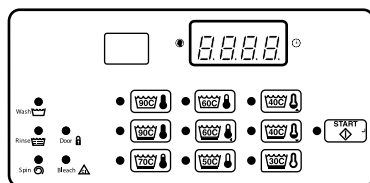


Quantum Silver Coin (International)

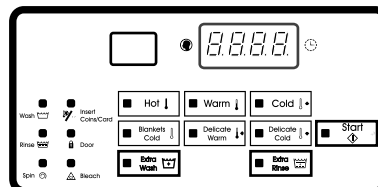

Galaxy 600 Coin (Domestic)

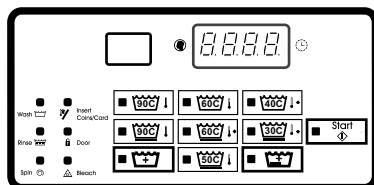

Galaxy 600 Coin (International)





M30/Quantum Gold OPL

CHM3026P\_F8339301


## Product Overview - M4, M30, Galaxy 400, Galaxy 600, Quantum Standard and Quantum Silver

| REF | PART NO. | DESCRIPTION       | COMMENTS                                                                                                                                                                                                                        |
|-----|----------|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1   | -        | Product Family    | HC<br>NC<br>SC<br>UC                                                                                                                                                                                                            |
| 2   | -        | Market            | D (Daiwa)<br>L (International ETL9c)<br>N (Domestic ETL(c))<br>U (International CE)<br>Z (No Agency International)                                                                                                              |
| 3   | -        | Capacity (Pounds) | 020<br>030<br>040<br>060<br>080<br>125                                                                                                                                                                                          |
| 4   | -        | Control           | G<br>H<br>J<br>K<br>L<br>W                                                                                                                                                                                                      |
| 5   | -        | Actuation         | C (Drop Coin Meter)<br>D (Digital Coin Meter)<br>E (Electronic World Drop)<br>L (Prep for Remote/Central Pay)<br>N (Non-Coin OPL)<br>X (Prep for Coin Meter)<br>Y (Prep for Card Reader)                                        |
| 6   | -        | Speed             | 2 (2 Speed)<br>F (F-Speed)<br>V (V-Speed)                                                                                                                                                                                       |
| 7   | -        | Voltage           | B (120/60/1/2)<br>C (380-415/50/3/4)<br>F (440-480/60/3/3)<br>J (200/50/3/3)<br>O (208/220-240/60/3/3)<br>Q (200-208/220-240/50/60/3)<br>R (380-415/440-480/50/60/3)<br>X (200-208/220-240/50/60/1/3)<br>Y (208/220-240/60/1/2) |
| 8   | -        | Side Panel        | U (Standard)<br>1 (Stainless Steel)                                                                                                                                                                                             |
| 9   | -        | Design            | 1                                                                                                                                                                                                                               |

# Product Overview - M9, Galaxy 200 and Quantum Gold

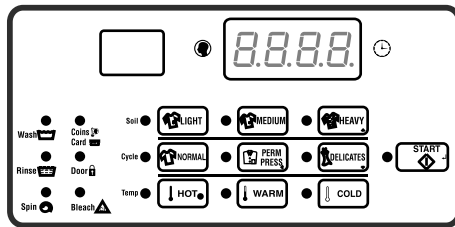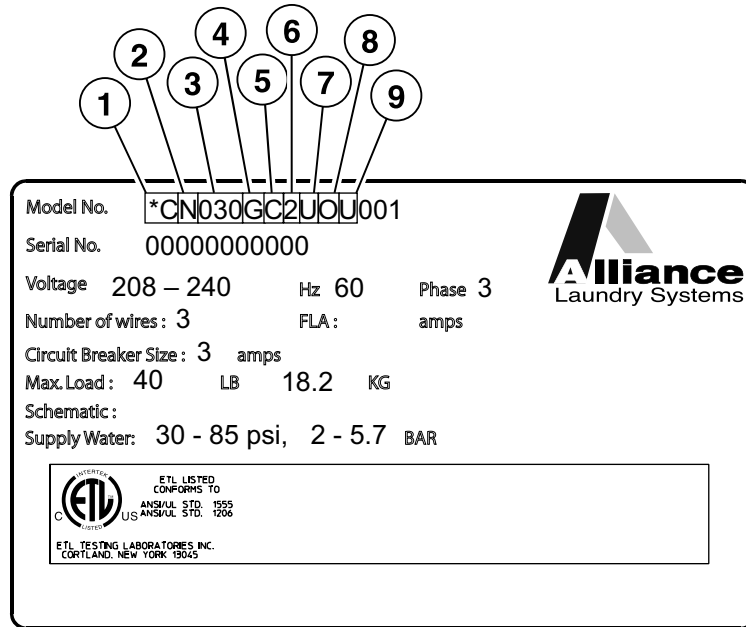

Quantum Gold

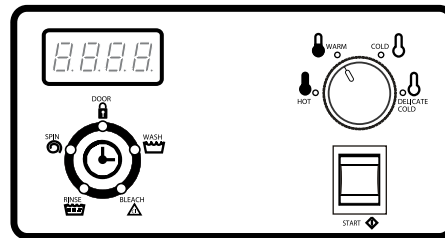

M4/Galaxy 200/Quantum Standard


CHM3034P\_F8339301



## Product Overview - M9, Galaxy 200 and Quantum Gold

| REF | PART NO. | DESCRIPTION       | COMMENTS                                                                                                                                                                                                                        |
|-----|----------|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1   | -        | Product Family    | HC<br>NC<br>SC<br>UC                                                                                                                                                                                                            |
| 2   | -        | Market            | D (Daiwa)<br>L (International ETL9c)<br>N (Domestic ETL(c))<br>U (International CE)<br>Z (No Agency International)                                                                                                              |
| 3   | -        | Capacity (Pounds) | 020<br>030<br>040<br>060<br>080<br>125                                                                                                                                                                                          |
| 4   | -        | Control           | G<br>H<br>J<br>K<br>L<br>W                                                                                                                                                                                                      |
| 5   | -        | Actuation         | C (Drop Coin Meter)<br>D (Digital Coin Meter)<br>E (Electronic World Drop)<br>L (Prep for Remote/Central Pay)<br>N (Non-Coin OPL)<br>X (Prep for Coin Meter)<br>Y (Prep for Card Reader)                                        |
| 6   | -        | Speed             | 2 (2 Speed)<br>F (F-Speed)<br>V (V-Speed)                                                                                                                                                                                       |
| 7   | -        | Voltage           | B (120/60/1/2)<br>C (380-415/50/3/4)<br>F (440-480/60/3/3)<br>J (200/50/3/3)<br>O (208/220-240/60/3/3)<br>Q (200-208/220-240/50/60/3)<br>R (380-415/440-480/50/60/3)<br>X (200-208/220-240/50/60/1/3)<br>Y (208/220-240/60/1/2) |
| 8   | -        | Side Panel        | U (Standard)<br>1 (Stainless Steel)                                                                                                                                                                                             |
| 9   | -        | Design            | 1                                                                                                                                                                                                                               |

# Decals

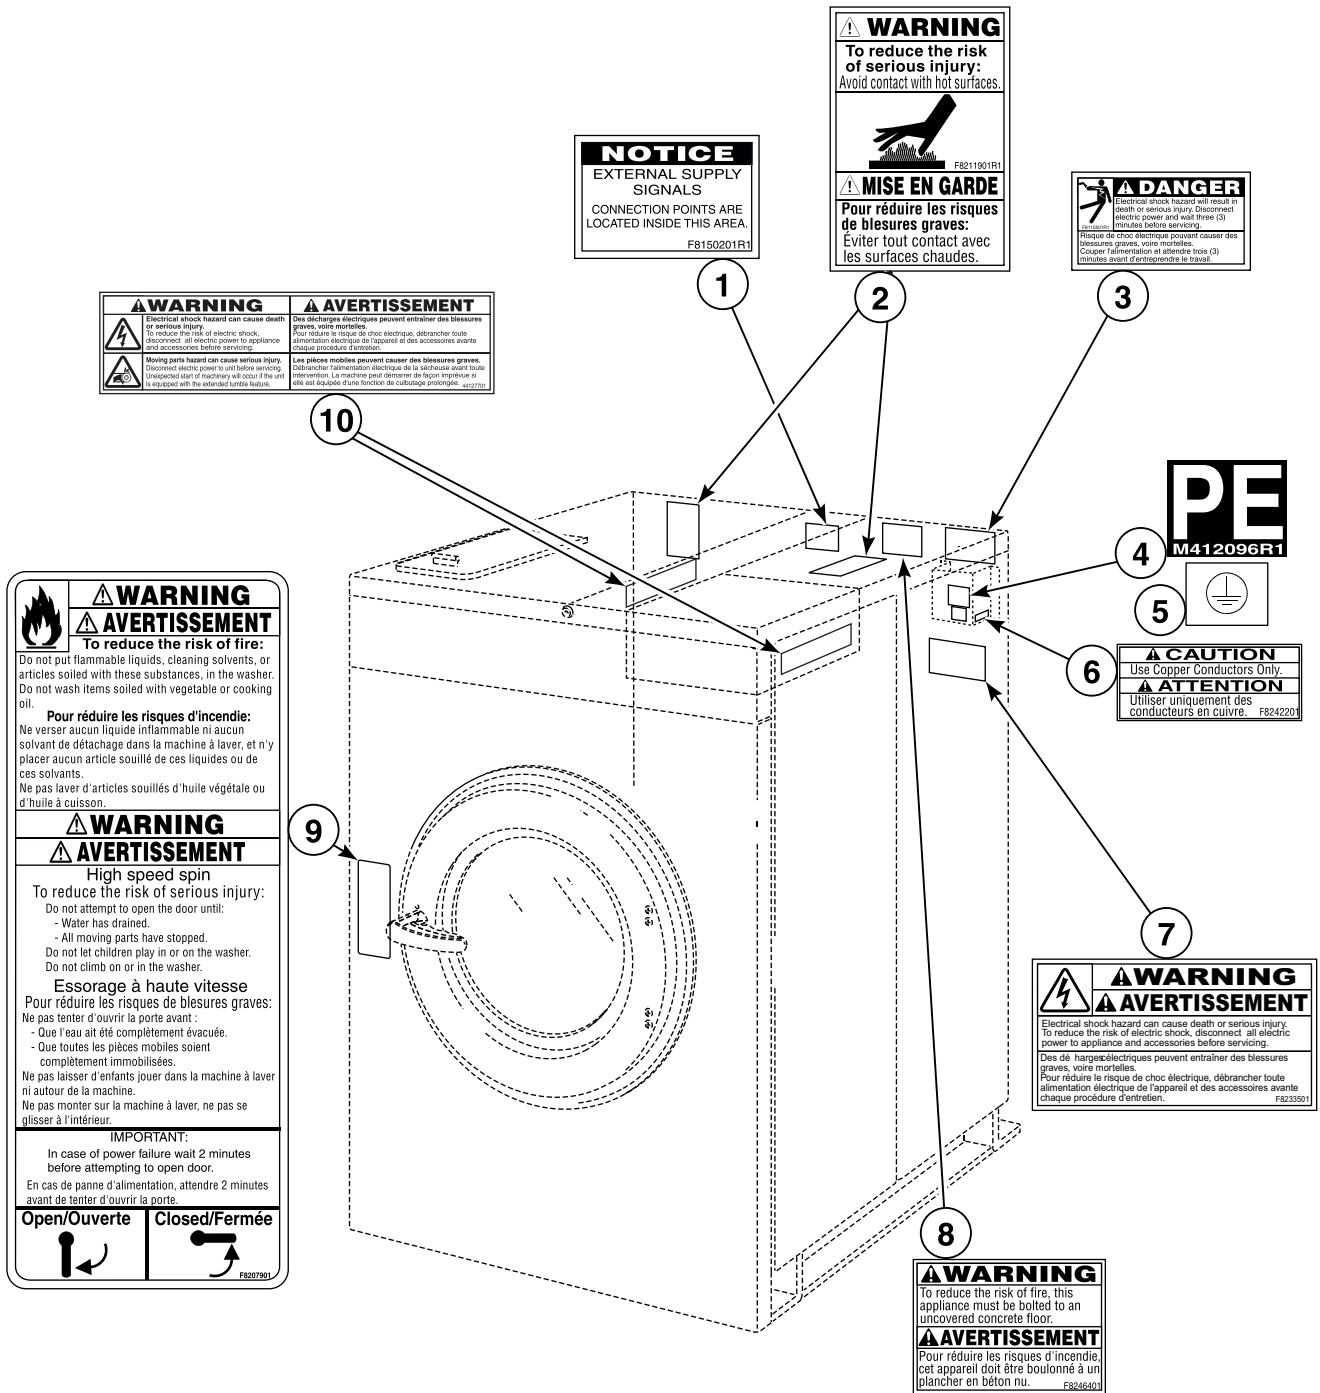


CHM3027P\_F8339301

# Decals

| REF | PART NO. | DESCRIPTION                              | COMMENTS |
|-----|----------|------------------------------------------|----------|
| 1   | F8150201 | External Supply Connection Decal         |          |
| 2   | F8211901 | Hot Surface Warning Plate                |          |
| 3   | F8115501 | Electric Shock Danger Label              |          |
| 4   | M412096  | Earth Terminal Sticker                   |          |
| 5   | F230739  | Ground Decal                             |          |
| 6   | F8242201 | Use Copper Conductors Only Caution Label |          |
| 7   | F8233501 | Warning Label                            |          |
| 8   | F8246401 | Mount on Concrete Warning Label          |          |
| 9   | F8207901 | Warning Label                            |          |
| 10  | 44127701 | Warning Label                            |          |

# Control Module - 2 Speed OPL Models

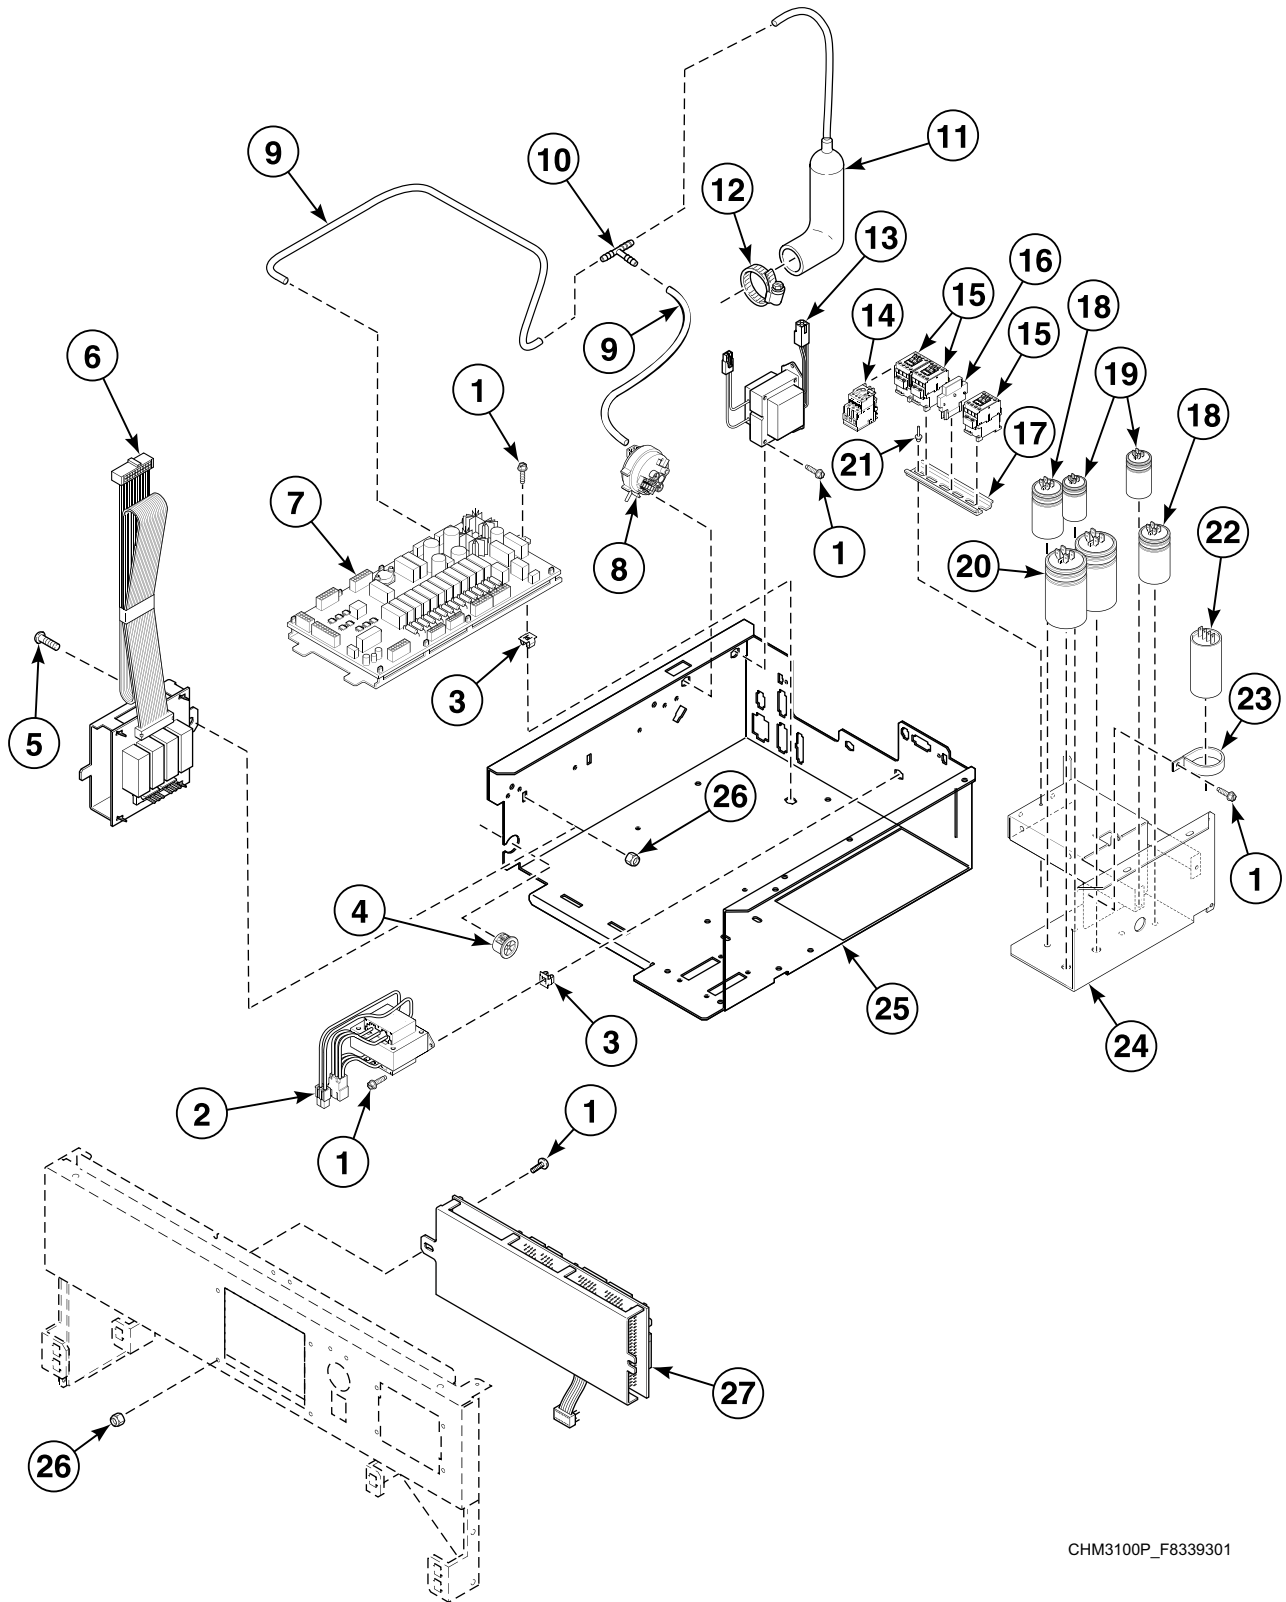


CHM3100P\_F8339301

## Control Module - 2 Speed OPL Models

| REF | PART NO.    | DESCRIPTION                   | COMMENTS                                                              |
|-----|-------------|-------------------------------|-----------------------------------------------------------------------|
|     | F8028701    | Output/Logic Harness          |                                                                       |
|     | F8167901    | USB IR Device Assembly        |                                                                       |
|     | F8191201P   | External Supply Harness       |                                                                       |
|     | F937P3      | External Supply Kit           | Includes items 1, 6, 13, F8191201P External Supply Harness and screws |
|     | M413506     | Jumper Harness Assembly       | 208 Volt                                                              |
|     | M413507     | Jumper Configuration Assembly | 240 Volt                                                              |
| 1   | F8206901    | Screw                         |                                                                       |
| 2   | 210019P     | Transformer                   |                                                                       |
| 3   | 70030501    | Expansion Clip                |                                                                       |
| 4   | 44071501    | Snap Bushing                  |                                                                       |
| 5   | F430903     | Screw                         |                                                                       |
| 6   | F8189401    | Auxiliary Control Assembly    |                                                                       |
| 7   | F980P3      | Control Assembly Kit          | Includes item 10 and F8108001 Output Assembly                         |
| 8   | F8223001P   | Water Pressure Switch         |                                                                       |
| 9   | F8153901    | Tubing                        |                                                                       |
| 10  | F8246601    | Tee                           |                                                                       |
| 11  | F020014200  | Air Trap Hose                 |                                                                       |
| 12  | F200222     | Hose Clamp                    | No. 12                                                                |
| 13  | 201616      | Transformer                   | External supply                                                       |
| 14  | F8176101P   | Overload Contactor            |                                                                       |
| 15  | F330177P    | Contactor                     |                                                                       |
| 16  | F330186P    | Interlock Contactor           |                                                                       |
| 17  | F8200101    | Din Rail                      |                                                                       |
| 18  | F370222     | Capacitor                     | 50 MFD; 20 and 40 pound models; Y-voltage                             |
|     | F370220     | Capacitor                     | 130 MFD; 20 pound B-voltage models; 30 pound Y-voltage models         |
| 19  | F370224P    | Capacitor                     | 20 MFD; 30 and 40 pound models; Y-voltage                             |
|     | F370221     | Capacitor                     | 100 MFD; 20 pound models; B-voltage                                   |
|     | F370223     | Capacitor                     | 25 MFD; 20 pound models; Y-voltage                                    |
| 20  | F370218P    | Capacitor                     | 160 MFD; 40 pound models; Y-voltage                                   |
| 21  | 70058501    | Pop Rivet                     |                                                                       |
| 22  | F340002     | Motor Switch                  | 50 Amp                                                                |
| 23  | F0340722-00 | Switch Clamp                  |                                                                       |
| 24  | F8199601    | Capacitor Tray Assembly       | 20 pound models; B and Y-voltage                                      |
|     | F8199901    | Capacitor Tray Assembly       | All other models; B and Y-voltage                                     |
|     | F8343401    | Contactor Tray Assembly       | C, F, J and O-voltage                                                 |
| 25  | F8205901    | Control Tray Assembly         |                                                                       |
| 26  | F430232     | Nut                           |                                                                       |
| 27  | F8108801P   | Control Assembly              |                                                                       |

# Control Module - F-Speed OPL Models

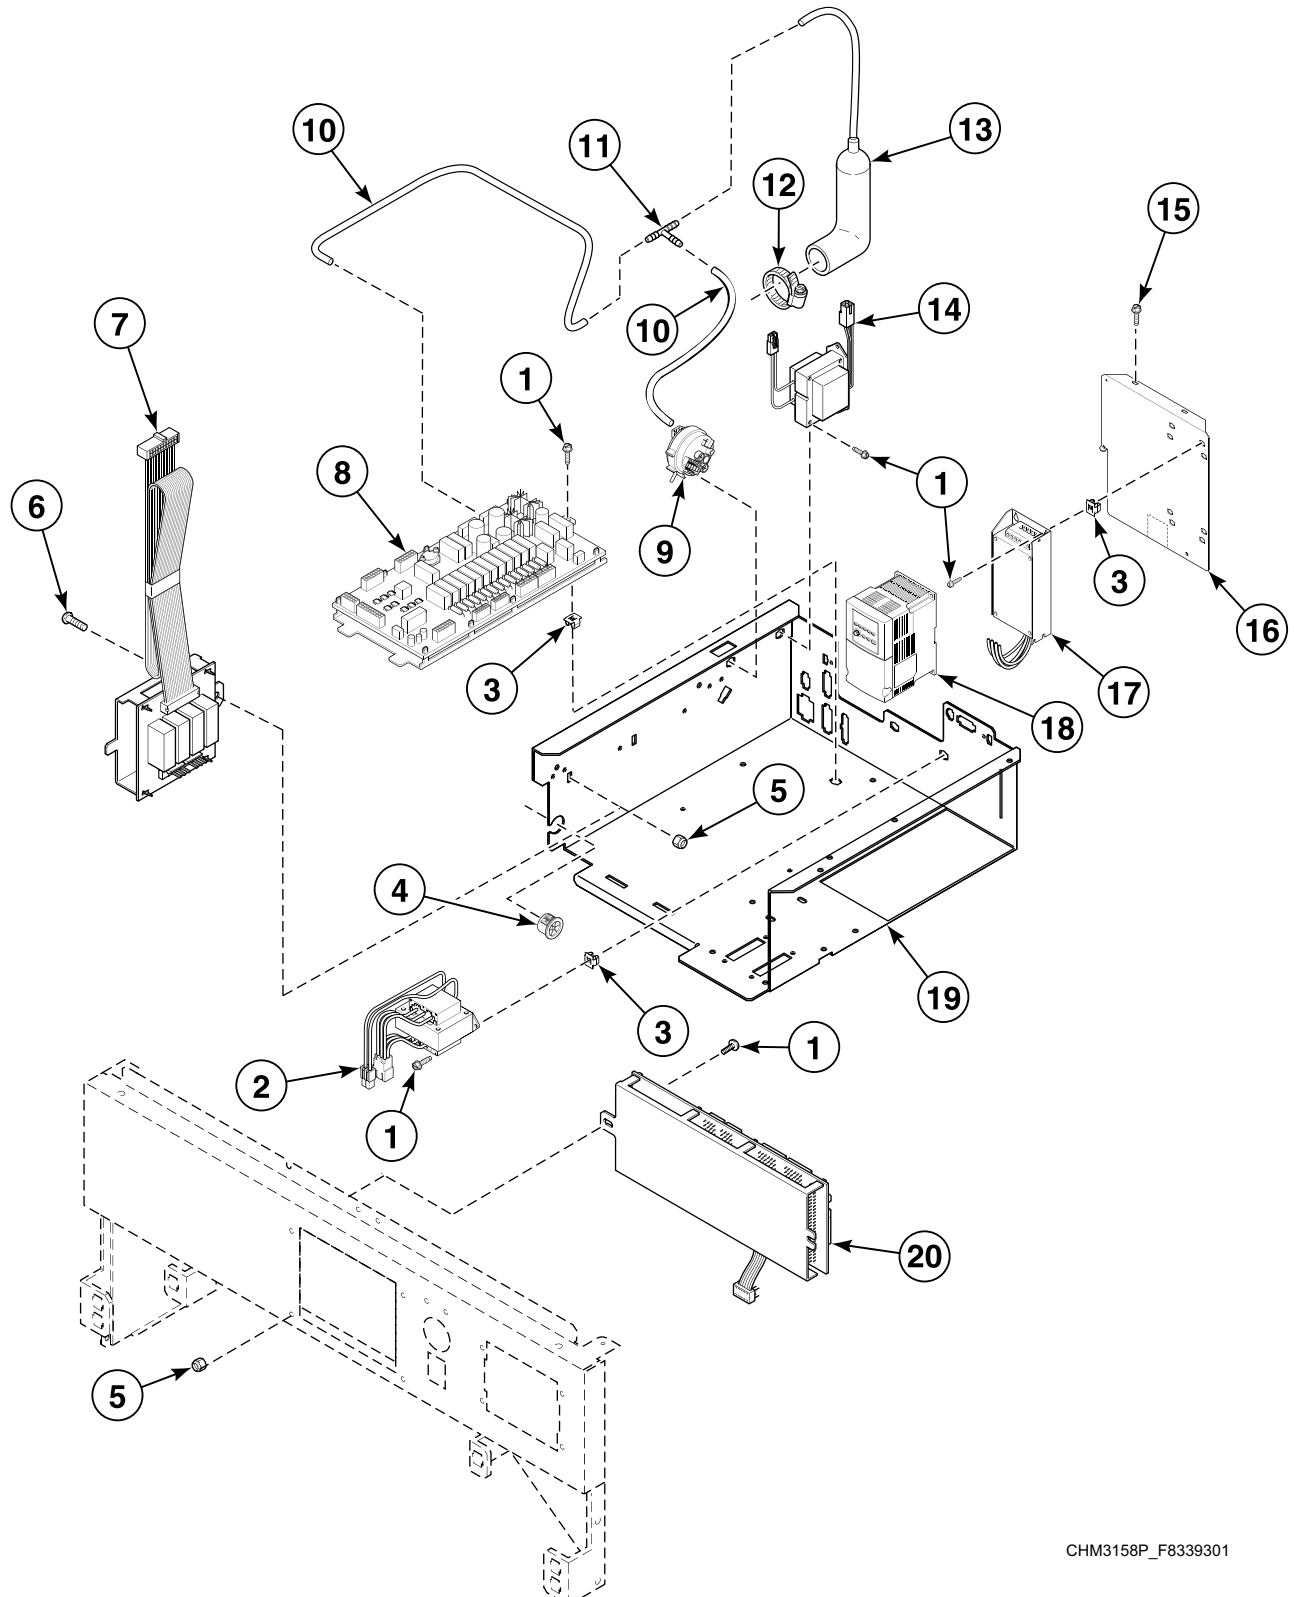


CHM3158P\_F8339301

## Control Module - F-Speed OPL Models

| REF | PART NO.   | DESCRIPTION                   | COMMENTS                                                              |
|-----|------------|-------------------------------|-----------------------------------------------------------------------|
|     | F8028701   | Output/Logic Harness          |                                                                       |
|     | F8060501   | Emergency Stop Harness        |                                                                       |
|     | F8167901   | USB IR Device Assembly        |                                                                       |
|     | F8191201P  | External Supply Harness       |                                                                       |
|     | F937P3     | External Supply Kit           | Includes items 1, 6, 13, F8191201P External Supply Harness and screws |
|     | M413506    | Jumper Harness Assembly       | 208 Volt                                                              |
|     | M413507    | Jumper Configuration Assembly | 240 Volt                                                              |
| 1   | F8206901   | Screw                         |                                                                       |
| 2   | 210019P    | Transformer                   |                                                                       |
| 3   | 70030501   | Expansion Clip                |                                                                       |
| 4   | 44071501   | Snap Bushing                  |                                                                       |
| 5   | F430232    | Nut                           |                                                                       |
| 6   | F430903    | Screw                         |                                                                       |
| 7   | F8189401   | Auxiliary Control Assembly    |                                                                       |
| 8   | F980P3     | Control Assembly Kit          | Includes item 11 and F8108001 Output Assembly                         |
| 9   | F8223001P  | Water Pressure Switch         |                                                                       |
| 10  | F8153901   | Tubing                        |                                                                       |
| 11  | F8246601   | Tee                           |                                                                       |
| 12  | F200222    | Hose Clamp                    | No. 12                                                                |
| 13  | F020014200 | Air Trap Hose                 |                                                                       |
| 14  | 201616     | Transformer                   | External supply                                                       |
| 15  | 430497     | Screw                         |                                                                       |
| 16  | F8195803   | Support Bracket               |                                                                       |
| 17  | F8053901P  | EMI Filter                    | 200 Volt                                                              |
|     | F8053902   | EMI Filter                    | 400 Volt                                                              |
| 18  | F8169407   | PowerFlex 40 Drive            | Models through 3/8/10; Q and X-voltage                                |
|     | F8169440   | PowerFlex 40 Drive            | Models starting 3/9/10; Q and X-voltage                               |
| 19  | F8205903   | Control Tray Assembly         |                                                                       |
| 20  | F8108801P  | Control Assembly              |                                                                       |

# Control Module - 2 Speed Coin Models

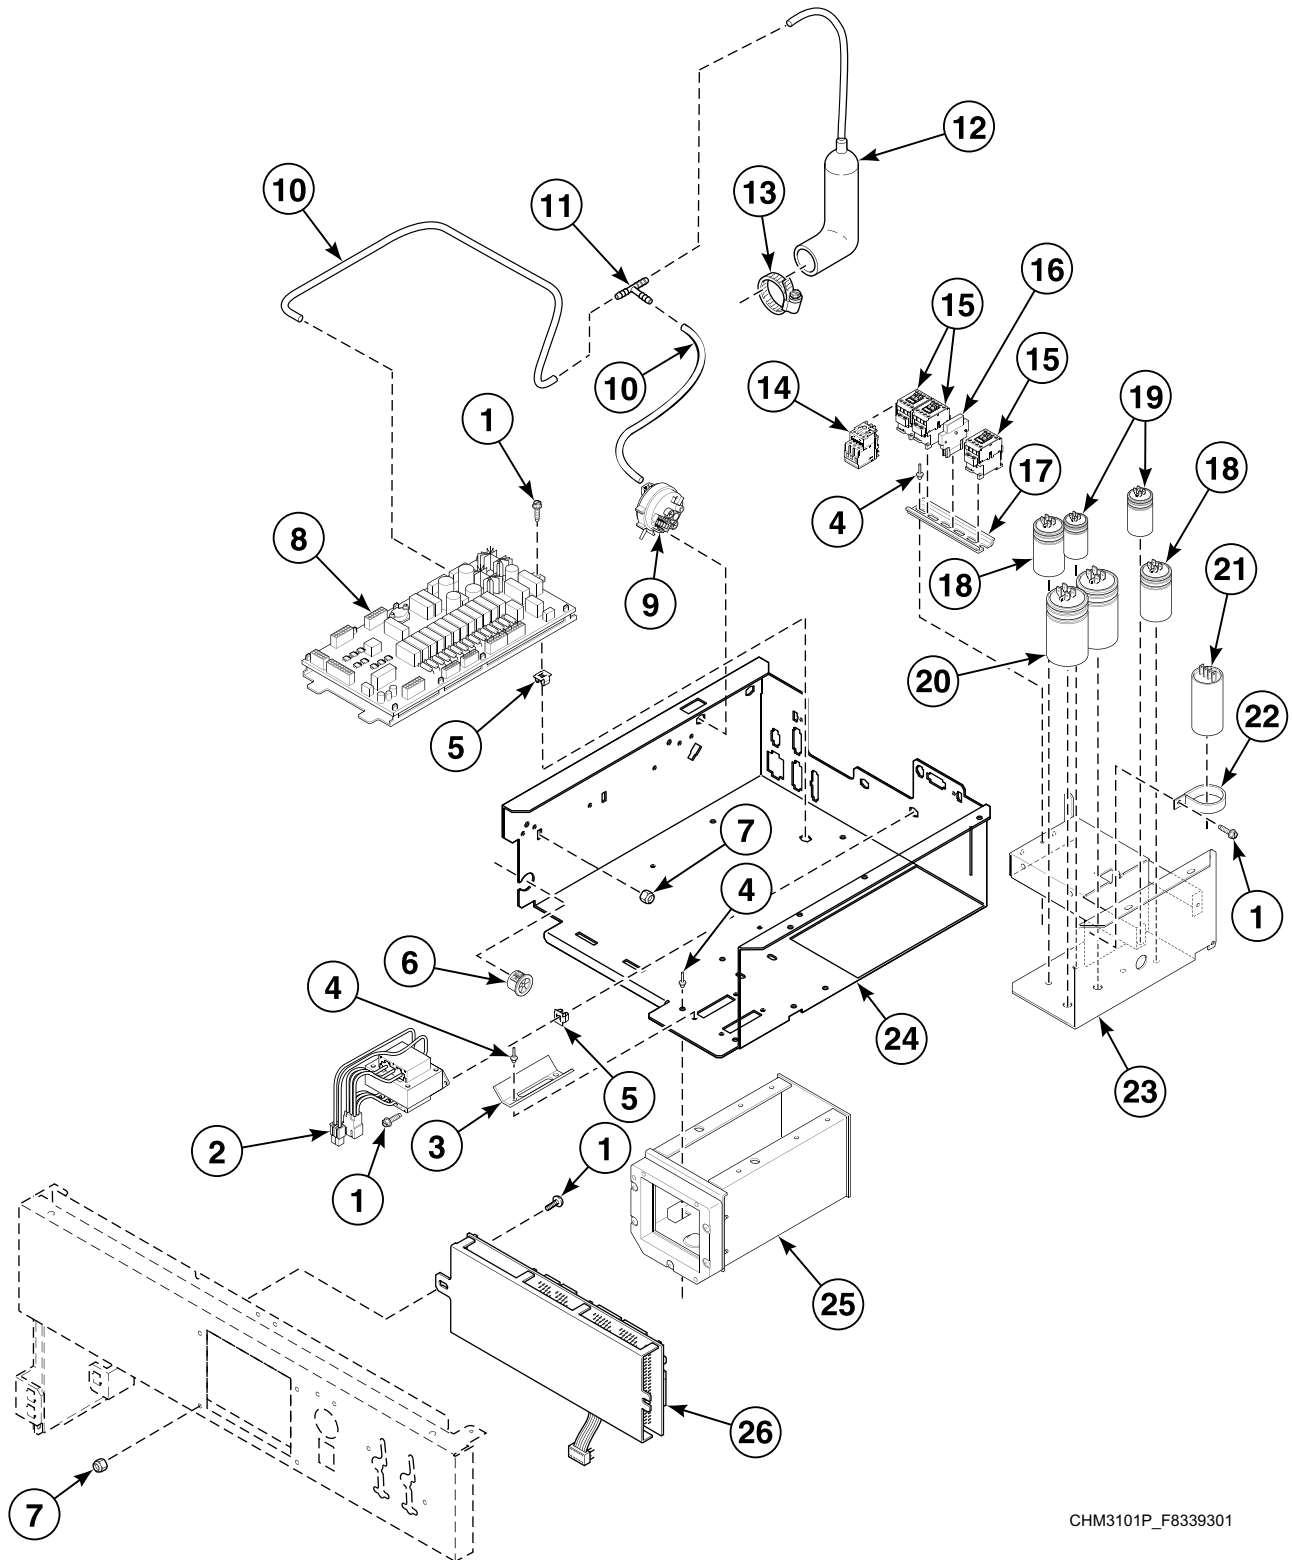


CHM3101P\_F8339301



## Control Module - 2 Speed Coin Models

| REF | PART NO.    | DESCRIPTION                   | COMMENTS                                                      |
|-----|-------------|-------------------------------|---------------------------------------------------------------|
|     | F8028701    | Output/Logic Harness          |                                                               |
|     | F8167901    | USB IR Device Assembly        |                                                               |
|     | M413506     | Jumper Harness Assembly       | 208 Volt                                                      |
|     | M413507     | Jumper Configuration Assembly | 240 Volt                                                      |
| 1   | F8206901    | Screw                         |                                                               |
| 2   | 210019P     | Transformer                   |                                                               |
| 3   | F8170801    | Coin Chute                    |                                                               |
| 4   | 70058501    | Pop Rivet                     |                                                               |
| 5   | 70030501    | Expansion Clip                |                                                               |
| 6   | 44071501    | Snap Bushing                  |                                                               |
| 7   | F430232     | Nut                           |                                                               |
| 8   | F980P3      | Control Assembly Kit          | Includes item 11 and F8108001 Output Assembly                 |
| 9   | F8223001P   | Water Pressure Switch         |                                                               |
| 10  | F8153901    | Tubing                        |                                                               |
| 11  | F8246601    | Tee                           |                                                               |
| 12  | F020014200  | Air Trap Hose                 |                                                               |
| 13  | F200222     | Hose Clamp                    | No. 12                                                        |
| 14  | F8176101P   | Overload Contactor            |                                                               |
| 15  | F330177P    | Contactor                     |                                                               |
| 16  | F330186P    | Interlock Contactor           |                                                               |
| 17  | F8200101    | Din Rail                      |                                                               |
| 18  | F370222     | Capacitor                     | 50 MFD; 20 and 40 pound models; Y-voltage                     |
|     | F370220     | Capacitor                     | 130 MFD; 20 pound B-voltage models; 30 pound Y-voltage models |
| 19  | F370224P    | Capacitor                     | 20 MFD; 30 and 40 pound models; Y-voltage                     |
|     | F370221     | Capacitor                     | 100 MFD; 20 pound models; B-voltage                           |
|     | F370223     | Capacitor                     | 25 MFD; 20 pound models; Y-voltage                            |
| 20  | F370218P    | Capacitor                     | 160 MFD; 40 pound models; Y-voltage                           |
| 21  | F340002     | Motor Switch                  | 50 Amp                                                        |
| 22  | F0340722-00 | Switch Clamp                  |                                                               |
| 23  | F8199601    | Capacitor Tray Assembly       | 20 pound models; B and Y-voltage                              |
|     | F8199901    | Capacitor Tray Assembly       | All other models; B and Y-voltage                             |
|     | F8343401    | Contactor Tray Assembly       | C, F, J and O-voltage                                         |
| 24  | F8205902    | Control Tray Assembly         | 20 and 30 pound models; Includes items 3 and 25               |
|     | F8205903    | Control Tray Assembly         | 40 and 60 pound models; Includes items 3 and 25               |
| 25  | F8182501    | Coin Vault Assembly           | 20 and 30 pound models                                        |
|     | F8182601    | Coin Vault Assembly           | 40 and 60 pound models                                        |
| 26  | F8108801P   | Control Assembly              |                                                               |

# Control Module - F-Speed Coin Models

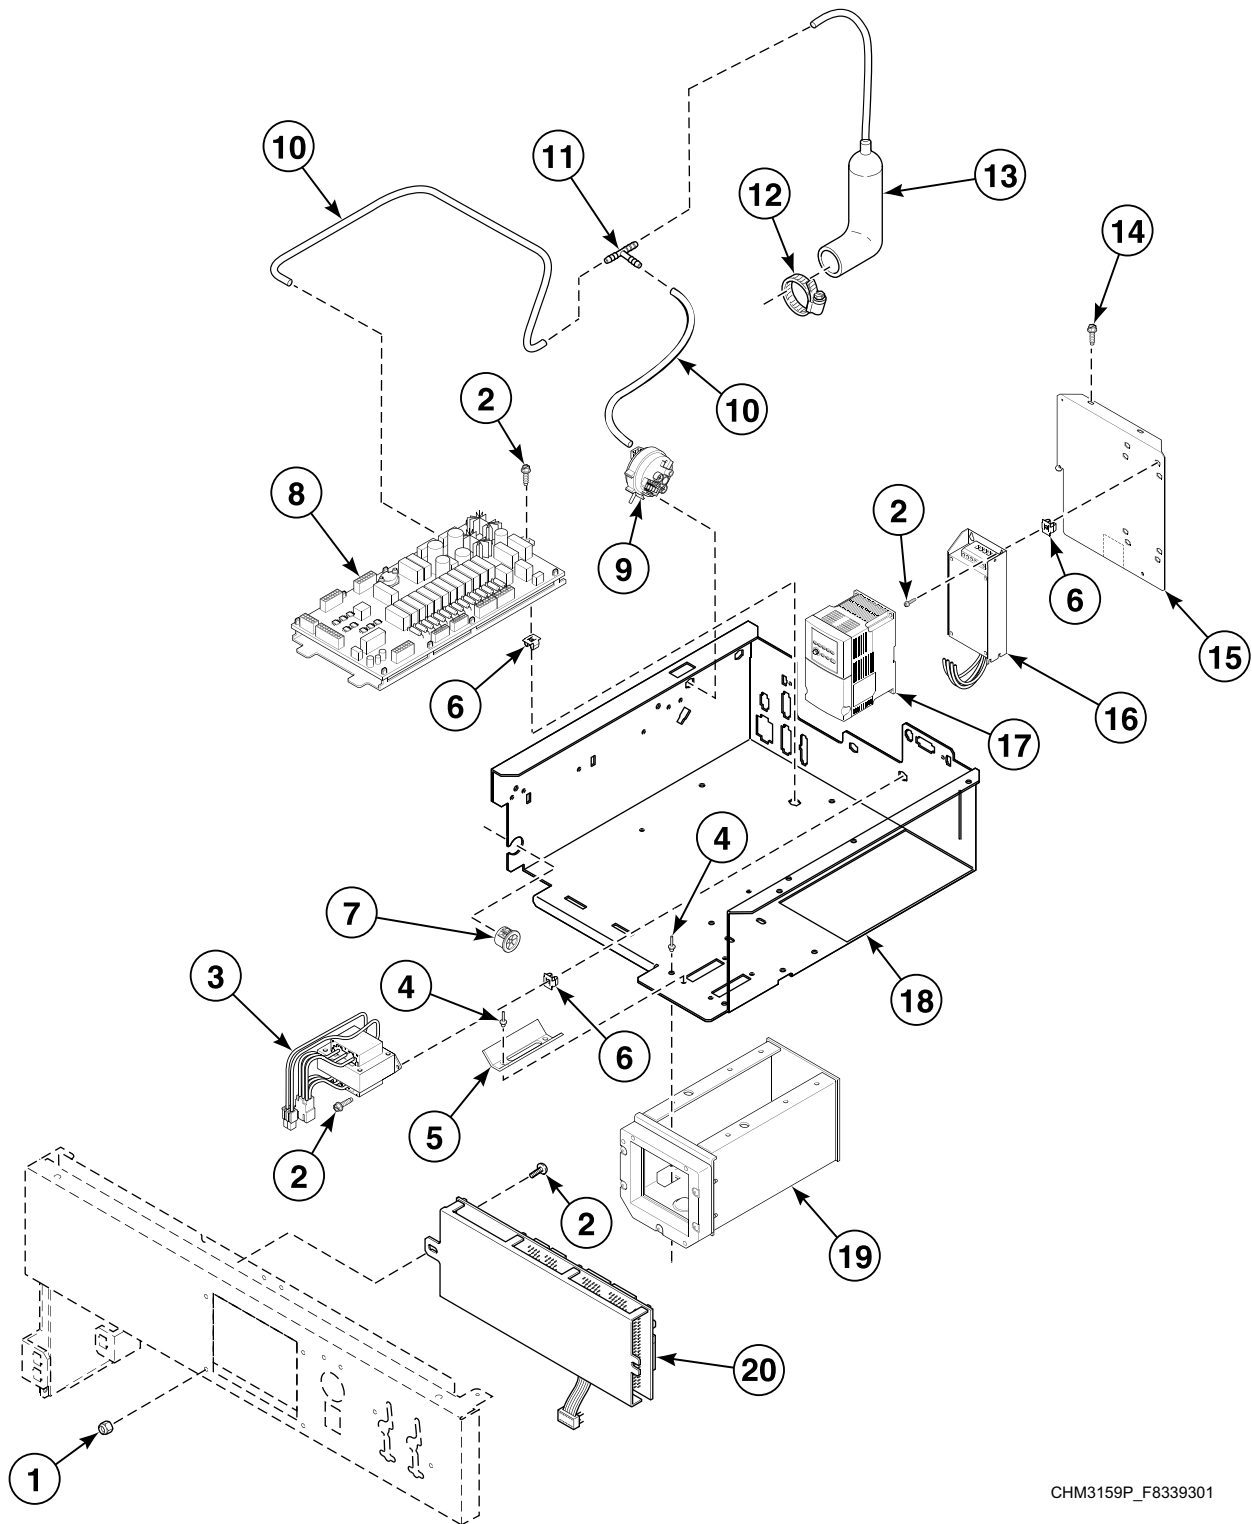


CHM3159P\_F8339301

## Control Module - F-Speed Coin Models

| REF | PART NO.   | DESCRIPTION                   | COMMENTS                                      |
|-----|------------|-------------------------------|-----------------------------------------------|
|     | F8028701   | Output/Logic Harness          |                                               |
|     | F8167901   | USB IR Device Assembly        |                                               |
|     | M413506    | Jumper Harness Assembly       | 208 Volt                                      |
|     | M413507    | Jumper Configuration Assembly | 240 Volt                                      |
| 1   | F430232    | Nut                           |                                               |
| 2   | F8206901   | Screw                         |                                               |
| 3   | 210019P    | Transformer                   |                                               |
| 4   | 70058501   | Pop Rivet                     |                                               |
| 5   | F8170801   | Coin Chute                    |                                               |
| 6   | 70030501   | Expansion Clip                |                                               |
| 7   | 44071501   | Snap Bushing                  |                                               |
| 8   | F980P3     | Control Assembly Kit          | Includes item 11 and F8108001 Output Assembly |
| 9   | F8223001P  | Water Pressure Switch         |                                               |
| 10  | F8153901   | Tubing                        |                                               |
| 11  | F8246601   | Tee                           |                                               |
| 12  | F200222    | Hose Clamp                    | No. 12                                        |
| 13  | F020014200 | Air Trap Hose                 |                                               |
| 14  | 430497     | Screw                         |                                               |
| 15  | F8195803   | Support Bracket               |                                               |
| 16  | F8053901P  | EMI Filter                    | 200 Volt                                      |
|     | F8053902   | EMI Filter                    | 400 Volt                                      |
| 17  | F8169407   | PowerFlex 40 Drive            | Models through 3/8/10; Q and X-voltage        |
|     | F8169440   | PowerFlex 40 Drive            | Models starting 3/9/10; Q and X-voltage       |
| 18  | F8205903   | Control Tray Assembly         | Includes items 5 and 19                       |
| 19  | F8182601   | Coin Vault Assembly           |                                               |
| 20  | F8108801P  | Control Assembly              |                                               |

Flush Mount Coin Meter Assembly (Drawing 1 of 2)

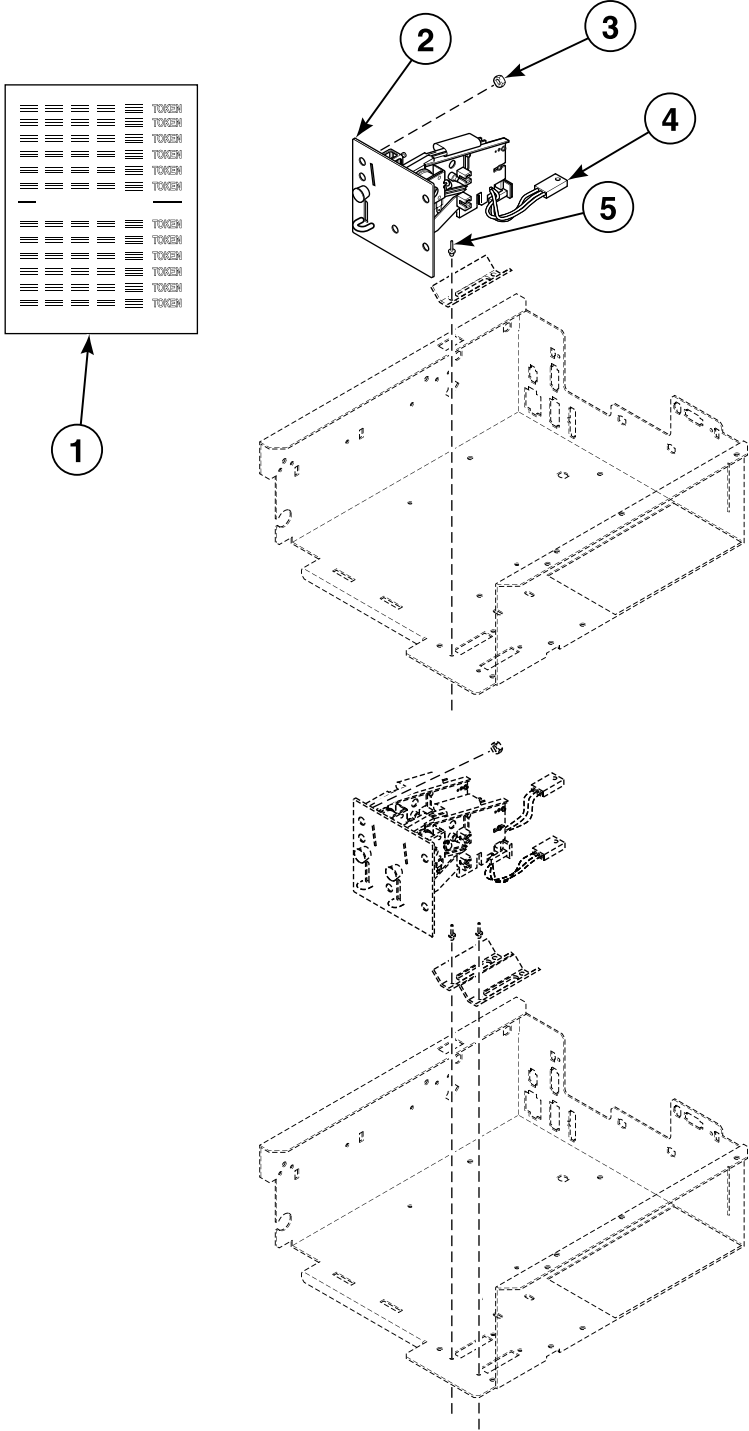


CHM3088P\_F8339301

## Flush Mount Coin Meter Assembly (Drawing 1 of 2)

| REF      | PART NO.    | DESCRIPTION               | COMMENTS                                               |
|----------|-------------|---------------------------|--------------------------------------------------------|
|          | F200010000P | Coin Meter Assembly       | Single drop; U.S. \$.25; Includes items 2 and 3        |
|          | F200010006  | Coin Meter Assembly       | Single drop; .800 token; Includes items 2 and 3        |
|          | F200010007  | Coin Meter Assembly       | Single drop; .880 token; Includes items 2 and 3        |
|          | F200010009  | Coin Meter Assembly       | Single drop; .990 token; Includes items 2 and 3        |
|          | F200010011  | Coin Meter Assembly       | Single drop; Jeton WH121 token; Includes items 2 and 3 |
|          | F200010012  | Coin Meter Assembly       | Single drop; Jeton .08 token; Includes items 2 and 3   |
| <b>1</b> | 38725       | Coin Identification Paper |                                                        |
| <b>2</b> | 38464P      | Coin Drop Assembly        | Single drop; Canada .25                                |
|          | N/A         | Coin Drop Assembly        | Single drop; Australia .20                             |
|          | N/A         | Coin Drop Assembly        | Single drop; Belgium 5 franc                           |
|          | N/A         | Coin Drop Assembly        | Single drop; Denmark 2 krone                           |
|          | N/A         | Coin Drop Assembly        | Single drop; United Kingdom 20 pence                   |
|          | N/A         | Coin Drop Assembly        | Single drop; France 2 franc                            |
|          | N/A         | Coin Drop Assembly        | Single drop; Hong Kong 5 dollar                        |
|          | N/A         | Coin Drop Assembly        | Single drop; Italy 500 lirraiget                       |
|          | N/A         | Coin Drop Assembly        | Single drop; Japan 100 yen                             |
|          | N/A         | Coin Drop Assembly        | Single drop; Korea 500 won                             |
|          | N/A         | Coin Drop Assembly        | Single drop; South Africa 2 rand                       |
|          | N/A         | Coin Drop Assembly        | Single drop; Spain 100 peseta                          |
|          | N/A         | Coin Drop Assembly        | Single drop; Thailand 10 baht                          |
|          | N/A         | Coin Drop Assembly        | Single drop; .886 token                                |
|          | N/A         | Coin Drop Assembly        | Single drop; 1.000 token                               |
|          | N/A         | Coin Drop Assembly        | Single drop; Jeton 08 token                            |
|          | 70441601P   | Coin Drop                 | Single drop; U.S. \$.25                                |
|          | N/A         | Coin Drop Assembly        | Single drop; .800 token                                |
|          | 38462P      | Coin Drop Assembly        | Single drop; .880 token                                |
|          | 38463       | Coin Drop Assembly        | Single drop; .990 token                                |
|          | N/A         | Coin Drop Assembly        | Single drop; Jeton WH121 token                         |
|          | N/A         | Coin Meter                | Single drop; Jeton .08 token                           |
| <b>3</b> | 685846      | Nut                       | Single drop                                            |
| <b>4</b> | 200674P     | Opto Coupler              |                                                        |
| <b>5</b> | 70058501    | Pop Rivet                 | Single drop                                            |

**N/A = Part no longer available**

Flush Mount Coin Meter Assembly (Drawing 2 of 2)

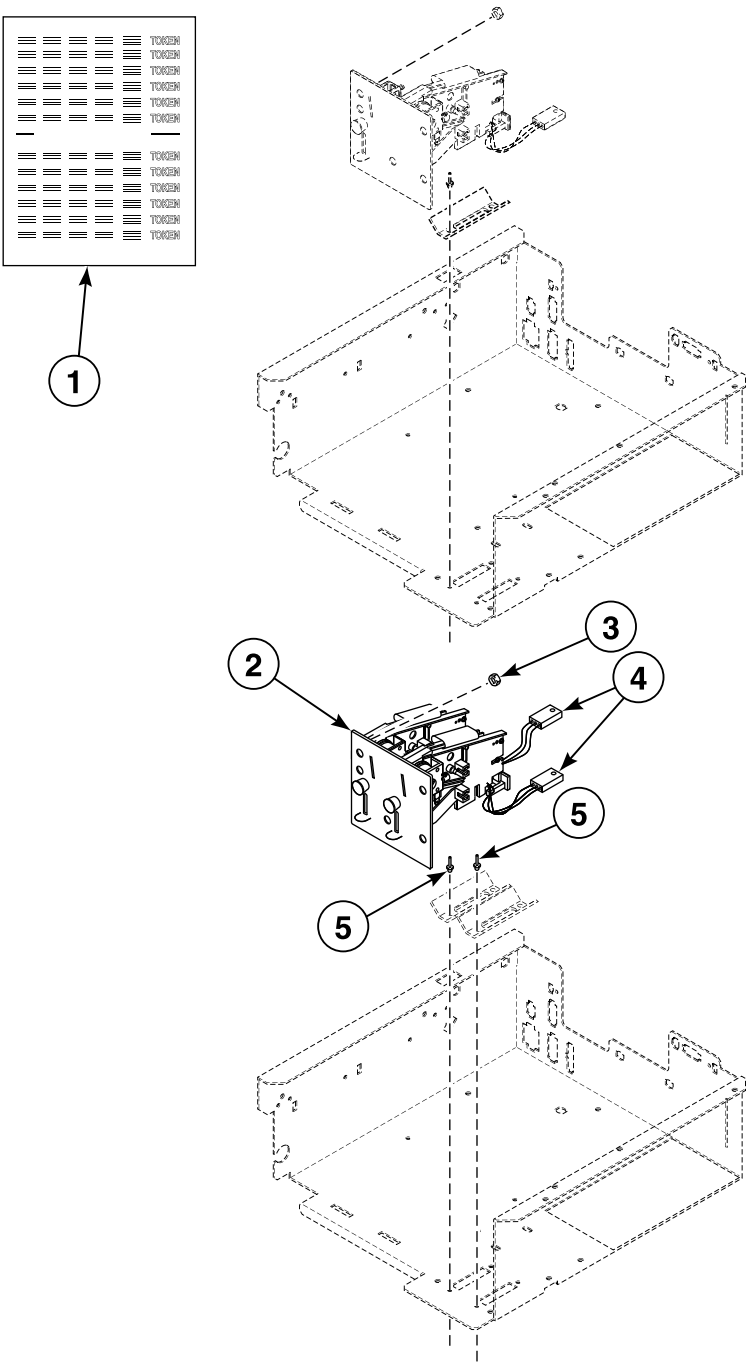


CHM3088PA\_F8339301

## Flush Mount Coin Meter Assembly (Drawing 2 of 2)

| REF      | PART NO.    | DESCRIPTION               | COMMENTS                                                 |
|----------|-------------|---------------------------|----------------------------------------------------------|
|          | F200010001  | Coin Meter Assembly       | Dual drop; Australia .20 and 1; Includes items 2 and 3   |
|          | F200010002  | Coin Meter Assembly       | Dual drop; 100 and 500 yen; Includes items 2 and 3       |
|          | F200010003  | Coin Meter Assembly       | Dual drop; Canada 1.00 and .25; Includes items 2 and 3   |
|          | F200010004  | Coin Meter Assembly       | Dual drop; New Zealand .20 and 1; Includes items 2 and 3 |
|          | F200010005  | Coin Meter Assembly       | Dual drop; U.S. \$1 and \$.25; Includes items 2 and 3    |
|          | F200010008  | Coin Meter Assembly       | Dual drop; .50 and 2.00 euro; Includes items 2 and 3     |
|          | F200010010  | Coin Meter Assembly       | Dual drop; 10 and 50 Taiwan; Includes items 2 and 3      |
| <b>1</b> | 38725       | Coin Identification Paper |                                                          |
| <b>2</b> | N/A         | Coin Meter                | Dual drop; 10 and 50 Taiwan                              |
|          | N/A         | Coin Meter                | Dual drop; Belgium 5 and 20 franc                        |
|          | N/A         | Coin Meter                | Dual drop; Denmark 1 and 5 krone                         |
|          | N/A         | Coin Meter                | Dual drop; Denmark 5 and 10 krone                        |
|          | 38472       | Coin Drop Assembly        | Dual drop; United Kingdom 20 pence and 1 pound           |
|          | N/A         | Coin Meter                | Dual drop; .20 and .50 euro                              |
|          | 210195      | Coin Drop Assembly        | Dual drop; .20 and 1.00 euro                             |
|          | 210196      | Coin Drop Assembly        | Dual drop; .50 and 1.00 euro                             |
|          | N/A         | Coin Meter                | Dual drop; 2 and 5 franc                                 |
|          | N/A         | Coin Meter                | Dual drop; 2 and 10 franc                                |
|          | 39157       | Coin Drop Assembly        | Dual drop; Israel 1 and 5 shekel                         |
|          | 38521       | Coin Drop Assembly        | Dual drop; Korea 100 and 500 won                         |
|          | N/A         | Coin Meter                | Dual drop; Spain 100 and 500 peseta                      |
|          | N/A         | Coin Drop Assembly        | Dual drop; Australia .20 and 1                           |
|          | N/A         | Coin Drop Assembly        | Dual drop; Japan 100 and 500 yen                         |
|          | N/A         | Coin Drop Assembly        | Dual drop; Canada 1.00 and .25                           |
|          | N/A         | Coin Drop Assembly        | Dual drop; New Zealand .20 and 1                         |
|          | 70256402P   | Coin Drop                 | Dual drop; U.S. \$1 and \$.25                            |
|          | F0160737-00 | Coin Meter                | Dual drop; .50 and 2.00 euro                             |
|          | 70281102    | Coin Drop Assembly        | Dual drop; 10 and 50 Taiwan dollar                       |
|          | N/A         | Coin Meter                | Dual drop; Taiwan 5 and 10 dollar                        |
| <b>3</b> | 685846      | Nut                       | Single drop                                              |
| <b>4</b> | 200674P     | Opto Coupler              |                                                          |
| <b>5</b> | 70058501    | Pop Rivet                 | Single drop                                              |

**N/A = Part no longer available**

# Electronic Coin Meter Assembly

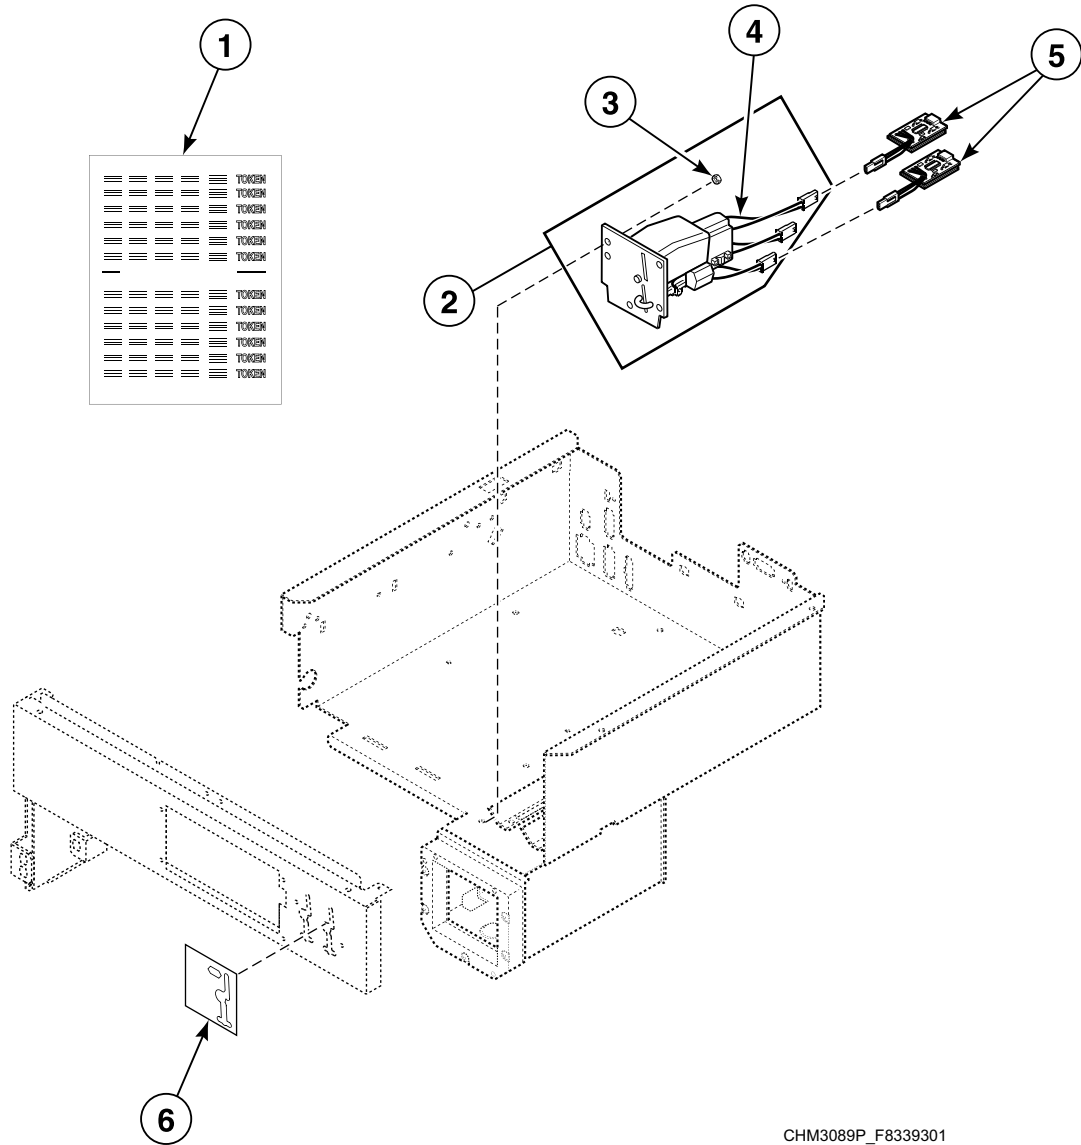


CHM3089P\_F8339301



# Electronic Coin Meter Assembly

| REF | PART NO.   | DESCRIPTION                   | COMMENTS                                                                                                                                      |
|-----|------------|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
|     | CK500      | Electronic Coin Drop Kit      | Includes item 2                                                                                                                               |
| 1   | 38725      | Coin Identification Paper     |                                                                                                                                               |
| 2   | F200021600 | Coin Meter Assembly           | U.S., Canada, Japan and Taiwan; Includes items 3 and 4; Requires CK500 Electronic Coin Drop Kit for installation                              |
|     | F200021601 | Coin Meter Assembly           | Australia, New Zealand, Hong Kong, South Korea and Malaysia; Includes items 3 and 4; Requires CK500 Electronic Coin Drop Kit for installation |
|     | F200021602 | Coin Meter Assembly           | United Kingdom and euro; Includes items 3 and 4; Requires CK500 Electronic Coin Drop Kit for installation                                     |
|     | F200021603 | Coin Meter Assembly           | Denmark, Norway and euro; Includes items 3 and 4; Requires CK500 Electronic Coin Drop Kit for installation                                    |
|     | F200021604 | Coin Meter Assembly           | U.S., Mexico and Ecuador; Includes items 3 and 4; Requires CK500 Electronic Coin Drop Kit for installation                                    |
|     | F200021605 | Coin Meter Assembly           | Euro, Latvia and Lithuania; Includes items 3 and 4; Requires CK500 Electronic Coin Drop Kit for installation                                  |
|     | F8238601   | Coin Meter Assembly           | China, Russia and Malaysia; Includes items 3 and 4; Requires CK500 Electronic Coin Drop Kit for installation                                  |
| 3   | 685846     | Nut                           |                                                                                                                                               |
| 4   | 70294101P  | Electronic Coin Drop Assembly | U.S., Canada, Japan and Taiwan                                                                                                                |
|     | CK095      | Electronic Coin Drop Kit      | U.S., Canada, Japan and Taiwan; Includes item 1; Requires CK500 Electronic Coin Drop Kit for installation                                     |
|     | 70294105P  | Electronic Coin Drop Assembly | Australia, New Zealand, Hong Kong, South Korea and Malaysia                                                                                   |
|     | CK099      | Electronic Coin Drop Kit      | Australia, New Zealand, Hong Kong, South Korea and Malaysia; Includes item 1; Requires CK500 Electronic Coin Drop Kit for installation        |
|     | 70294103P  | Electronic Coin Drop Assembly | United Kingdom and euro                                                                                                                       |
|     | CK100      | Electronic Coin Drop Kit      | United Kingdom and euro; Includes item 1; Requires CK500 Electronic Coin Drop Kit for installation                                            |
|     | 70294104   | Electronic Coin Drop Assembly | Denmark, Norway and euro                                                                                                                      |
|     | CK101      | Electronic Coin Drop Kit      | Denmark, Norway and euro; Includes item 1; Requires CK500 Electronic Coin Drop Kit for installation                                           |
|     | CK110      | Electronic Coin Drop Kit      | U.S., Mexico and Ecuador; Includes item 1; Requires CK500 Electronic Coin Drop Kit for installation                                           |
|     | 70294106   | Electronic Coin Drop Assembly | U.S., Mexico and Ecuador                                                                                                                      |
|     | 70294107   | Electronic Coin Drop Assembly | Euro, Latvia and Lithuania                                                                                                                    |
|     | CK103      | Electronic Coin Drop Kit      | Euro, Latvia and Lithuania; Includes item 1; Requires CK500 Electronic Coin Drop Kit for installation                                         |
|     | 70294109   | Electronic Coin Drop Assembly | Singapore, China, Russia and Malaysia                                                                                                         |
|     | CK106      | Electronic Coin Drop Kit      | Singapore, China, Russia and Malaysia; Includes item 1; Requires CK500 Electronic Coin Drop Kit for installation                              |
|     | CK109      | Electronic Coin Drop Kit      | Euro; Includes item 1; Requires CK500 Electronic Coin Drop Kit for installation                                                               |
|     | 70294111   | Electronic Coin Drop Assembly | Euro                                                                                                                                          |
| 5   | F8034701P  | Pulse Expander Assembly       |                                                                                                                                               |
| 6   | 70295101   | Overlay                       | Black                                                                                                                                         |
|     | 70295301   | Overlay                       | Gray                                                                                                                                          |

Card Reader - GY Models

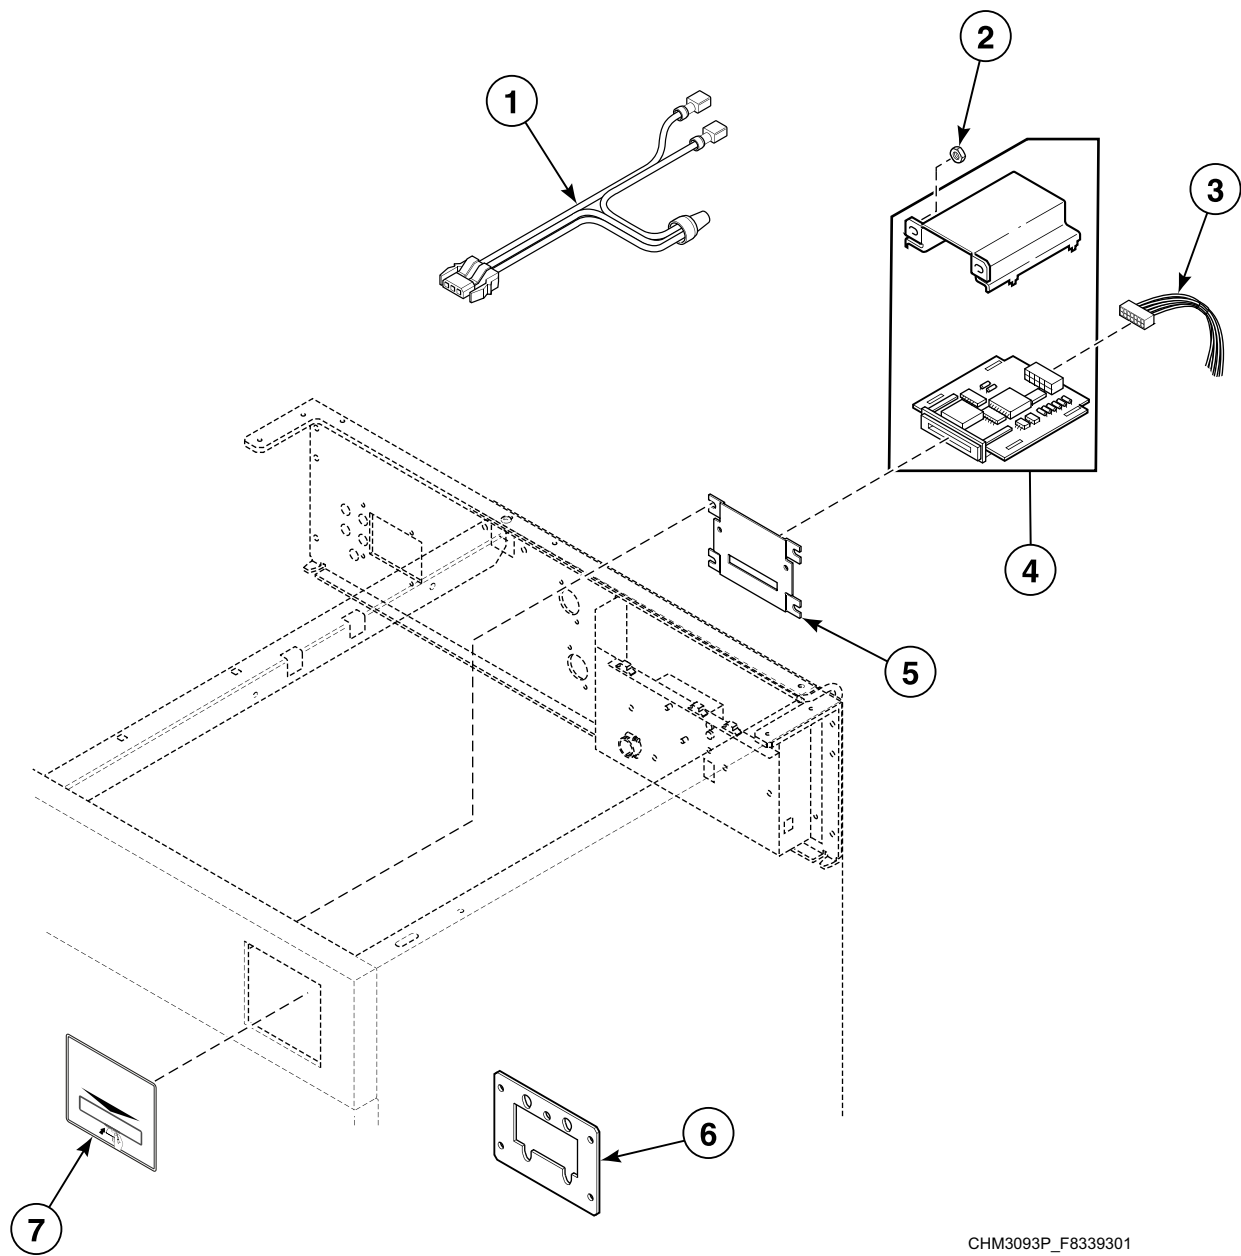


CHM3093P\_F8339301

## Card Reader - GY Models

| REF | PART NO.  | DESCRIPTION                      | COMMENTS  |
|-----|-----------|----------------------------------|-----------|
| 1   | F631973-2 | Harness                          | Access    |
| 2   | F430174   | Screw                            |           |
| 3   | F141887   | Card Reader Harness              |           |
| 4   | 510068P   | Card Reader and Bracket Assembly |           |
| 5   | F8201501  | Card Reader Assembly             |           |
| 6   | 70208801  | Mounting Plate                   |           |
| 7   | 70334201  | Card Reader Overlay              | SC models |
|     | 70334301  | Card Reader Overlay              | HC models |

# Optional Coin Box

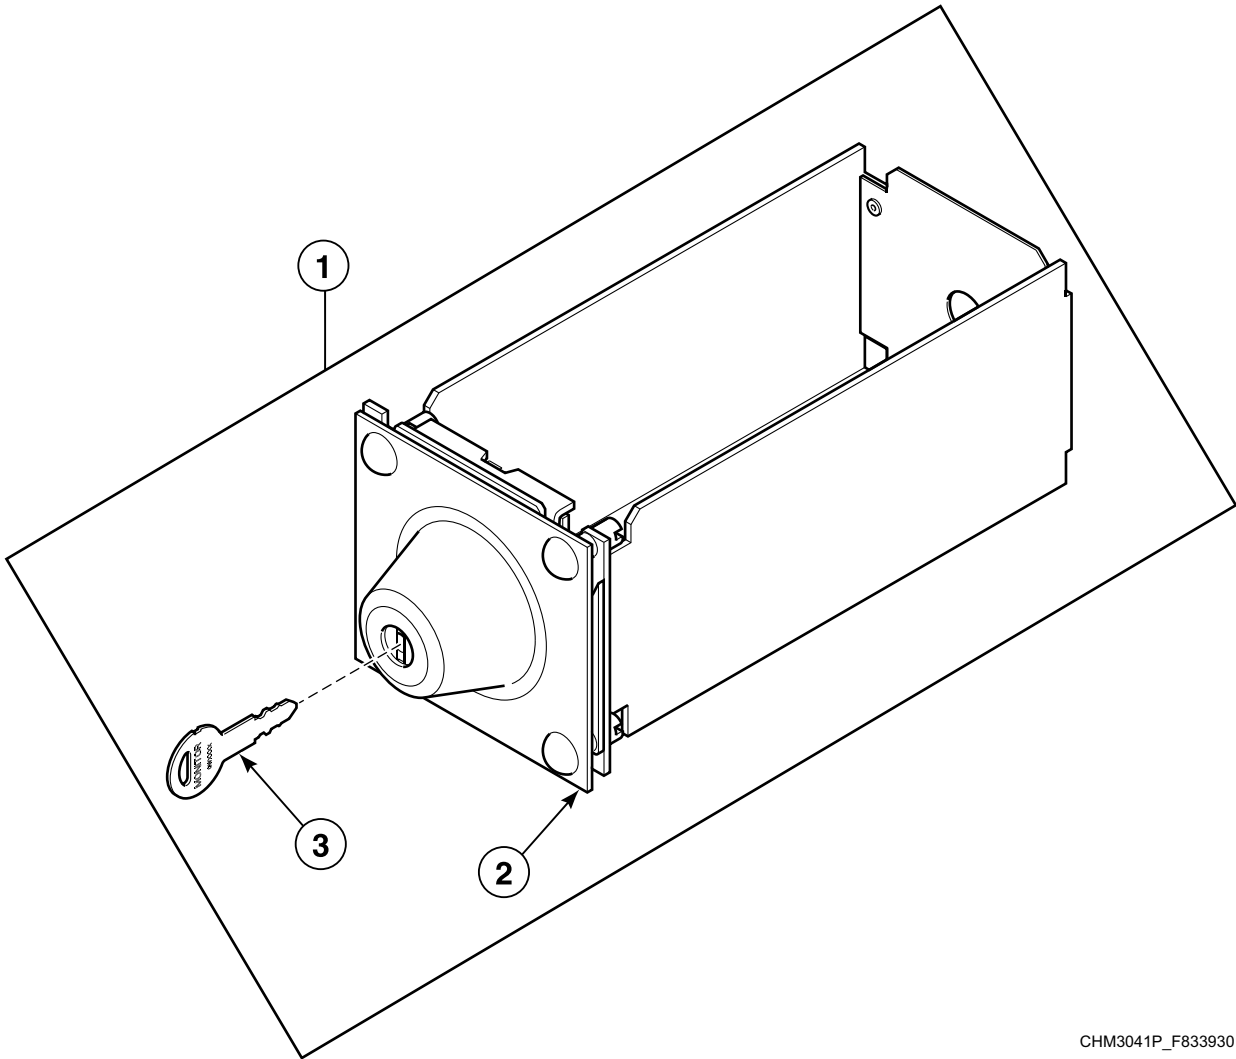


CHM3041P\_F8339301

## Optional Coin Box

| REF | PART NO. | DESCRIPTION          | COMMENTS                     |
|-----|----------|----------------------|------------------------------|
| 1   | F8182001 | Coin Drawer Assembly | 40 and 60 pound models       |
| 2   | F160672  | Coin Box             | UG21; 20 and 30 pound models |
| 3   | F160420  | Key                  | UG21                         |

# Rocker Switch, Temperature Knob and Emergency Stop Button - GN Models

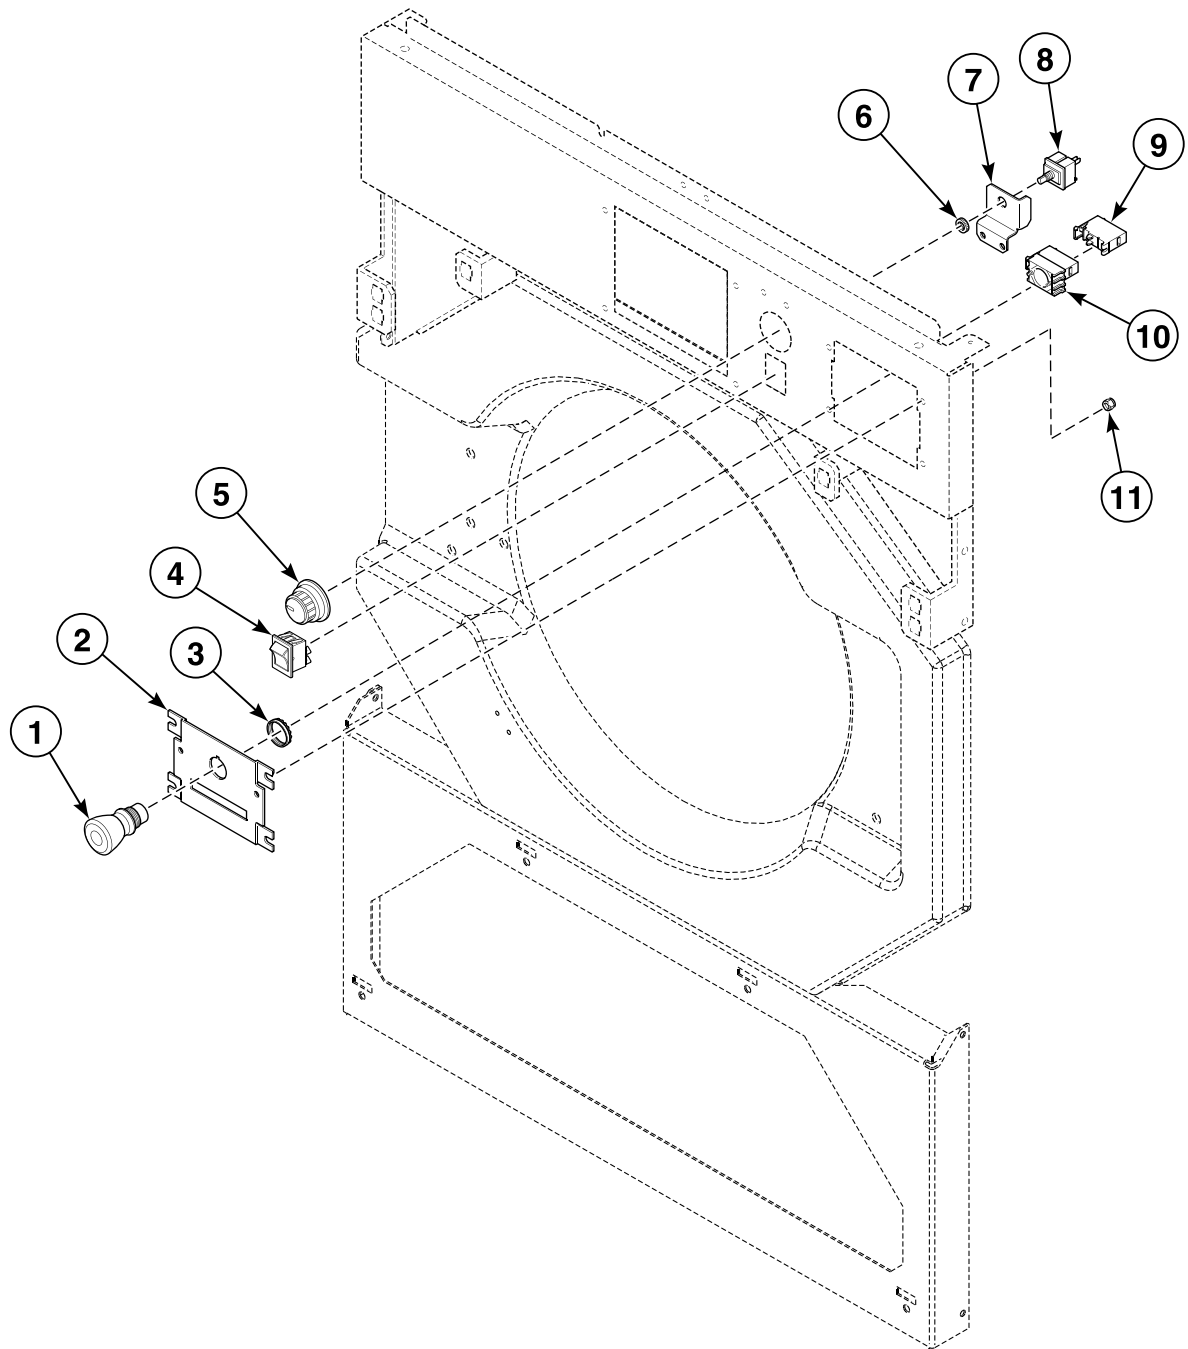


CHM3160P\_F8339301

## Rocker Switch, Temperature Knob and Emergency Stop Button - GN Models

| REF | PART NO.   | DESCRIPTION                         | COMMENTS |
|-----|------------|-------------------------------------|----------|
| 1   | F200233500 | Emergency Stop Pushbutton           |          |
| 2   | F8201301   | Emergency Stop Plate                |          |
| 3   | 24205      | Nut                                 |          |
| 4   | 512562P    | Rocker Switch                       |          |
| 5   | 44104601   | Temperature Knob                    |          |
| 6   | F431017    | Nut                                 |          |
| 7   | 70391701   | Temperature Selector Switch Bracket |          |
| 8   | 511711     | Temperature Selector Switch         |          |
| 9   | F8069501   | Contact Switch                      |          |
| 10  | F200233401 | Contact Block Switch                |          |
| 11  | F431017    | Nut                                 |          |

## Front Panels and Control Panel - Coin Models

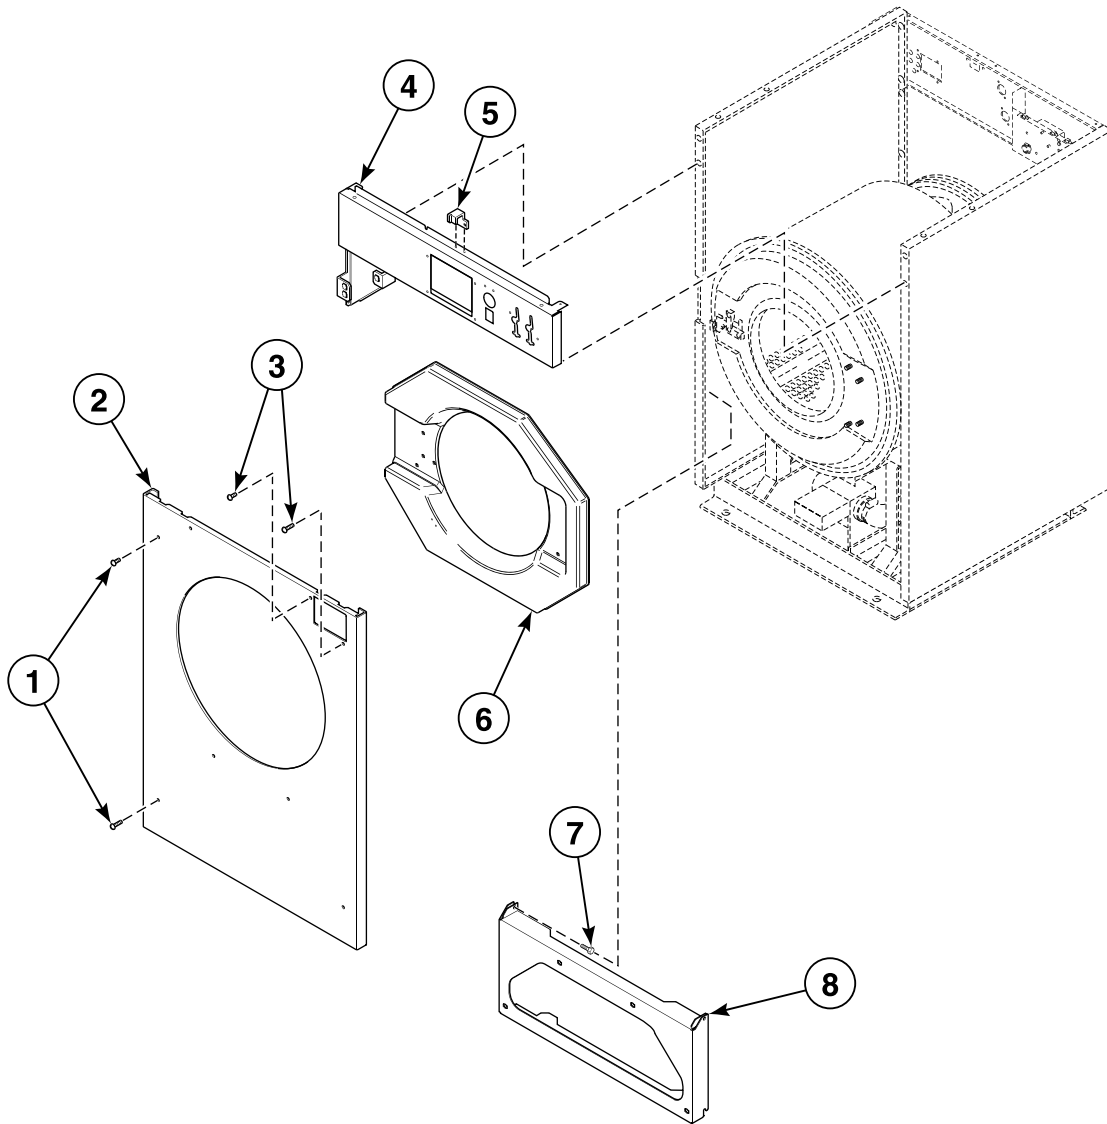


CHM3103P\_F8339301



## Front Panels and Control Panel - Coin Models

| REF | PART NO.    | DESCRIPTION            | COMMENTS                                                       |
|-----|-------------|------------------------|----------------------------------------------------------------|
| 1   | F430956     | Screw                  |                                                                |
| 2   | F8171301P   | Front Panel            | Stainless steel; 20 pound models                               |
|     | F8173001    | Front Panel            | Stainless steel; 30 pound models                               |
|     | F8173101P   | Front Panel            | Stainless steel; 40 pound models                               |
|     | F8173201P   | Front Panel            | Stainless steel; 60 pound models                               |
| 3   | 801019      | Screw                  |                                                                |
| 4   | F8038502    | Control Panel Assembly | 20 pound models                                                |
|     | F8038602    | Control Panel Assembly | 30 pound models                                                |
|     | F8038702    | Control Panel Assembly | 40 pound models                                                |
|     | F8038802    | Control Panel Assembly | 60 pound models                                                |
| 5   | F8201001    | Top Cover Latch        |                                                                |
| 6   | F170416-1   | Door Bezel             | Black; 20 pound SC models                                      |
|     | F170416-2   | Door Bezel             | Pantone 403; 20 pound HC models; Models through 1/10/10        |
|     | F170416-3   | Door Bezel             | Gray; 20 pound HC models; Models starting 1/11/10              |
|     | F170417-1   | Door Bezel             | Black; 30 pound SC models                                      |
|     | F170417-2   | Door Bezel             | Pantone 403; 30 pound HC models; Models through 1/10/10        |
|     | F170417-3   | Door Bezel             | Gray; 30 pound HC models; Models starting 1/11/10              |
|     | F0170426-00 | Door Bezel             | Black; 40 and 60 pound SC models                               |
|     | F0170426-10 | Door Bezel             | Pantone 403; 40 and 60 pound HC models; Models through 1/10/10 |
|     | F0170426-30 | Door Bezel             | Gray; 40 and 60 pound HC models; Models starting 1/11/10       |
| 7   | F430174     | Screw                  |                                                                |
| 8   | F8173801    | Front Cabinet Brace    | 20 pound models                                                |
|     | F8173901    | Front Cabinet Brace    | 30 pound models                                                |
|     | F8174001    | Front Cabinet Brace    | 40 pound models                                                |
|     | F8174101    | Lower Cabinet Brace    | 60 pound models                                                |

## Front Panel and Control Panel - GN and GY Models

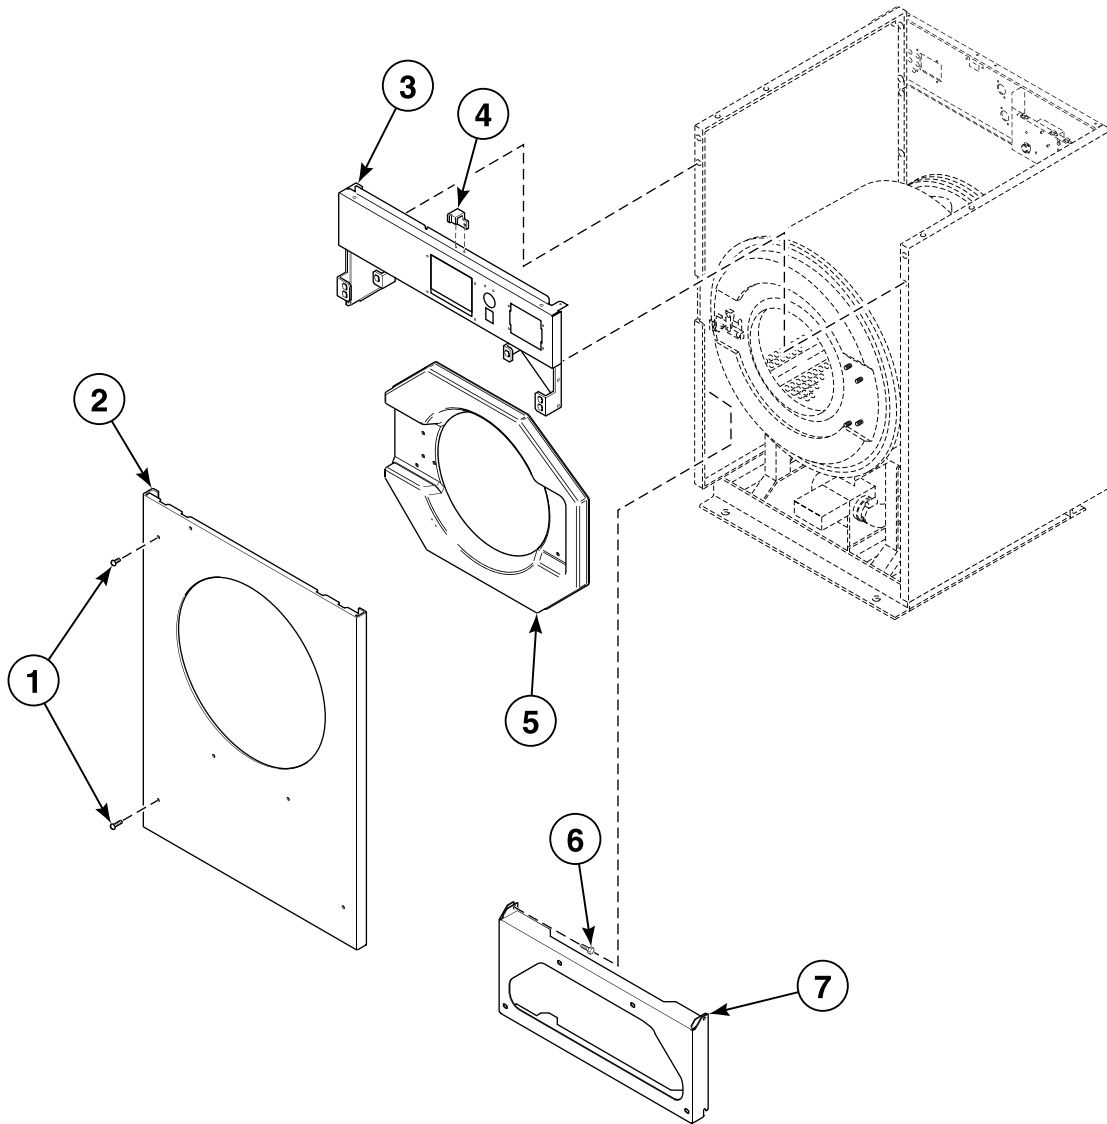


CHM3104P\_8339301

## Front Panel and Control Panel - GN and GY Models

| REF | PART NO.    | DESCRIPTION            | COMMENTS                                                       |
|-----|-------------|------------------------|----------------------------------------------------------------|
| 1   | F430956     | Screw                  |                                                                |
| 2   | F8171302P   | Front Panel            | Stainless steel; 20 pound models                               |
|     | F8173002P   | Front Panel            | Stainless steel; 30 pound models                               |
|     | F8173102P   | Front Panel            | Stainless steel; 40 pound models                               |
|     | F8173202P   | Front Panel            | Stainless steel; 60 pound models                               |
| 3   | F8038504    | Control Panel Assembly | 20 pound models                                                |
|     | F8038604    | Control Panel Assembly | 30 pound models                                                |
|     | F8038704    | Control Panel Assembly | 40 pound models                                                |
|     | F8038804    | Control Panel Assembly | 60 pound models                                                |
| 4   | F8201001    | Top Cover Latch        |                                                                |
| 5   | F170416-1   | Door Bezel             | Black; 20 pound SC and UC models                               |
|     | F170416-2   | Door Bezel             | Pantone 403; 20 pound HC models; Models through 1/10/10        |
|     | F170416-3   | Door Bezel             | Gray; 20 pound HC models; Models starting 1/11/10              |
|     | F170417-1   | Door Bezel             | Black; 30 pound SC and UC models                               |
|     | F170417-2   | Door Bezel             | Pantone 403; 30 pound HC models; Models through 1/10/10        |
|     | F170417-3   | Door Bezel             | Gray; 30 pound HC models; Models starting 1/11/10              |
|     | F0170426-00 | Door Bezel             | Black; 40 and 60 pound SC and UC models                        |
|     | F0170426-10 | Door Bezel             | Pantone 403; 40 and 60 pound HC models; Models through 1/10/10 |
|     | F0170426-30 | Door Bezel             | Gray; 40 and 60 pound HC models; Models starting 1/11/10       |
| 6   | F430174     | Screw                  |                                                                |
| 7   | F8173801    | Front Cabinet Brace    | 20 pound models                                                |
|     | F8173901    | Front Cabinet Brace    | 30 pound models                                                |
|     | F8174001    | Front Cabinet Brace    | 40 pound models                                                |
|     | F8174101    | Lower Cabinet Brace    | 60 pound models                                                |

## Control Panel Overlays

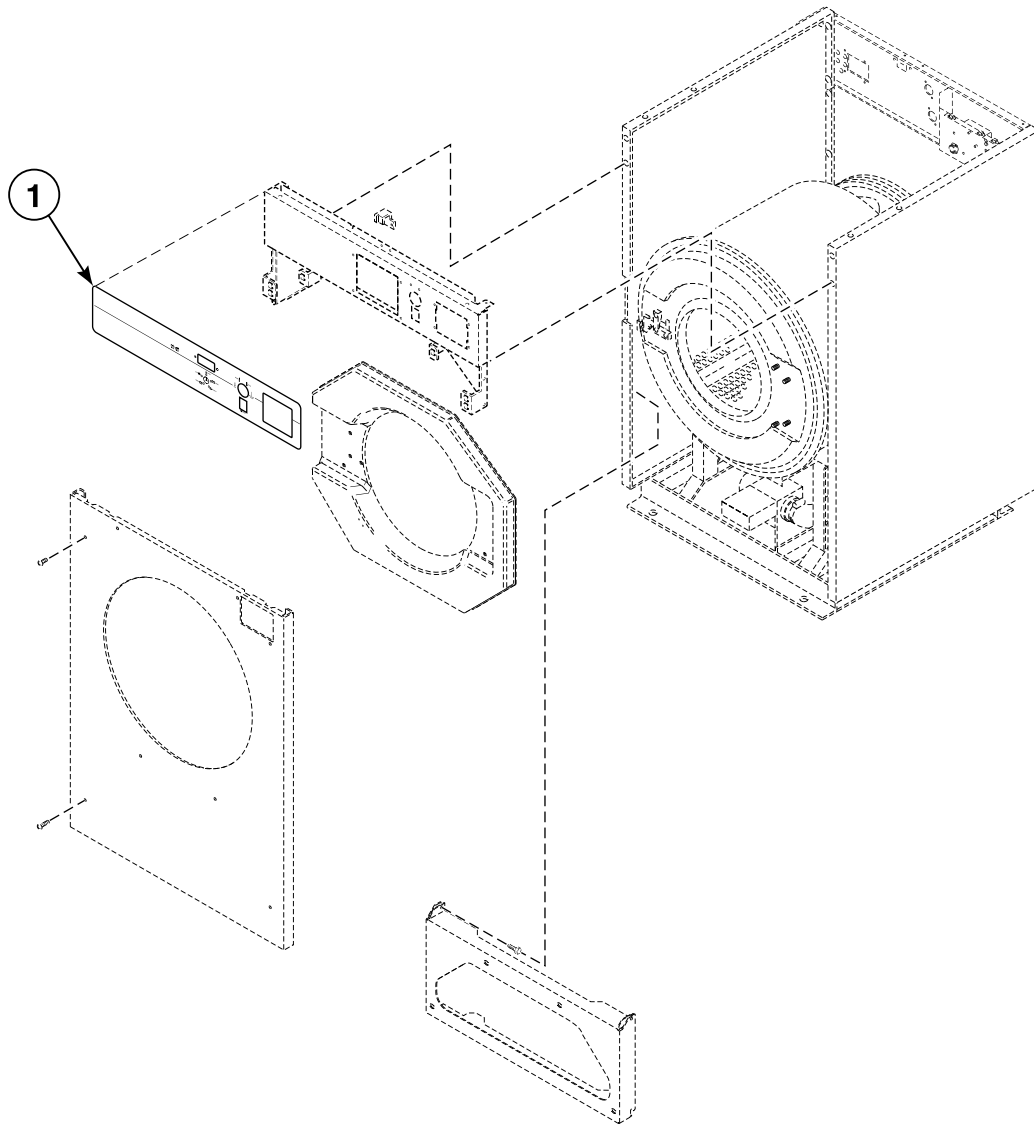


CHM3105P\_F8339301

## Control Panel Overlays

| REF | PART NO. | DESCRIPTION           | COMMENTS                                                                                                            |
|-----|----------|-----------------------|---------------------------------------------------------------------------------------------------------------------|
| 1   | F8293001 | Overlay               | Single coin drop; 20 pound SC models with GC, GD, GE, GL, GX and GY in the 7th and 8th position in the model number |
|     | F8293002 | Overlay               | Dual coin drop; 20 pound SC models with GC, GD, GE, GL, GX and GY in the 7th and 8th position in the model number   |
|     | F8293101 | Overlay               | Single coin drop; 30 pound SC models with GC, GD, GE, GL, GX and GY in the 7th and 8th position in the model number |
|     | F8293102 | Overlay               | Dual coin drop; 30 pound SC models with GC, GD, GE, GL, GX and GY in the 7th and 8th position in the model number   |
|     | F8293201 | Overlay               | Single coin drop; 40 pound SC models with GC, GD, GE, GL, GX and GY in the 7th and 8th position in the model number |
|     | F8293202 | Overlay               | Dual coin drop; 40 pound SC models with GC, GD, GE, GL, GX and GY in the 7th and 8th position in the model number   |
|     | F8293301 | Overlay               | Single coin drop; 60 pound SC models with GC, GD, GE, GL, GX and GY in the 7th and 8th position in the model number |
|     | F8293302 | Overlay               | Dual coin drop; 60 pound SC models with GC, GD, GE, GL, GX and GY in the 7th and 8th position in the model number   |
|     | F8218701 | Overlay               | Single coin drop; 20 pound HC models with GC, GD, GE, GL, GX and GY in the 7th and 8th position in the model number |
|     | F8218702 | Overlay               | Dual coin drop; 20 pound HC models with GC, GD, GE, GL, GX and GY in the 7th and 8th position in the model number   |
|     | F8218801 | Overlay               | Single coin drop; 30 pound HC models with GC, GD, GE, GL, GX and GY in the 7th and 8th position in the model number |
|     | F8218802 | Overlay               | Dual coin drop; 30 pound HC models with GC, GD, GE, GL, GX and GY in the 7th and 8th position in the model number   |
|     | F8218901 | Overlay               | Single coin drop; 40 pound HC models with GC, GD, GE, GL, GX and GY in the 7th and 8th position in the model number |
|     | F8218902 | Overlay               | Dual coin drop; 40 pound HC models with GC, GD, GE, GL, GX and GY in the 7th and 8th position in the model number   |
|     | F8219001 | Overlay               | Single coin drop; 60 pound HC models with GC, GD, GE, GL, GX and GY in the 7th and 8th position in the model number |
|     | F8219002 | Overlay               | Dual coin drop; 60 pound HC models with GC, GD, GE, GL, GX and GY in the 7th and 8th position in the model number   |
|     | F8293501 | Overlay               | Models SCL020GN2, SCN020GN2 and SCU020GN2                                                                           |
|     | F8293601 | Overlay               | Models SCL030GN2, SCN030GN2 and SCU030GN2                                                                           |
|     | F8293701 | Overlay               | Models SCN040GN2 and SCU040GN2                                                                                      |
|     | F8293801 | Overlay               | Models SCL060GN2, SCN060GN2, SCN060GNF and SCU060GN2                                                                |
|     | F8219201 | Overlay               | Models HCL020GN2, HCN020GN2, HCU020GN2 and HCZ020GN2                                                                |
|     | F8219301 | Overlay               | Models HCL030GN2, HCN030GN2, HCU030GN2 and HCZ030GN2                                                                |
|     | F8219401 | Overlay               | Models HCL040GN2, HCN040GN2 and HCU040GN2                                                                           |
|     | F8219501 | Overlay               | Models HCL060GN2, HCL060GNF, HCN060GN2, HCN060GNF and HCU060GN2                                                     |
|     | F8219701 | Overlay               | Models UCL020GN2, UCN020GN2, UCU020GN2 and UCZ020GN2                                                                |
|     | F8219801 | Overlay               | Models UCL030GN2, UCN030GN2, UCU030GN2 and UCZ030GN2                                                                |
|     | F8219901 | Overlay               | Models UCL040GN2, UCN040GN2 and UCU040GN2                                                                           |
|     | F8220001 | Overlay               | Models UCL060GN2, UCN060GN2 and UCU060GN2                                                                           |
|     | F8236801 | Control Panel Overlay | Models VCU030GN2, VCU040GN2 and VCU060GN2                                                                           |

## Panels (Drawing 1 of 2)

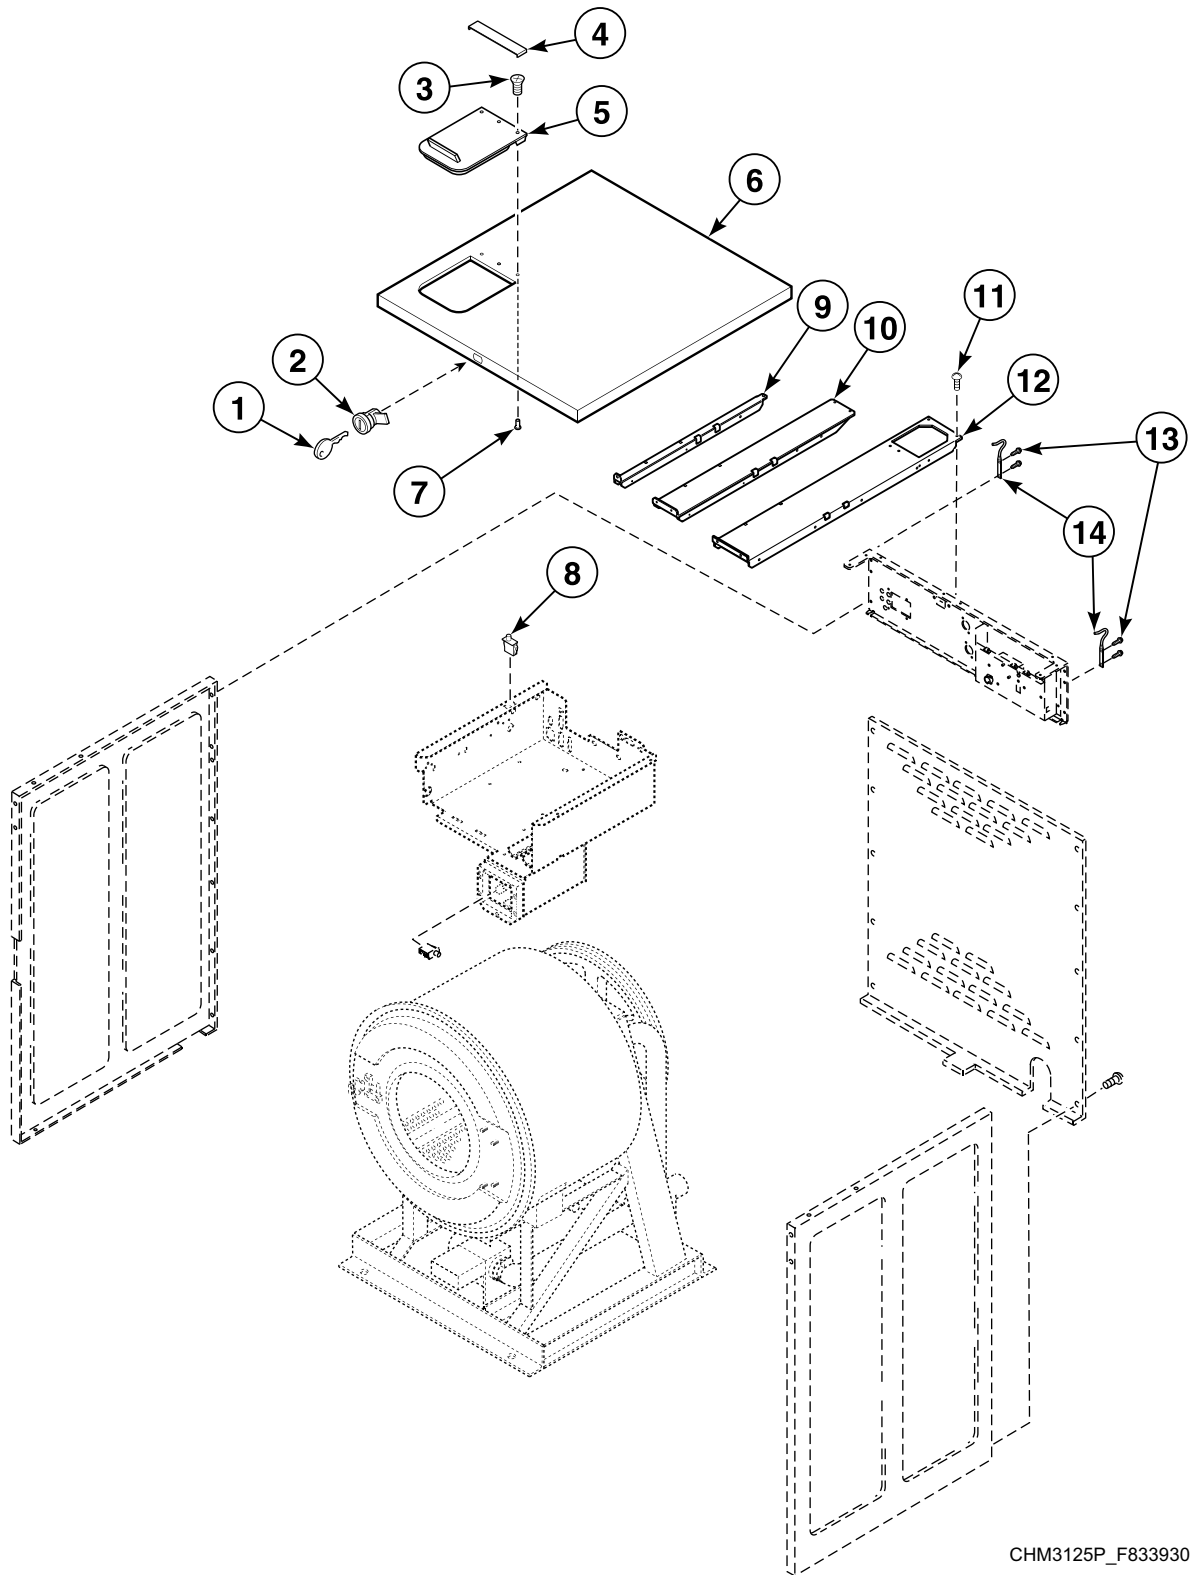


CHM3125P\_F8339301

## Panels (Drawing 1 of 2)

| REF | PART NO.  | DESCRIPTION       | COMMENTS        |
|-----|-----------|-------------------|-----------------|
| 1   | 70155603  | Key               |                 |
| 2   | 44089303P | Panel Lock        |                 |
| 3   | F8230601  | Screw             |                 |
| 4   | F8091701  | Lid Clamp         |                 |
| 5   | F8048101  | Dispenser Lid     | Gray            |
| 6   | F8040201  | Top Cover         | 20 pound models |
|     | F8017401  | Top Cover         | 30 pound models |
|     | F8040301  | Top Cover         | 40 pound models |
|     | F8040401P | Top Cover         | 60 pound models |
| 7   | F8230501  | Bolt              |                 |
| 8   | 70107001  | Pushbutton Switch |                 |
| 9   | F8043501  | Top Cabinet Brace | 20 pound models |
| 10  | F8043701  | Top Cabinet Brace | 30 pound models |
| 11  | F430174   | Screw             |                 |
| 12  | F8043801  | Top Cabinet Brace | 40 pound models |
|     | F8043901  | Top Cabinet Brace | 60 pound models |
| 13  | F8206901  | Screw             |                 |
| 14  | F8258601  | Top Cover Hinge   |                 |

## Panels (Drawing 2 of 2)

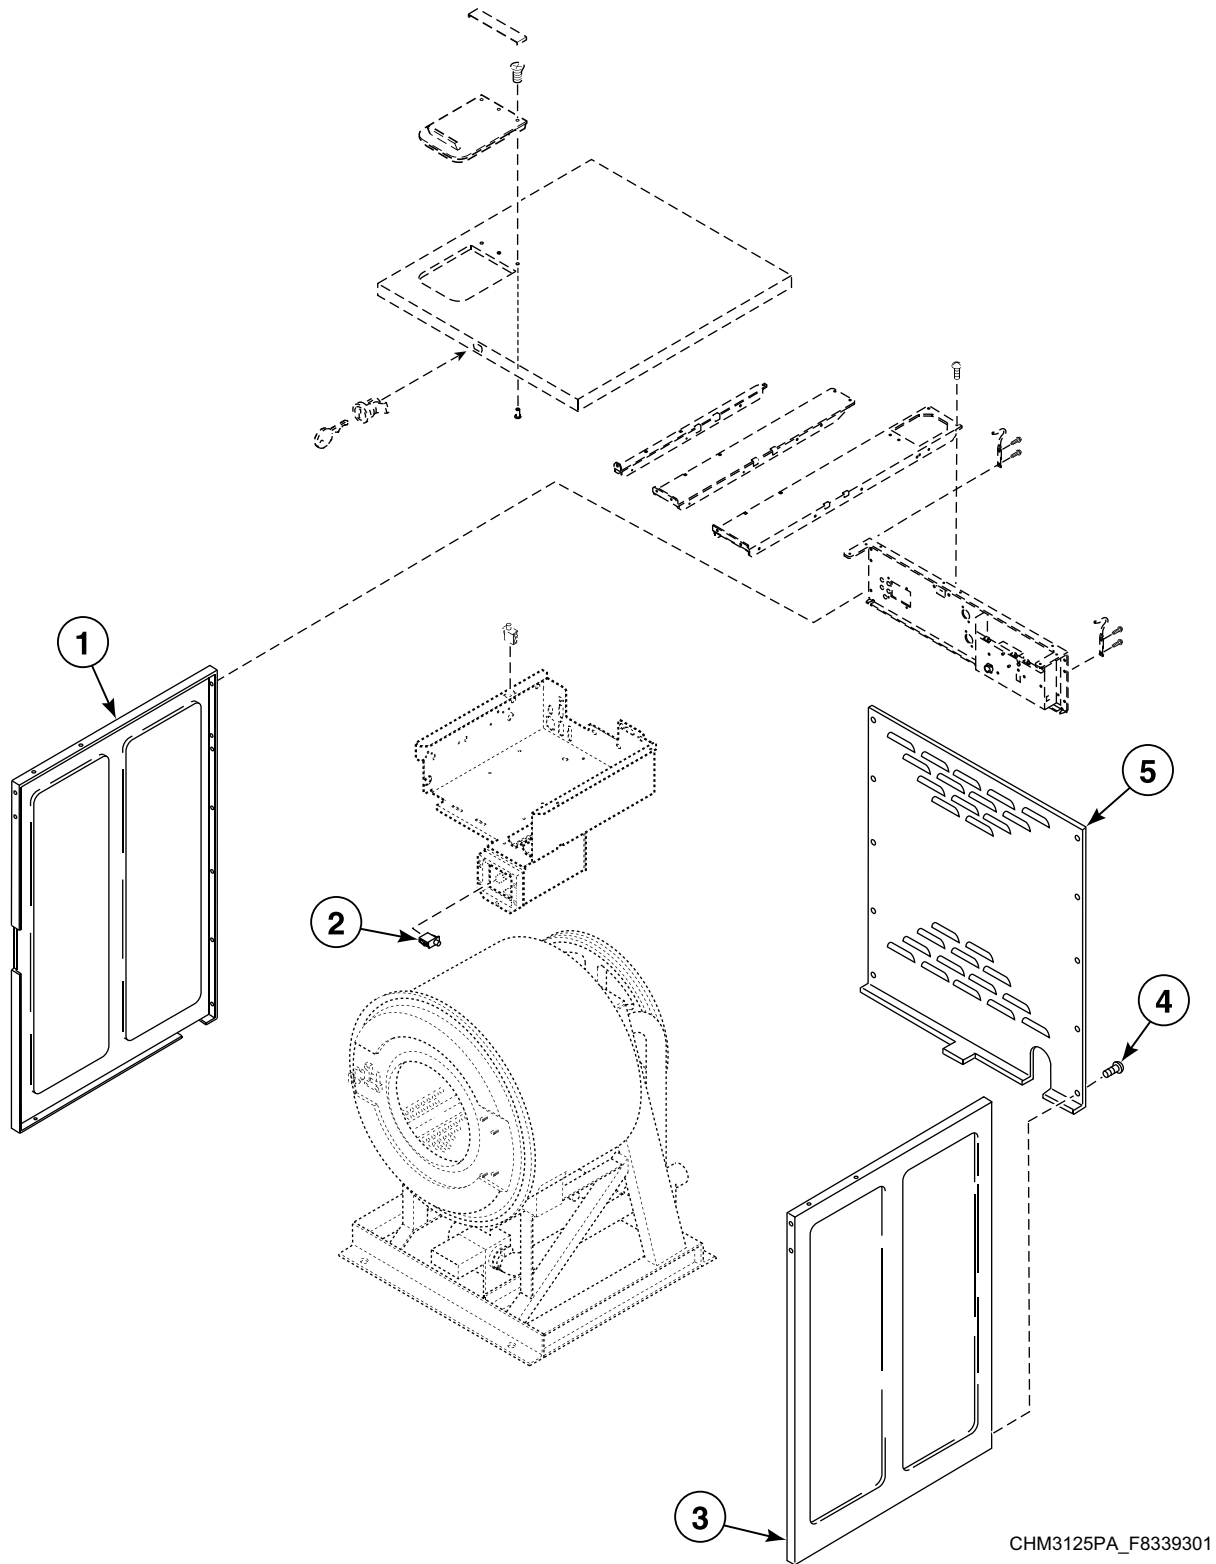


CHM3125PA\_F8339301



## Panels (Drawing 2 of 2)

| REF | PART NO.  | DESCRIPTION       | COMMENTS               |
|-----|-----------|-------------------|------------------------|
| 1   | F8042902P | Left Side Panel   | Vinyl; 20 pound models |
|     | F8043102P | Left Side Panel   | Vinyl; 30 pound models |
|     | F8043202P | Left Side Panel   | Vinyl; 40 pound models |
|     | F8043302P | Left Side Panel   | Vinyl; 60 pound models |
| 2   | 70107001  | Pushbutton Switch | Coin models            |
| 3   | F8042901P | Right Side Panel  | Vinyl; 20 pound models |
|     | F8043101P | Right Side Panel  | Vinyl; 30 pound models |
|     | F8043201P | Right Side Panel  | Vinyl; 40 pound models |
|     | F8043301P | Right Side Panel  | Vinyl; 60 pound models |
| 4   | F8206901  | Screw             |                        |
| 5   | F8176201P | Rear Panel        | 20 pound models        |
|     | F8176301  | Rear Panel        | 30 pound models        |
|     | F8177701P | Rear Panel        | 40 pound models        |
|     | F8177501P | Rear Panel        | 60 pound models        |

# Door

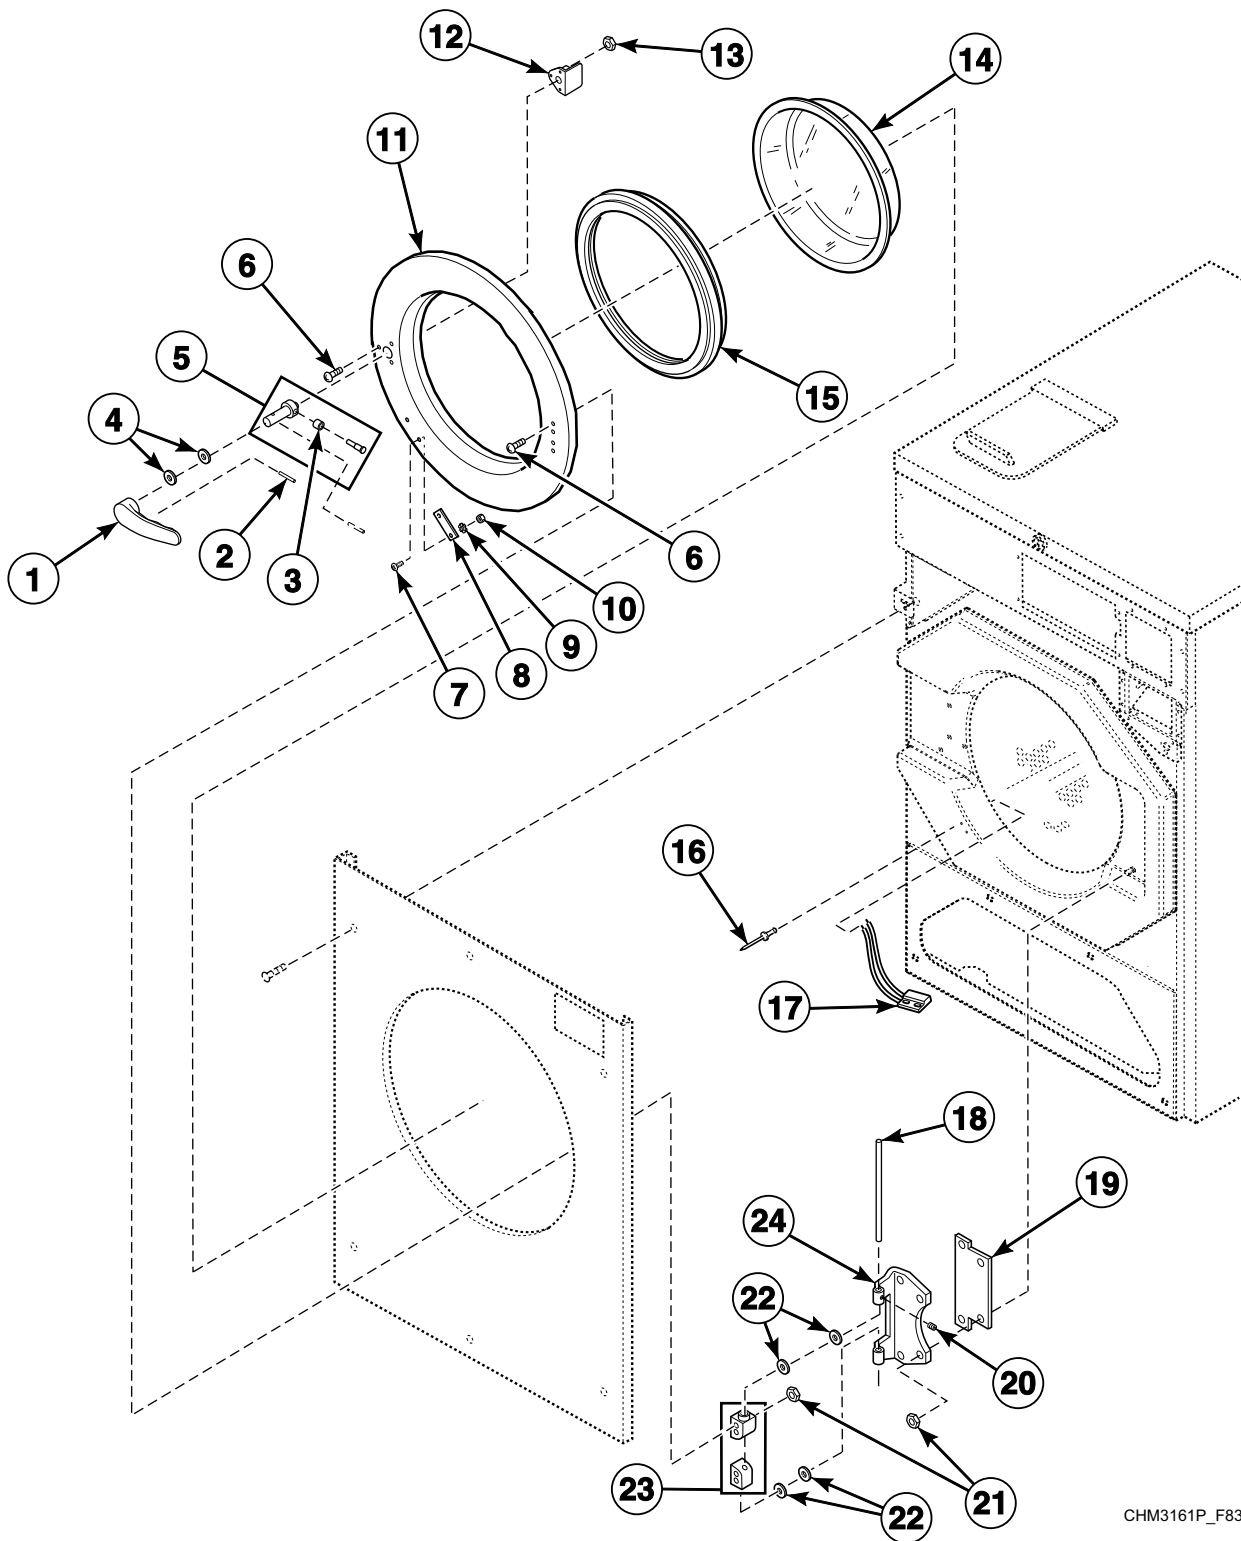


CHM3161P\_F8339301

# Door

| REF | PART NO.    | DESCRIPTION             | COMMENTS                                                                    |
|-----|-------------|-------------------------|-----------------------------------------------------------------------------|
|     | F8187201    | Door Assembly           | 20 pound SC and UC models; Includes items 1-15 and 18-24                    |
|     | F8187203    | Door Assembly           | 20 pound HC models; Includes items 1-15 and 18-24                           |
|     | F8187301    | Door Assembly           | 30 pound SC and UC models; Includes items 1-15 and 18-24                    |
|     | F8187303    | Door Assembly           | 30 pound HC models; Includes items 1-15 and 18-24                           |
|     | F8187401    | Door Assembly           | 40 and 60 pound SC and UC models; Includes items 1-15 and 18-24             |
|     | F8187403    | Door Assembly           | 40 and 60 pound HC models; Includes items 1-15 and 18-24                    |
| 1   | F8199501    | Door Handle             | Gray; HCL, HCN and HCU Models                                               |
|     | F8199401P   | Door Handle             | Black; All other models                                                     |
| 2   | F431222     | Spring Pin              |                                                                             |
| 3   | F8221701    | Bearing Sleeve          |                                                                             |
| 4   | F431916     | Washer                  |                                                                             |
| 5   | F8221401    | Door Latch Arm Assembly |                                                                             |
| 6   | F430976     | Screw                   |                                                                             |
| 7   | F430916     | Screw                   |                                                                             |
| 8   | F340703     | Magnet                  |                                                                             |
| 9   | F431113     | Washer                  |                                                                             |
| 10  | F431022     | Nut                     |                                                                             |
| 11  | F0602431-02 | Door                    | 20 pound models                                                             |
|     | F0602837-02 | Door                    | 30 pound models                                                             |
|     | F602842-2   | Door                    | 40 and 60 pound models                                                      |
| 12  | F8223701    | Door Handle Spacer      |                                                                             |
| 13  | F430232     | Nut                     |                                                                             |
| 14  | F290205P    | Door Glass Kit          | 20 pound SC and UC models; 20 pound HC models through 1/10/10               |
|     | F8341701    | Door Glass              | 20 pound HC models; Models starting 1/11/10                                 |
|     | F290207P    | Door Glass Kit          | 30 pound SC and UC models; 30 pound HC models through 1/10/10               |
|     | F8341801P   | Door Glass              | 30 pound HC models; Models starting 1/11/10                                 |
|     | F290208P    | Door Glass              | 40 and 60 pound SC and UC models; 40 and 60 pound HC models through 1/10/10 |
|     | F8341901    | Door Glass              | 40 and 60 pound HC models; Models starting 1/11/10                          |
| 15  | F200000200  | Door Gasket             | All 20 pound models except HCD020GD2                                        |
|     | F200000202  | Door Gasket             | Model HCD020GD2                                                             |
|     | F8111601    | Door Gasket             | 30 pound models                                                             |
|     | F170124     | Door Gasket             | 40 and 60 pound models                                                      |
| 16  | F8245101    | Blind Rivet             |                                                                             |
| 17  | F8066802    | Reed Switch Assembly    |                                                                             |
| 18  | F602813-2   | Rod                     | 20 and 30 pound models                                                      |
|     | F602813-3   | Rod                     | 40 and 60 pound models                                                      |
| 19  | F200131000  | Door Hinge Shim         |                                                                             |
| 20  | F430536     | Screw                   |                                                                             |
| 21  | F430215     | Nut                     |                                                                             |
| 22  | F431929     | Washer                  |                                                                             |
| 23  | F150271     | Door Mount              |                                                                             |
| 24  | F190216P    | Door Hinge              |                                                                             |

# Door Lock

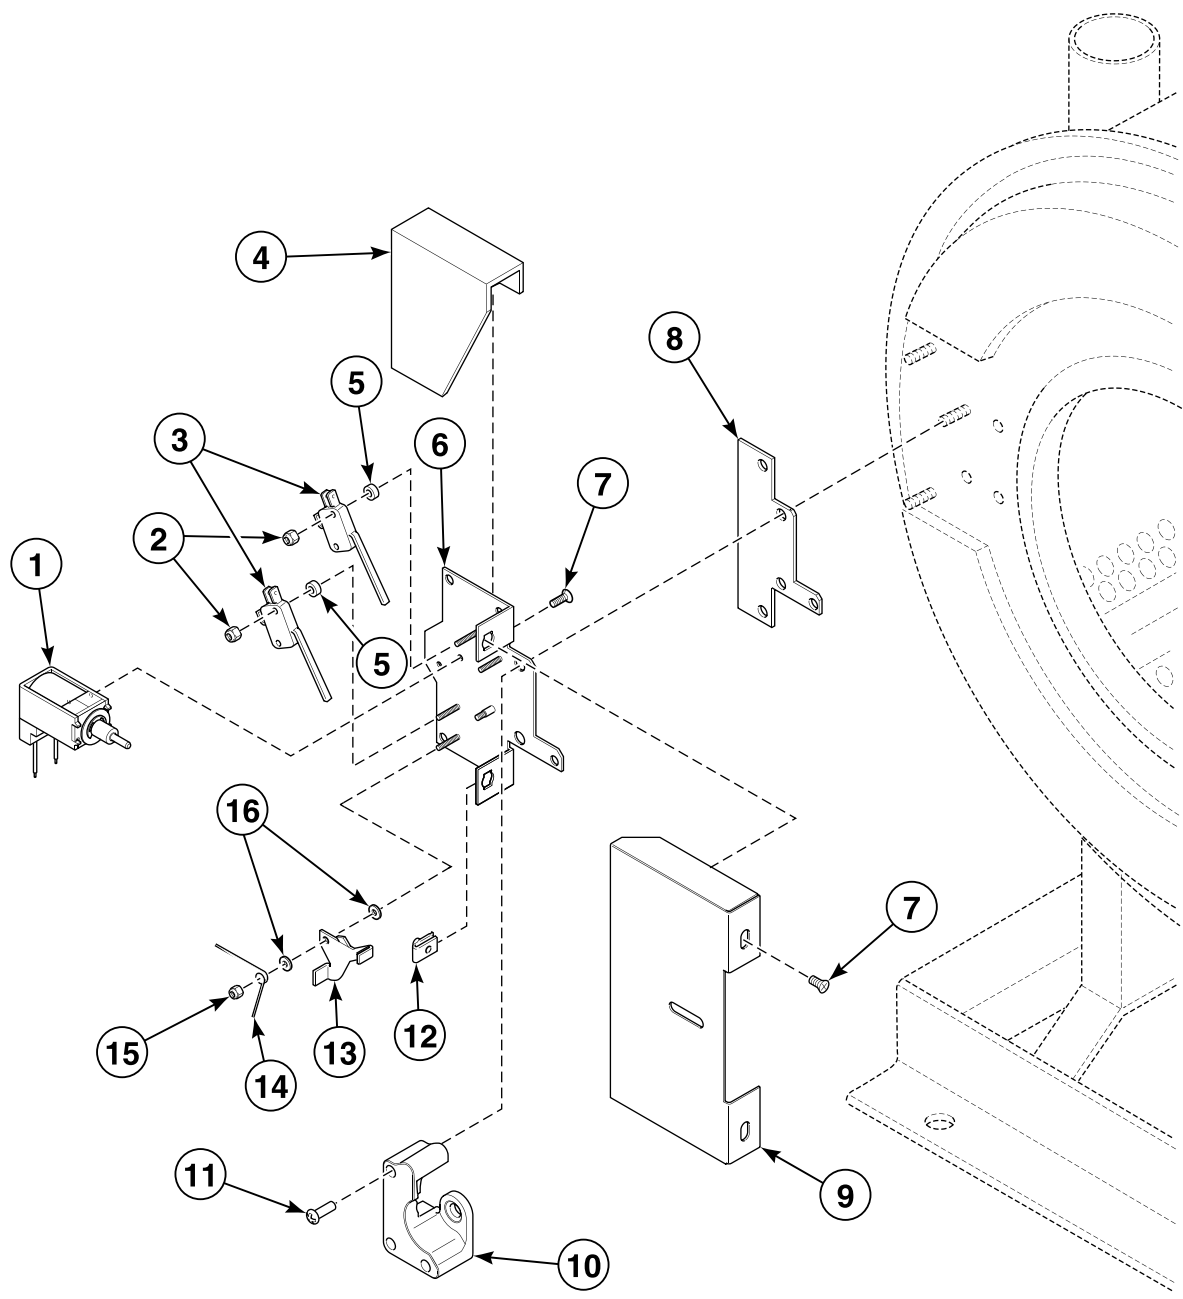


CHM3044P\_F8339301

# Door Lock

| REF | PART NO.   | DESCRIPTION                        | COMMENTS                                                                                             |
|-----|------------|------------------------------------|------------------------------------------------------------------------------------------------------|
|     | F8197101   | Door Lock Assembly                 | Includes F8339902 External Door Lock Harness; Models through 10/31/10                                |
|     | F8340501   | Door Lock Assembly                 | Includes F8340001 External Door Lock Harness; Models starting 11/1/10                                |
|     | F977P3     | Door Lock Solenoid Replacement Kit | Includes F8340101 Solenoid                                                                           |
| 1   | F8340101   | Solenoid                           | Includes F8224201 Solenoid; Models through 10/31/10; Order F977P3 Door Lock Solenoid Replacement Kit |
|     | F8340001   | External Door Lock Harness         | Includes F8340101 Solenoid; Models starting 11/1/10                                                  |
| 2   | F430225    | Nut                                |                                                                                                      |
| 3   | F200203200 | Door Lock Microswitch              |                                                                                                      |
| 4   | F320200    | Door Lock Splash Shield            |                                                                                                      |
| 5   | F431901    | Spacer                             |                                                                                                      |
| 6   | F8223201   | Door Lock Plate Assembly           | Models through 10/31/10                                                                              |
| 7   | F430956    | Screw                              |                                                                                                      |
| 8   | F8059701   | Door Lock Plate Shim               | Models through 9/25/09                                                                               |
|     | F8344401   | Door Lock Plate Shim               | Models starting 9/26/09                                                                              |
| 9   | F8245001   | Door Lock Cover                    |                                                                                                      |
| 10  | F8223601   | Door Lock Catch                    | Models through 10/31/10                                                                              |
|     | F8344501   | Door Lock Catch                    | Models starting 11/1/10                                                                              |
| 11  | F8221601   | Bolt                               | Models through 10/31/10                                                                              |
|     | F8270701   | Bolt                               | Models starting 11/1/10                                                                              |
| 12  | F430264    | Nut                                |                                                                                                      |
| 13  | F8223401   | Door Lock Switch Lever             |                                                                                                      |
| 14  | F8070301   | Torsion/Door Lock Spring           |                                                                                                      |
| 15  | F430232    | Nut                                |                                                                                                      |
| 16  | F431902    | Washer                             |                                                                                                      |

**Basket, Shell, Frame and Trunnion (Drawing 1 of 3)**

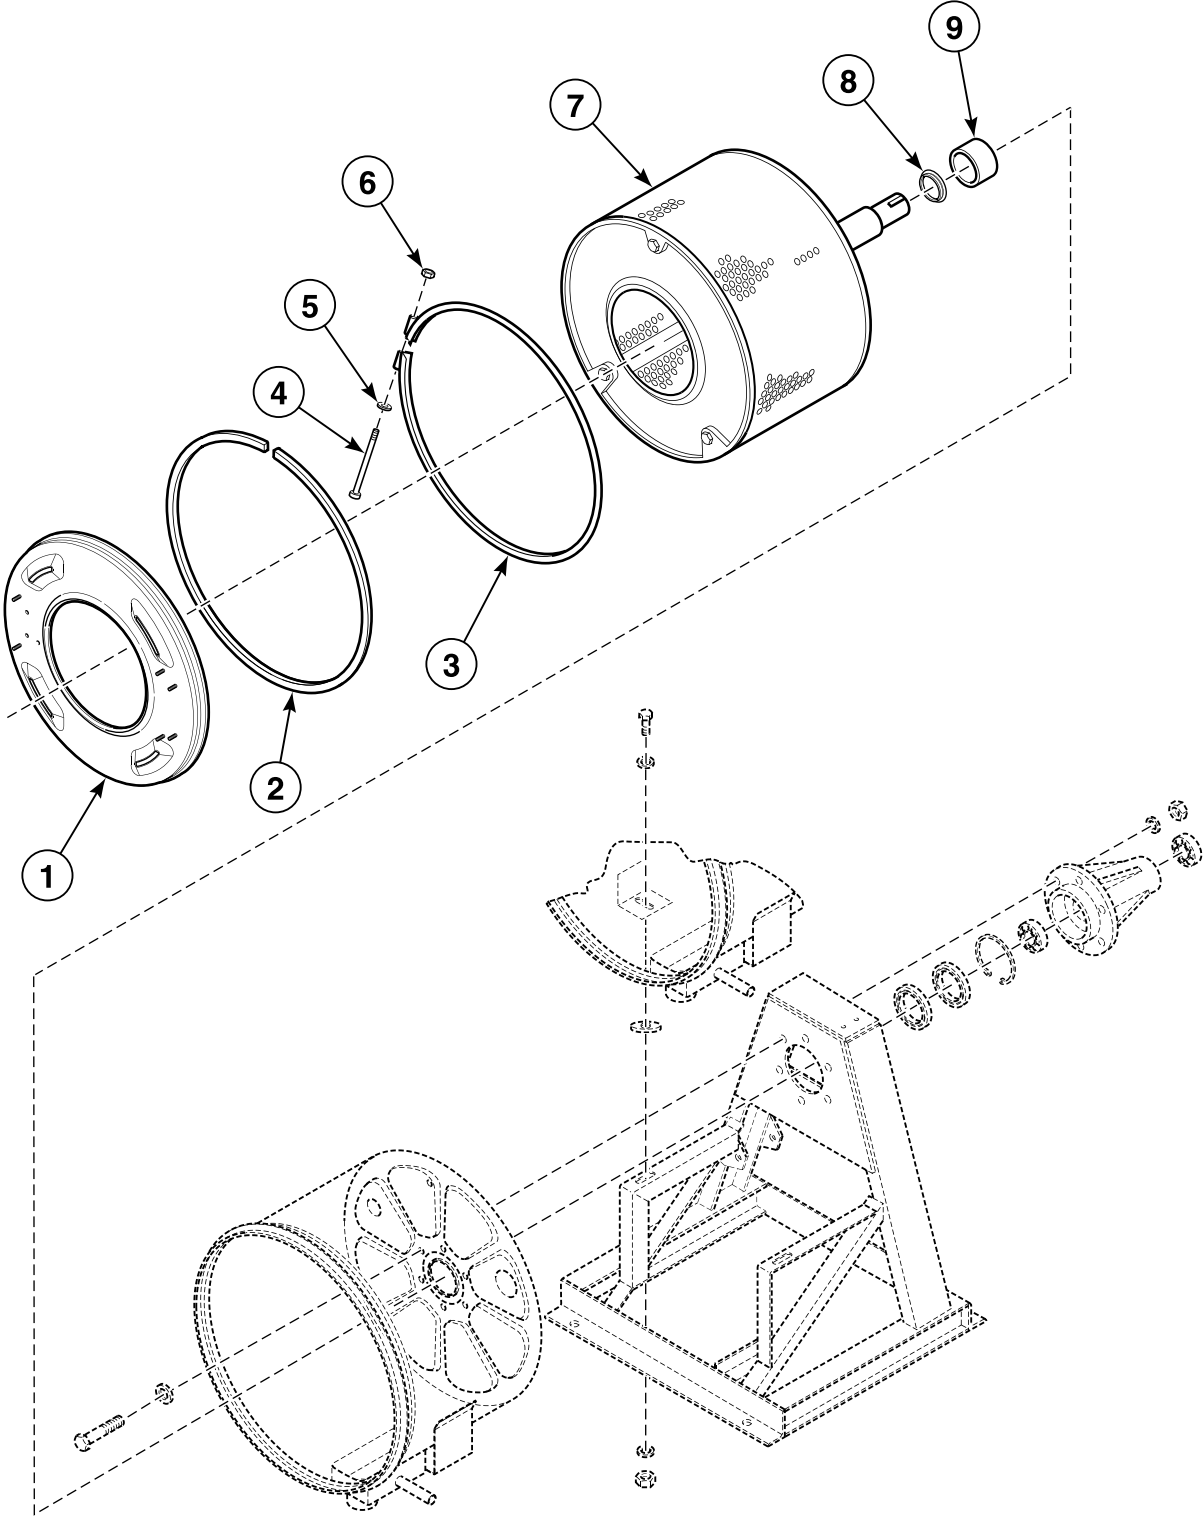


CHM3153P\_F8339301

## Basket, Shell, Frame and Trunnion (Drawing 1 of 3)

| REF | PART NO.    | DESCRIPTION          | COMMENTS                                                                                                                   |
|-----|-------------|----------------------|----------------------------------------------------------------------------------------------------------------------------|
| 1   | F8229401    | Shell Front Assembly | 20 pound models                                                                                                            |
|     | F8229501    | Shell Front Assembly | 30 pound models                                                                                                            |
|     | F8229601    | Shell Front Assembly | 40 pound models                                                                                                            |
|     | F8229701    | Shell Front Assembly | 60 pound models                                                                                                            |
| 2   | F200001600P | Shell Band Gasket    | 20, 40 and 60 pound models                                                                                                 |
|     | F200001602  | Shell Gasket         | 30 pound models                                                                                                            |
| 3   | F602757     | Shell Band Assembly  | 20 pound models                                                                                                            |
|     | F631977     | Shell Band Assembly  | 30 pound models                                                                                                            |
|     | F741701     | Shell Band Kit       | 40 pound models                                                                                                            |
|     | F741702     | Shell Band Kit       | 60 pound models                                                                                                            |
| 4   | F430518     | Screw                |                                                                                                                            |
| 5   | F430317     | Washer               |                                                                                                                            |
| 6   | F430215     | Nut                  |                                                                                                                            |
| 7   | F8123501    | Basket Assembly      | 20 pound models; Includes item 9; Models through 3/31/10                                                                   |
|     | F8347801P   | Basket Assembly      | 20 pound models; Includes items 8 and 9; Models starting 4/1/10                                                            |
|     | F8114201P   | Basket Assembly      | 30 pound models; Includes item 9; Models through 3/31/10                                                                   |
|     | F8347901P   | Basket Assembly      | 30 pound models; Includes items 8 and 9; Models starting 4/1/10                                                            |
|     | F938P3      | Pressfit Upgrade Kit | 40 pound models; Includes item 9; Models through 3/31/10                                                                   |
|     | F8336301P   | Basket Assembly      | 40 pound models that have been upgraded with F938P3 Pressfit Upgrade Kit or models starting 4/1/10; Includes items 8 and 9 |
|     | F8116201    | Basket Assembly      | 60 pound models; Includes item 9; Models through 3/31/10                                                                   |
|     | F8336501P   | Basket Assembly      | 60 pound models; Includes items 8 and 9; Models starting 4/1/10                                                            |
| 8   | F8336801    | Excluder Seal        | 20 pound models; Models starting 4/1/10                                                                                    |
|     | F8336901    | Excluder Seal        | 30 pound models; Models starting 4/1/10                                                                                    |
|     | F8337001    | Excluder Seal        | 40 pound models; Models starting 4/1/10                                                                                    |
|     | F8337101    | Excluder Seal        | 60 pound models; Models starting 4/1/10                                                                                    |
| 9   | F8312001P   | Shaft Seal Sleeve    | 20 pound models; Models through 3/31/10                                                                                    |
|     | F8343901    | Shaft Seal Sleeve    | 20 pound models; Models starting 4/1/10                                                                                    |
|     | F8312004P   | Shaft Seal Sleeve    | 30 pound models; Models through 3/31/10                                                                                    |
|     | F8343904    | Shaft Seal Sleeve    | 30 pound models; Models starting 4/1/10                                                                                    |
|     | F8312006P   | Shaft Seal Sleeve    | 40 pound models; Models through 3/31/10                                                                                    |
|     | F8343906    | Shaft Seal Sleeve    | 40 pound models that have been upgraded with F938P3 Pressfit Upgrade Kit or models starting 4/1/10                         |
|     | F8312009P   | Shaft Seal Sleeve    | 60 pound models; Models through 3/31/10                                                                                    |
|     | F8343909    | Shaft Seal Sleeve    | 60 pound models; Models starting 4/1/10                                                                                    |

**Basket, Shell, Frame and Trunnion (Drawing 2 of 3)**

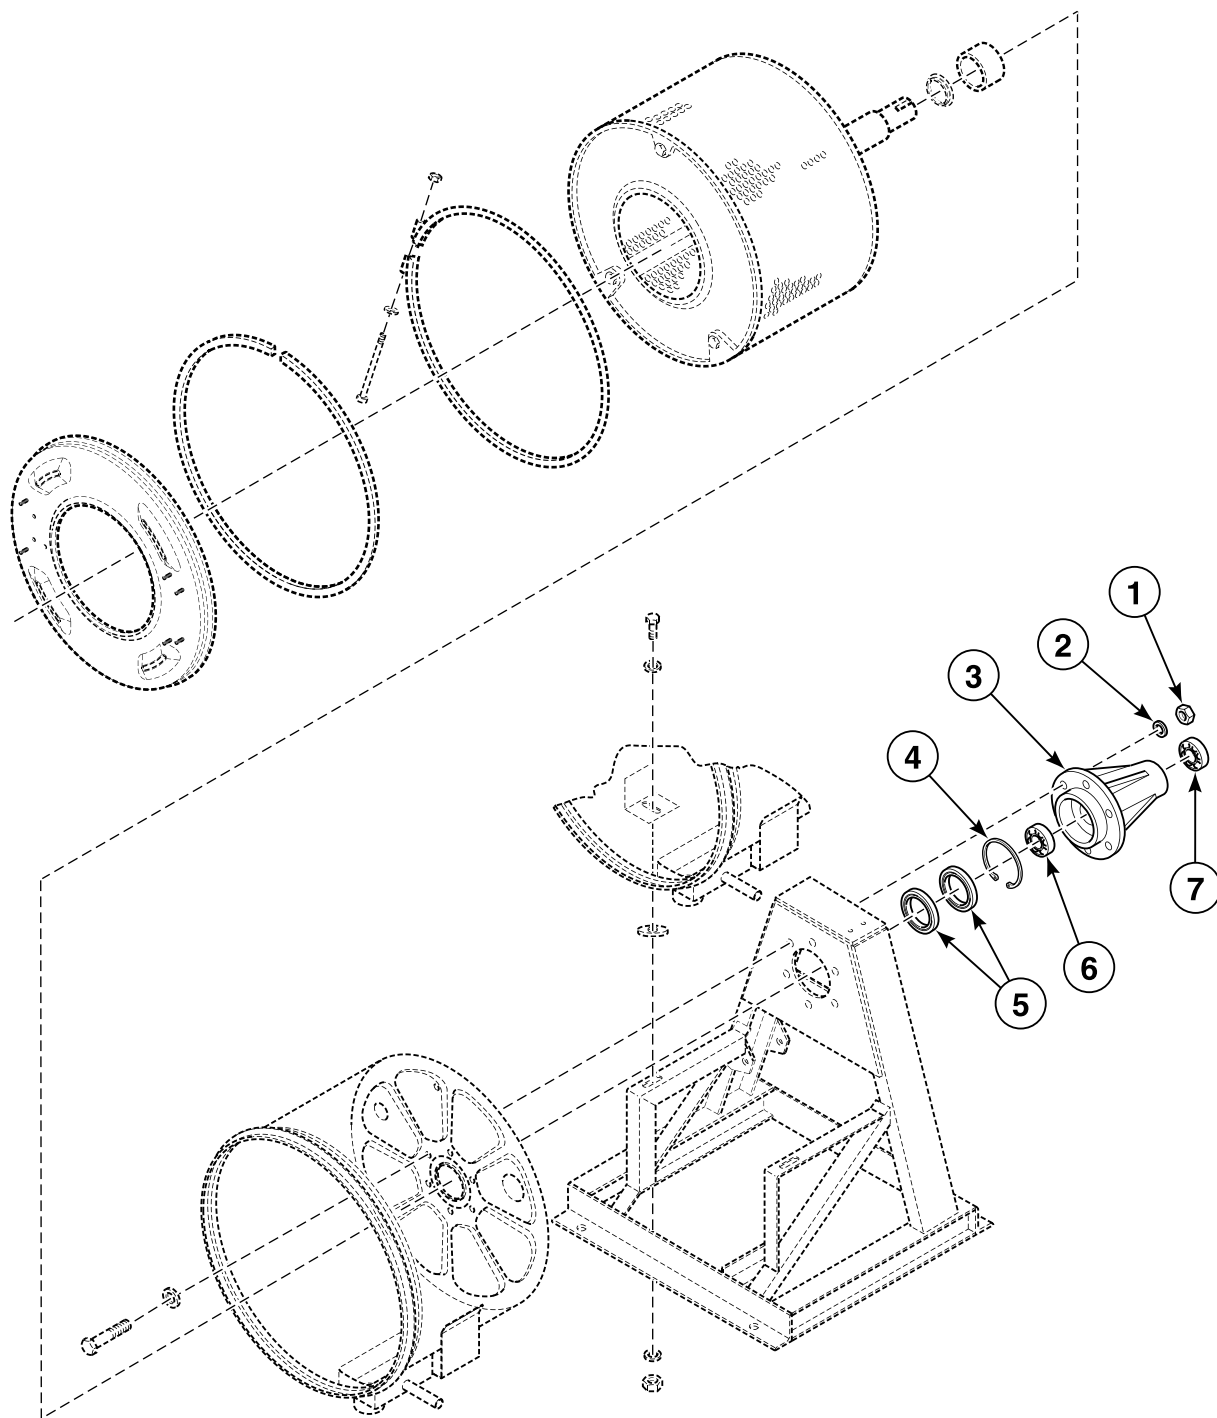


CHM3153PA\_F8339301



## Basket, Shell, Frame and Trunnion (Drawing 2 of 3)

| REF | PART NO. | DESCRIPTION     | COMMENTS                                   |
|-----|----------|-----------------|--------------------------------------------|
| 1   | F430239  | Nut             | 20 pound models                            |
|     | F430240  | Nut             | All other models                           |
| 2   | F431128  | Washer          | 20 pound models                            |
|     | F431131  | Washer          | All other models                           |
| 3   | F747001  | Trunnion Kit    | Includes items 4-6; 20 pound models        |
|     | F747002  | Trunnion Kit    | Includes items 4-6; 30 pound models        |
|     | F747003  | Trunnion Kit    | Includes items 4-6; 40 pound models        |
|     | F747005  | Trunnion Kit    | Includes items 4-6; 60 pound models        |
| 4   | F8344901 | Retaining Ring  | 20 pound models; Models starting 4/1/10    |
|     | F8345001 | Retaining Ring  | 30 pound models; Models starting 4/1/10    |
|     | F8337801 | Retaining Ring  | 40 pound models; Models starting 4/1/10    |
|     | F8337901 | Retaining Ring  | 60 pound models; Models starting 4/1/10    |
| 5   | F8203801 | Triple Lip Seal | 20 pound models                            |
|     | F8203802 | Triple Lip Seal | 30 pound models                            |
|     | F8203803 | Triple Lip Seal | 40 pound models                            |
|     | F8203806 | Triple Lip Seal | 60 pound models                            |
| 6   | F100137P | Bearing         | 6308 2RS C3; Front; 20 and 40 pound models |
|     | F100123P | Bearing         | 6309 2RS C3; Front; 30 pound models        |
|     | F100135  | Bearing         | 6313 2RS C3; Front; 60 pound models        |
| 7   | F100136P | Bearing         | 6307 2RS C3; Rear; 20 pound models         |
|     | F100108  | Bearing         | Rear; 30 pound models                      |
|     | F100134  | Bearing         | 6310 2RS C3; Rear; 40 and 60 pound models  |

**Basket, Shell, Frame and Trunnion (Drawing 3 of 3)**

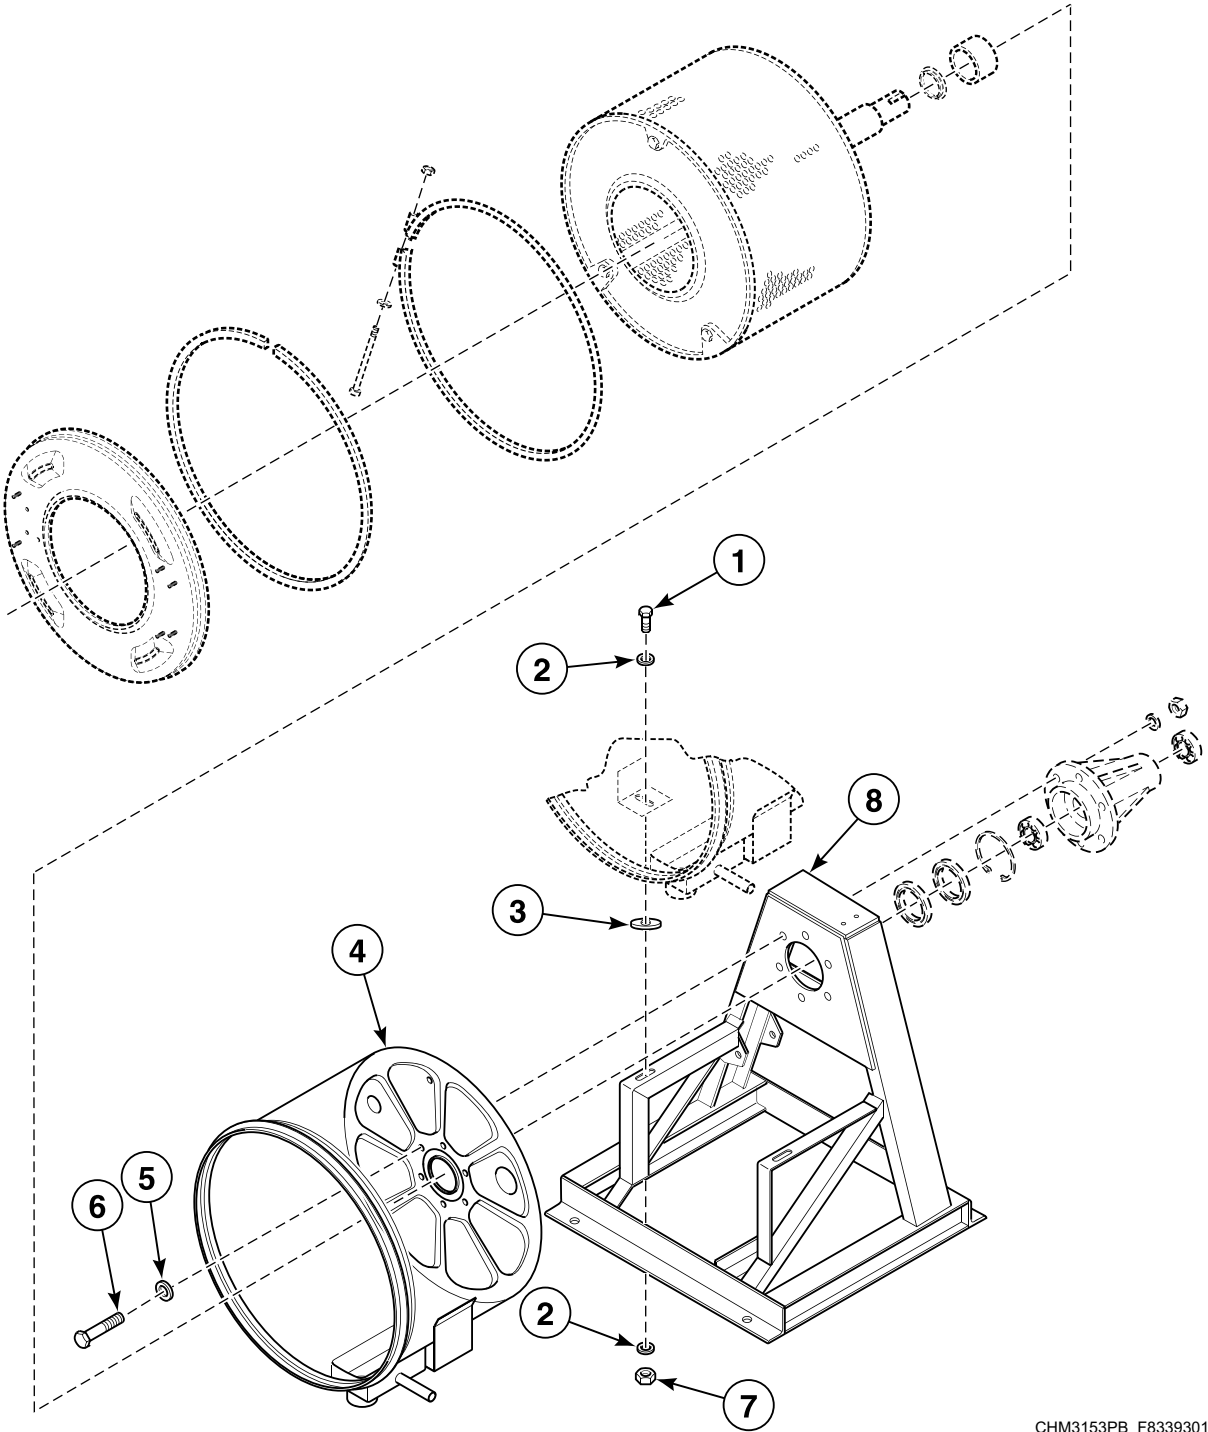


CHM3153PB\_F8339301

## Basket, Shell, Frame and Trunnion (Drawing 3 of 3)

| REF | PART NO. | DESCRIPTION    | COMMENTS                                       |
|-----|----------|----------------|------------------------------------------------|
| 1   | F430942  | Screw          |                                                |
| 2   | M400081  | Washer         |                                                |
| 3   | F430303  | Washer         |                                                |
| 4   | F8179201 | Shell Weldment | 20 pound coin models; Standard                 |
|     | F8179202 | Shell Weldment | 20 pound OPL models; Models with electric heat |
|     | F8179301 | Shell Weldment | 30 pound coin models; Standard                 |
|     | F8179302 | Shell Weldment | 30 pound OPL models; Models with electric heat |
|     | F8179401 | Shell Weldment | 40 pound coin models; Standard                 |
|     | F8179402 | Shell Weldment | 40 pound OPL models; Models with electric heat |
|     | F8179501 | Shell Weldment | 60 pound coin models; Standard                 |
|     | F8179502 | Shell Weldment | 60 pound OPL models; Models with electric heat |
| 5   | F431128  | Washer         | 20 pound models                                |
|     | F431131  | Washer         | All other models                               |
| 6   | F430949  | Screw          | 20 pound models                                |
|     | F430987  | Screw          | All other models                               |
| 7   | F430218  | Nut            |                                                |
| 8   | F8195901 | Frame Weldment | 20 pound models                                |
|     | F8196001 | Frame Weldment | 30 pound models                                |
|     | F8196101 | Frame Weldment | 40 pound models                                |
|     | F8199101 | Frame Weldment | 60 pound models                                |

# Drain Plumbing

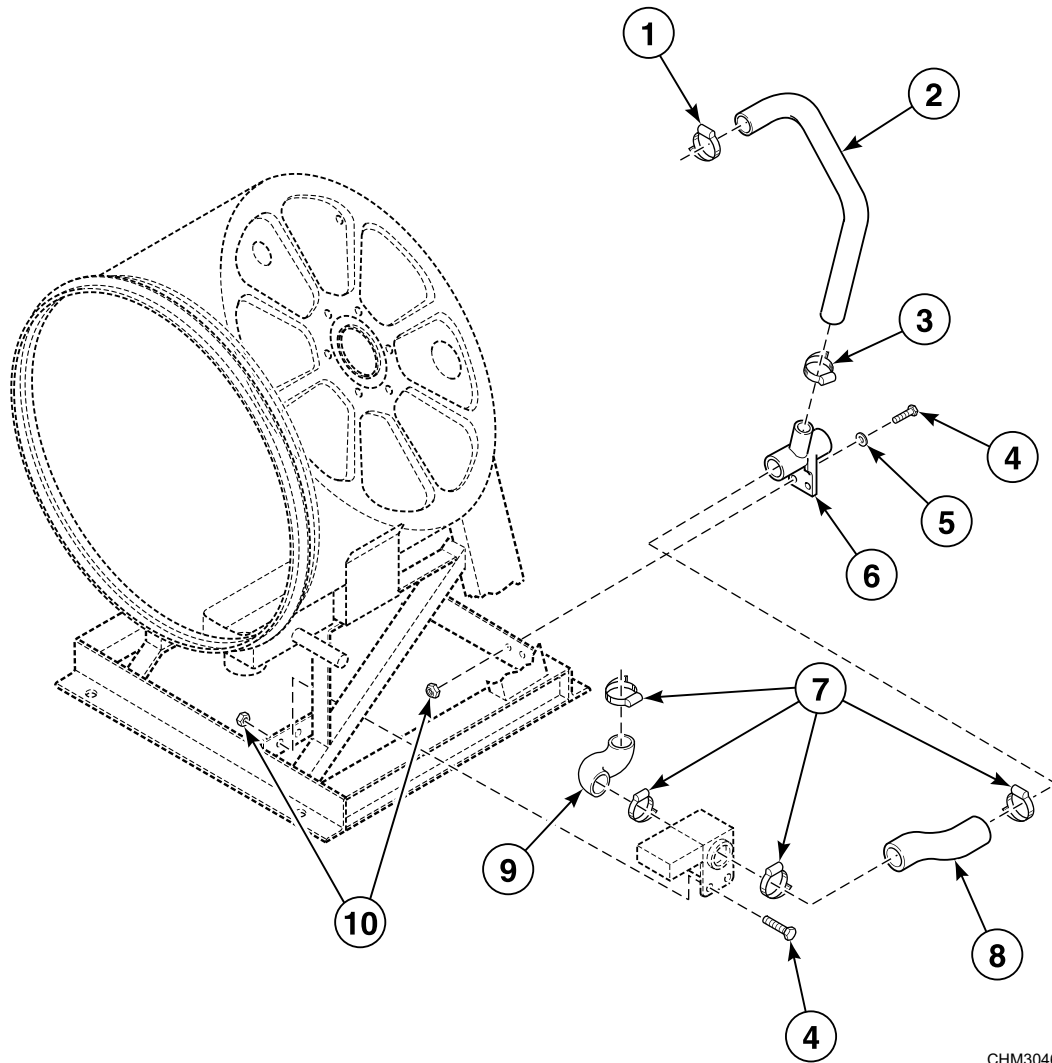


CHM3046P\_F8339301

## Drain Plumbing

| REF | PART NO.     | DESCRIPTION         | COMMENTS                       |
|-----|--------------|---------------------|--------------------------------|
| 1   | F200213      | Hose Clamp          | No. 40                         |
| 2   | F150308      | Overflow Hose       | 20 and 30 pound models         |
|     | F0200238-00  | Overflow Hose       | 40 pound models                |
|     | F8337701     | Overflow Hose       | 40 pound models; Electric heat |
|     | F150417      | Overflow Hose       | 60 pound models                |
| 3   | F200215      | Hose Clamp          | 40 pound models                |
|     | F200213      | Hose Clamp          | All other models; No. 40       |
| 4   | F430107      | Screw               |                                |
| 5   | F430317      | Washer              |                                |
| 6   | F0150318-00D | Drain Connector Tee | 20 and 30 pound models         |
|     | F150398      | Drain Tee           | 40 and 60 pound models         |
| 7   | F200213      | Hose Clamp          | 20 and 30 pound models; No. 40 |
|     | F200201      | Hose Clamp          | 40 and 60 pound models; No. 56 |
| 8   | F8233101     | Drain Hose          | 20 pound models                |
|     | F8233102     | Drain Hose          | 30 pound models                |
|     | F8231901     | Drain Hose          | 40 pound models                |
|     | F8231902     | Drain Hose          | 60 pound models                |
| 9   | F8233001     | Drain Hose          | 20 and 30 pound models         |
|     | F8232901     | Drain Hose          | 40 and 60 pound models         |
| 10  | F430215      | Nut                 |                                |

## Drain Valve Assembly - 20 and 30 Pound Models

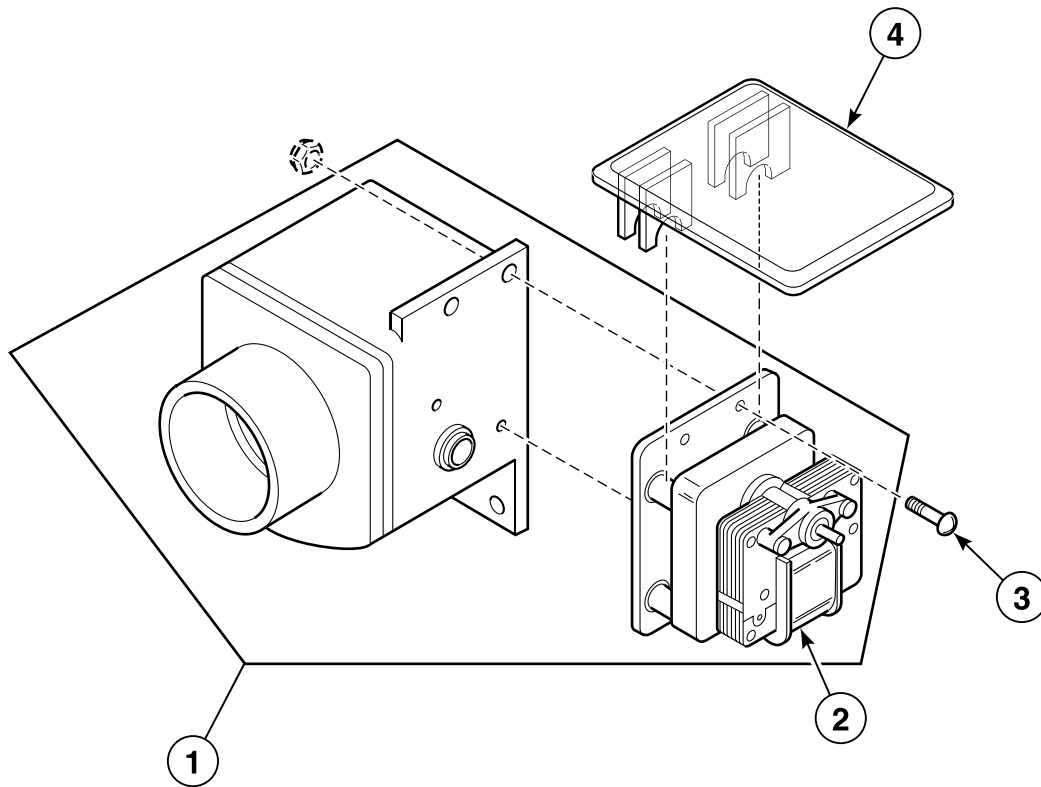


CHM2450P\_F8339301

## Drain Valve Assembly - 20 and 30 Pound Models

| REF | PART NO.   | DESCRIPTION                             | COMMENTS              |
|-----|------------|-----------------------------------------|-----------------------|
| 1   | 803292     | Gravity Drain Valve                     | 220 Volt              |
| 2   | F380933P   | Drain Valve Motor                       | Round shaft; 220 Volt |
|     | G159764P   | Drain Valve Motor and Gear Box Assembly | Keyed shaft; 220 Volt |
| 3   | F200182700 | Bolt                                    |                       |
| 4   | F200133600 | Drain Valve Cover                       |                       |

## Drain Valve Assembly - 40 and 60 Pound Models

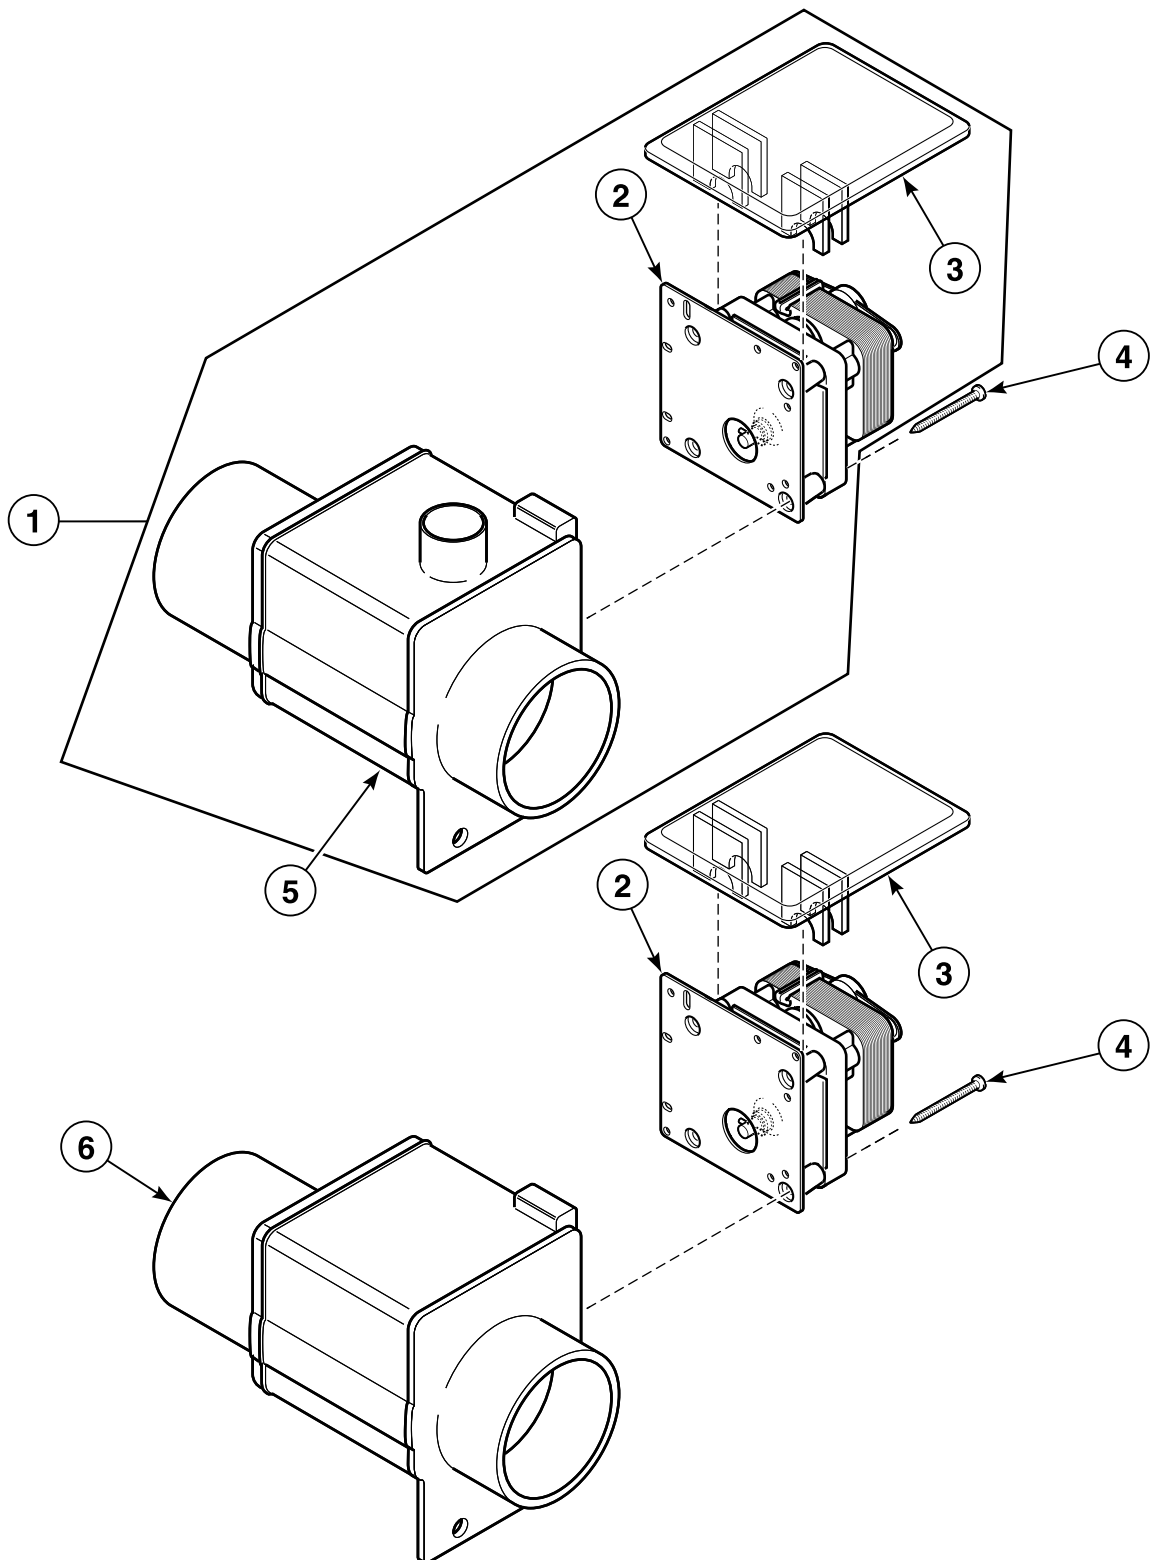


CHM3081P\_F8339301



## Drain Valve Assembly - 40 and 60 Pound Models

| REF | PART NO.   | DESCRIPTION                             | COMMENTS                   |
|-----|------------|-----------------------------------------|----------------------------|
| 1   | F200166400 | Drain Valve Kit                         | 220 Volt; Models with heat |
| 2   | F200215    | Hose Clamp                              | No. 28                     |
| 3   | F150352    | Overflow Plug                           |                            |
| 4   | F380933P   | Drain Valve Motor                       | Round shaft; 220 Volt      |
|     | G159764P   | Drain Valve Motor and Gear Box Assembly | Keyed shaft; 220 Volt      |
| 5   | F200133600 | Drain Valve Cover                       |                            |
|     | F038062900 | Drain Valve                             | 220 Volt; Models with heat |
| 6   | F200166402 | Drain Valve Kit                         | 220 Volt                   |

Filter (Optional) and Water Supply Hose

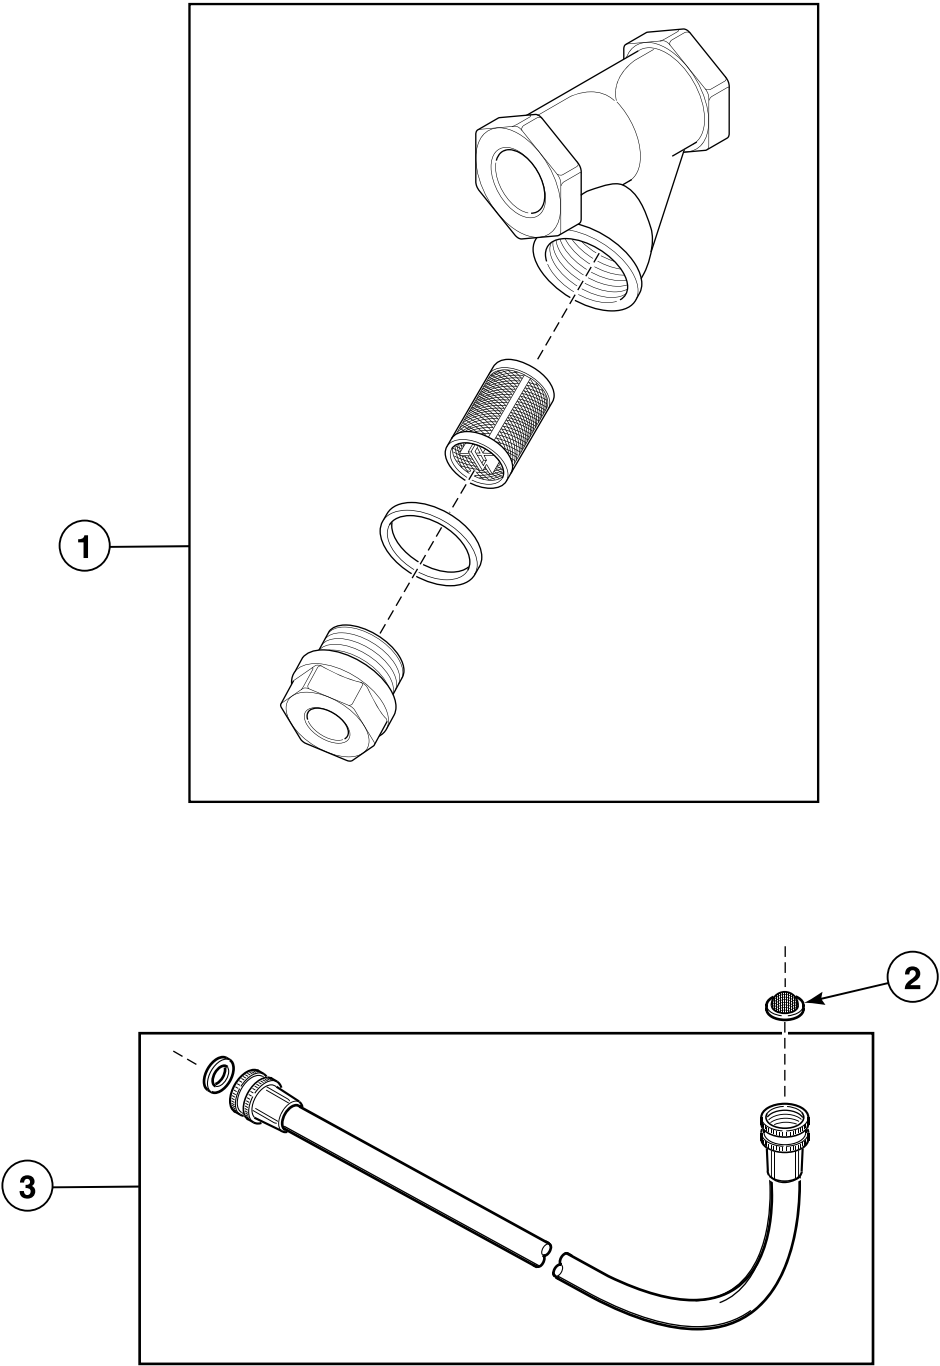


CHM3049P\_F8339301

## Filter (Optional) and Water Supply Hose

| REF | PART NO.      | DESCRIPTION  | COMMENTS                            |
|-----|---------------|--------------|-------------------------------------|
| 1   | F270307       | Steam Filter | 1/2 inch                            |
|     | F270308       | Steam Filter | 3/4 inch                            |
| 2   | 28605         | Washer       |                                     |
| 3   | F200116       | Water Hose   | 3/8 inch; Standard thread           |
|     | F200108P      | Water Hose   | 1/2 inch; Standard or metric thread |
|     | 223/00049/10P | Fill Hose    | Metric thread                       |

# Fill Plumbing Assembly (Drawing 1 of 2)

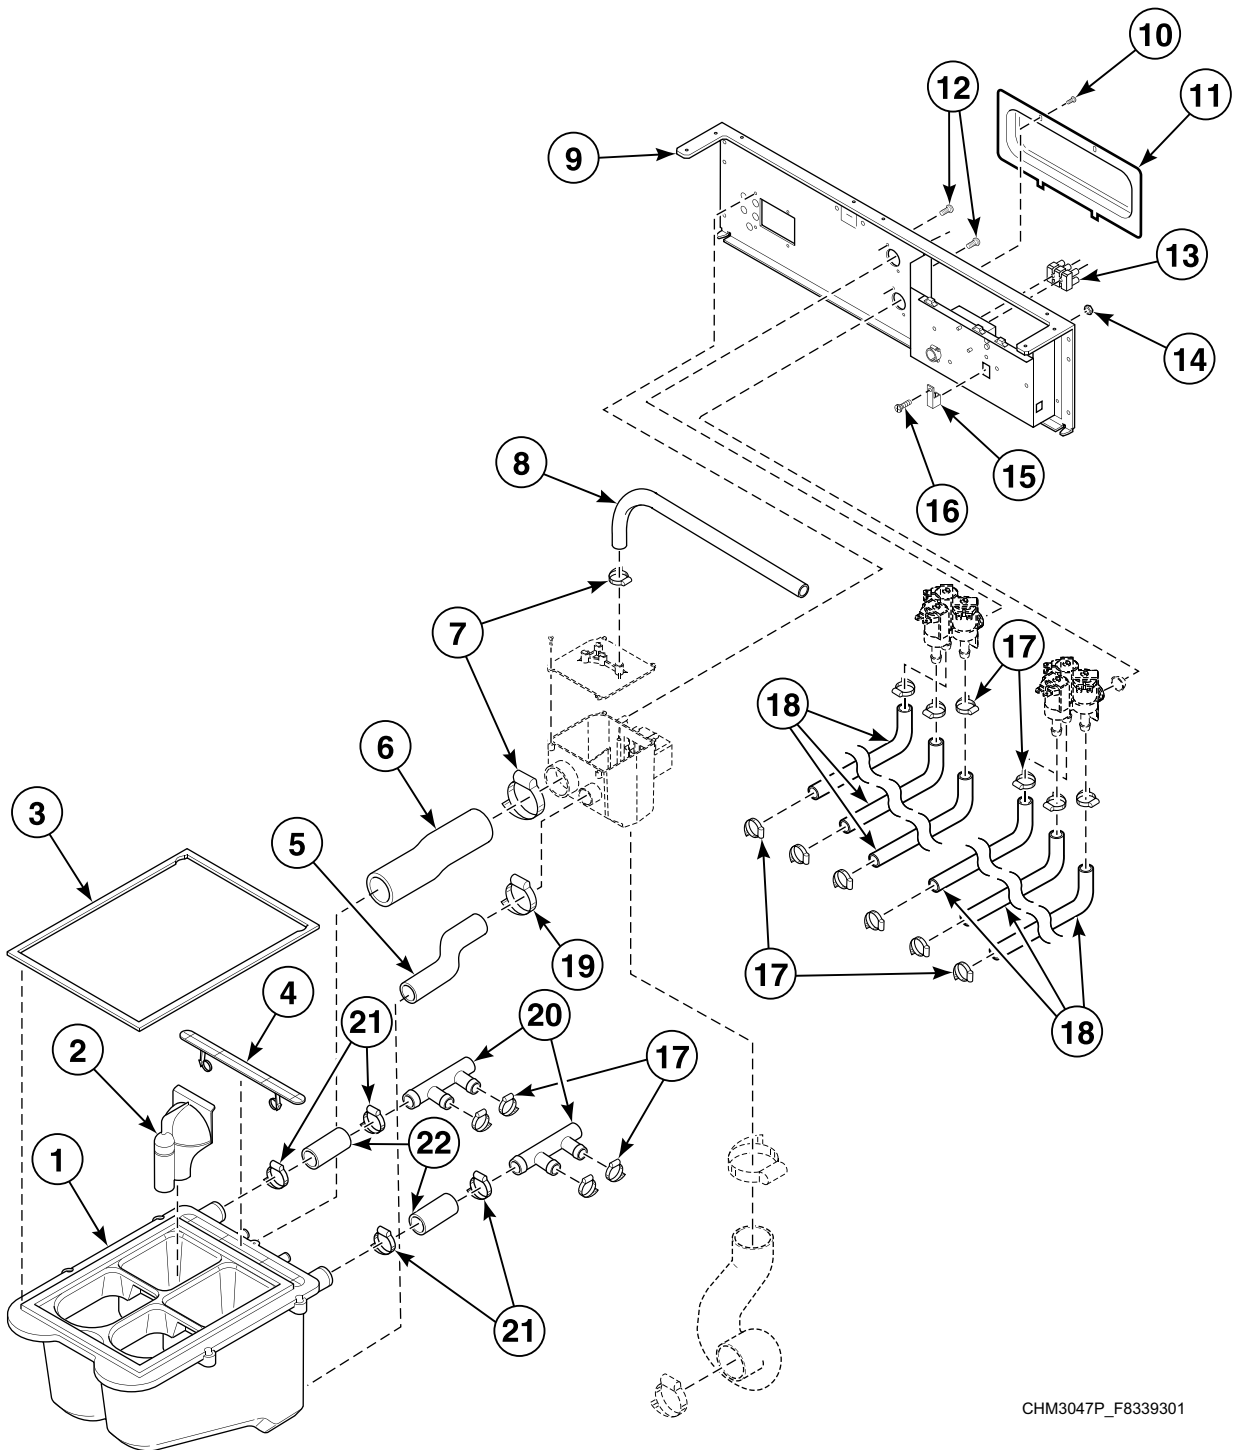


CHM3047P\_F8339301

## Fill Plumbing Assembly (Drawing 1 of 2)

| REF | PART NO.    | DESCRIPTION             | COMMENTS               |
|-----|-------------|-------------------------|------------------------|
| 1   | F8047401    | Dispenser Assembly      |                        |
| 2   | F8047901    | Siphon Cover            |                        |
| 3   | F8308301    | Dispenser Gasket        |                        |
| 4   | F8047801    | Access Cover            |                        |
| 5   | F8043401    | Dispenser Overflow Hose | 20 pound models        |
|     | F8043403    | Dispenser Overflow Hose | 30 pound models        |
|     | F8043404    | Dispenser Overflow Hose | 40 pound models        |
|     | F8043405    | Supply Overflow Hose    | 60 pound models        |
| 6   | F8042801    | Vacuum Supply Hose      | 20 pound models        |
|     | F8042803    | Vacuum Supply Hose      | 30 pound models        |
|     | F8042804    | Vacuum Supply Hose      | 40 pound models        |
|     | F8042805    | Vacuum Supply Hose      | 60 pound models        |
| 7   | F200213     | Hose Clamp              | No. 40                 |
| 8   | F0200244-01 | Vacuum Breaker Hose     | 60 pound models        |
|     | F0200244-02 | Vacuum Breaker Hose     | All other models       |
| 9   | F8039901    | Valve Panel             | 20 pound models        |
|     | F8017501    | Valve Panel             | 30 pound models        |
|     | F8039601    | Valve Panel             | 40 pound models        |
|     | F8039801    | Valve Panel             | 60 pound models        |
| 10  | F8206901    | Screw                   |                        |
| 11  | F8177001    | Terminal Tray Cover     |                        |
| 12  | F8230301    | Screw                   |                        |
| 13  | 430642      | Terminal Block          | Includes screws        |
| 14  | F430232     | Nut                     |                        |
| 15  | M411283     | Ground Lug Connector    |                        |
| 16  | F430909     | Screw                   |                        |
| 17  | 36801       | Hose Clamp              | No. 8                  |
| 18  | F8232004    | Hose                    | 20 pound models        |
|     | F8232001    | Hose                    | 30 pound models        |
|     | F8232002    | Hose                    | 40 and 60 pound models |
| 19  | 20211       | Hose Clamp              | No. 17                 |
| 20  | F8333201    | Manifold                |                        |
| 21  | F200222     | Hose Clamp              | No. 12                 |
| 22  | F606816-1   | Hose                    |                        |


## Fill Plumbing Assembly (Drawing 2 of 2)

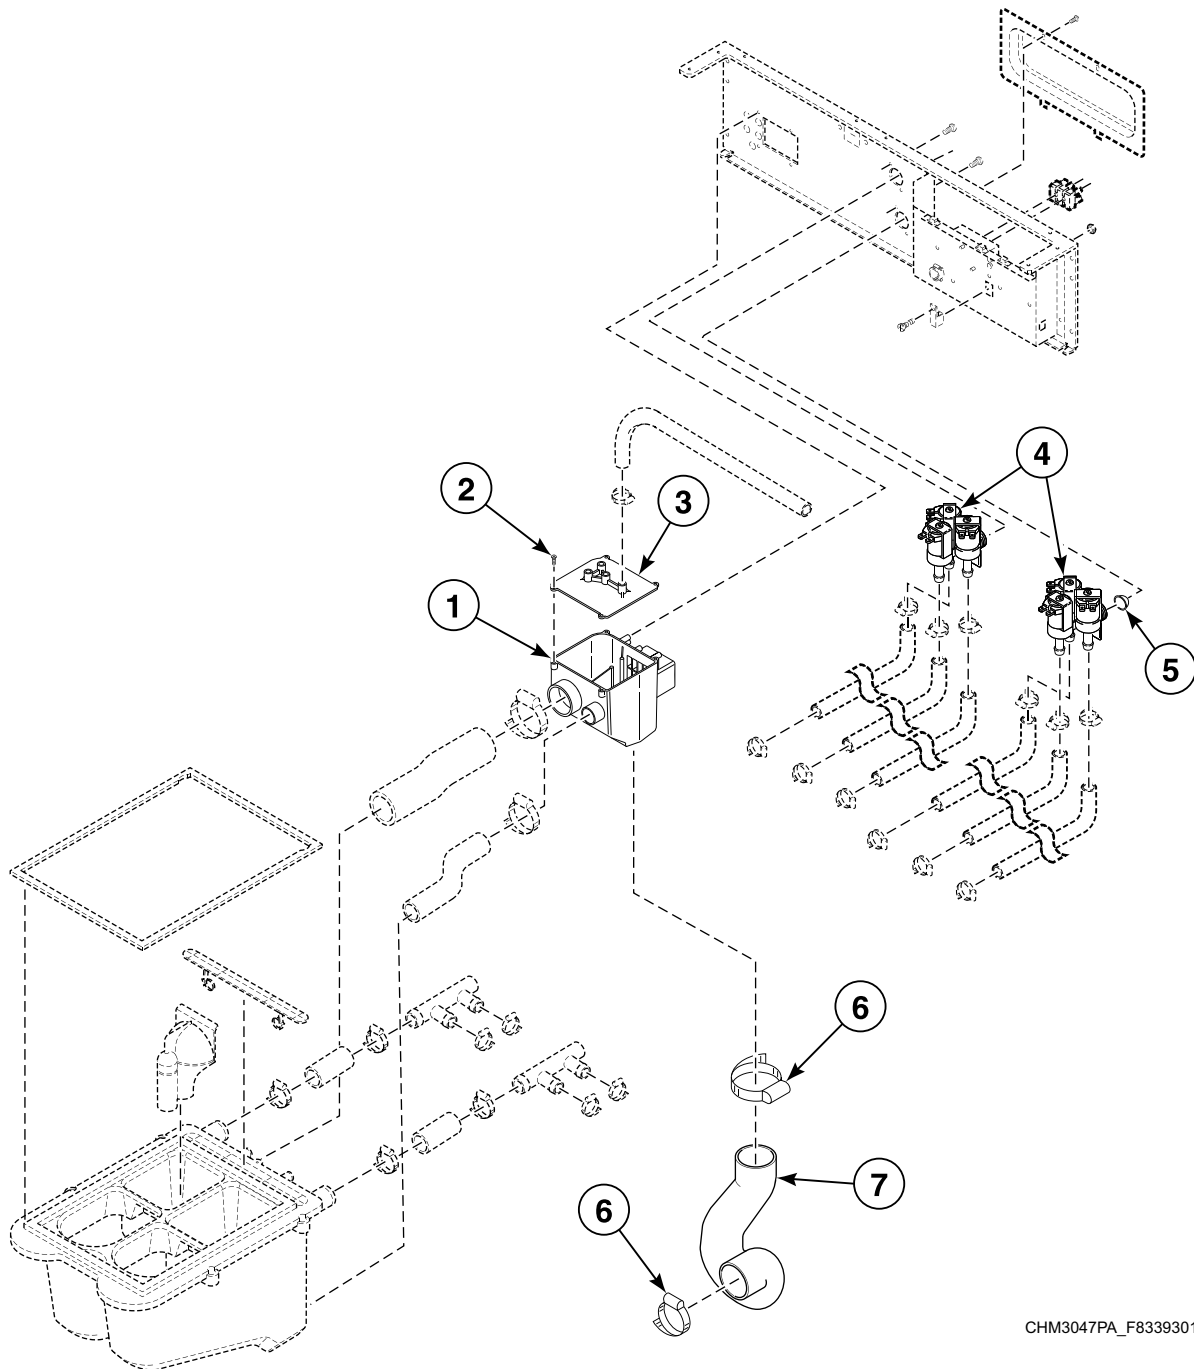

## Fill Plumbing Assembly (Drawing 2 of 2)

| REF | PART NO.  | DESCRIPTION             | COMMENTS                        |
|-----|-----------|-------------------------|---------------------------------|
| 1   | F8048601  | Vacuum Breaker Assembly | Includes items 2 and 3          |
| 2   | 800548    | Screw                   |                                 |
| 3   | F8048501  | Vacuum Breaker Cover    |                                 |
| 4   | F8286401P | 3-Way Valve             | 240 Volt/50 or 60 Hertz; U.S.   |
|     | F8286402P | 3-Way Valve             | 240 Volt/50 or 60 Hertz; Metric |
| 5   | 28605     | Washer                  |                                 |
| 6   | F200213   | Hose Clamp              | No. 40                          |
| 7   | F8042201  | P-Trap Hose             | 20 pound models                 |
|     | F8042202  | P-Trap Hose             | 30 and 40 pound models          |
|     | F8042301  | P-Trap Hose             | 60 pound models                 |

## Pulley and Belt (Drawing 1 of 3)

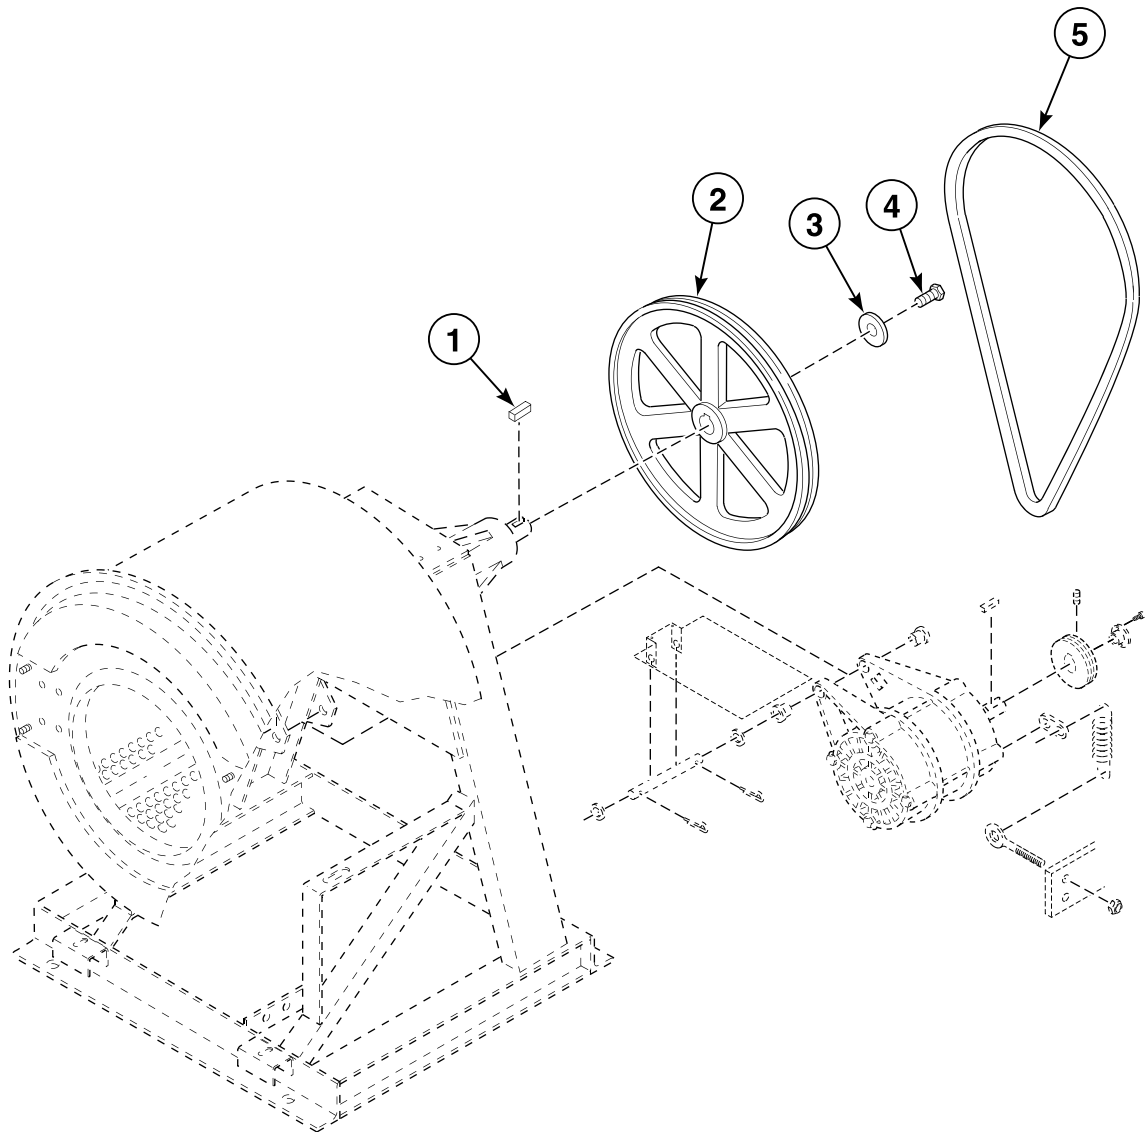


CHM3050P\_F8339301



## Pulley and Belt (Drawing 1 of 3)

| REF | PART NO.   | DESCRIPTION   | COMMENTS                                      |
|-----|------------|---------------|-----------------------------------------------|
| 1   | F430801    | Key           |                                               |
| 2   | F280170    | Sheave Pulley | 20 pound models; 13V1800                      |
|     | F280172    | Sheave Pulley | 30 pound models; 13V2200                      |
|     | F280197    | Pulley        | 40 pound models; 23V2200                      |
|     | F200299700 | Basket Pulley | 60 pound models; X-voltage                    |
|     | F280173    | Pulley        | 60 pound models; All other voltages; 23V2400  |
| 3   | F431115    | Washer        |                                               |
| 4   | F430100    | Screw         |                                               |
| 5   | F280343    | Belt          | 20 pound models; C and F-voltage; 3V730       |
|     | F280337    | Belt          | 20 pound models; B, F, O and Y-voltage; 3V710 |
|     | F280321    | Belt          | 30 pound models; C, F, O and Y-voltage; 3V800 |
|     | F280341    | Belt          | 40 pound models; C-voltage; 3V850             |
|     | F280342    | Belt          | 40 pound models; F, O and Y-voltage; 3V830    |
|     | F280373    | Belt          | 60 pound models; C-voltage; 3V90.65           |
|     | F280304    | Belt          | 60 pound models; F and O-voltage; 3V900       |

## Pulley and Belt (Drawing 2 of 3)

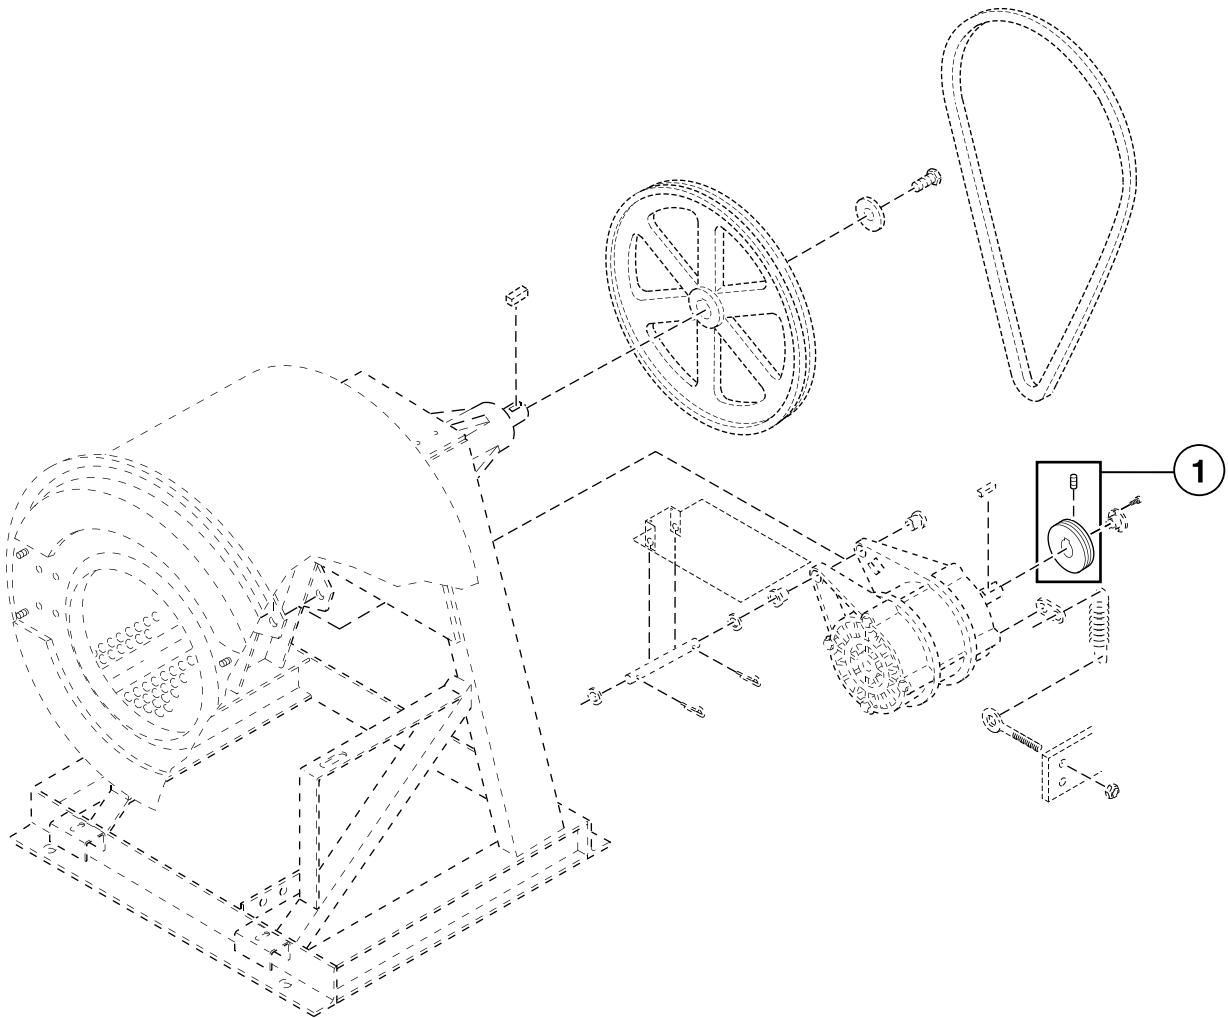


CHM3050PA\_F8339301

## Pulley and Belt (Drawing 2 of 3)

| REF | PART NO.    | DESCRIPTION   | COMMENTS                                                            |
|-----|-------------|---------------|---------------------------------------------------------------------|
| 1   | F280427P    | Pulley        | 20 pound models; C and J-voltage; 1GR3V3.15JA; Requires JA bushing  |
|     | F280170     | Sheave Pulley | 20 pound models; B, F, O and Y-voltage; 1GR3V2.65                   |
|     | F280284     | Pulley        | 30 pound models; F and O-voltage; 1GR3V2.9                          |
|     | F280281     | Motor Pulley  | 30 pound models; Y-voltage; 1GR3V3.0                                |
|     | F280172     | Sheave Pulley | 30 pound models; C, F, J, O and Y-voltage; 1GRV3V22.00              |
|     | F280197     | Pulley        | 40 pound models; C, F, J, O and Y-voltage; 2GRV3V22.00              |
|     | F280105P    | Pulley        | 40 pound models; C-voltage; 2GR3V3.35SH; Requires SH bushing        |
|     | F0280385-00 | Sheave        | 40 and 60 pound models; F, O and Y-voltage; 2GR3V3.00               |
|     | F280422P    | Pulley        | 60 pound models; C and J-voltage; 2GR3V3.365SH; Requires SH bushing |
|     | F280173     | Pulley        | 60 pound models; C, F, J and O-voltage                              |

## Pulley and Belt (Drawing 3 of 3)

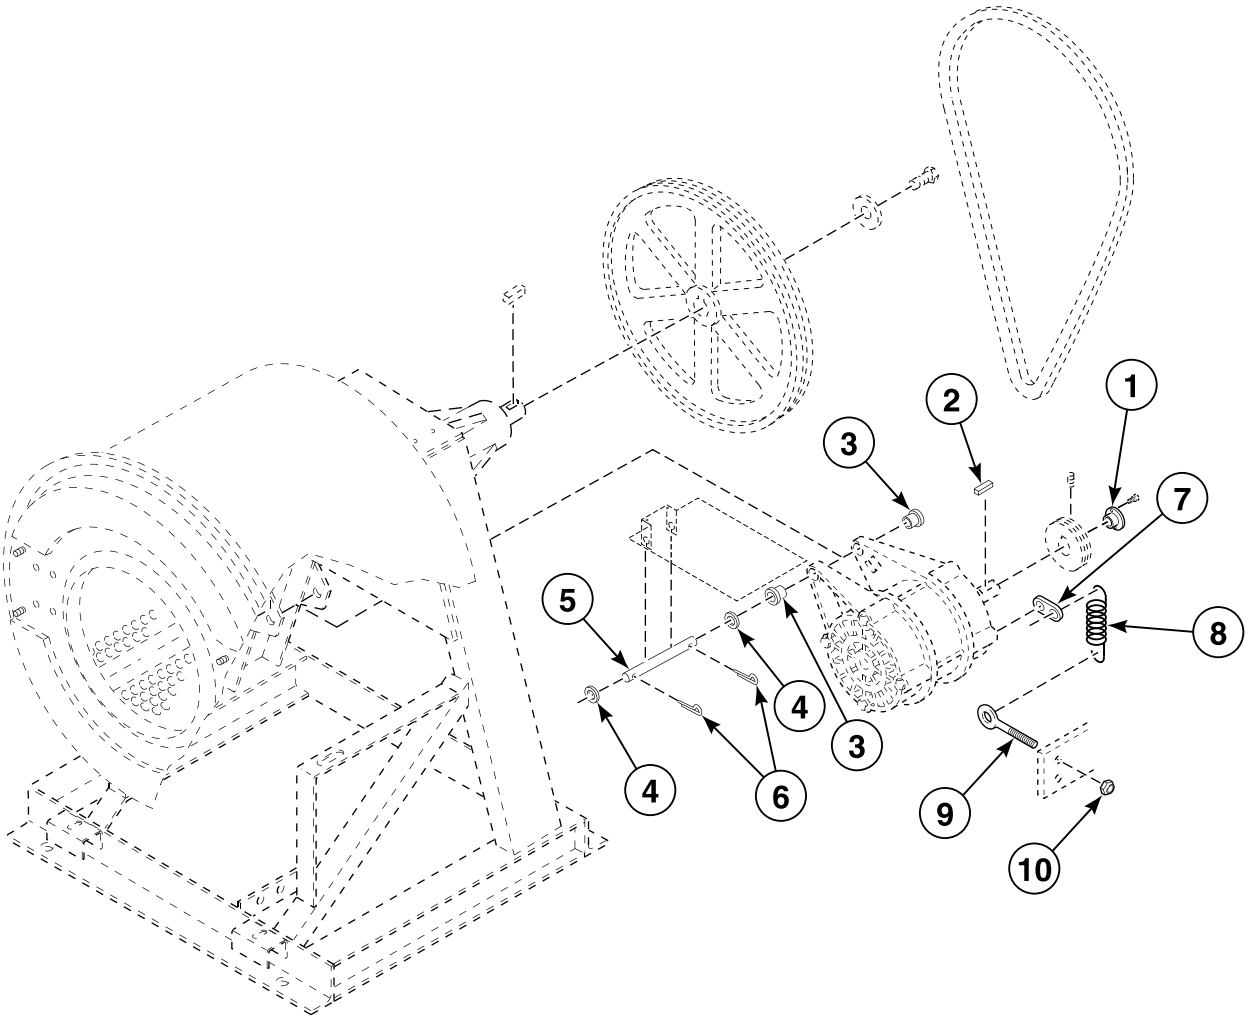


CHM3050PB\_F8339301

## Pulley and Belt (Drawing 3 of 3)

| REF | PART NO.   | DESCRIPTION           | COMMENTS                                        |
|-----|------------|-----------------------|-------------------------------------------------|
| 1   | H87529111P | Bushing               | 20 and 30 pound models; C and J-voltage; JA 5/8 |
|     | M412995P   | Bushing               | 40 and 60 pound models; C and J-voltage; SH 7/8 |
| 2   | F430801    | Key                   | 30 pound models                                 |
|     | F430802    | Key                   | All other models                                |
| 3   | F200186100 | Motor Support Bushing |                                                 |
| 4   | 901690     | Washer                |                                                 |
| 5   | F602844    | Motor Support Rod     | 20 and 30 pound models                          |
|     | F603059    | Motor Support Rod     | 40 pound models                                 |
|     | F603897    | Motor Support Rod     | 60 pound models                                 |
| 6   | F430401    | Cotter Pin            |                                                 |
| 7   | F633374    | Spring Clip           |                                                 |
| 8   | F310124    | Extension Spring      |                                                 |
| 9   | F430537    | Screw                 |                                                 |
| 10  | F430218    | Nut                   |                                                 |

# Motor and Capacitors

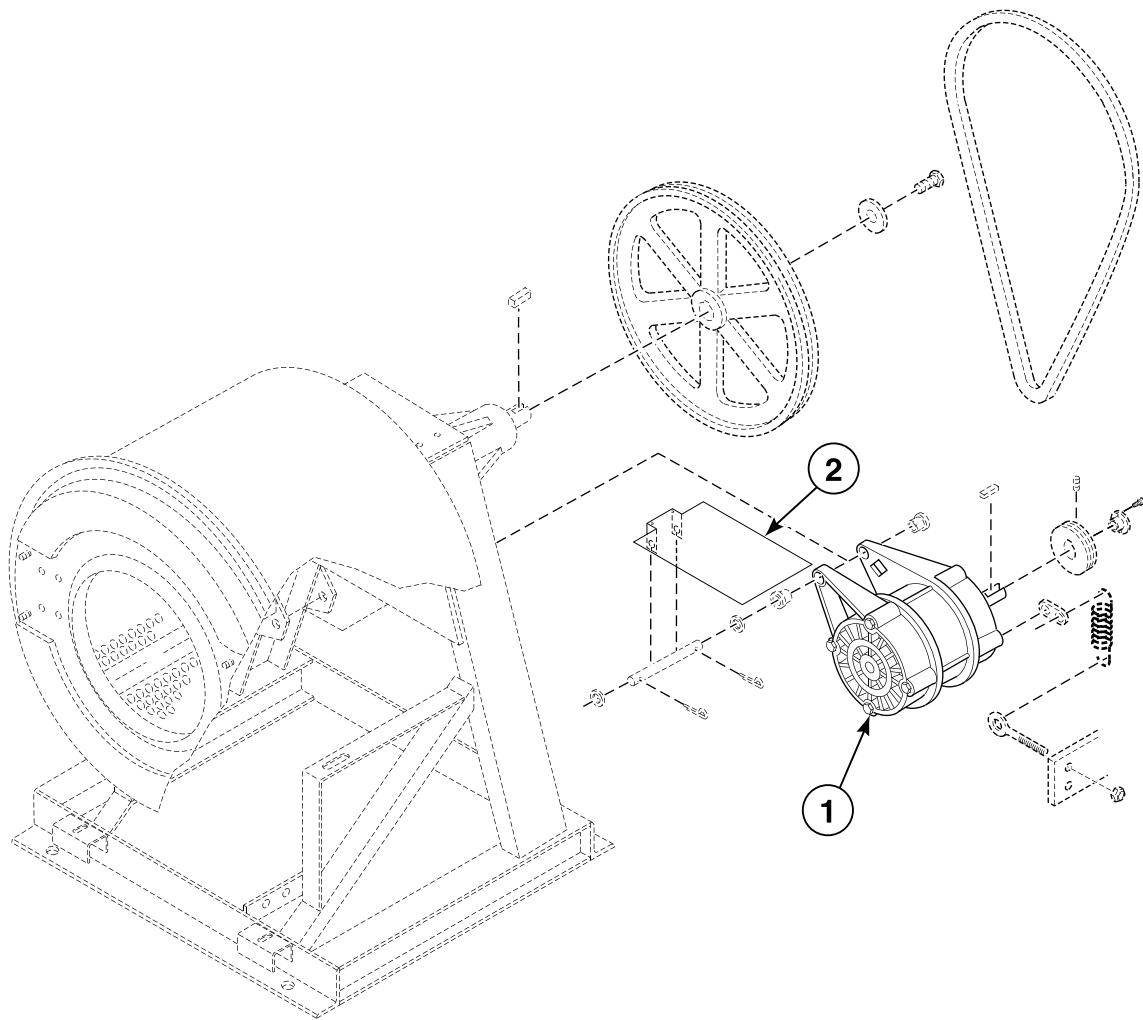

CHM3050PC\_F8339301


# Motor and Capacitors

| REF | PART NO.    | DESCRIPTION          | COMMENTS                                                                                                                                                                                                                        |
|-----|-------------|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1   | F8329601P   | Motor                | 2 speed 20 pound models; Replaces F220110 Motor; B-voltage; Includes motor support bushing                                                                                                                                      |
|     | F022032500P | Motor                | 2 speed 20 pound models; C and F-voltage; Use with F220325-H Motor; Includes F200186100 Motor Support Bushing                                                                                                                   |
|     | F8329301P   | Motor                | 2 speed 20 pound models; Replaces F022039600 and F220396-H Motor on models through 7/25/10; All other models starting 7/26/10; J and O-voltage; Use with F220396-H Motor; Includes motor support bushing; Order F8329301P Motor |
|     | F022012800P | Motor                | 2 speed 20 pound models; Y-voltage; Use with F220128-H Motor; Includes F200186100 Motor Support Bushing                                                                                                                         |
|     | F022038800P | Motor                | 2 speed 30 pound models; C and F-voltage; Use with F220388-H Motor; Includes F200186100 Motor Support Bushing                                                                                                                   |
|     | F8329701P   | Motor                | 2 speed 30 pound models; J and O-voltage; Replaces F220387-H and F022038700 Motor; Includes motor support bushing                                                                                                               |
|     | F8329901P   | Motor                | 2 speed 30 pound models; Y-voltage; Use with F220124-H Motor; Includes F200186100 Motor Support Bushing                                                                                                                         |
|     | F022032600P | Motor                | 2 speed 40 pound models; C and F-voltage; Use with F220326-H Motor; Includes F200186100 Motor Support Bushing                                                                                                                   |
|     | F8330001P   | Motor                | 2 speed 40 pound models; Replaces F0220321-00 on models through 7/25/10; All other models starting 7/26/10; O-voltage; Includes motor support bushing                                                                           |
|     | F8330201P   | Motor                | 2 speed 40 pound models; Y-voltage; Includes F200186100 Motor Support Bushing                                                                                                                                                   |
|     | F220327P    | Motor                | 2 speed 60 pound models; Models through 4/27/10; C and F-voltage; Includes F200186100 Motor Support Bushing; Order F8330401P Motor                                                                                              |
|     | F8330401P   | Motor                | 2 speed 60 pound models; Models starting 4/28/10; C and F-voltage; Includes motor support bushing                                                                                                                               |
|     | F8330301P   | Motor                | 2 speed 60 pound models; O-voltage; Replaces F022032200 Motor; Includes motor support bushing                                                                                                                                   |
|     | F8329201P   | Motor Conversion Kit | Models HCL060GNF, HCN060GCF, HCN060GNF, SCN060GCF and SCN060GNF; Replaces F220234P Motor on models through 9/15/10; X-voltage; Includes motor support bushing                                                                   |
|     | F8329201    | Motor                | Models HCL060GNF, HCN060GCF, HCN060GNF, SCN060GCF and SCN060GNF; Models that have been converted with F8329201P Motor Conversion Kit or models starting 9/16/10; X-voltage                                                      |
| 2   | F200216900  | Motor Drip Shield    | 20 and 30 pound models                                                                                                                                                                                                          |
|     | F200280700  | Motor Drip Shield    | 40 and 60 pound models                                                                                                                                                                                                          |

N/A = Part no longer available

**\*\* NOTE: AC drive parameters must be compatible with the motor and motor pulley. Please request the AC drive parameter illustration for parameter verification when ordering a motor.**

# Electric Heat Option

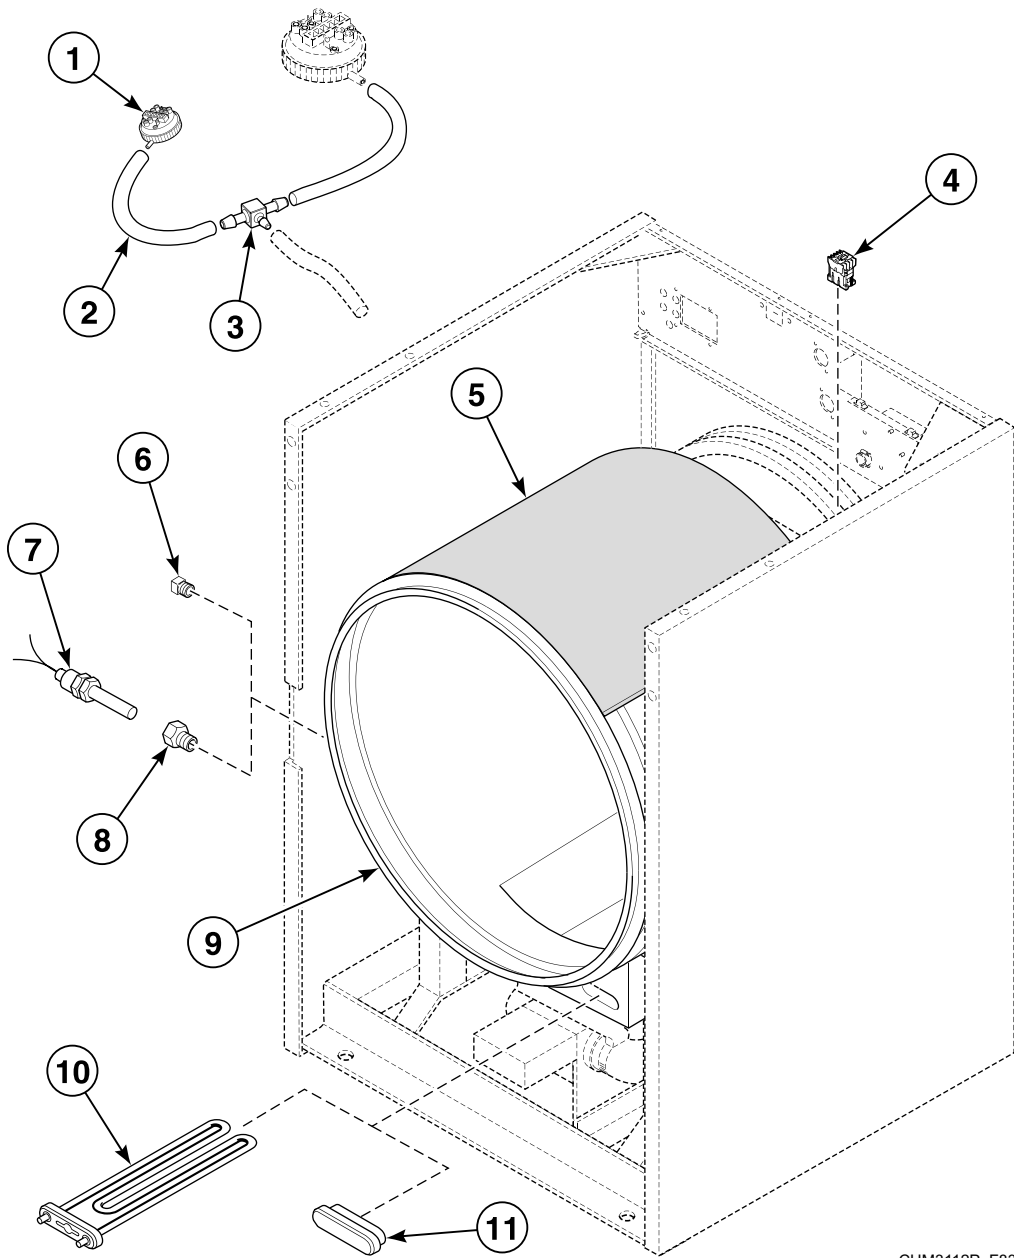


CHM3112P\_F8339301



## Electric Heat Option

| REF | PART NO.  | DESCRIPTION           | COMMENTS                                                                     |
|-----|-----------|-----------------------|------------------------------------------------------------------------------|
| 1   | F8223001P | Water Pressure Switch | Heat Safety                                                                  |
| 2   | F8153901  | Tubing                |                                                                              |
| 3   | F8246601  | Tee                   |                                                                              |
| 4   | F330188P  | Contactor             |                                                                              |
| 5   | F410300   | Pipe Insulation       |                                                                              |
| 6   | F421507   | Plug                  |                                                                              |
| 7   | F370609   | Thermistor Sensor     |                                                                              |
| 8   | F421936   | Reducer Bushing       |                                                                              |
| 9   | F8179602  | Shell Weldment        |                                                                              |
| 10  | F360205P  | Element               | 2.6 kW; 12 used in 20 and 30 pound models; 30 used in 40 and 60 pound models |
| 11  | F360202   | Heating Element Plug  |                                                                              |

## Steam Heat Option

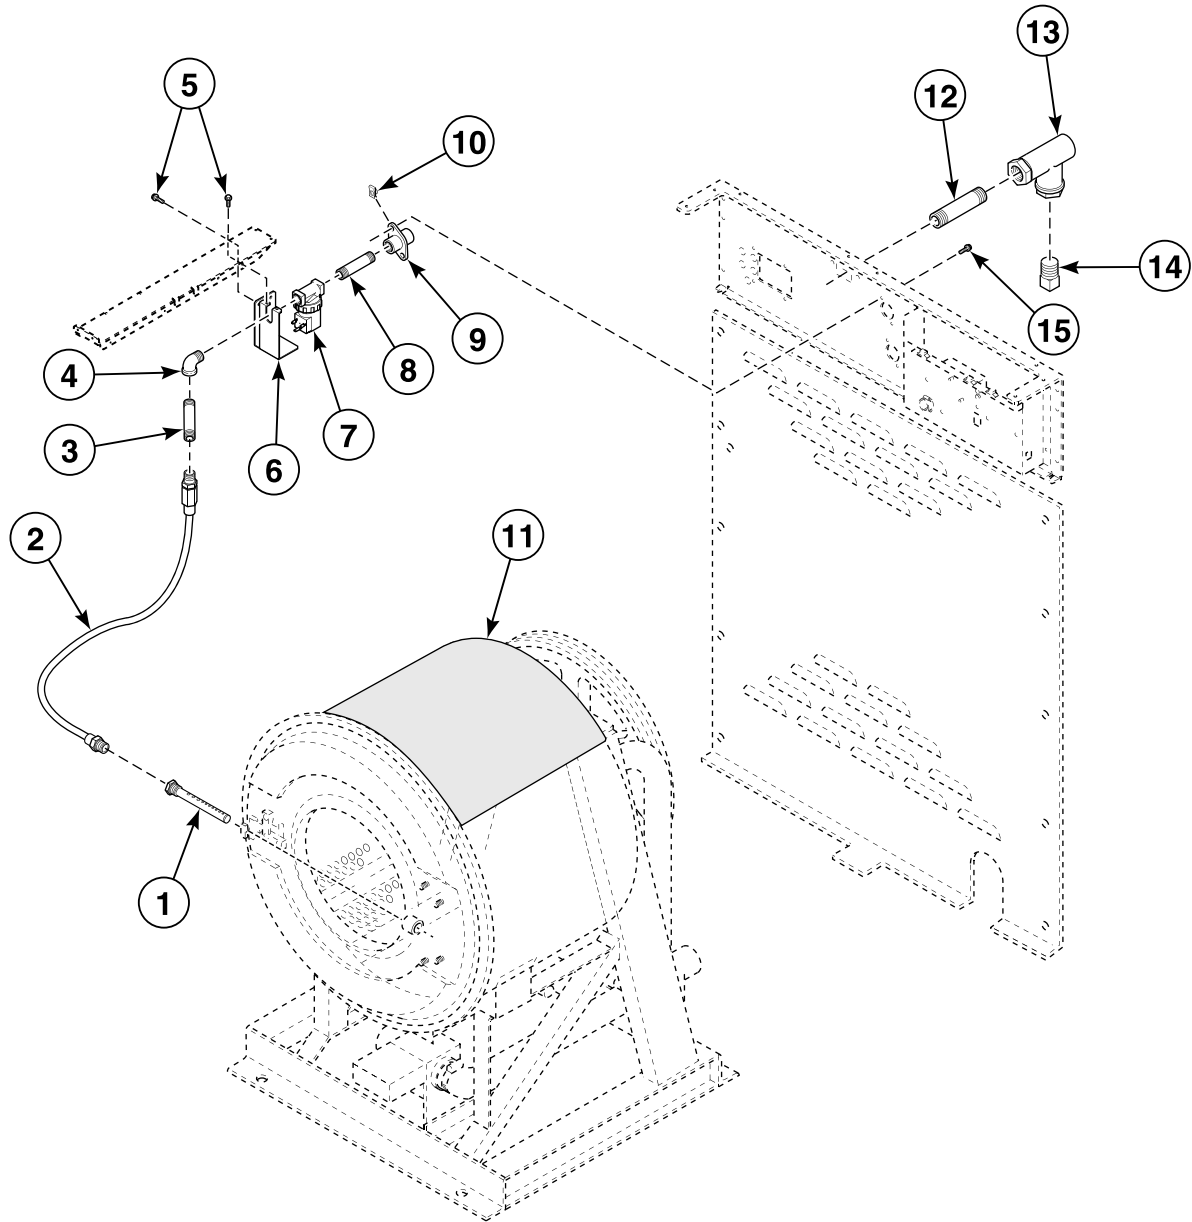

CHM3095P\_F8339301

## Steam Heat Option

| REF | PART NO.  | DESCRIPTION                  | COMMENTS                                   |
|-----|-----------|------------------------------|--------------------------------------------|
|     | F953P3    | Steam Heat Kit               | Includes items 1-10, 12, 14-15 and harness |
|     | F380984P  | Steam Valve Repair Kit       | Use with item 7                            |
| 1   | F603131   | Steam Injector Tube Assembly |                                            |
| 2   | F200197   | Steam Hose                   | 60 pound models                            |
| 3   | F8110601  | Nipple                       |                                            |
| 4   | H86070034 | Street Elbow                 |                                            |
| 5   | 430497    | Screw                        |                                            |
| 6   | F8212001  | Steam Bracket                |                                            |
| 7   | F380787P  | Steam Valve                  | 220 Volt                                   |
| 8   | 70263801  | Pipe Nipple                  |                                            |
| 9   | F8154501  | Coupling                     |                                            |
| 10  | 70030401  | Nut                          |                                            |
| 11  | F410300   | Pipe Insulation              |                                            |
| 12  | 431486    | Pipe Nipple                  |                                            |
| 13  | F270307   | Steam Filter                 |                                            |
| 14  | F420409   | Plug                         |                                            |
| 15  | 20253     | Screw                        |                                            |

## This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

# Parts Index

## A

|                            |                |
|----------------------------|----------------|
| Access Cover               |                |
| F8047801 .....             | 59             |
| Air Trap Hose              |                |
| F020014200 .....           | 11, 13, 15, 17 |
| Auxiliary Control Assembly |                |
| F8189401 .....             | 11, 13         |

## B

|                  |    |
|------------------|----|
| Basket Assembly  |    |
| F8114201P .....  | 45 |
| F8116201 .....   | 45 |
| F8123501 .....   | 45 |
| F8336301P .....  | 45 |
| F8336501P .....  | 45 |
| F8347801P .....  | 45 |
| F8347901P .....  | 45 |
| Basket Pulley    |    |
| F200299700 ..... | 63 |
| Bearing          |    |
| F100108 .....    | 47 |
| F100123P .....   | 47 |
| F100134 .....    | 47 |
| F100135 .....    | 47 |
| F100136P .....   | 47 |
| F100137P .....   | 47 |
| Bearing Sleeve   |    |
| F8221701 .....   | 41 |
| Belt             |    |
| F280304 .....    | 63 |
| F280321 .....    | 63 |
| F280337 .....    | 63 |
| F280341 .....    | 63 |
| F280342 .....    | 63 |
| F280343 .....    | 63 |
| F280373 .....    | 63 |
| Blind Rivet      |    |
| F8245101 .....   | 41 |
| Bolt             |    |
| F200182700 ..... | 53 |
| F8221601 .....   | 43 |
| F8230501 .....   | 37 |
| F8270701 .....   | 43 |
| Bushing          |    |
| H87529111P ..... | 67 |
| M412995P .....   | 67 |

## C

|                |        |
|----------------|--------|
| Capacitor      |        |
| F370218P ..... | 11, 15 |
| F370220 .....  | 11, 15 |
| F370221 .....  | 11, 15 |
| F370222 .....  | 11, 15 |
| F370223 .....  | 11, 15 |
| F370224P ..... | 11, 15 |

|                                  |            |
|----------------------------------|------------|
| Capacitor Tray Assembly          |            |
| F8199601 .....                   | 11, 15     |
| F8199901 .....                   | 11, 15     |
| Card Reader and Bracket Assembly |            |
| 510068P .....                    | 25         |
| Card Reader Assembly             |            |
| F8201501 .....                   | 25         |
| Card Reader Harness              |            |
| F141887 .....                    | 25         |
| Card Reader Overlay              |            |
| 70334201 .....                   | 25         |
| 70334301 .....                   | 25         |
| Coin Box                         |            |
| F160672 .....                    | 27         |
| Coin Chute                       |            |
| F8170801 .....                   | 15, 17     |
| Coin Drawer Assembly             |            |
| F8182001 .....                   | 27         |
| Coin Drop                        |            |
| 70256402P .....                  | 21         |
| 70441601P .....                  | 19         |
| Coin Drop Assembly               |            |
| 210195 .....                     | 21         |
| 210196 .....                     | 21         |
| 38462P .....                     | 19         |
| 38463 .....                      | 19         |
| 38464P .....                     | 19         |
| 38472 .....                      | 21         |
| 38521 .....                      | 21         |
| 39157 .....                      | 21         |
| 70281102 .....                   | 21         |
| Coin Identification Paper        |            |
| 38725 .....                      | 19, 21, 23 |
| Coin Meter                       |            |
| F0160737-00 .....                | 21         |
| Coin Meter Assembly              |            |
| F200010000P .....                | 19         |
| F200010001 .....                 | 21         |
| F200010002 .....                 | 21         |
| F200010003 .....                 | 21         |
| F200010004 .....                 | 21         |
| F200010005 .....                 | 21         |
| F200010006 .....                 | 19         |
| F200010007 .....                 | 19         |
| F200010008 .....                 | 21         |
| F200010009 .....                 | 19         |
| F200010010 .....                 | 21         |
| F200010011 .....                 | 19         |
| F200010012 .....                 | 19         |
| F200021600 .....                 | 23         |
| F200021601 .....                 | 23         |
| F200021602 .....                 | 23         |
| F200021603 .....                 | 23         |
| F200021604 .....                 | 23         |
| F200021605 .....                 | 23         |
| F8238601 .....                   | 23         |
| Coin Vault Assembly              |            |
| F8182501 .....                   | 15         |
| F8182601 .....                   | 15, 17     |
| Contact Block Switch             |            |
| F200233401 .....                 | 29         |
| Contact Switch                   |            |
| F8069501 .....                   | 29         |

N/A items do not appear in index.

|                          |                |
|--------------------------|----------------|
| Contactors               |                |
| F330177P .....           | 11, 15         |
| F330188P .....           | 71             |
| Contactors Tray Assembly |                |
| F8343401 .....           | 11, 15         |
| Control Assembly         |                |
| F8108801P .....          | 11, 13, 15, 17 |
| Control Assembly Kit     |                |
| F980P3 .....             | 11, 13, 15, 17 |
| Control Panel Assembly   |                |
| F8038502 .....           | 31             |
| F8038504 .....           | 33             |
| F8038602 .....           | 31             |
| F8038604 .....           | 33             |
| F8038702 .....           | 31             |
| F8038704 .....           | 33             |
| F8038802 .....           | 31             |
| F8038804 .....           | 33             |
| Control Panel Overlay    |                |
| F8236801 .....           | 35             |
| Control Tray Assembly    |                |
| F8205901 .....           | 11             |
| F8205902 .....           | 15             |
| F8205903 .....           | 13, 15, 17     |
| Cotter Pin               |                |
| F430401 .....            | 67             |
| Coupling                 |                |
| F8154501 .....           | 73             |

## D

|                         |        |
|-------------------------|--------|
| Din Rail                |        |
| F8200101 .....          | 11, 15 |
| Dispenser Assembly      |        |
| F8047401 .....          | 59     |
| Dispenser Gasket        |        |
| F8308301 .....          | 59     |
| Dispenser Lid           |        |
| F8048101 .....          | 37     |
| Dispenser Overflow Hose |        |
| F8043401 .....          | 59     |
| F8043403 .....          | 59     |
| F8043404 .....          | 59     |
| Door                    |        |
| F0602431-02 .....       | 41     |
| F0602837-02 .....       | 41     |
| F602842-2 .....         | 41     |
| Door Assembly           |        |
| F8187201 .....          | 41     |
| F8187203 .....          | 41     |
| F8187301 .....          | 41     |
| F8187303 .....          | 41     |
| F8187401 .....          | 41     |
| F8187403 .....          | 41     |
| Door Bezel              |        |
| F0170426-00 .....       | 31, 33 |
| F0170426-10 .....       | 31, 33 |
| F0170426-30 .....       | 31, 33 |
| F170416-1 .....         | 31, 33 |
| F170416-2 .....         | 31, 33 |
| F170416-3 .....         | 31, 33 |
| F170417-1 .....         | 31, 33 |
| F170417-2 .....         | 31, 33 |
| F170417-3 .....         | 31, 33 |

|                                    |        |
|------------------------------------|--------|
| Door Gasket                        |        |
| F170124 .....                      | 41     |
| F200000200 .....                   | 41     |
| F200000202 .....                   | 41     |
| F8111601 .....                     | 41     |
| Door Glass                         |        |
| F290208P .....                     | 41     |
| F8341701 .....                     | 41     |
| F8341801P .....                    | 41     |
| F8341901 .....                     | 41     |
| Door Glass Kit                     |        |
| F290205P .....                     | 41     |
| F290207P .....                     | 41     |
| Door Handle                        |        |
| F8199401P .....                    | 41     |
| F8199501 .....                     | 41     |
| Door Handle Spacer                 |        |
| F8223701 .....                     | 41     |
| Door Hinge                         |        |
| F190216P .....                     | 41     |
| Door Hinge Shim                    |        |
| F200131000 .....                   | 41     |
| Door Latch Arm Assembly            |        |
| F8221401 .....                     | 41     |
| Door Lock Assembly                 |        |
| F8197101 .....                     | 43     |
| F8340501 .....                     | 43     |
| Door Lock Catch                    |        |
| F8223601 .....                     | 43     |
| F8344501 .....                     | 43     |
| Door Lock Cover                    |        |
| F8245001 .....                     | 43     |
| Door Lock Microswitch              |        |
| F200203200 .....                   | 43     |
| Door Lock Plate Assembly           |        |
| F8223201 .....                     | 43     |
| Door Lock Plate Shim               |        |
| F8059701 .....                     | 43     |
| F8344401 .....                     | 43     |
| Door Lock Solenoid Replacement Kit |        |
| F977P3 .....                       | 43     |
| Door Lock Splash Shield            |        |
| F320200 .....                      | 43     |
| Door Lock Switch Lever             |        |
| F8223401 .....                     | 43     |
| Door Mount                         |        |
| F150271 .....                      | 41     |
| Drain Connector Tee                |        |
| F0150318-00D .....                 | 51     |
| Drain Hose                         |        |
| F8231901 .....                     | 51     |
| F8231902 .....                     | 51     |
| F8232901 .....                     | 51     |
| F8233001 .....                     | 51     |
| F8233101 .....                     | 51     |
| F8233102 .....                     | 51     |
| Drain Tee                          |        |
| F150398 .....                      | 51     |
| Drain Valve                        |        |
| F038062900 .....                   | 55     |
| Drain Valve Cover                  |        |
| F200133600 .....                   | 53, 55 |
| Drain Valve Kit                    |        |
| F200166400 .....                   | 55     |
| F200166402 .....                   | 55     |

N/A items do not appear in index.

|                                                           |        |
|-----------------------------------------------------------|--------|
| Drain Valve Motor<br>F380933P .....                       | 53, 55 |
| Drain Valve Motor and Gear Box Assembly<br>G159764P ..... | 53, 55 |

## E

|                                                    |                |
|----------------------------------------------------|----------------|
| Earth Terminal Sticker<br>M412096 .....            | 9              |
| Electric Shock Danger Label<br>F8115501 .....      | 9              |
| Electronic Coin Drop Assembly<br>70294101P .....   | 23             |
| 70294103P .....                                    | 23             |
| 70294104 .....                                     | 23             |
| 70294105P .....                                    | 23             |
| 70294106 .....                                     | 23             |
| 70294107 .....                                     | 23             |
| 70294109 .....                                     | 23             |
| 70294111 .....                                     | 23             |
| Electronic Coin Drop Kit<br>CK095 .....            | 23             |
| CK099 .....                                        | 23             |
| CK100 .....                                        | 23             |
| CK101 .....                                        | 23             |
| CK103 .....                                        | 23             |
| CK106 .....                                        | 23             |
| CK109 .....                                        | 23             |
| CK110 .....                                        | 23             |
| CK500 .....                                        | 23             |
| Element<br>F360205P .....                          | 71             |
| Emergency Stop Harness<br>F8060501 .....           | 13             |
| Emergency Stop Plate<br>F8201301 .....             | 29             |
| Emergency Stop Pushbutton<br>F200233500 .....      | 29             |
| EMI Filter<br>F8053901P .....                      | 13, 17         |
| F8053902 .....                                     | 13, 17         |
| Excluder Seal<br>F8336801 .....                    | 45             |
| F8336901 .....                                     | 45             |
| F8337001 .....                                     | 45             |
| F8337101 .....                                     | 45             |
| Expansion Clip<br>70030501 .....                   | 11, 13, 15, 17 |
| Extension Spring<br>F310124 .....                  | 67             |
| External Door Lock Harness<br>F8340001 .....       | 43             |
| External Supply Connection Decal<br>F8150201 ..... | 9              |
| External Supply Harness<br>F8191201P .....         | 11, 13         |
| External Supply Kit<br>F937P3 .....                | 11, 13         |

## F

|                                  |    |
|----------------------------------|----|
| Fill Hose<br>223/00049/10P ..... | 57 |
|----------------------------------|----|

|                                       |        |
|---------------------------------------|--------|
| Frame Weldment<br>F8195901 .....      | 49     |
| F8196001 .....                        | 49     |
| F8196101 .....                        | 49     |
| F8199101 .....                        | 49     |
| Front Cabinet Brace<br>F8173801 ..... | 31, 33 |
| F8173901 .....                        | 31, 33 |
| F8174001 .....                        | 31, 33 |
| Front Panel<br>F8171301P .....        | 31     |
| F8171302P .....                       | 33     |
| F8173001 .....                        | 31     |
| F8173002P .....                       | 33     |
| F8173101P .....                       | 31     |
| F8173102P .....                       | 33     |
| F8173201P .....                       | 31     |
| F8173202P .....                       | 33     |

## G

|                                       |    |
|---------------------------------------|----|
| Gravity Drain Valve<br>803292 .....   | 53 |
| Ground Decal<br>F230739 .....         | 9  |
| Ground Lug Connector<br>M411283 ..... | 59 |

## H

|                                             |                    |
|---------------------------------------------|--------------------|
| Harness<br>F631973-2 .....                  | 25                 |
| Heating Element Plug<br>F360202 .....       | 71                 |
| Hose<br>F606816-1 .....                     | 59                 |
| F8232001 .....                              | 59                 |
| F8232002 .....                              | 59                 |
| F8232004 .....                              | 59                 |
| Hose Clamp<br>F200201 .....                 | 51                 |
| F200213 .....                               | 51, 59, 61         |
| F200215 .....                               | 51, 55             |
| F200222 .....                               | 11, 13, 15, 17, 59 |
| 20211 .....                                 | 59                 |
| 36801 .....                                 | 59                 |
| Hot Surface Warning Plate<br>F8211901 ..... | 9                  |

## I

|                                       |        |
|---------------------------------------|--------|
| Interlock Contactor<br>F330186P ..... | 11, 15 |
|---------------------------------------|--------|

## J

|                                                |                |
|------------------------------------------------|----------------|
| Jumper Configuration Assembly<br>M413507 ..... | 11, 13, 15, 17 |
| Jumper Harness Assembly<br>M413506 .....       | 11, 13, 15, 17 |

N/A items do not appear in index.

---

## K

|                |        |
|----------------|--------|
| Key            |        |
| F160420 .....  | 27     |
| F430801 .....  | 63, 67 |
| F430802 .....  | 67     |
| 70155603 ..... | 37     |

---

## L

|                     |        |
|---------------------|--------|
| Left Side Panel     |        |
| F8042902P .....     | 39     |
| F8043102P .....     | 39     |
| F8043202P .....     | 39     |
| F8043302P .....     | 39     |
| Lid Clamp           |        |
| F8091701 .....      | 37     |
| Lower Cabinet Brace |        |
| F8174101 .....      | 31, 33 |

---

## M

|                                 |        |
|---------------------------------|--------|
| Magnet                          |        |
| F340703 .....                   | 41     |
| Manifold                        |        |
| F8333201 .....                  | 59     |
| Motor                           |        |
| F022012800P .....               | 69     |
| F022032500P .....               | 69     |
| F022032600P .....               | 69     |
| F022038800P .....               | 69     |
| F220327P .....                  | 69     |
| F8329201 .....                  | 69     |
| F8329301P .....                 | 69     |
| F8329601P .....                 | 69     |
| F8329701P .....                 | 69     |
| F8329901P .....                 | 69     |
| F8330001P .....                 | 69     |
| F8330201P .....                 | 69     |
| F8330301P .....                 | 69     |
| F8330401P .....                 | 69     |
| Motor Conversion Kit            |        |
| F8329201P .....                 | 69     |
| Motor Drip Shield               |        |
| F200216900 .....                | 69     |
| F200280700 .....                | 69     |
| Motor Pulley                    |        |
| F280281 .....                   | 65     |
| Motor Support Bushing           |        |
| F200186100 .....                | 67     |
| Motor Support Rod               |        |
| F602844 .....                   | 67     |
| F603059 .....                   | 67     |
| F603897 .....                   | 67     |
| Motor Switch                    |        |
| F340002 .....                   | 11, 15 |
| Mount on Concrete Warning Label |        |
| F8246401 .....                  | 9      |
| Mounting Plate                  |        |
| 70208801 .....                  | 25     |

---

## N

|                |                            |
|----------------|----------------------------|
| Nipple         |                            |
| F8110601 ..... | 73                         |
| Nut            |                            |
| F430215 .....  | 41, 45, 51                 |
| F430218 .....  | 49, 67                     |
| F430225 .....  | 43                         |
| F430232 .....  | 11, 13, 15, 17, 41, 43, 59 |
| F430239 .....  | 47                         |
| F430240 .....  | 47                         |
| F430264 .....  | 43                         |
| F431017 .....  | 29                         |
| F431022 .....  | 41                         |
| 24205 .....    | 29                         |
| 685846 .....   | 19, 21, 23                 |
| 70030401 ..... | 73                         |

---

## O

|                      |                |
|----------------------|----------------|
| Opto Coupler         |                |
| 200674P .....        | 19, 21         |
| Output/Logic Harness |                |
| F8028701 .....       | 11, 13, 15, 17 |
| Overflow Hose        |                |
| F0200238-00 .....    | 51             |
| F150308 .....        | 51             |
| F150417 .....        | 51             |
| F8337701 .....       | 51             |
| Overflow Plug        |                |
| F150352 .....        | 55             |
| Overlay              |                |
| F8218701 .....       | 35             |
| F8218702 .....       | 35             |
| F8218801 .....       | 35             |
| F8218802 .....       | 35             |
| F8218901 .....       | 35             |
| F8218902 .....       | 35             |
| F8219001 .....       | 35             |
| F8219002 .....       | 35             |
| F8219201 .....       | 35             |
| F8219301 .....       | 35             |
| F8219401 .....       | 35             |
| F8219501 .....       | 35             |
| F8219701 .....       | 35             |
| F8219801 .....       | 35             |
| F8219901 .....       | 35             |
| F8220001 .....       | 35             |
| F8293001 .....       | 35             |
| F8293002 .....       | 35             |
| F8293101 .....       | 35             |
| F8293102 .....       | 35             |
| F8293201 .....       | 35             |
| F8293202 .....       | 35             |
| F8293301 .....       | 35             |
| F8293302 .....       | 35             |
| F8293501 .....       | 35             |
| F8293601 .....       | 35             |
| F8293701 .....       | 35             |
| F8293801 .....       | 35             |
| 70295101 .....       | 23             |
| 70295301 .....       | 23             |
| Overload Contactor   |                |
| F8176101P .....      | 11, 15         |

N/A items do not appear in index.



---

## P

|                         |                    |
|-------------------------|--------------------|
| Panel Lock              |                    |
| 44089303P .....         | 37                 |
| Pipe Insulation         |                    |
| F410300 .....           | 71, 73             |
| Pipe Nipple             |                    |
| 431486 .....            | 73                 |
| 70263801 .....          | 73                 |
| Plug                    |                    |
| F420409 .....           | 73                 |
| F421507 .....           | 71                 |
| Pop Rivet               |                    |
| 70058501 .....          | 11, 15, 17, 19, 21 |
| PowerFlex 40 Drive      |                    |
| F8169407 .....          | 13, 17             |
| F8169440 .....          | 13, 17             |
| Pressfit Upgrade Kit    |                    |
| F938P3 .....            | 45                 |
| P-Trap Hose             |                    |
| F8042201 .....          | 61                 |
| F8042202 .....          | 61                 |
| F8042301 .....          | 61                 |
| Pulley                  |                    |
| F280105P .....          | 65                 |
| F280173 .....           | 63, 65             |
| F280197 .....           | 63, 65             |
| F280284 .....           | 65                 |
| F280422P .....          | 65                 |
| F280427P .....          | 65                 |
| Pulse Expander Assembly |                    |
| F8034701P .....         | 23                 |
| Pushbutton Switch       |                    |
| 70107001 .....          | 37, 39             |

---

## R

|                      |    |
|----------------------|----|
| Rear Panel           |    |
| F8176201P .....      | 39 |
| F8176301 .....       | 39 |
| F8177501P .....      | 39 |
| F8177701P .....      | 39 |
| Reducer Bushing      |    |
| F421936 .....        | 71 |
| Reed Switch Assembly |    |
| F8066802 .....       | 41 |
| Retaining Ring       |    |
| F8337801 .....       | 47 |
| F8337901 .....       | 47 |
| F8344901 .....       | 47 |
| F8345001 .....       | 47 |
| Right Side Panel     |    |
| F8042901P .....      | 39 |
| F8043101P .....      | 39 |
| F8043201P .....      | 39 |
| F8043301P .....      | 39 |
| Rocker Switch        |    |
| 512562P .....        | 29 |
| Rod                  |    |
| F602813-2 .....      | 41 |
| F602813-3 .....      | 41 |

---

## S

|                      |                            |
|----------------------|----------------------------|
| Screw                |                            |
| F430100 .....        | 63                         |
| F430107 .....        | 51                         |
| F430174 .....        | 25, 31, 33, 37             |
| F430518 .....        | 45                         |
| F430536 .....        | 41                         |
| F430537 .....        | 67                         |
| F430903 .....        | 11, 13                     |
| F430909 .....        | 59                         |
| F430916 .....        | 41                         |
| F430942 .....        | 49                         |
| F430949 .....        | 49                         |
| F430956 .....        | 31, 33, 43                 |
| F430976 .....        | 41                         |
| F430987 .....        | 49                         |
| F8206901 .....       | 11, 13, 15, 17, 37, 39, 59 |
| F8230301 .....       | 59                         |
| F8230601 .....       | 37                         |
| 20253 .....          | 73                         |
| 430497 .....         | 13, 17, 73                 |
| 800548 .....         | 61                         |
| 801019 .....         | 31                         |
| Shaft Seal Sleeve    |                            |
| F8312001P .....      | 45                         |
| F8312004P .....      | 45                         |
| F8312006P .....      | 45                         |
| F8312009P .....      | 45                         |
| F8343901 .....       | 45                         |
| F8343904 .....       | 45                         |
| F8343906 .....       | 45                         |
| F8343909 .....       | 45                         |
| Sheave               |                            |
| F0280385-00 .....    | 65                         |
| Sheave Pulley        |                            |
| F280170 .....        | 63, 65                     |
| F280172 .....        | 63, 65                     |
| Shell Band Assembly  |                            |
| F602757 .....        | 45                         |
| F631977 .....        | 45                         |
| Shell Band Gasket    |                            |
| F200001600P .....    | 45                         |
| Shell Band Kit       |                            |
| F741701 .....        | 45                         |
| F741702 .....        | 45                         |
| Shell Front Assembly |                            |
| F8229401 .....       | 45                         |
| F8229501 .....       | 45                         |
| F8229601 .....       | 45                         |
| F8229701 .....       | 45                         |
| Shell Gasket         |                            |
| F200001602 .....     | 45                         |
| Shell Weldment       |                            |
| F8179201 .....       | 49                         |
| F8179202 .....       | 49                         |
| F8179301 .....       | 49                         |
| F8179302 .....       | 49                         |
| F8179401 .....       | 49                         |
| F8179402 .....       | 49                         |
| F8179501 .....       | 49                         |
| F8179502 .....       | 49                         |
| F8179602 .....       | 71                         |
| Siphon Cover         |                            |
| F8047901 .....       | 59                         |

N/A items do not appear in index.

|                              |                |
|------------------------------|----------------|
| Snap Bushing                 |                |
| 44071501 .....               | 11, 13, 15, 17 |
| Solenoid                     |                |
| F8340101 .....               | 43             |
| Spacer                       |                |
| F431901 .....                | 43             |
| Spring Clip                  |                |
| F633374 .....                | 67             |
| Spring Pin                   |                |
| F431222 .....                | 41             |
| Steam Bracket                |                |
| F8212001 .....               | 73             |
| Steam Filter                 |                |
| F270307 .....                | 57, 73         |
| F270308 .....                | 57             |
| Steam Heat Kit               |                |
| F953P3 .....                 | 73             |
| Steam Hose                   |                |
| F200197 .....                | 73             |
| Steam Injector Tube Assembly |                |
| F603131 .....                | 73             |
| Steam Valve                  |                |
| F380787P .....               | 73             |
| Steam Valve Repair Kit       |                |
| F380984P .....               | 73             |
| Street Elbow                 |                |
| H86070034 .....              | 73             |
| Supply Overflow Hose         |                |
| F8043405 .....               | 59             |
| Support Bracket              |                |
| F8195803 .....               | 13, 17         |
| Switch Clamp                 |                |
| F0340722-00 .....            | 11, 15         |

## T

|                                     |                    |
|-------------------------------------|--------------------|
| Tee                                 |                    |
| F8246601 .....                      | 11, 13, 15, 17, 71 |
| Temperature Knob                    |                    |
| 44104601 .....                      | 29                 |
| Temperature Selector Switch         |                    |
| 511711 .....                        | 29                 |
| Temperature Selector Switch Bracket |                    |
| 70391701 .....                      | 29                 |
| Terminal Block                      |                    |
| 430642 .....                        | 59                 |
| Terminal Tray Cover                 |                    |
| F8177001 .....                      | 59                 |
| Thermistor Sensor                   |                    |
| F370609 .....                       | 71                 |
| Top Cabinet Brace                   |                    |
| F8043501 .....                      | 37                 |
| F8043701 .....                      | 37                 |
| F8043801 .....                      | 37                 |
| F8043901 .....                      | 37                 |
| Top Cover                           |                    |
| F8017401 .....                      | 37                 |
| F8040201 .....                      | 37                 |
| F8040301 .....                      | 37                 |
| F8040401P .....                     | 37                 |
| Top Cover Hinge                     |                    |
| F8258601 .....                      | 37                 |

|                          |                    |
|--------------------------|--------------------|
| Top Cover Latch          |                    |
| F8201001 .....           | 31, 33             |
| Torsion/Door Lock Spring |                    |
| F8070301 .....           | 43                 |
| Transformer              |                    |
| 201616 .....             | 11, 13             |
| 210019P .....            | 11, 13, 15, 17     |
| Triple Lip Seal          |                    |
| F8203801 .....           | 47                 |
| F8203802 .....           | 47                 |
| F8203803 .....           | 47                 |
| F8203806 .....           | 47                 |
| Trunnion Kit             |                    |
| F747001 .....            | 47                 |
| F747002 .....            | 47                 |
| F747003 .....            | 47                 |
| F747005 .....            | 47                 |
| Tubing                   |                    |
| F8153901 .....           | 11, 13, 15, 17, 71 |

## U

|                                          |                |
|------------------------------------------|----------------|
| USB IR Device Assembly                   |                |
| F8167901 .....                           | 11, 13, 15, 17 |
| Use Copper Conductors Only Caution Label |                |
| F8242201 .....                           | 9              |

## V

|                         |    |
|-------------------------|----|
| Vacuum Breaker Assembly |    |
| F8048601 .....          | 61 |
| Vacuum Breaker Cover    |    |
| F8048501 .....          | 61 |
| Vacuum Breaker Hose     |    |
| F0200244-01 .....       | 59 |
| F0200244-02 .....       | 59 |
| Vacuum Supply Hose      |    |
| F8042801 .....          | 59 |
| F8042803 .....          | 59 |
| F8042804 .....          | 59 |
| F8042805 .....          | 59 |
| Valve Panel             |    |
| F8017501 .....          | 59 |
| F8039601 .....          | 59 |
| F8039801 .....          | 59 |
| F8039901 .....          | 59 |
| Valve, 3-Way            |    |
| F8286401P .....         | 61 |
| F8286402P .....         | 61 |

## W

|                |        |
|----------------|--------|
| Warning Label  |        |
| F8207901 ..... | 9      |
| F8233501 ..... | 9      |
| 44127701 ..... | 9      |
| Washer         |        |
| F430303 .....  | 49     |
| F430317 .....  | 45, 51 |
| F431113 .....  | 41     |
| F431115 .....  | 63     |
| F431128 .....  | 47, 49 |

N/A items do not appear in index.

|                       |                    |
|-----------------------|--------------------|
| F431131 .....         | 47, 49             |
| F431902 .....         | 43                 |
| F431916 .....         | 41                 |
| F431929 .....         | 41                 |
| M400081 .....         | 49                 |
| 28605 .....           | 57, 61             |
| 901690 .....          | 67                 |
| Water Hose            |                    |
| F200108P .....        | 57                 |
| F200116 .....         | 57                 |
| Water Pressure Switch |                    |
| F8223001P .....       | 11, 13, 15, 17, 71 |

---

[illegible]