


# Washer-Extractor

## Cabinet Hardmount

Refer to Page 5 for Model Numbers

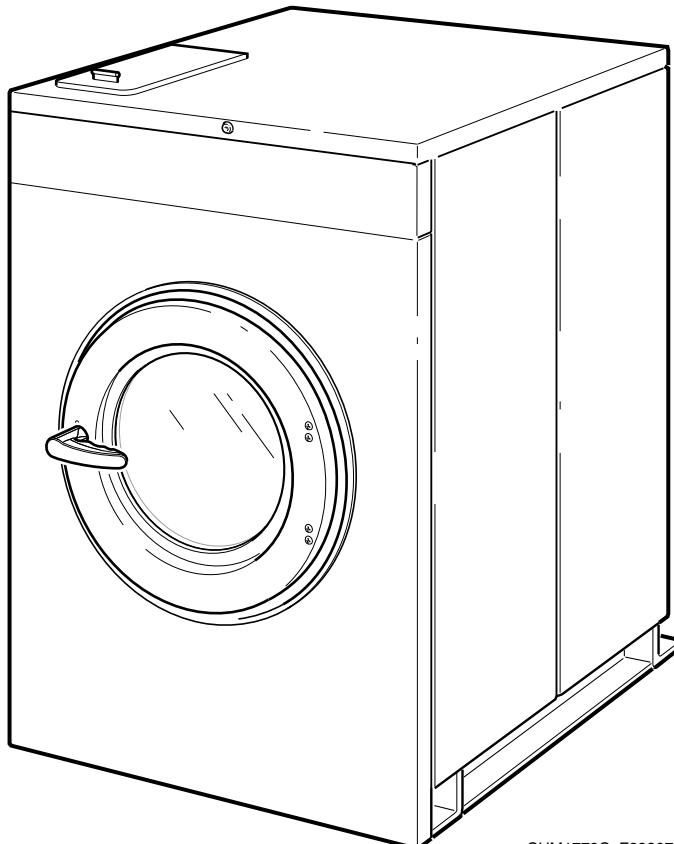

CHM1772C\_F8330701



# Table of Contents

Title	Page
Parts Ordering Information.....	3
Serial Plate Location .....	3
Model Identification .....	5
Product Overview - M9, M30, Galaxy 400, Galaxy 600, Quantum Silver and Quantum Gold.....	6
Product Overview for M4, Galaxy 200 and Quantum Standard.....	8
Decals .....	10
Control Module - 2 Speed OPL Models .....	12
Control Module - F-Speed Design 1 OPL Models.....	14
Control Module - F and V-Speed Design 2 and 3 OPL Models (Drawing 1 of 2).....	16
Control Module - F and V-Speed Design 2 and 3 OPL Models (Drawing 2 of 2).....	18
Control Module - 2 Speed Coin Models .....	20
Control Module - F-Speed Design 1 Coin Models.....	22
Control Module - F-Speed Design 2 and 3 Coin Models (Drawing 1 of 2).....	24
Control Module - F-Speed Design 2 and 3 Coin Models (Drawing 2 of 2).....	26
Flush Mount Coin Meter Assembly - Single Drop .....	28
Flush Mount Coin Meter Assembly - Dual Drop.....	30
Electronic Coin Meter Assembly .....	32
Card Reader - HY Models.....	34
Optional Coin Box .....	36
Front Panels and Control Panel - Coin Models.....	38
Front Panel and Control Panel - Card Reader and OPL Models .....	40
Control Panel Overlays - Coin and Card Ready Models.....	42
Control Panel Overlays - OPL Models .....	44
Panels (Drawing 1 of 2) .....	46
Panels (Drawing 2 of 2) .....	48
Door - 20 and 30 Pound Models .....	50
Door - 40 and 60 Pound Models .....	52
Door Lock.....	54
Basket, Shell, Frame and Trunnion - Design 1 Models (Drawing 1 of 3).....	56
Basket, Shell, Frame and Trunnion - Design 1 Models (Drawing 2 of 3).....	58
Basket, Shell, Frame and Trunnion - Design 1 Models (Drawing 3 of 3).....	60
Basket, Shell, Frame and Bearing Housing - Design 2 and 3 Models (Drawing 1 of 3).....	62
Basket, Shell, Frame and Bearing Housing - Design 2 and 3 Models (Drawing 2 of 3).....	64
Basket, Shell, Frame and Bearing Housing - Design 2 and 3 Models (Drawing 3 of 3).....	66
Drain Plumbing - Design 1 Models .....	68
Drain Plumbing - Design 2 and 3 Models .....	70
Drain Valve Assembly - 20 and 30 Pound Models.....	72
Drain Valve Assembly - 40 and 60 Pound Models.....	74
Steam Filter (Optional) and Water Supply Hose .....	76
Fill Plumbing Assembly (Drawing 1 of 2) .....	78
Fill Plumbing Assembly (Drawing 2 of 2) .....	80

© Copyright 2014, Alliance Laundry Systems LLC

All rights reserved. No part of the contents of this book may be reproduced or transmitted in any form or by any means without the expressed written consent of the publisher.

Pulley and Belt - Design 1 Models (Drawing 1 of 3).....	82
Pulley and Belt - Design 1 Models (Drawing 2 of 3).....	84
Pulley and Belt - Design 1 Models (Drawing 3 of 3).....	86
Pulley and Belt - Design 2 and 3 Models (Drawing 1 of 2).....	88
Pulley and Belt - Design 2 and 3 Models (Drawing 2 of 2).....	90
Motor - Design 1 Models.....	92
Motor - Design 2 and 3 Models .....	94
Electric Heat Option .....	96
Steam Heat Option .....	98
Parts Index .....	101

## Parts Ordering Information

If literature or replacement parts are required, contact the source from whom the machine was purchased or contact Alliance Laundry Systems at (920) 748-3950 for the name and address of the nearest authorized parts distributor.


For technical assistance, call either of the numbers listed below:

(920) 748-3121 Ripon, Wisconsin

+32 56 41 20 54 Wevelgem, Belgium

## Serial Plate Location

When calling or writing about your product, be sure to mention model and serial numbers. Model and serial numbers are located on serial plate(s) as shown.

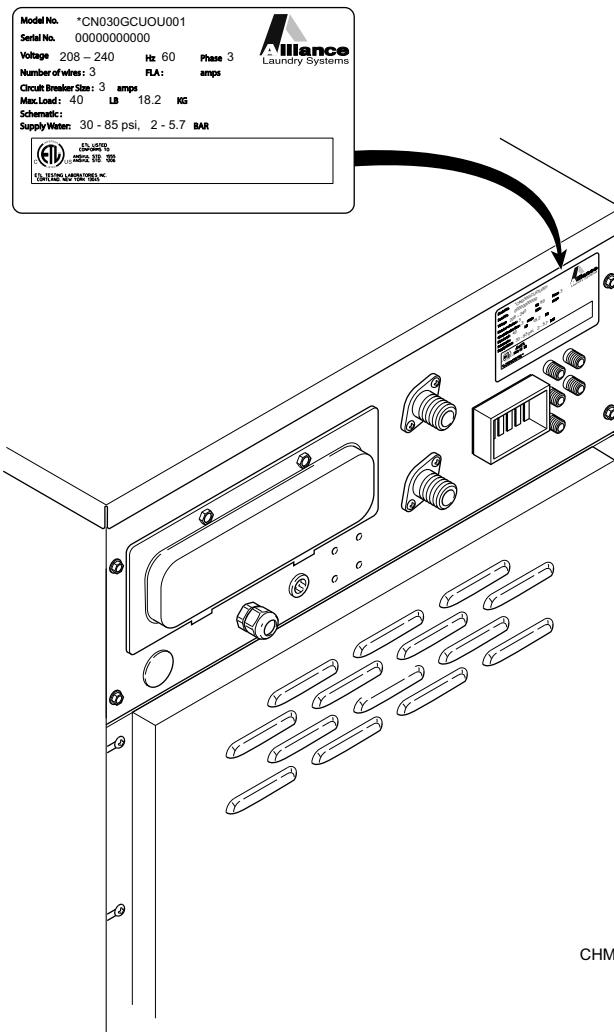

CHM3025P\_F8330701



## Notes

## Model Identification


Information in this manual is applicable to these washer-extractor models:

CCN020HNF	HCN020HC2	HCU020HC2	SCB040HNF	UCB040HNF
CCN020HNV	HCN020HCF	HCU020HEF	SCB040HNV	UCB040HNV
CCN030HNF	HCN020HD2	HCU020HL2	SCL020HN2	UCL020HN2
CCN030HNV	HCN020HDF	HCU020HN2	SCL020HNF	UCL020HNF
CCN040HNF	HCN020HEF	HCU020HNF	SCL020HNV	UCL020HNV
CCN040HNV	HCN020HN2	HCU020HNV	SCL030HN2	UCL030HN2
CCN060HNF	HCN020HNF	HCU020HX2	SCL030HNF	UCL030HNF
CCN060HNV	HCN020HNV	HCU030HC2	SCL030HNV	UCL030HNV
HCB040HNF	HCN020HXF	HCU030HE2	SCL040HN2	UCL040HN2
HCB040HNV	HCN020HY2	HCU030HL2	SCL040HNF	UCL040HNF
HCL020HDF	HCN020HYF	HCU030HLF	SCL040HNV	UCL040HNV
HCL020HN2	HCN030HC2	HCU030HN2	SCL060HN2	UCL060HN2
HCL020HNF	HCN030HCF	HCU030HNF	SCL060HNF	UCL060HNF
HCL020HNV	HCN030HD2	HCU030HNV	SCL060HNV	UCL060HNV
HCL030HDF	HCN030HDF	HCU030HX2	SCN020HN2	UCN020HN2
HCL030HE2	HCN030HEF	HCU040HC2	SCN020HNF	UCN020HNF
HCL030HEF	HCN030HN2	HCU040HLF	SCN020HNV	UCN020HNV
HCL030HLF	HCN030HNF	HCU040HN2	SCN030HN2	UCN030HN2
HCL030HN2	HCN030HNV	HCU040HNF	SCN030HNF	UCN030HNF
HCL030HNF	HCN030HXF	HCU040HNV	SCN030HNV	UCN030HNV
HCL030HNV	HCN030HY2	HCU040HX2	SCN040HN2	UCN040HN2
HCL040HC2	HCN030HYF	HCU060HC2	SCN040HNF	UCN040HNF
HCL040HCF	HCN040HC2	HCU060HL2	SCN040HNV	UCN040HNV
HCL040HDF	HCN040HCF	HCU060HN2	SCN060HN2	UCN060HN2
HCL040HE2	HCN040HD2	HCU060HNF	SCN060HNF	UCN060HNF
HCL040HEF	HCN040HDF	HCU060HNV	SCN060HNV	UCN060HNV
HCL040HN2	HCN040HEF	HCU060HX2	SCU020HN2	UCU020HN2
HCL040HNF	HCN040HN2	HCZ020HN2	SCU020HNF	UCU020HNF
HCL040HNV	HCN040HNF	HCZ030HNV	SCU030HN2	UCU020HNV
HCL060HC2	HCN040HNV	ICN020HNF	SCU030HNF	UCU030HN2
HCL060HCF	HCN040HXF	ICN020HNV	SCU040HN2	UCU030HNF
HCL060HDF	HCN040HY2	ICN030HNF	SCU040HNF	UCU030HNV
HCL060HN2	HCN040HYF	ICN030HNV	SCU060HN2	UCU040HN2
HCL060HNF	HCN060HC2	ICN040HNF	SCU060HNF	UCU040HNF
HCL060HNV	HCN060HCF	ICN040HNV	SCU060HNV	UCU040HNV
	HCN060HDF	ICN060HNF	SCZ020HN2	UCU060HN2
	HCN060HEF	ICN060HNV		UCU060HNF
	HCN060HN2			UCU060HNV
	HCN060HNF			UCZ030HN2
	HCN060HNV			UCZ030HNF
	HCN060HXF			
	HCN060HY2			
	HCN060HYF			


# Product Overview - M9, M30, Galaxy 400, Galaxy 600, Quantum Silver and Quantum Gold

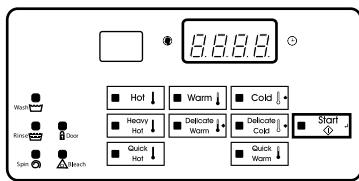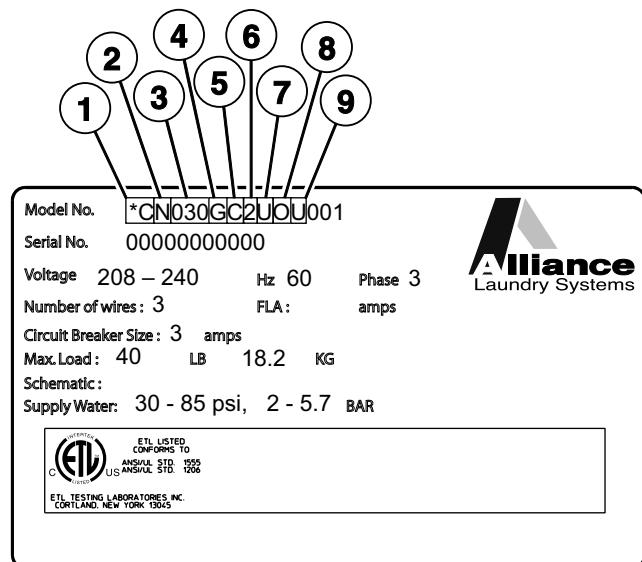


Galaxy 400 Coin

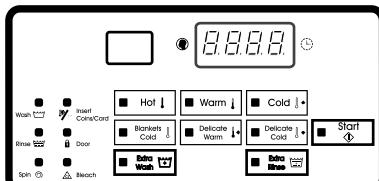


Galaxy 600 Coin (Domestic)

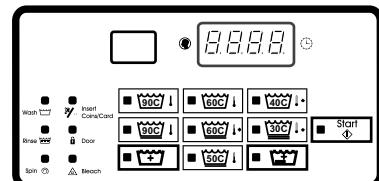


Galaxy 600 Coin (International)

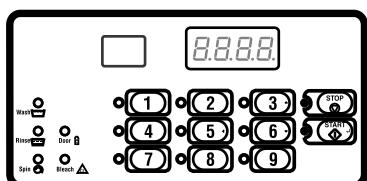


M9/Galaxy 400 OPL/Quantum Silver OPL

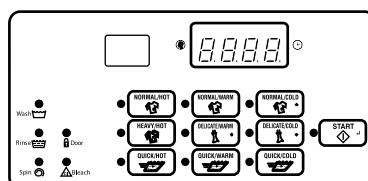


Quantum Silver Coin (Domestic)

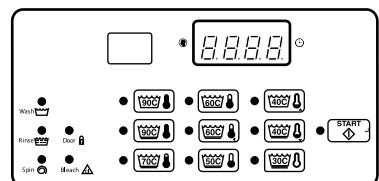

Quantum Silver Coin (International)



M30/Quantum Gold OPL

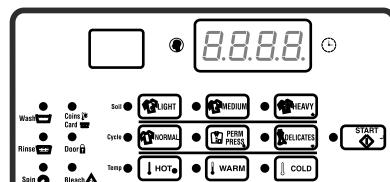



Quantum Gold

CHM3217P\_F8330701

# Product Overview - M9, M30, Galaxy 400, Galaxy 600, Quantum Silver and Quantum Gold

REF	PART NO.	DESCRIPTION	COMMENTS
1	-	Product Family	CC HC IC NC SC UC
2	-	Market	B (Brazil CE) N (Domestic ETL(c)) L (International ETL(c)) U (International CE) D (Daiwa) Z (No Agency International)
3	-	Capacity (Pounds)	020 030 040 060 080 125
4	-	Control	G J L H K W
5	-	Actuation	C (Drop Coin Meter) D (Digital Coin Meter) E (Electronic World Drop) L (Prep for Remote/Central Pay) N (Non-Coin OPL) X (Prep for Coin Meter) Y (Prep for Card Reader)
6	-	Speed	2 (2 Speed) F (F-Speed) V (V-Speed)
7	-	Voltage	B (120/60/1/2) C (380-415/50/3/4) F (440-480/60/3/3) J (200/50/3/3) N (440-480/50/60/3) O (208/220-240/60/3/3) P (380-415/50/60/3) Q (200-208/220-240/50/60/3) R (380-415/440-480/50/60/3) X (200-208/220-240/50/60/1/3) Y (208/220-240/60/1/2)
8	-	Side Panel	U (Standard) 1 (Stainless Steel)
9	-	Design	1 2 3

# Product Overview for M4, Galaxy 200 and Quantum Standard

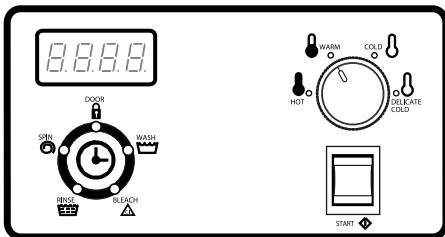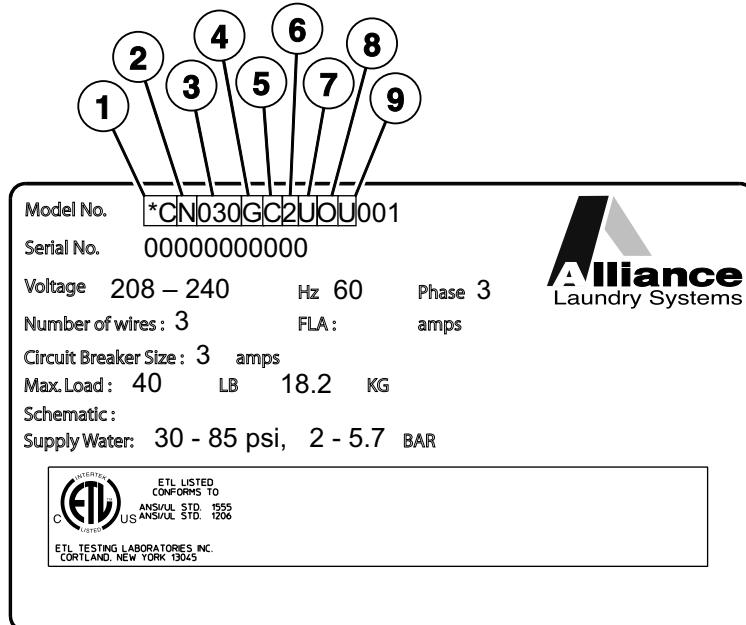


M4/Galaxy 200/Quantum Standard

CHM3218P\_F8330701

# Product Overview for M4, Galaxy 200 and Quantum Standard

REF	PART NO.	DESCRIPTION	COMMENTS
1	-	Product Family	CC HC IC NC SC UC
2	-	Market	B (Brazil CE) N (Domestic ETL(c)) L (International ETL(c)) U (International CE) D (Daiwa) Z (No Agency International)
3	-	Capacity (Pounds)	020 030 040 060 080 125
4	-	Control	G J L H K W
5	-	Actuation	C (Drop Coin Meter) D (Digital Coin Meter) E (Electronic World Drop) L (Prep for Remote/Central Pay) N (Non-Coin OPL) X (Prep for Coin Meter) Y (Prep for Card Reader)
6	-	Speed	2 (2 Speed) F (F-Speed) V (V-Speed)
7	-	Voltage	B (120/60/1/2) C (380-415/50/3/4) F (440-480/60/3/3) J (200/50/3/3) N (440-480/50/60/3) O (208/220-240/60/3/3) P (380-415/50/60/3) Q (200-208/220-240/50/60/3) R (380-415/440-480/50/60/3) X (200-208/220-240/50/60/1/3) Y (208/220-240/60/1/2)
8	-	Side Panel	U (Standard) 1 (Stainless Steel)
9	-	Design	1 2 3

# Decals

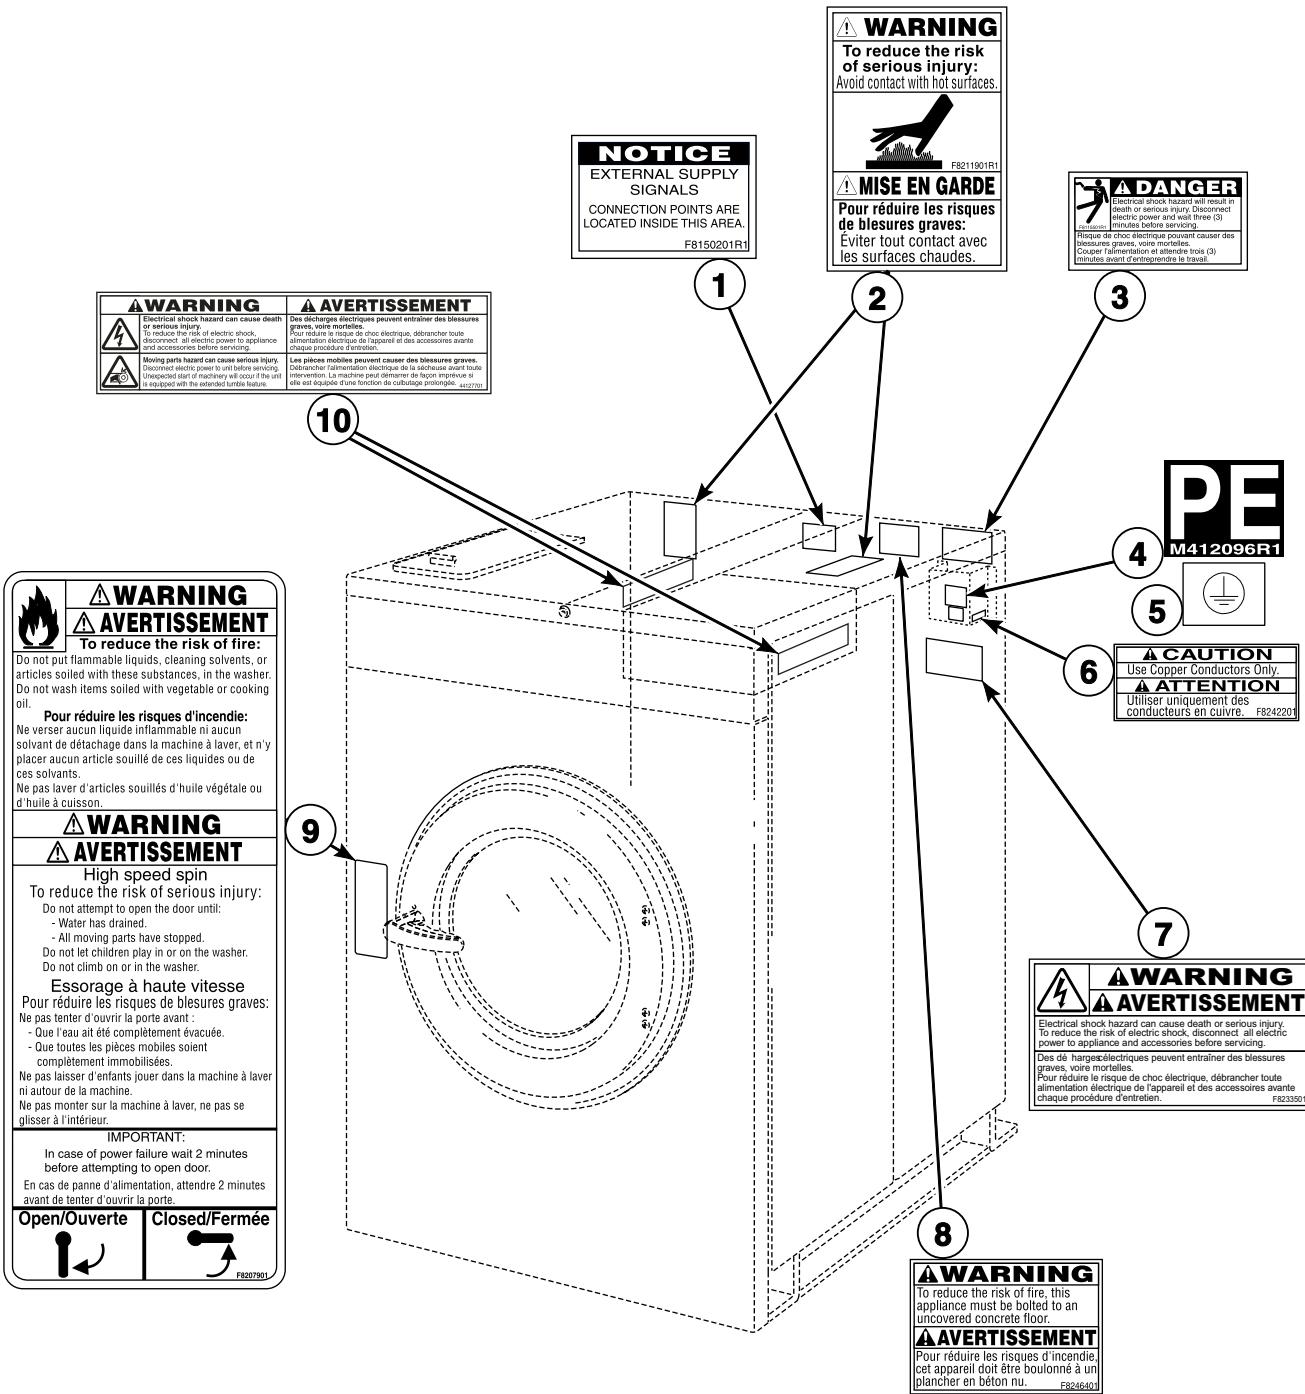


CHM3027P\_F8330701

## Decals

REF	PART NO.	DESCRIPTION	COMMENTS
1	F8150201	External Supply Connection Decal	
2	F8211901	Hot Surface Warning Plate	
3	F8115501	Electric Shock Danger Label	
4	M412096	Earth Terminal Sticker	
5	F230739	Ground Decal	
6	F8242201	Use Copper Conductors Only Caution Label	
7	F8233501	Warning Label	
8	F8246401	Mount on Concrete Warning Label	
9	F8207901	Warning Label	
10	44127701	Warning Label	

## Control Module - 2 Speed OPL Models

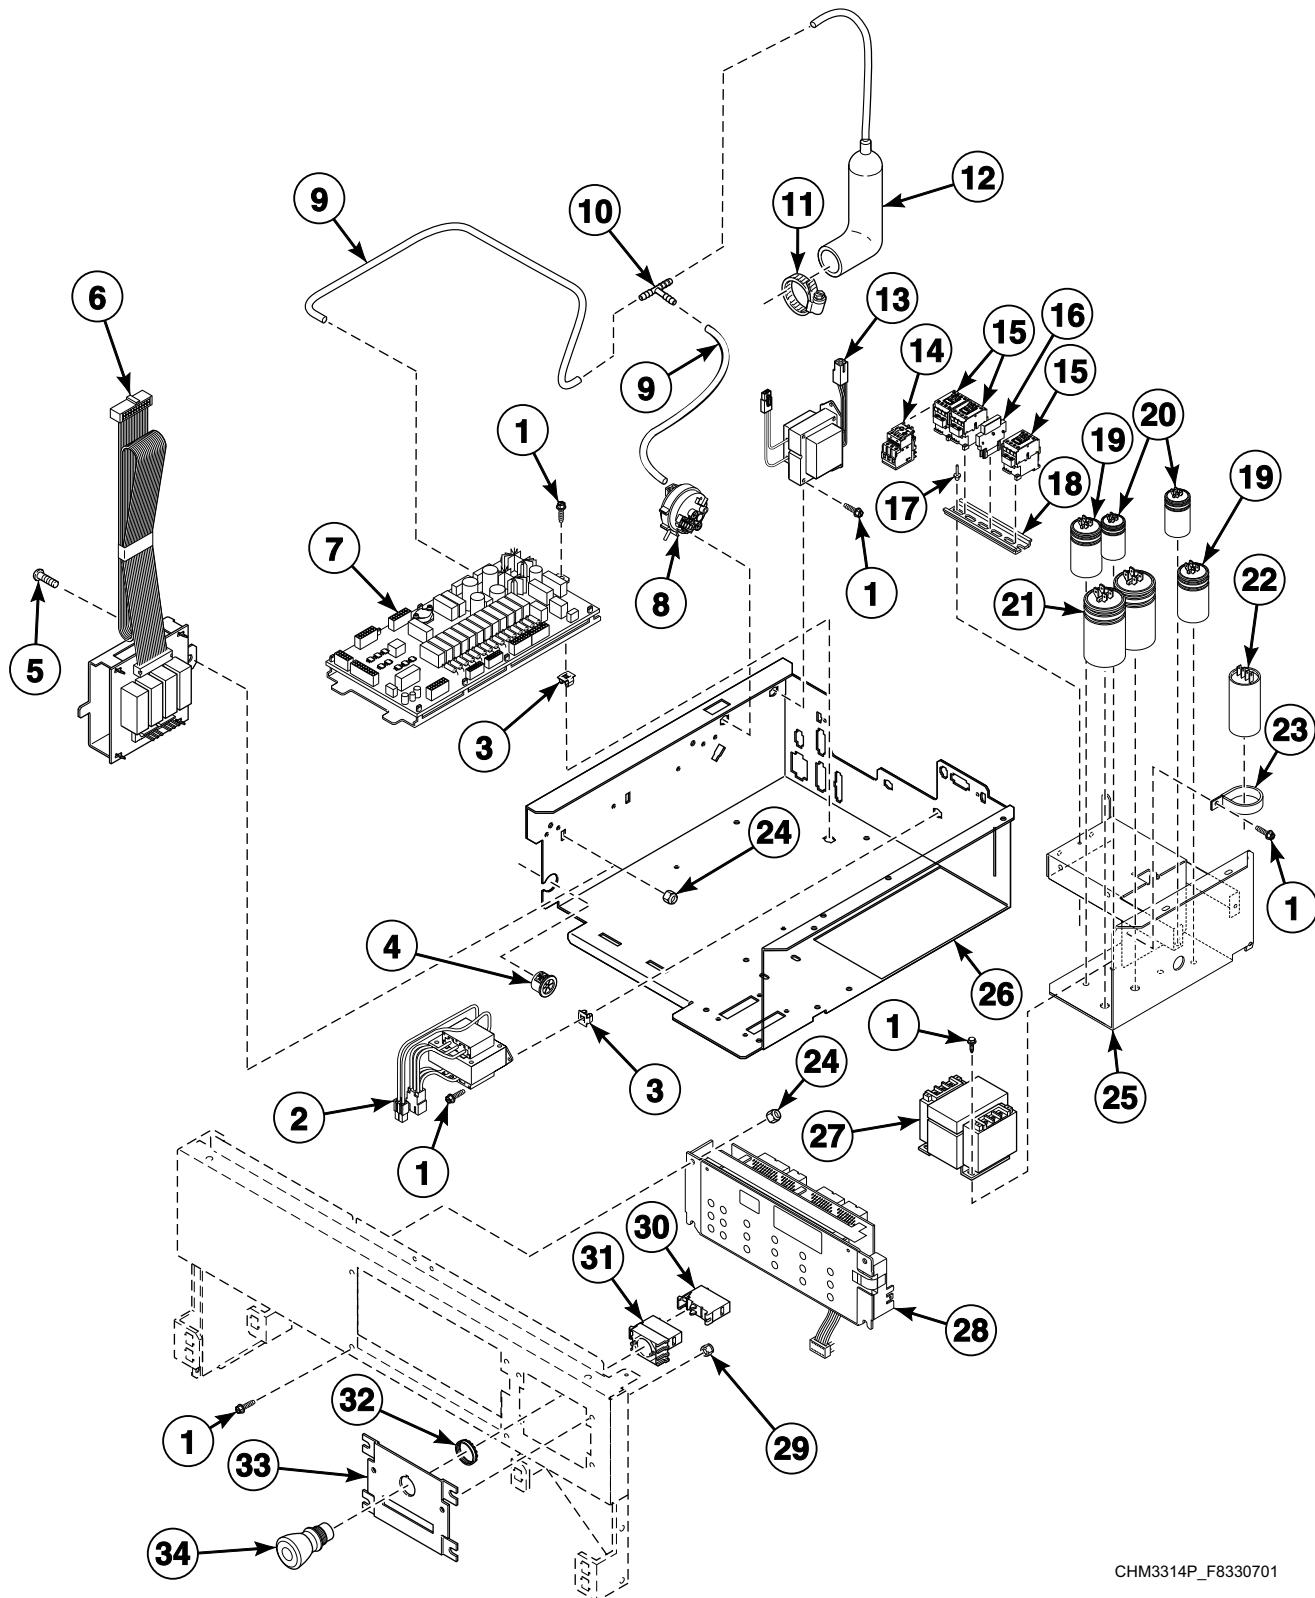


CHM3314P\_F8330701

## Control Module - 2 Speed OPL Models

REF	PART NO.	DESCRIPTION	COMMENTS
	F8028701	Output/Logic Harness	
	F8060501	Emergency Stop Harness	
	F8028101P	Machine Size Configuration Harness	20 pound models
	F8028103P	Machine Size Configuration Harness	30 pound models
	F8028104P	Machine Size Configuration Harness	40 pound models
	F8028105P	Machine Size Configuration Harness	60 pound models
	F8167901	USB IR Device Assembly	
	F8191201P	External Supply Harness	
	F937P3	External Supply Kit	Includes items 1, 6, 13, F8191201P External Supply Harness and screws
	M413506	Jumper Harness Assembly	208 Volt
	M413507	Jumper Configuration Assembly	240 Volt
	F8028219P	Temperature Configuration Harness	
1	F8206901	Screw	
2	803527P	Transformer	
3	70030501	Expansion Clip	
4	44071501	Snap Bushing	
5	F430903	Screw	
6	F8189401P	Auxiliary Control Assembly	
7	F980P3	Control Assembly Kit	Includes item 10 and F8108001 Output Assembly
	802493	Fuse	2.5 Amp
8	F8223001P	Water Pressure Switch	
9	F8153901	Tubing	
10	F8246601	Tee	
11	F200222	Hose Clamp	No. 12
12	F020014200	Air Trap Hose	
13	201616P	Transformer	External supply
14	F8176101P	Overload Contactor	
15	F330177P	Contactor	
16	F330186P	Interlock Contactor	
17	70058501	Pop Rivet	
18	F8200101	DIN Rail	
19	F8411901	Capacitor	50 MFD; 20 pound models Y-voltage, 1 used; 40 pound models Y-voltage, 2 used
	F370221	Capacitor	100 MFD; 20 pound models B-voltage, 1 used
20	F8411701	Capacitor	20 MFD; 30 pound models Y-voltage, 4 used; 40 pound models Y-voltage, 2 used
	F8411801	Capacitor	25 MFD; 20 pound models Y-voltage, 2 used
21	F370218P	Capacitor	160 MFD; 40 pound models Y-voltage, 2 used
	F370220	Capacitor	130 MFD; 20 pound models B-voltage, 2 used; 30 pound models Y-voltage, 1 used
22	F340002	Motor Switch	50 Amp
23	F0340722-00	Switch Clamp	
24	F430232	Nut	
25	F8199601	Capacitor Tray Assembly	20 pound models; B and Y-voltage
	F8199901	Capacitor Tray Assembly	All other models; B and Y-voltage
	F8343401	Contactor Tray Assembly	C, F, J and O-voltage
26	F8205901	Control Tray Assembly	
27	F360157P	Transformer	B-voltage
28	F997P3	Control Kit	HCN, HCZ, SCN, SCZ, UCN and UCZ models
	F998P3	Control Kit	HCL, HCU, SCL, SCU, UCL and UCU models
29	F431017	Nut	
30	F8069501	Contact Switch	
31	F200233401	Contact Block Switch	
32	24205	Nut	
33	F8201301	Emergency Stop Plate	
34	F200233500	Emergency Stop Pushbutton	

## Control Module - F-Speed Design 1 OPL Models

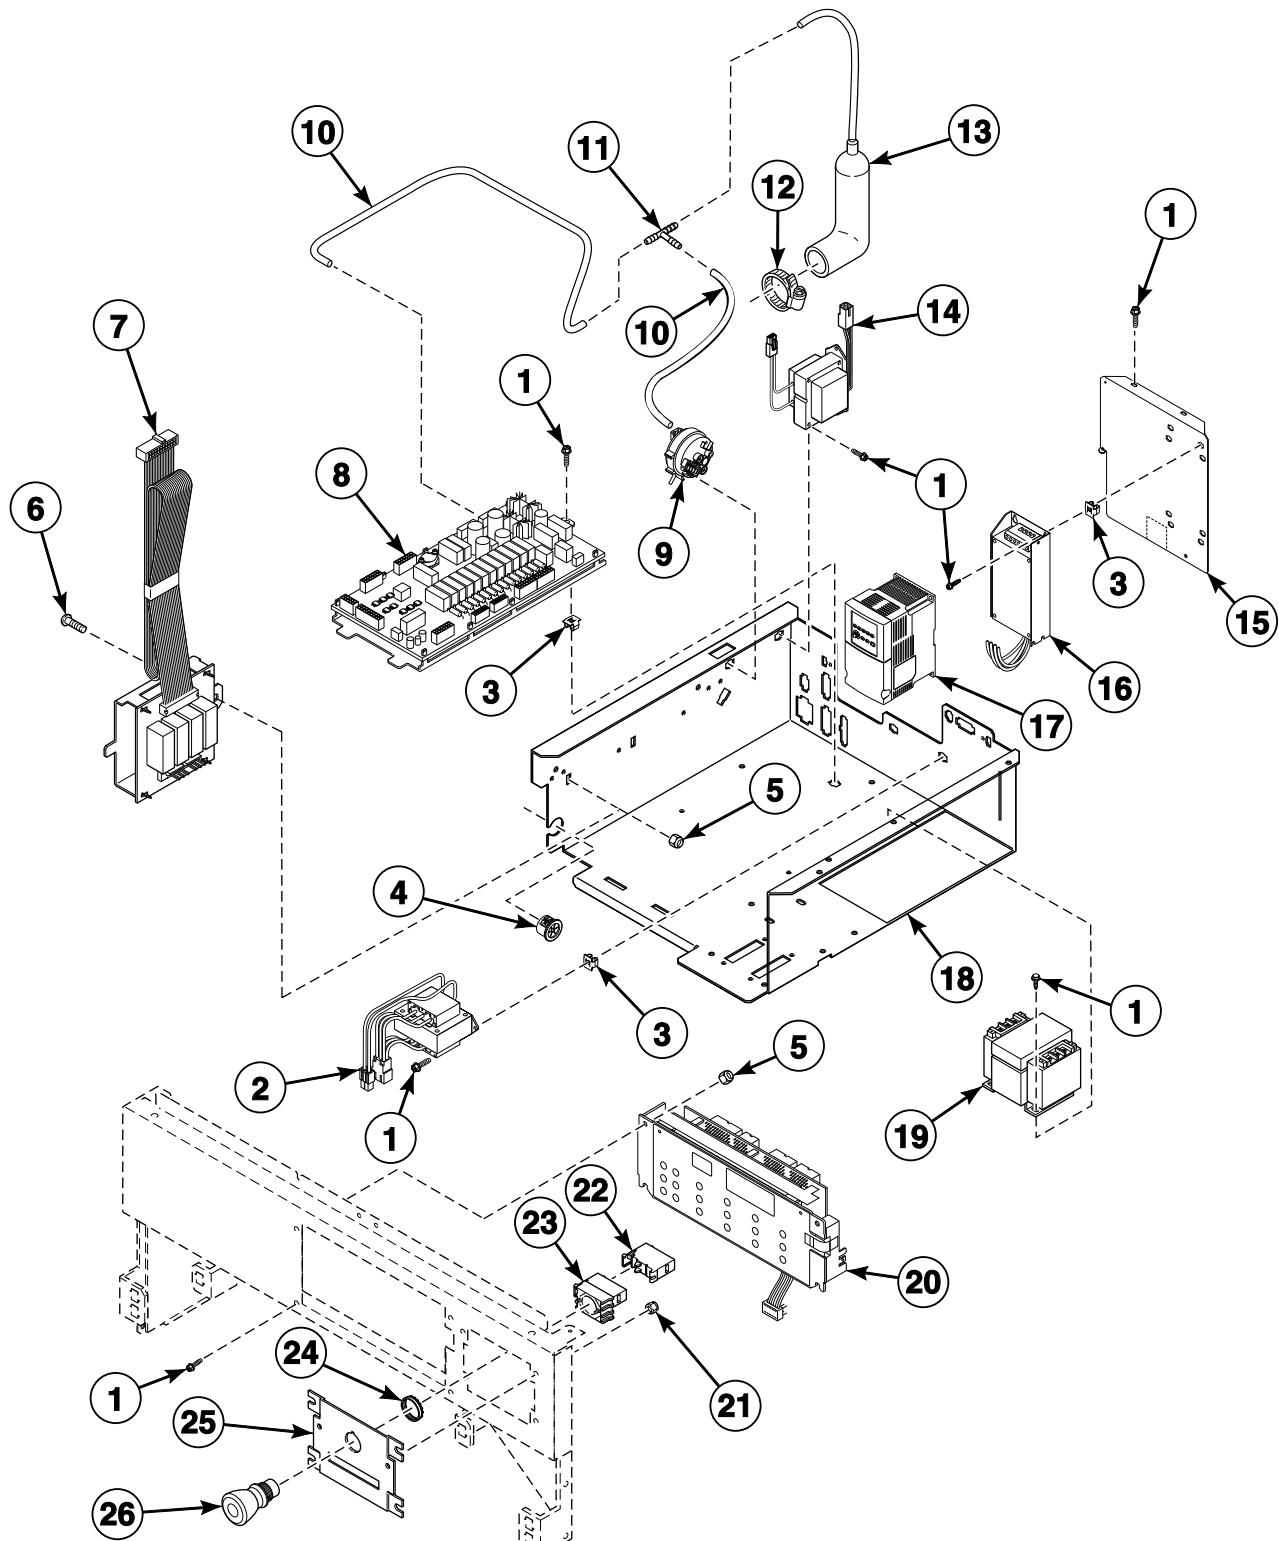


CHM3321P\_F8330701

# Control Module - F-Speed Design 1 OPL Models

REF	PART NO.	DESCRIPTION	COMMENTS
	F8028701	Output/Logic Harness	
	F8060501	Emergency Stop Harness	
	F8028101P	Machine Size Configuration Harness	20 pound models
	F8028103P	Machine Size Configuration Harness	30 pound models
	F8028104P	Machine Size Configuration Harness	40 pound models
	F8028105P	Machine Size Configuration Harness	60 pound models
	F8167901	USB IR Device Assembly	
	F8191201P	External Supply Harness	
	F937P3	External Supply Kit	Includes items 1, 8, 15, F8191201P External Supply Harness and screws
	M413506	Jumper Harness Assembly	208 Volt
	M413507	Jumper Configuration Assembly	240 Volt
	F8261501P	Control Tray Harness	
1	F8206901	Screw	
2	803527P	Transformer	
3	70030501	Expansion Clip	
4	44071501	Snap Bushing	
5	F430232	Nut	
6	F430903	Screw	
7	F8189401P	Auxiliary Control Assembly	
8	F980P3	Control Assembly Kit	Includes item 11 and F8108001 Output Assembly
	802493	Fuse	2.5 Amp
9	F8223001P	Water Pressure Switch	
10	F8153901	Tubing	
11	F8246601	Tee	
12	F200222	Hose Clamp	No. 12
13	F020014200	Air Trap Hose	
14	201616P	Transformer	External supply
15	F8195803	Support Bracket	
16	F8053901P	EMI Filter	240 Volt; International models
	F8053902	EMI Filter	480 Volt; International models
17	F8169401	PowerFlex 40 Drive	20 pound models; Models through 2/28/10; Q and X-voltage
	F8169402	PowerFlex 40 Drive	20 pound models; Models through 2/28/10; N, P and R-voltage
	F8169403	PowerFlex 40 Drive	30 pound models; Models through 2/28/10; Q and X-voltage
	F8169404	PowerFlex 40 Drive	30 pound models; Models through 2/28/10; N, P and R-voltage
	F8169405	PowerFlex 40 Drive	40 pound models; Models through 3/8/10; Q and X-voltage
	F8169406	PowerFlex 40 Drive	40 pound models; Models through 3/8/10; N, P and R-voltage
	F8169407	PowerFlex 40 Drive	60 pound models; Models through 3/8/10; Q and X-voltage
	F8169408	PowerFlex 40 Drive	60 pound models; Models through 3/8/10; N, P and R-voltage
	F8169434	PowerFlex 40 Drive	20 pound models; Models starting 3/1/10; Q and X-voltage
	F8169435	PowerFlex 40 Drive	20 pound models; Models starting 3/1/10; N, P and R-voltage
	F8169436	PowerFlex 40 Drive	30 pound models; Models starting 3/1/10; Q and X-voltage
	F8169437	PowerFlex 40 Drive	30 pound models; Models starting 3/1/10; N, P and R-voltage
	F8169438	PowerFlex 40 Drive	40 pound models; Models starting 3/9/10; Q and X-voltage
	F8169439	PowerFlex 40 Drive	40 pound models; Models starting 3/9/10; N, P and R-voltage
	F8169440	PowerFlex 40 Drive	60 pound models; Models starting 3/9/10; Q and X-voltage
	F8169441	PowerFlex 40 Drive	60 pound models; Models starting 3/9/10; N, P and R-voltage
18	F8205902	Control Tray Assembly	20 and 30 pound models
	F8205903	Control Tray Assembly	40 and 60 pound models
19	F360157P	Transformer	B-voltage
20	F997P3	Control Kit	HCN, SCN and UCN F-speed models
	F998P3	Control Kit	HCL, HCU, SCL, SCU, UCL and UCU F-speed models
21	F431017	Nut	
22	F8069501	Contact Switch	
23	F200233401	Contact Block Switch	
24	24205	Nut	
25	F8201301	Emergency Stop Plate	
26	F200233500	Emergency Stop Pushbutton	

# Control Module - F and V-Speed Design 2 and 3 OPL Models (Drawing 1 of 2)

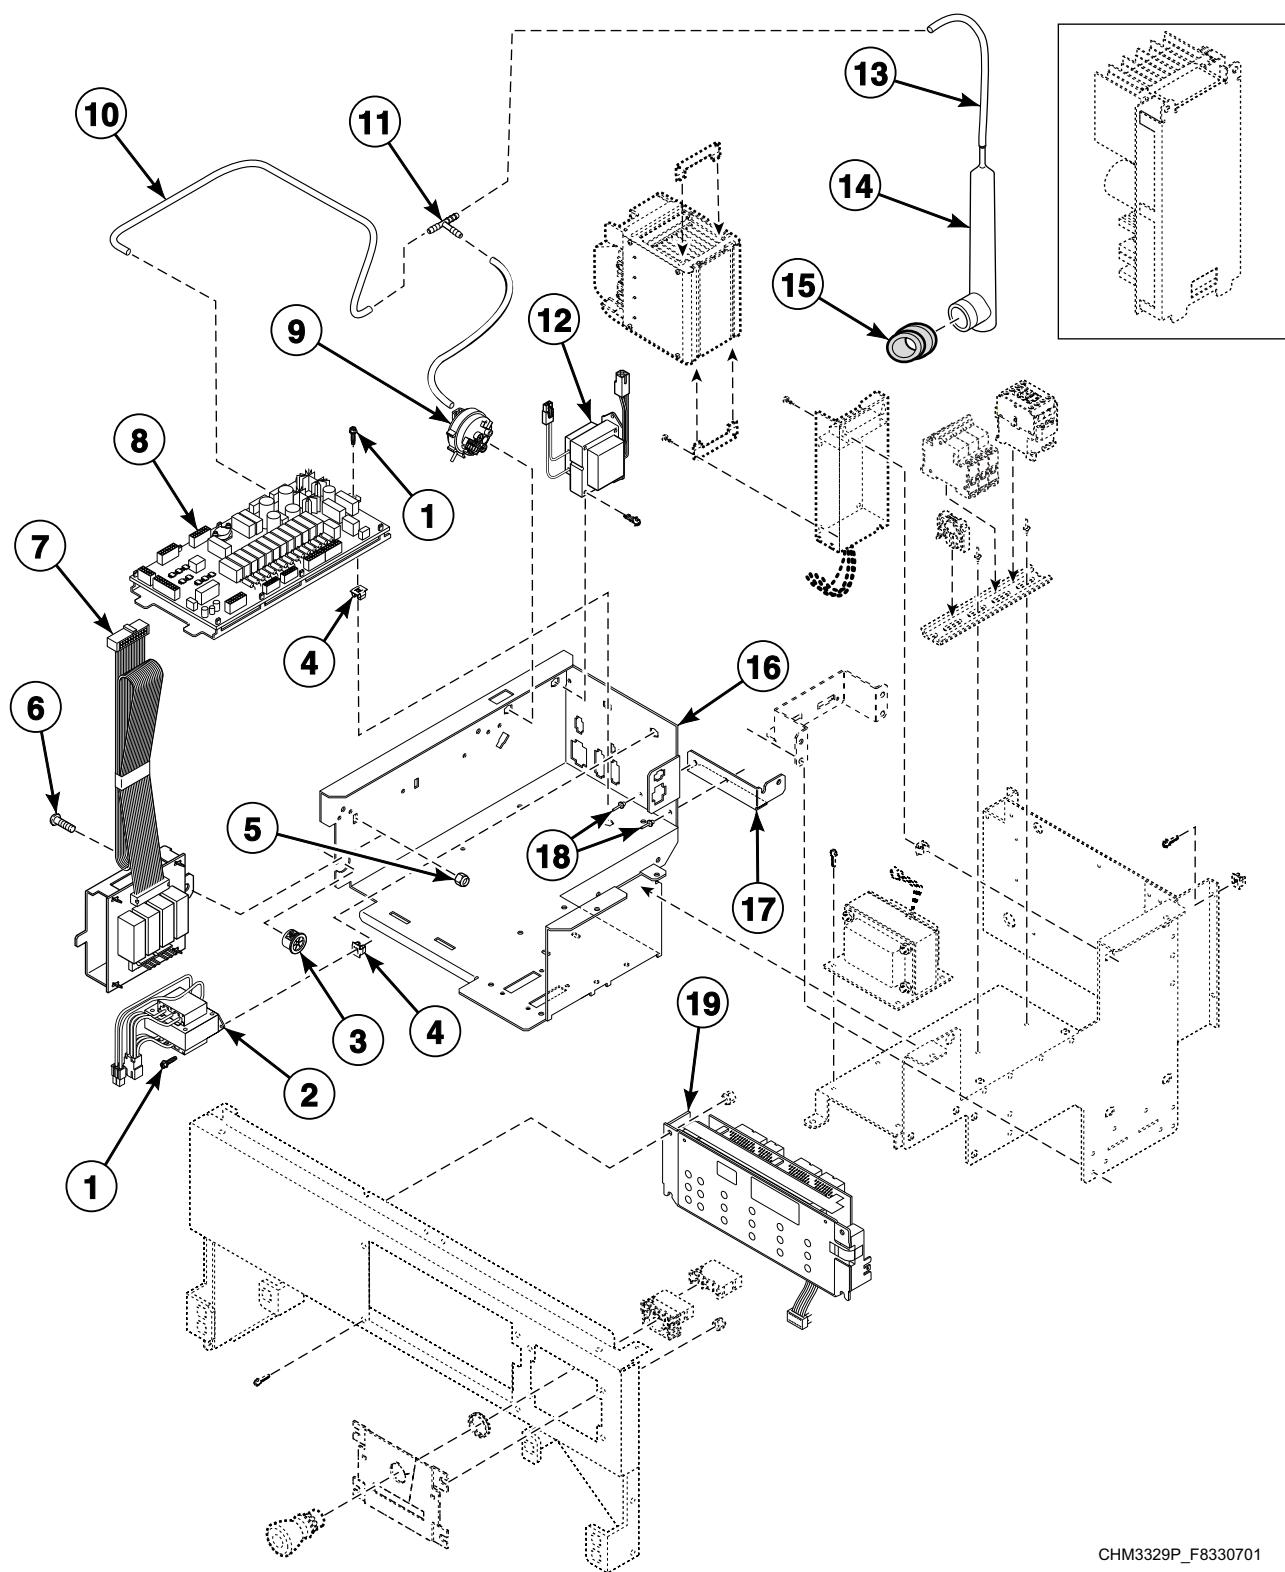


CHM3329P\_F8330701

# Control Module - F and V-Speed Design 2 and 3 OPL Models (Drawing 1 of 2)

REF	PART NO.	DESCRIPTION	COMMENTS
	F8028701	Output/Logic Harness	
	F8060501	Emergency Stop Harness	
	F8028101P	Machine Size Configuration Harness	20 pound models
	F8028103P	Machine Size Configuration Harness	30 pound models
	F8028104P	Machine Size Configuration Harness	40 pound models
	F8028105P	Machine Size Configuration Harness	60 pound models
	F8167901	USB IR Device Assembly	
	F8191201P	External Supply Harness	
	F937P3	External Supply Kit	Includes items 1, 8, 15, F8191201P External Supply Harness and screws
	M413506	Jumper Harness Assembly	208 Volt
	M413507	Jumper Configuration Assembly	240 Volt
	F8261501P	Control Tray Harness	
1	F8206901	Screw	
2	803527P	Transformer	
3	44071501	Snap Bushing	
4	70030501	Expansion Clip	
5	F430232	Nut	
6	F430903	Screw	
7	F8189401P	Auxiliary Control Assembly	
8	F980P3	Control Assembly Kit	Includes item 11 and F8108001 Output Assembly
	802493	Fuse	2.5 Amp
9	F8404401	Water Pressure Switch	Electric heat
10	F8153901	Tubing	
11	F8246601	Tee	Electric heat
	F8431001	Hose Barb Connector	All other models
12	201616P	Transformer	External supply
13	F8405301	Hose	
14	30907	Pressure Bulb	
15	F8433001	Grommet	
16	F8359701	Control Tray Assembly	20 and 30 pound models
	F8359703	Control Tray Assembly	40 and 60 pound models
17	F8375201	Tray Support Bracket	
18	70058501	Pop Rivet	
19	F120P3	Front End Control Kit	HCN and UCN F-speed models; Includes F8028701 Output/Logic Harness
	F121P3	Front End Control Kit	HCB, HCL, HCU, UCB, UCL, UCU and UCZ F-speed models; Includes F8028701 Output/Logic Harness
	F115P3	Front End Control Kit	HCN and UCN V-speed models; Includes F8028701 Output/Logic Harness
	F116P3	Front End Control Kit	HCB, HCL, HCZ, UCB, UCL and UCU V-speed models; Includes F8028701 Output/Logic Harness
	F8549008	Front End Control	CC and IC V-speed models
	F8549018	Front End Control	CC and IC F-speed models

## Control Module - F and V-Speed Design 2 and 3 OPL Models (Drawing 2 of 2)

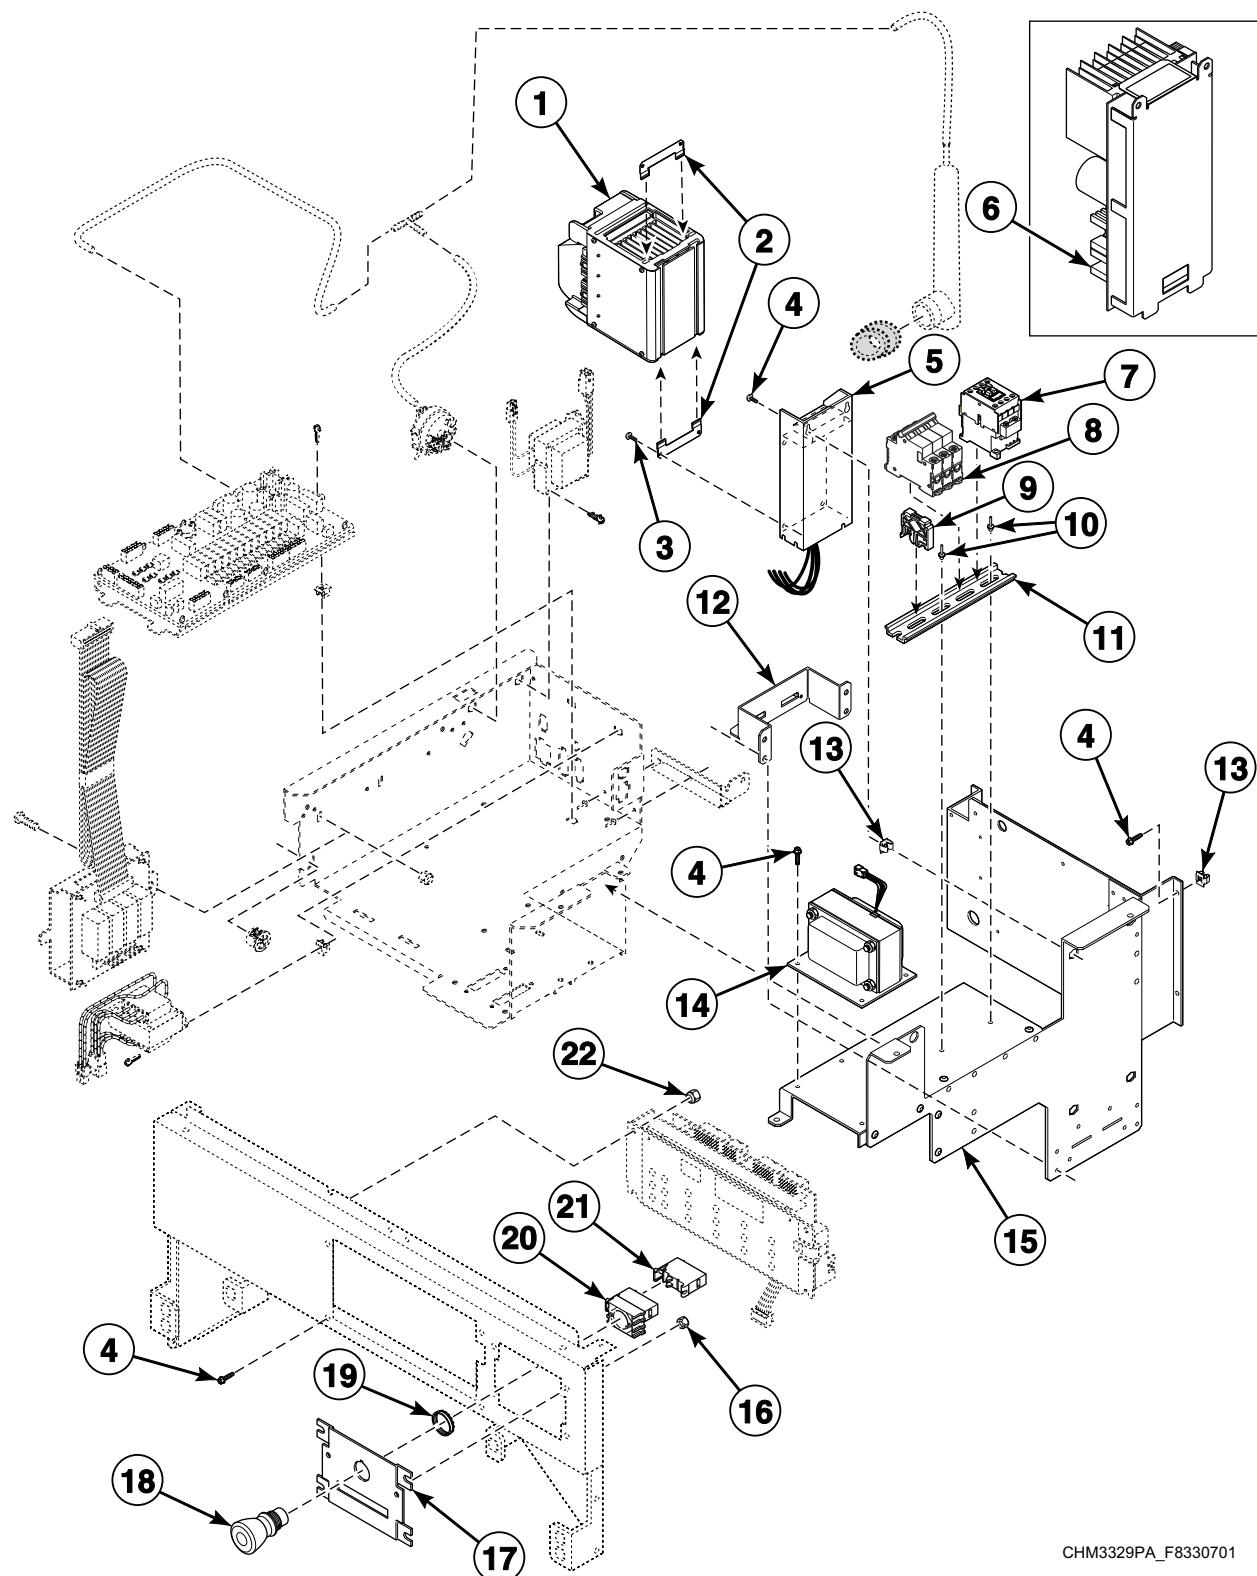


CHM3329PA\_F8330701

## Control Module - F and V-Speed Design 2 and 3 OPL Models (Drawing 2 of 2)

REF	PART NO.	DESCRIPTION	COMMENTS
1	F8303601P	Drive Assembly	N and P-voltage; 5 hp
	F8204701P	Drive Assembly	60 pound models; Q and X-voltage; 3 hp
2	F8322401	Drive Mounting Bracket	Use with item 1
3	503688	Screw	
4	F8206901	Screw	
5	F8053901P	EMI Filter	240 Volt; International models
	F8053902	EMI Filter	480 Volt; International models
6	F8327301P	Drive Assembly	20 , 30 and 40 pound models; B, Q and X-voltage; 2 hp
7	F330177P	Contactor	
8	70256901P	Circuit Breaker	Electric heat models
9	F8449801	End Stop	
10	70058501	Pop Rivet	
11	F8385301	DIN Rail	
12	F8310101	Lower Drive Mounting Bracket	Use with item 6
13	70030501	Expansion Clip	
14	F8401301	Transformer	
15	F8359801	Drive Tray Assembly	20 pound models
	F8359802	Drive Tray Assembly	30 pound models
	F8359803	Drive Tray Assembly	40 and 60 pound models
16	F431017	Nut	
17	F8201301	Emergency Stop Plate	
18	F200233500	Emergency Stop Pushbutton	
19	24205	Nut	
20	F200233401	Contact Block Switch	
21	F8069501	Contact Switch	
22	F430232	Nut	

## Control Module - 2 Speed Coin Models

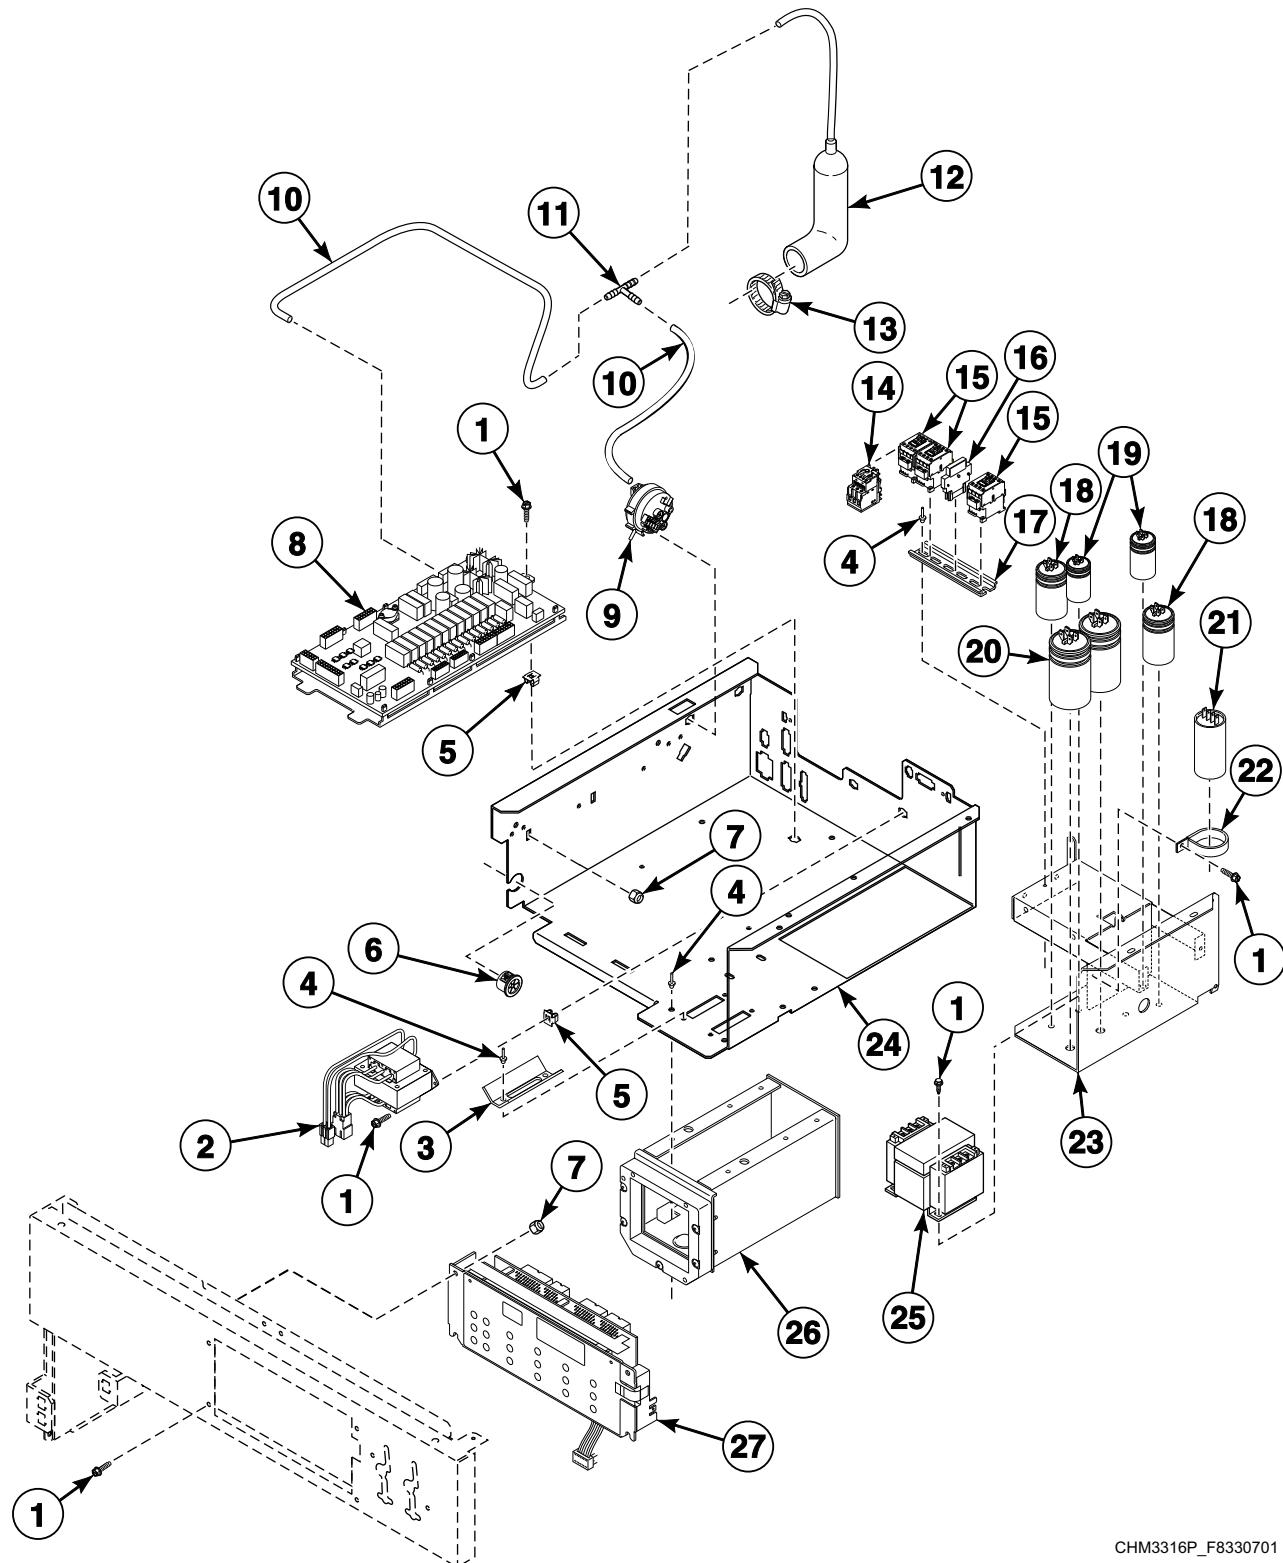


CHM3316P\_F8330701

## Control Module - 2 Speed Coin Models

REF	PART NO.	DESCRIPTION	COMMENTS
	F8028701	Output/Logic Harness	
	F8028101P	Machine Size Configuration Harness	20 pound models
	F8028103P	Machine Size Configuration Harness	30 pound models
	F8028104P	Machine Size Configuration Harness	40 pound models
	F8028105P	Machine Size Configuration Harness	60 pound models
	F8167901	USB IR Device Assembly	
	M413506	Jumper Harness Assembly	208 Volt
	M413507	Jumper Configuration Assembly	240 Volt
	F8191201P	External Supply Harness	
	F8028219P	Temperature Configuration Harness	
	F937P3	External Supply Kit	Includes items 1, 10, 24, F8191201P External Supply Harness and screws
1	F8206901	Screw	
2	803527P	Transformer	
3	F8170801	Coin Chute	
4	70058501	Pop Rivet	
5	70030501	Expansion Clip	
6	44071501	Snap Bushing	
7	F430232	Nut	
8	F980P3	Control Assembly Kit	Includes item 11 and F8108001 Output Assembly
	802493	Fuse	2.5 Amp
9	F8223001P	Water Pressure Switch	
10	F8153901	Tubing	
11	F8246601	Tee	
12	F020014200	Air Trap Hose	
13	F200222	Hose Clamp	No. 12
14	F8176101P	Overload Contactor	
15	F330177P	Contactor	
16	F330186P	Interlock Contactor	
17	F8200101	DIN Rail	
18	F8411901	Capacitor	50 MFD; 20 pound models Y-voltage, 1 used; 40 pound models Y-voltage, 2 used
	F370221	Capacitor	100 MFD; 20 pound models B-voltage, 1 used
19	F8411701	Capacitor	20 MFD; 30 pound models Y-voltage, 4 used; 40 pound models Y-voltage, 2 used
	F8411801	Capacitor	25 MFD; 20 pound models Y-voltage, 2 used
20	F370218P	Capacitor	160 MFD; 40 pound models Y-voltage, 2 used
	F370220	Capacitor	130 MFD; 20 pound models B-voltage, 2 used; 30 pound models Y-voltage, 1 used
21	F340002	Motor Switch	50 Amp
22	F0340722-00	Switch Clamp	
23	F8199601	Capacitor Tray Assembly	20 pound models; B and Y-voltage
	F8199901	Capacitor Tray Assembly	All other models; B and Y-voltage
	F8343401	Contactor Tray Assembly	C, F, J and O-voltage
24	F8205902	Control Tray Assembly	20 and 30 pound models; Includes items 3 and 25
	F8205903	Control Tray Assembly	40 and 60 pound models; Includes items 3 and 25
25	F360157P	Transformer	B-voltage
26	F8182501	Coin Vault Assembly	20 and 30 pound models
	F8182601	Coin Vault Assembly	40 and 60 pound models
27	F996P3	Control Kit	HCL and HCN models

# Control Module - F-Speed Design 1 Coin Models

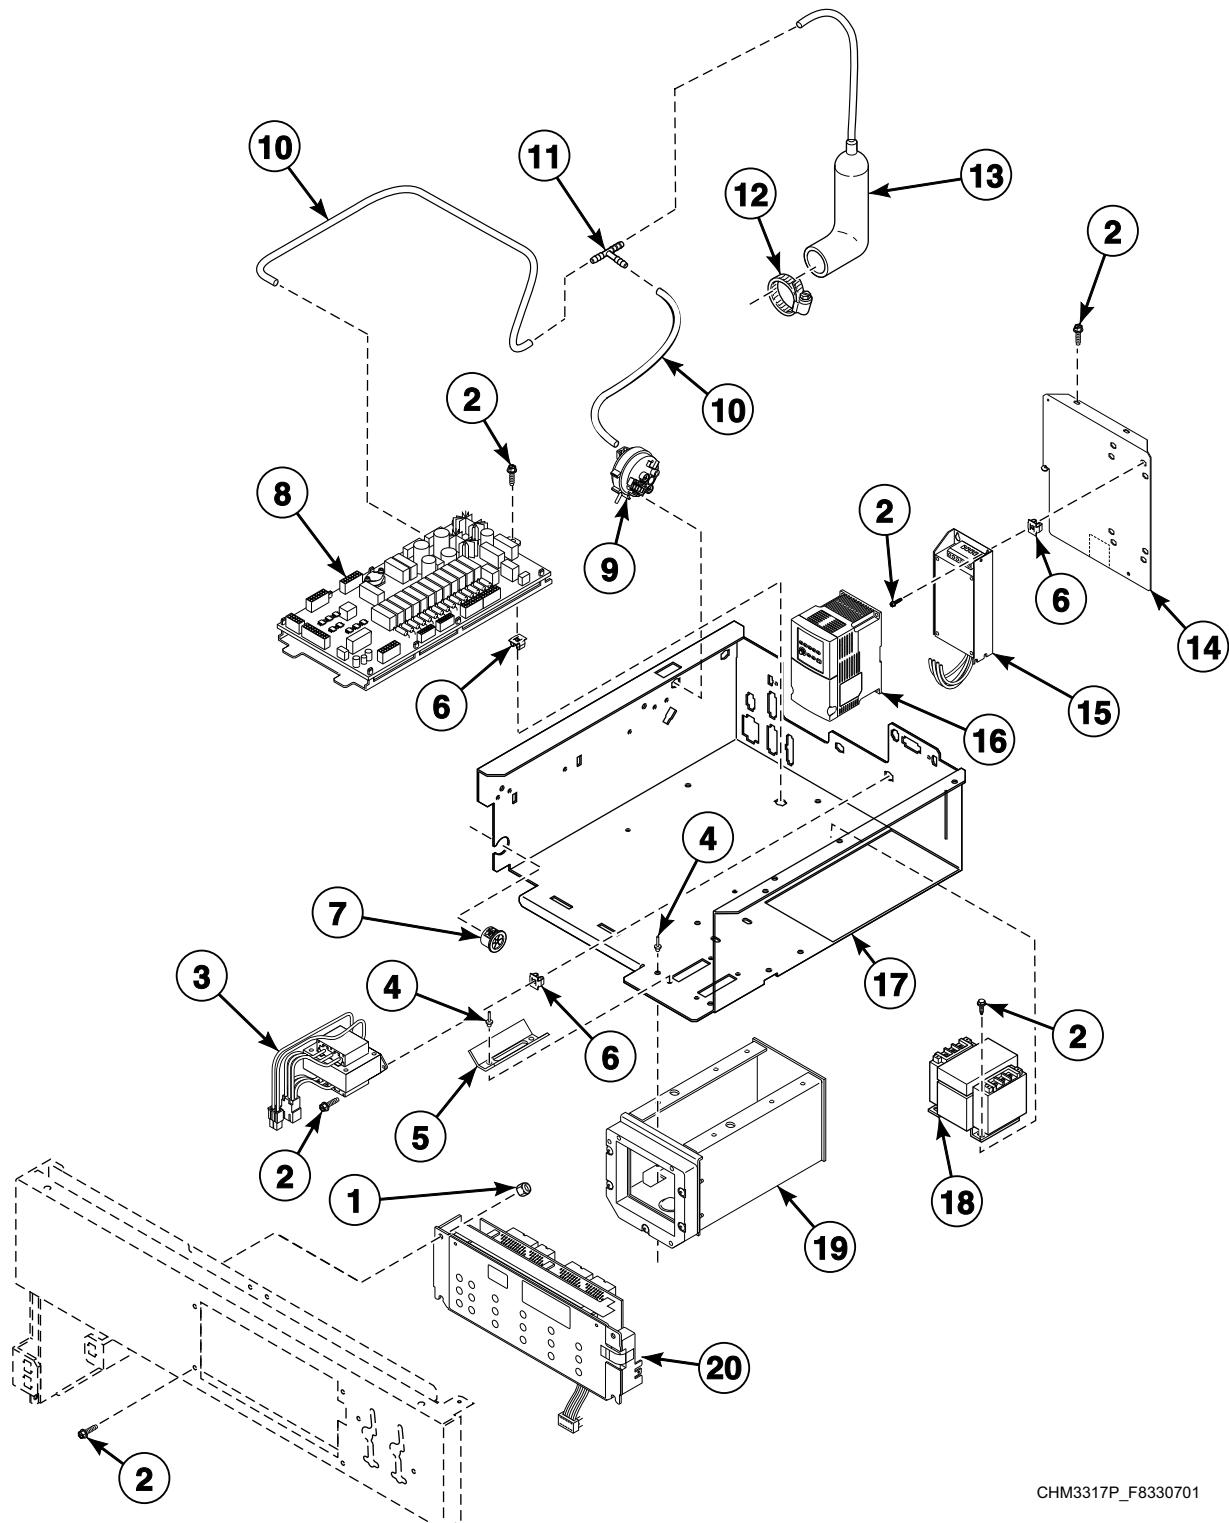


CHM3317P\_F8330701

# Control Module - F-Speed Design 1 Coin Models

REF	PART NO.	DESCRIPTION	COMMENTS
	F8028701	Output/Logic Harness	
	F8028101P	Machine Size Configuration Harness	20 pound models
	F8028103P	Machine Size Configuration Harness	30 pound models
	F8028104P	Machine Size Configuration Harness	40 pound models
	F8028105P	Machine Size Configuration Harness	60 pound models
	F8167901	USB IR Device Assembly	
	M413506	Jumper Harness Assembly	208 Volt
	M413507	Jumper Configuration Assembly	240 Volt
	F8191201P	External Supply Harness	
	F8261501P	Control Tray Harness	40 and 60 pound models
	F937P3	External Supply Kit	Includes items 1, 10, 24, F8191201P External Supply Harness and screws
1	F430232	Nut	
2	F8206901	Screw	
3	803527P	Transformer	
4	70058501	Pop Rivet	
5	F8170801	Coin Chute	
6	70030501	Expansion Clip	
7	44071501	Snap Bushing	
8	F980P3	Control Assembly Kit	Includes item 11 and F8108001 Output Assembly
	802493	Fuse	2.5 Amp
9	F8223001P	Water Pressure Switch	
10	F8153901	Tubing	
11	F8246601	Tee	
12	F200222	Hose Clamp	No. 12
13	F020014200	Air Trap Hose	
14	F8195803	Support Bracket	
15	F8053901P	EMI Filter	240 Volt; International model
	F8053902	EMI Filter	480 Volt; International model
16	F8169401	PowerFlex 40 Drive	20 pound models; Models through 2/28/10; Q and X-voltage
	F8169402	PowerFlex 40 Drive	20 pound models; Models through 2/28/10; N, P and R-voltage
	F8169403	PowerFlex 40 Drive	30 pound models; Models through 2/28/10; Q and X-voltage
	F8169404	PowerFlex 40 Drive	30 pound models; Models through 2/28/10; N, P and R-voltage
	F8169405	PowerFlex 40 Drive	40 pound models; Models through 3/8/10; Q and X-voltage
	F8169406	PowerFlex 40 Drive	40 pound models; Models through 3/8/10; N, P and R-voltage
	F8169407	PowerFlex 40 Drive	60 pound models; Models through 3/8/10; Q and X-voltage
	F8169408	PowerFlex 40 Drive	60 pound models; Models through 3/8/10; N, P and R-voltage
	F8169434	PowerFlex 40 Drive	20 pound models; Models starting 3/1/10; Q and X-voltage
	F8169435	PowerFlex 40 Drive	20 pound models; Models starting 3/1/10; N, P and R-voltage
	F8169436	PowerFlex 40 Drive	30 pound models; Models starting 3/1/10; Q and X-voltage
	F8169437	PowerFlex 40 Drive	30 pound models; Models starting 3/1/10; N, P and R-voltage
	F8169438	PowerFlex 40 Drive	40 pound models; Models starting 3/9/10; Q and X-voltage
	F8169439	PowerFlex 40 Drive	40 pound models; Models starting 3/9/10; N, P and R-voltage
	F8169440	PowerFlex 40 Drive	60 pound models; Models starting 3/9/10; Q and X-voltage
	F8169441	PowerFlex 40 Drive	60 pound models; Models starting 3/9/10; N, P and R-voltage
17	F8205902	Control Tray Assembly	20 and 30 pound models; Includes items 5 and 19
	F8205903	Control Tray Assembly	40 and 60 pound models; Includes items 5 and 19
18	F360157P	Transformer	B-voltage
19	F8182501	Coin Vault Assembly	20 and 30 pound models
	F8182601	Coin Vault Assembly	40 and 60 pound models
20	F996P3	Control Kit	

# Control Module - F-Speed Design 2 and 3 Coin Models (Drawing 1 of 2)

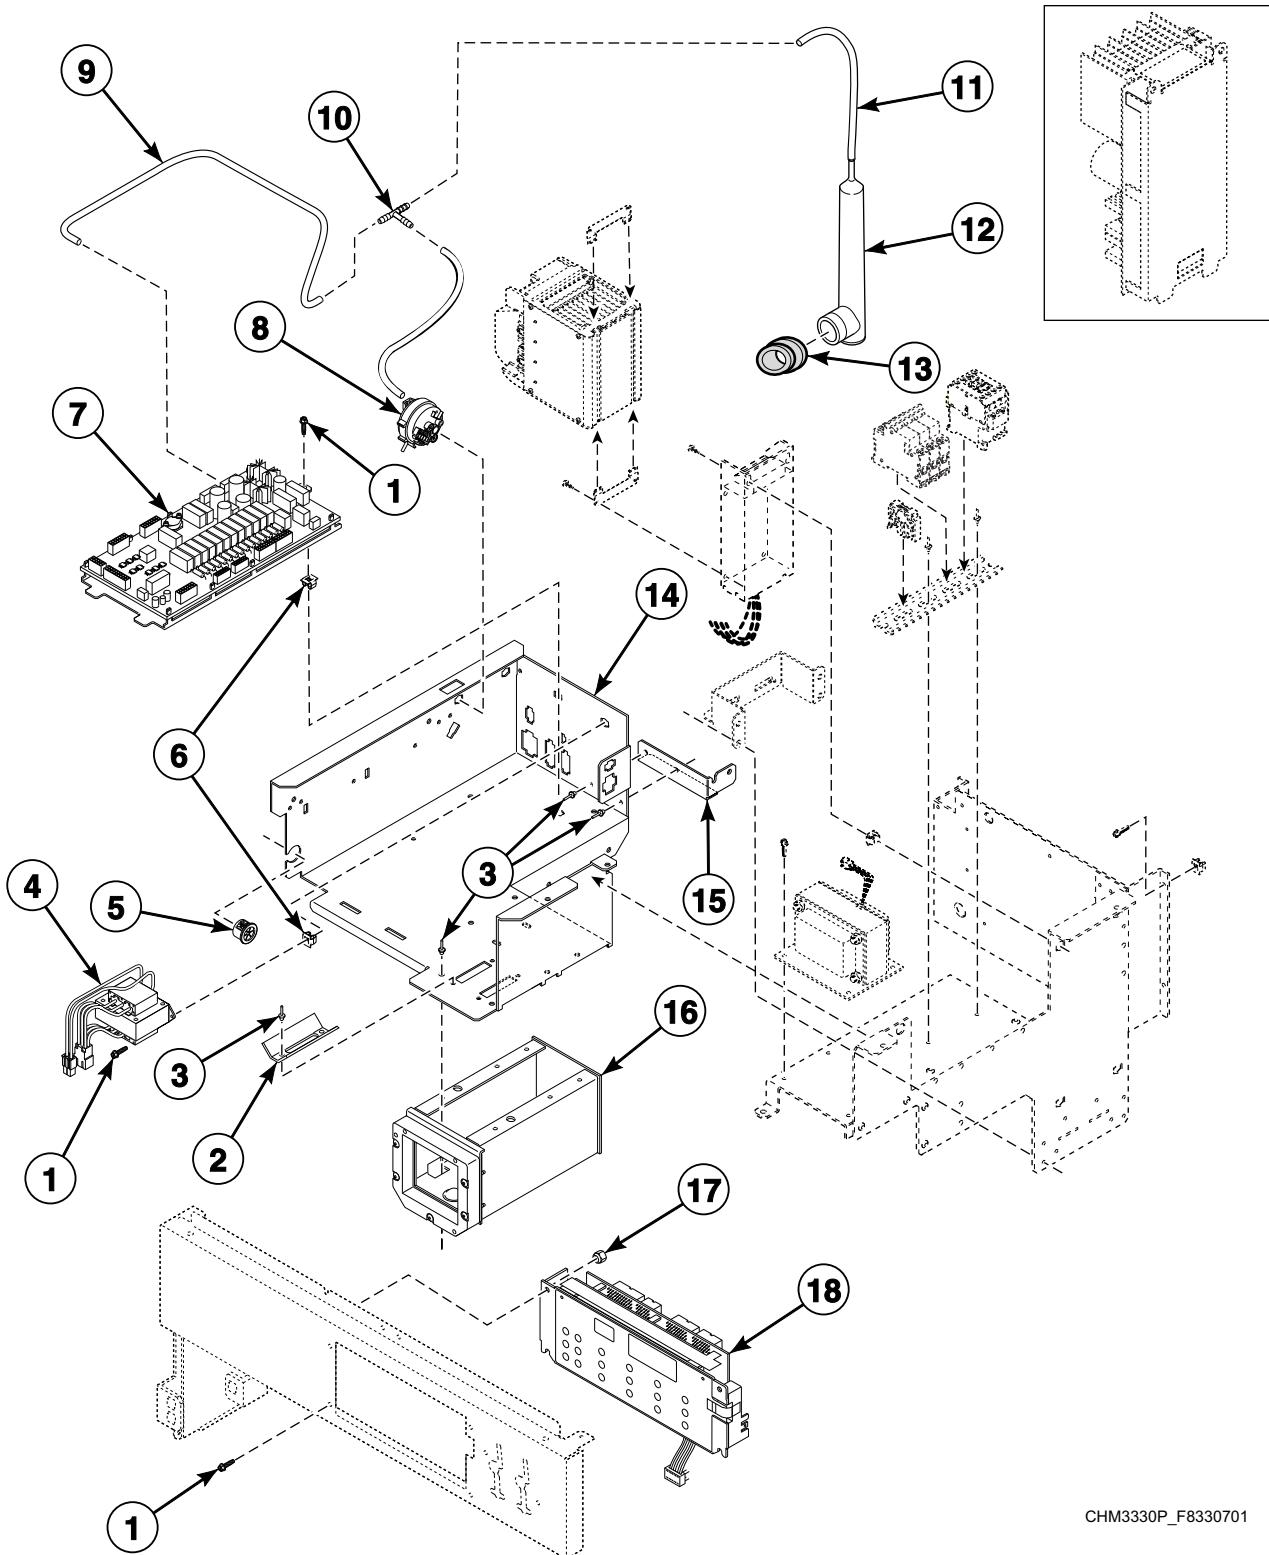


CHM3330P\_F8330701

# Control Module - F-Speed Design 2 and 3 Coin Models (Drawing 1 of 2)

REF	PART NO.	DESCRIPTION	COMMENTS
	F8028701	Output/Logic Harness	
	F8028101P	Machine Size Configuration Harness	20 pound models
	F8028103P	Machine Size Configuration Harness	30 pound models
	F8028104P	Machine Size Configuration Harness	40 pound models
	F8028105P	Machine Size Configuration Harness	60 pound models
	F8167901	USB IR Device Assembly	
	M413506	Jumper Harness Assembly	208 Volt
	M413507	Jumper Configuration Assembly	240 Volt
	F8191201P	External Supply Harness	
	F937P3	External Supply Kit	Includes items 1, 9, F8191201P External Supply Harness and screws
1	F8206901	Screw	
2	F8170801	Coin Chute	
3	70058501	Pop Rivet	
4	803527P	Transformer	
5	44071501	Snap Bushing	
6	70030501	Expansion Clip	
7	F980P3	Control Assembly Kit	Includes item 10 and F8108001 Output Assembly
8	F8404401	Water Pressure Switch	
9	F8153901	Tubing	
10	F8246601	Tee	Electric heat
	F8431001	Hose Barb Connector	All other models
11	F8405301	Hose	
12	30907	Pressure Bulb	
13	F8433001	Grommet	
14	F8359602	Control Tray Assembly	20 and 30 pound models; Design 2; Includes item 2
	F8359707	Control Tray Assembly	20 and 30 pound models; Design 3
	F8359604	Control Tray Assembly	40 and 60 pound models; Includes item 2
15	F8375201	Tray Support Bracket	
16	F8182501	Coin Vault Assembly	20 and 30 pound models; Design 2
	F8182601	Coin Vault Assembly	All other models
17	F431017	Nut	
18	F118P3	Front End Control Kit	Includes F8028701 Output/Logic Harness

## Control Module - F-Speed Design 2 and 3 Coin Models (Drawing 2 of 2)

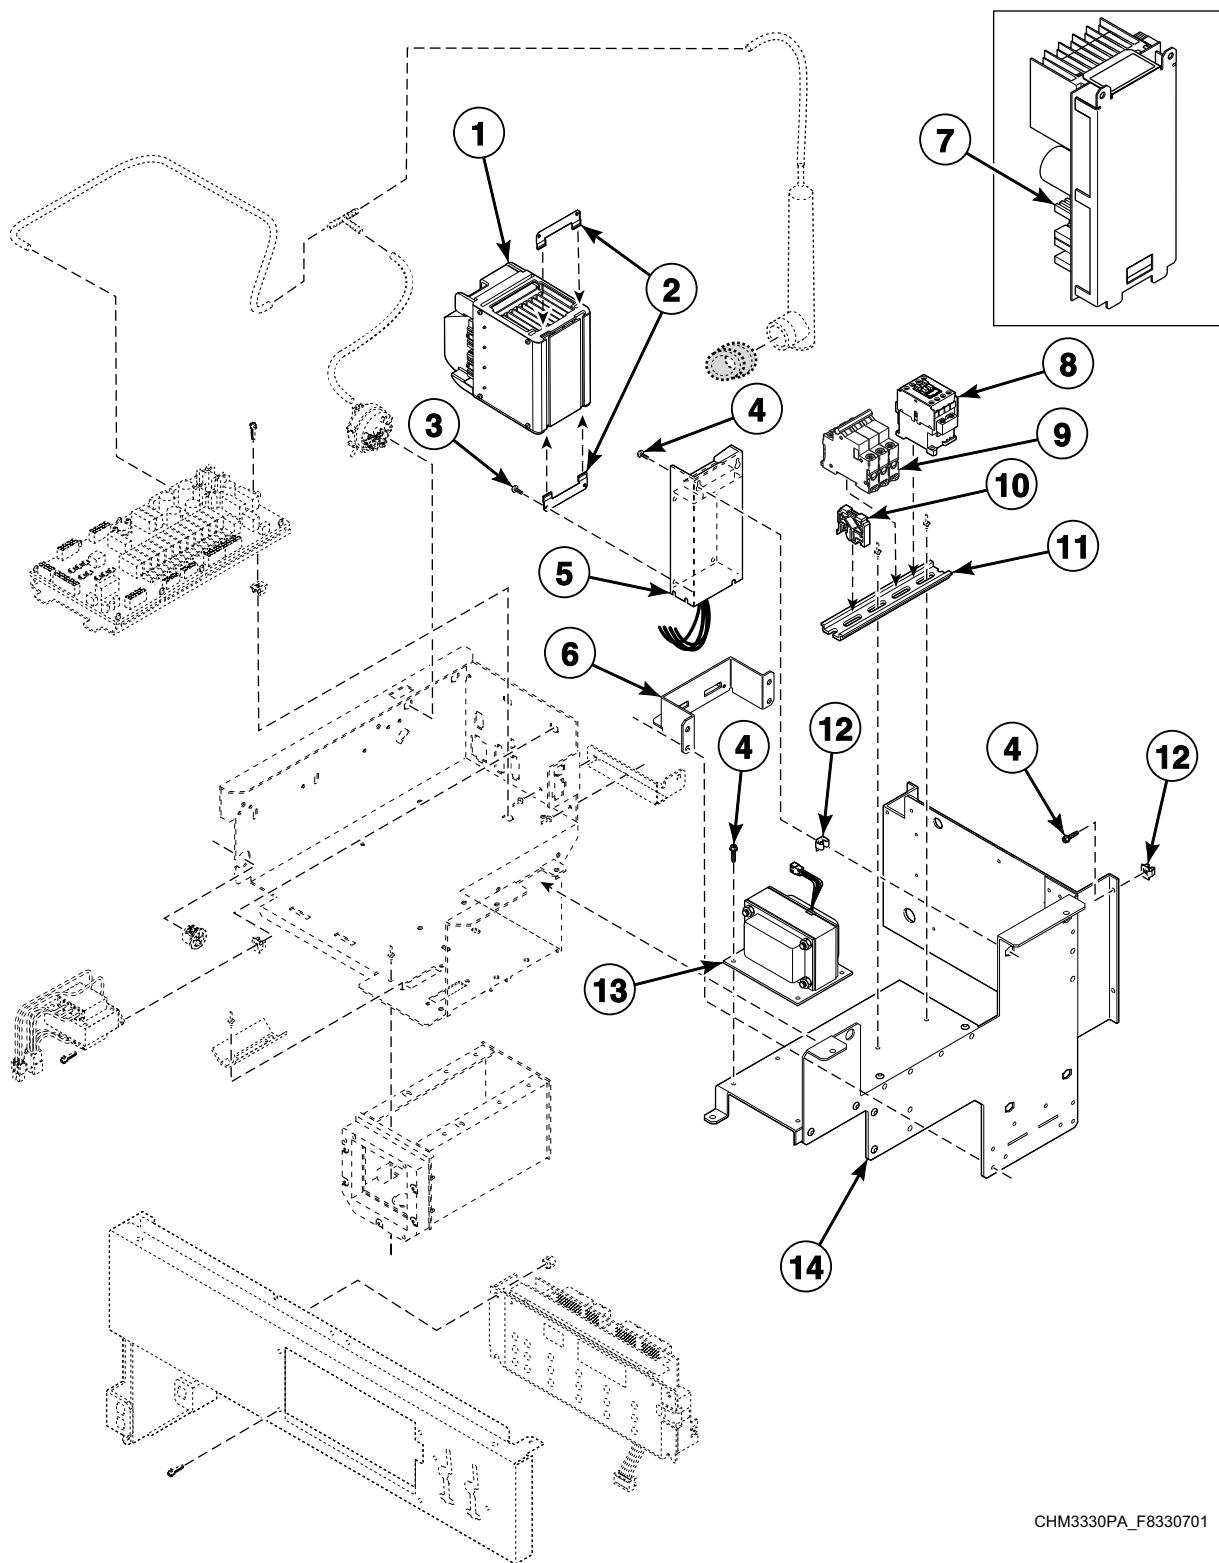


CHM3330PA\_F8330701

## Control Module - F-Speed Design 2 and 3 Coin Models (Drawing 2 of 2)

REF	PART NO.	DESCRIPTION	COMMENTS
	F8028701	Output/Logic Harness	
	F8028101P	Machine Size Configuration Harness	20 pound models
	F8028103P	Machine Size Configuration Harness	30 pound models
	F8028104P	Machine Size Configuration Harness	40 pound models
	F8028105P	Machine Size Configuration Harness	60 pound models
	F8167901	USB IR Device Assembly	
	M413506	Jumper Harness Assembly	208 Volt
	M413507	Jumper Configuration Assembly	240 Volt
	F8191201P	External Supply Harness	
	F937P3	External Supply Kit	Includes item 4, F8191201P External Supply Harness and screws
1	F8303601P	Drive Assembly	N and P-voltage; 5 hp
	F8204701P	Drive Assembly	60 pound models; Q and X-voltage; 3 hp
2	F8322401	Drive Mounting Bracket	Use with item 1
3	503688	Screw	
4	F8206901	Screw	
5	F8053901P	EMI Filter	240 Volt; International models
	F8053902	EMI Filter	480 Volt; International models
6	F8310101	Lower Drive Mounting Bracket	Use with item 7
7	F8327301P	Drive Assembly	20 , 30 and 40 pound models; B and Q-voltage; 2 hp
8	F330177P	Contactor	
9	70256901P	Circuit Breaker	Electric heat
10	70121001	End Stop	
11	F8385301	DIN Rail	
12	70030501	Expansion Clip	
13	F8401301	Transformer	
14	F8359801	Drive Tray Assembly	20 pound models
	F8359802	Drive Tray Assembly	30 pound models
	F8359803	Drive Tray Assembly	40 and 60 pound models

## Flush Mount Coin Meter Assembly - Single Drop

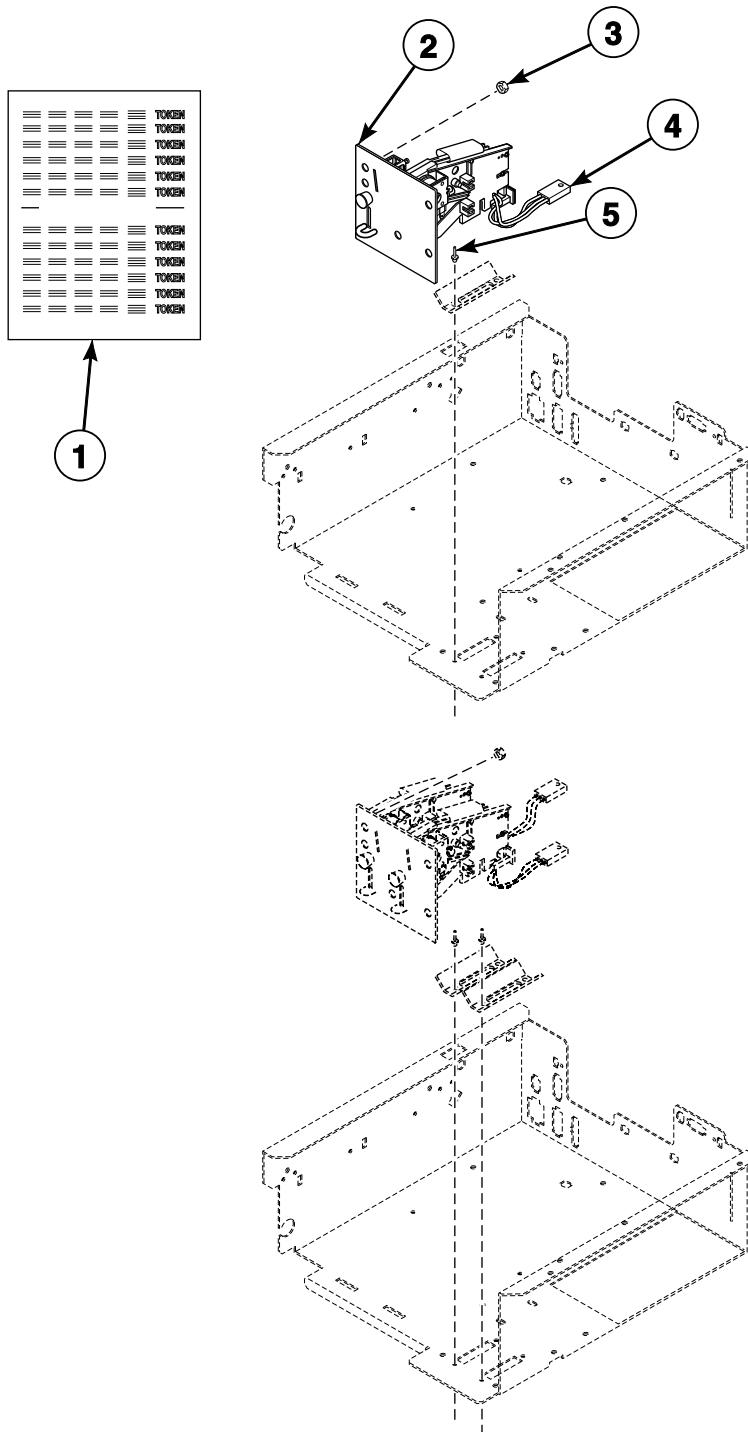


CHM3088P\_F8330701

## Flush Mount Coin Meter Assembly - Single Drop

REF	PART NO.	DESCRIPTION	COMMENTS
	F200010000P	Coin Meter Assembly	U.S. \$.25; Includes items 2 and 3
	F200010006	Coin Meter Assembly	.800 token; Includes items 2 and 3
	F200010007	Coin Meter Assembly	.880 token; Includes items 2 and 3
	F200010009	Coin Meter Assembly	.990 token; Includes items 2 and 3
	F200010011	Coin Meter Assembly	Jeton WH121 token; Includes items 2 and 3
	F200010012	Coin Meter Assembly	Jeton .08 token; Includes items 2 and 3
1	38725	Coin Identification Paper	
2	38464P	Coin Drop Assembly	Canada .25
	N/A	Coin Drop Assembly	Australia .20
	N/A	Coin Drop Assembly	Belgium 5 franc
	N/A	Coin Drop Assembly	Denmark 2 krone
	N/A	Coin Drop Assembly	United Kingdom 20 pence
	N/A	Coin Drop Assembly	France 2 franc
	N/A	Coin Drop Assembly	Hong Kong 5 dollar
	N/A	Coin Drop Assembly	Italy 500 lirraiget
	N/A	Coin Drop Assembly	Japan 100 yen
	N/A	Coin Drop Assembly	Korea 500 won
	N/A	Coin Drop Assembly	South Africa 2 rand
	N/A	Coin Drop Assembly	Spain 100 peseta
	N/A	Coin Drop Assembly	Thailand 10 baht
	N/A	Coin Drop Assembly	.886 token
	N/A	Coin Drop Assembly	1.000 token
	N/A	Coin Drop Assembly	Jeton 08 token
	70441601P	Coin Drop	U.S. \$.25
	N/A	Coin Drop Assembly	.800 token
	38462P	Coin Drop Assembly	Token; 118-1; .880 diameter x .079 thick; Brass
	38463	Coin Drop Assembly	Token; 118-5; .990 diameter x .081 thick; Silver
	N/A	Coin Drop Assembly	Jeton WH121 token
	N/A	Coin Meter	Jeton .08 token
3	685846	Nut	
4	200674P	Opto Coupler	
5	70058501	Pop Rivet	

N/A = Part no longer available

## Flush Mount Coin Meter Assembly - Dual Drop

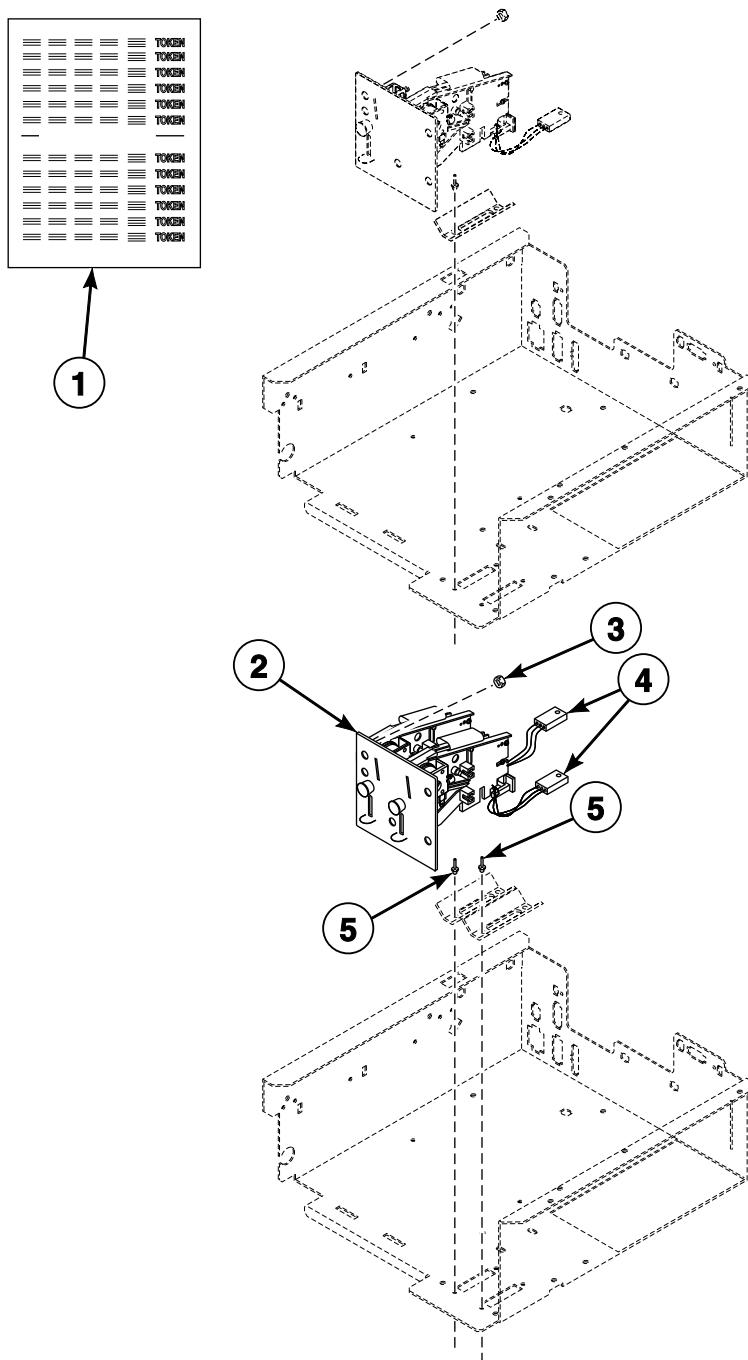


CHM3088PA\_F8330701

## Flush Mount Coin Meter Assembly - Dual Drop

REF	PART NO.	DESCRIPTION	COMMENTS
	F200010001	Coin Meter Assembly	Australia .20 and 1.00; Includes items 2 and 3
	F200010002	Coin Meter Assembly	100 and 500 yen; Includes items 2 and 3
	F200010003	Coin Meter Assembly	Canada .25 and 1.00; Includes items 2 and 3
	F200010004	Coin Meter Assembly	New Zealand .20 and 1.00; Includes items 2 and 3
	F200010005	Coin Meter Assembly	U.S. \$.25 and \$1.00; Includes items 2 and 3
	F200010008	Coin Meter Assembly	.50 and 2.00 euro; Includes items 2 and 3
	F200010010	Coin Meter Assembly	10 and 50 Taiwan; Includes items 2 and 3
1	38725	Coin Identification Paper	
2	N/A	Coin Meter	10 and 50 Taiwan
	N/A	Coin Meter	Belgium 5 and 20 franc
	N/A	Coin Meter	Denmark 1 and 5 krone
	N/A	Coin Meter	Denmark 5 and 10 krone
	38472	Coin Drop Assembly	United Kingdom 20 pence and 1 pound
	N/A	Coin Meter	.20 and .50 euro
	210195	Coin Drop Assembly	.20 and 1.00 euro
	210196	Coin Drop Assembly	.50 and 1.00 euro
	N/A	Coin Meter	2 and 5 franc
	N/A	Coin Meter	2 and 10 franc
	39157	Coin Drop Assembly	Israel 1 and 5 shekel
	38521	Coin Drop Assembly	Korea 100 and 500 won
	N/A	Coin Meter	Spain 100 and 500 peseta
	N/A	Coin Drop Assembly	Australia .20 and 1.00
	N/A	Coin Drop Assembly	Japan 100 and 500 yen
	N/A	Coin Drop Assembly	Canada .25 and 1.00
	N/A	Coin Drop Assembly	New Zealand .20 and 1.00
	70256402P	Coin Drop	U.S. \$.25 and \$1.00
	F0160737-00	Coin Meter	.50 and 2.00 euro
	70281102	Coin Drop Assembly	Taiwan 10 and 50 dollar
	N/A	Coin Meter	Taiwan 5 and 10 dollar
3	685846	Nut	
4	200674P	Opto Coupler	
5	70058501	Pop Rivet	

N/A = Part no longer available

# Electronic Coin Meter Assembly

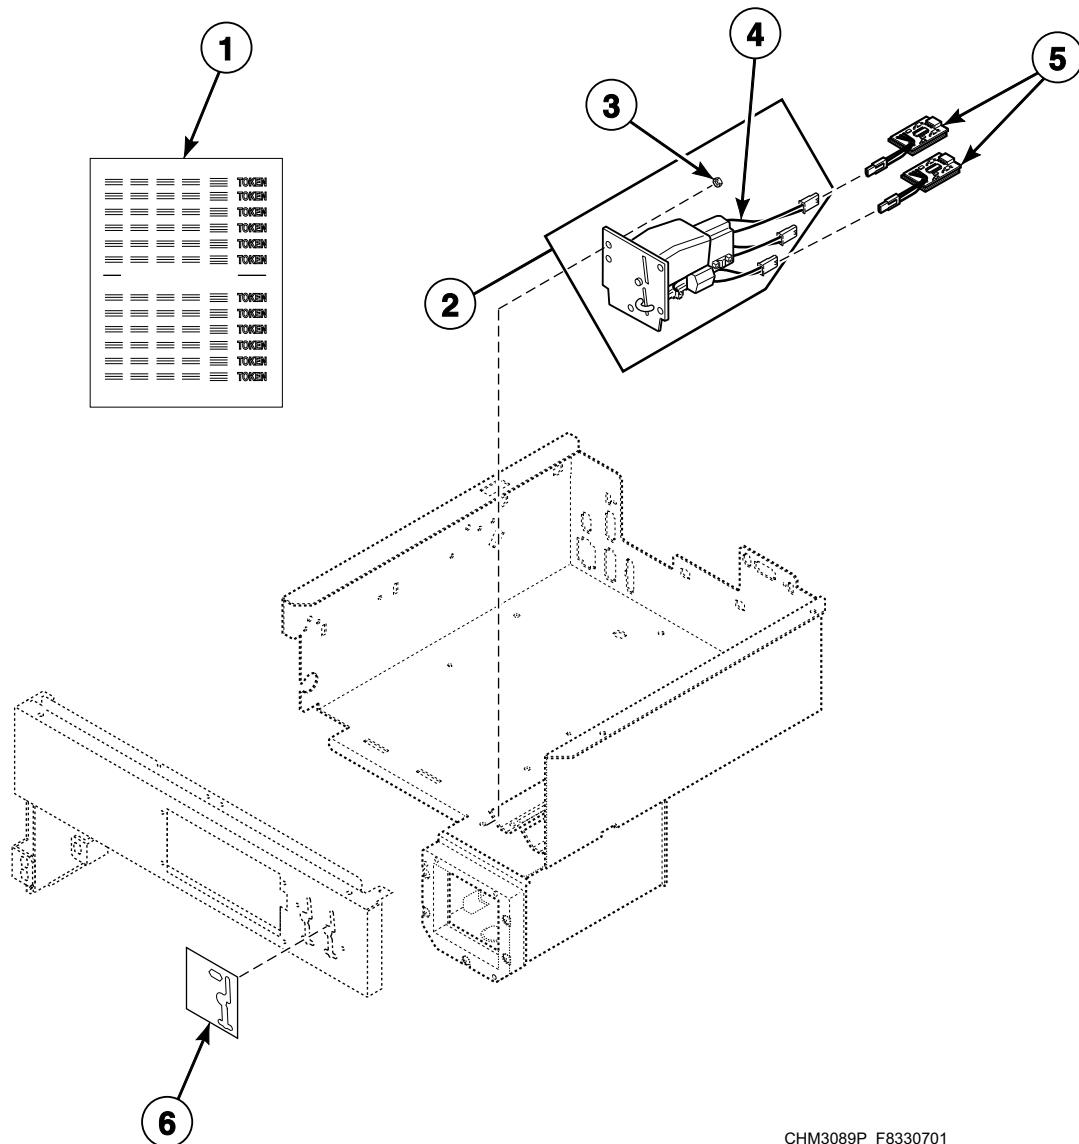


CHM3089P\_F8330701

# Electronic Coin Meter Assembly

REF	PART NO.	DESCRIPTION	COMMENTS
	CK500	Electronic Coin Drop Kit	Includes item 2
1	38725	Coin Identification Paper	
2	F200021600P	Coin Meter Assembly	U.S., Canada, Japan and Taiwan; Includes items 3 and 4; Requires CK500 Electronic Coin Drop Kit for installation
	F200021601	Coin Meter Assembly	Australia, New Zealand, Hong Kong, South Korea and Malaysia; Includes items 3 and 4; Requires CK500 Electronic Coin Drop Kit for installation
	F200021602	Coin Meter Assembly	United Kingdom and euro; Includes items 3 and 4; Requires CK500 Electronic Coin Drop Kit for installation
	F200021603	Coin Meter Assembly	Denmark, Norway and euro; Includes items 3 and 4; Requires CK500 Electronic Coin Drop Kit for installation
	F200021604	Coin Meter Assembly	U.S., Mexico and Ecuador; Includes items 3 and 4; Requires CK500 Electronic Coin Drop Kit for installation
	F200021605	Coin Meter Assembly	Euro, Latvia and Lithuania; Includes items 3 and 4; Requires CK500 Electronic Coin Drop Kit for installation
	F8238601	Coin Meter Assembly	China, Russia and Malaysia; Includes items 3 and 4; Requires CK500 Electronic Coin Drop Kit for installation
3	685846	Nut	
4	CK115	Electronic Coin Drop Kit	U.S. and Canada; Includes item 1; Requires CK500 Electronic Coin Drop Kit for installation
	CK113	Electronic Coin Drop Kit	Japan and Taiwan; Includes item 1; Requires CK500 Electronic Coin Drop Kit for installation
	70294105P	Electronic Coin Drop Assembly	Australia, New Zealand, Hong Kong, South Korea and Malaysia
	CK099	Electronic Coin Drop Kit	Australia, New Zealand, Hong Kong, South Korea and Malaysia; Includes item 1; Requires CK500 Electronic Coin Drop Kit for installation
	70294103P	Electronic Coin Drop Assembly	United Kingdom and euro
	CK100	Electronic Coin Drop Kit	United Kingdom and euro; Includes item 1; Requires CK500 Electronic Coin Drop Kit for installation
	70294104	Electronic Coin Drop Assembly	Denmark, Norway and euro
	CK101	Electronic Coin Drop Kit	Denmark, Norway and euro; Includes item 1; Requires CK500 Electronic Coin Drop Kit for installation
	70294106	Electronic Coin Drop Assembly	U.S., Mexico and Ecuador
	CK110	Electronic Coin Drop Kit	U.S., Mexico and Ecuador; Includes item 1; Requires CK500 Electronic Coin Drop Kit for installation
	70294107	Electronic Coin Drop Assembly	Euro, Latvia and Lithuania
	CK103	Electronic Coin Drop Kit	Euro, Latvia and Lithuania; Includes item 1; Requires CK500 Electronic Coin Drop Kit for installation
	70294109	Electronic Coin Drop Assembly	Singapore, China, Russia and Malaysia
	CK106	Electronic Coin Drop Kit	Singapore, China, Russia and Malaysia; Includes item 1; Requires CK500 Electronic Coin Drop Kit for installation
	70294111	Electronic Coin Drop Assembly	Euro
	CK109	Electronic Coin Drop Kit	Euro; Includes item 1; Requires CK500 Electronic Coin Drop Kit for installation
	70294119	Electronic Coin Drop Assembly	Thailand
	CK119	Electronic Coin Drop Kit	Thailand; Includes item 1; Requires CK500 Electronic Coin Drop Kit for installation
5	F8034701P	Pulse Expander Assembly	
6	70295301	Overlay	Gray

## Card Reader - HY Models

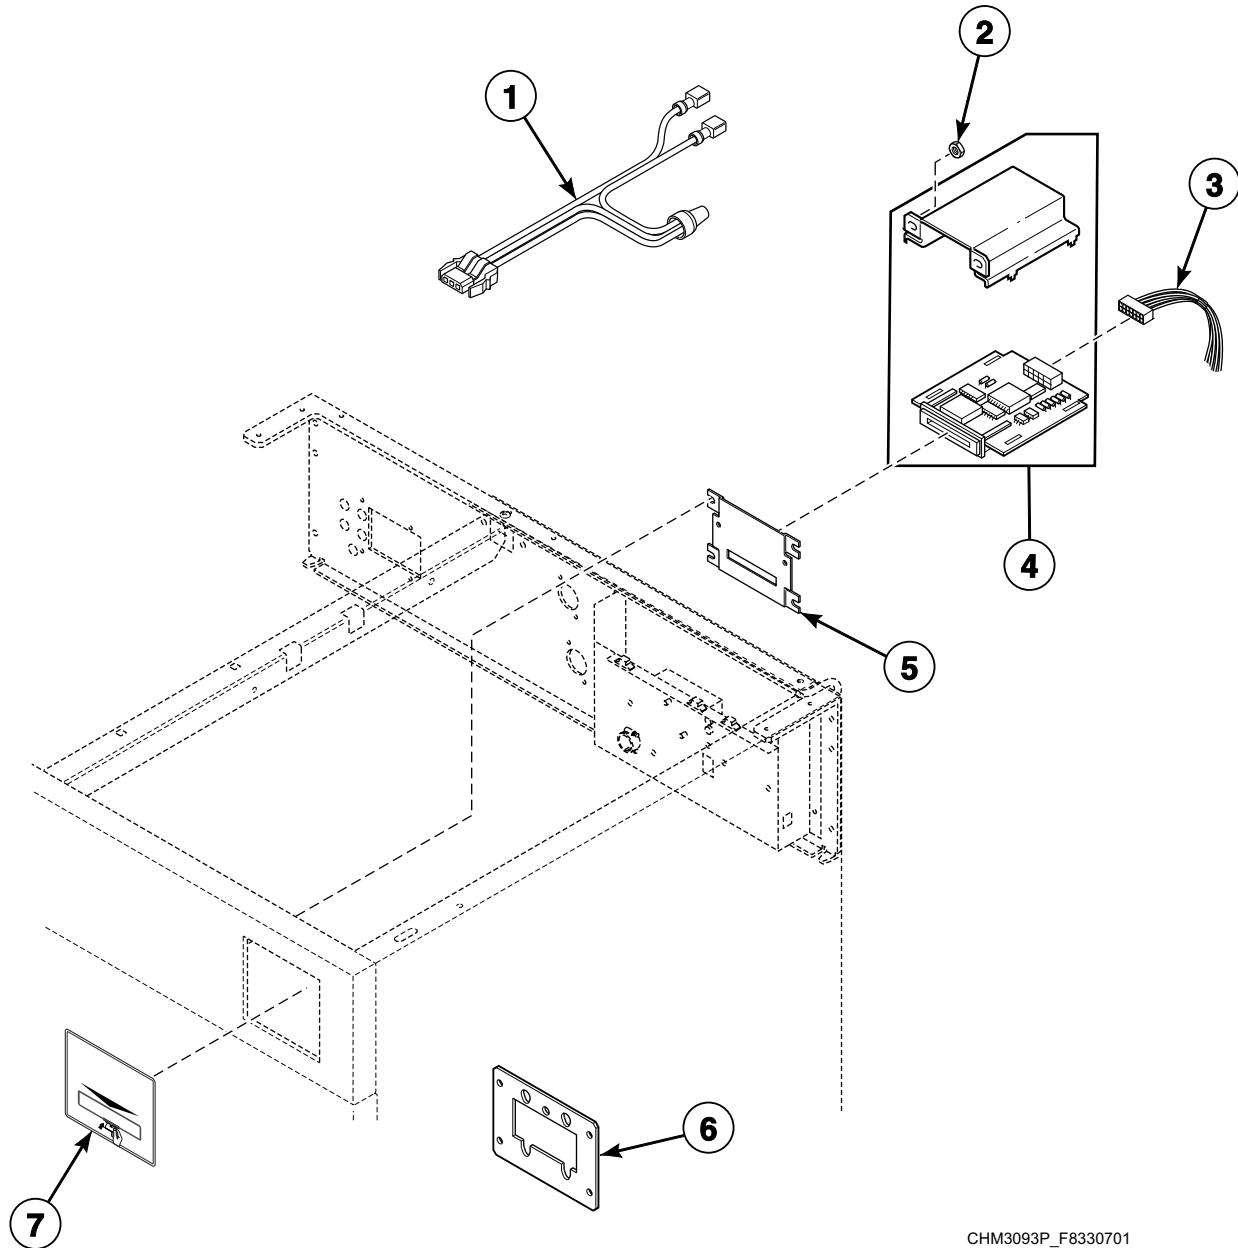


CHM3093P\_F8330701

## Card Reader - HY Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	F631973-2	Harness	Access
2	F430174	Screw	
3	F141887	Card Reader Harness	
4	510068P	Card Reader and Bracket Assembly	
5	F8201501	Card Plate Assembly	
6	70208801	Mounting Plate	
7	70334301	Card Reader Overlay	

## Optional Coin Box

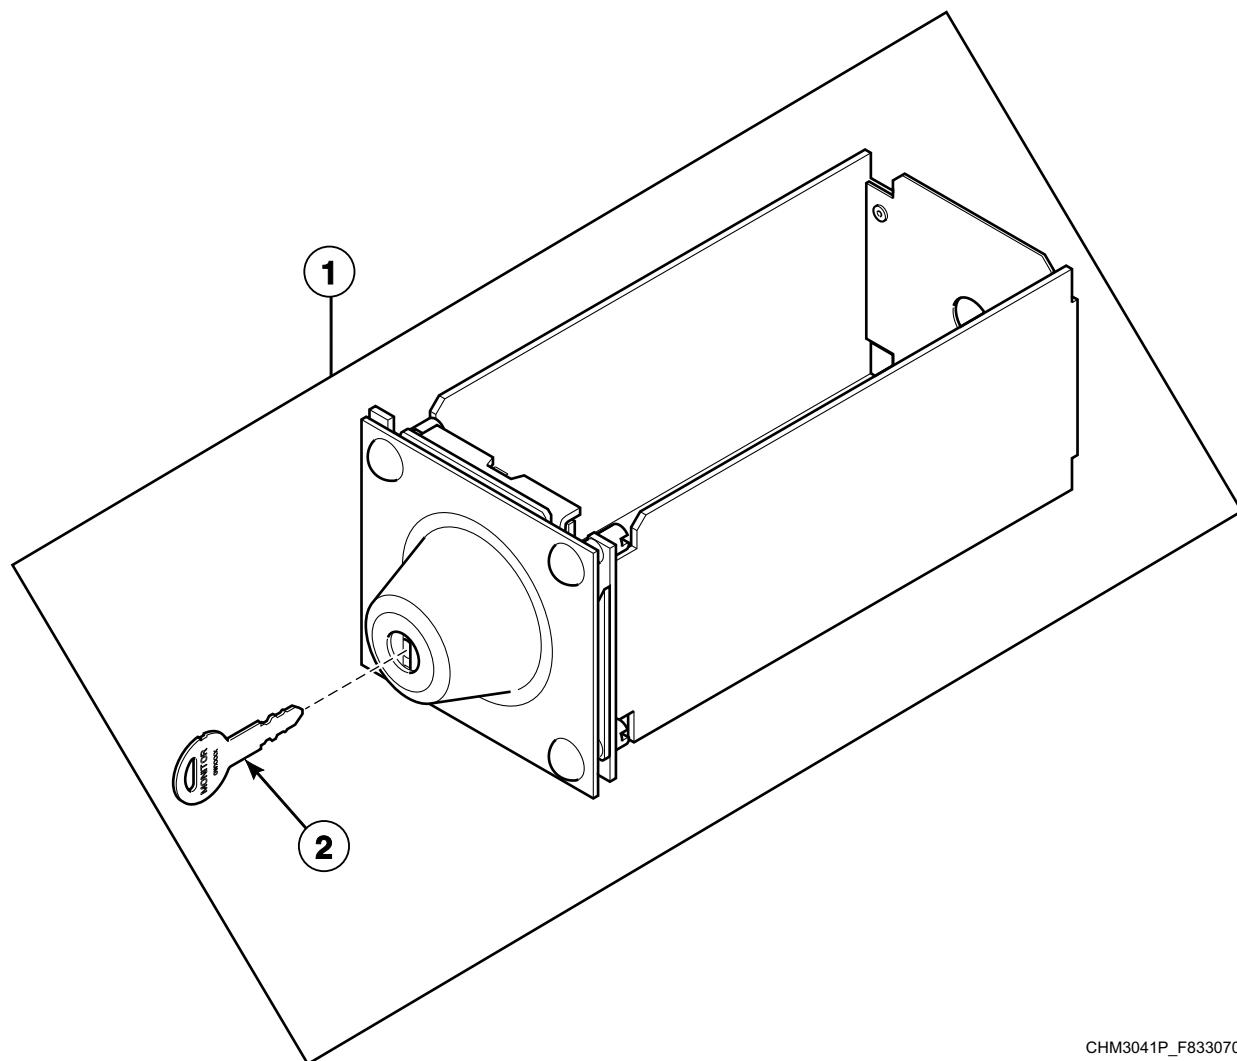


CHM3041P\_F8330701

## Optional Coin Box

REF	PART NO.	DESCRIPTION	COMMENTS
1	F160672	Coin Box	20 and 30 pound models; Design 1 and 2; GW0023
	F8182001	Coin Drawer Assembly	20 and 30 pound models Design 3; 40 and 60 pound models
2	F160420	Key	GW0023

## Front Panels and Control Panel - Coin Models

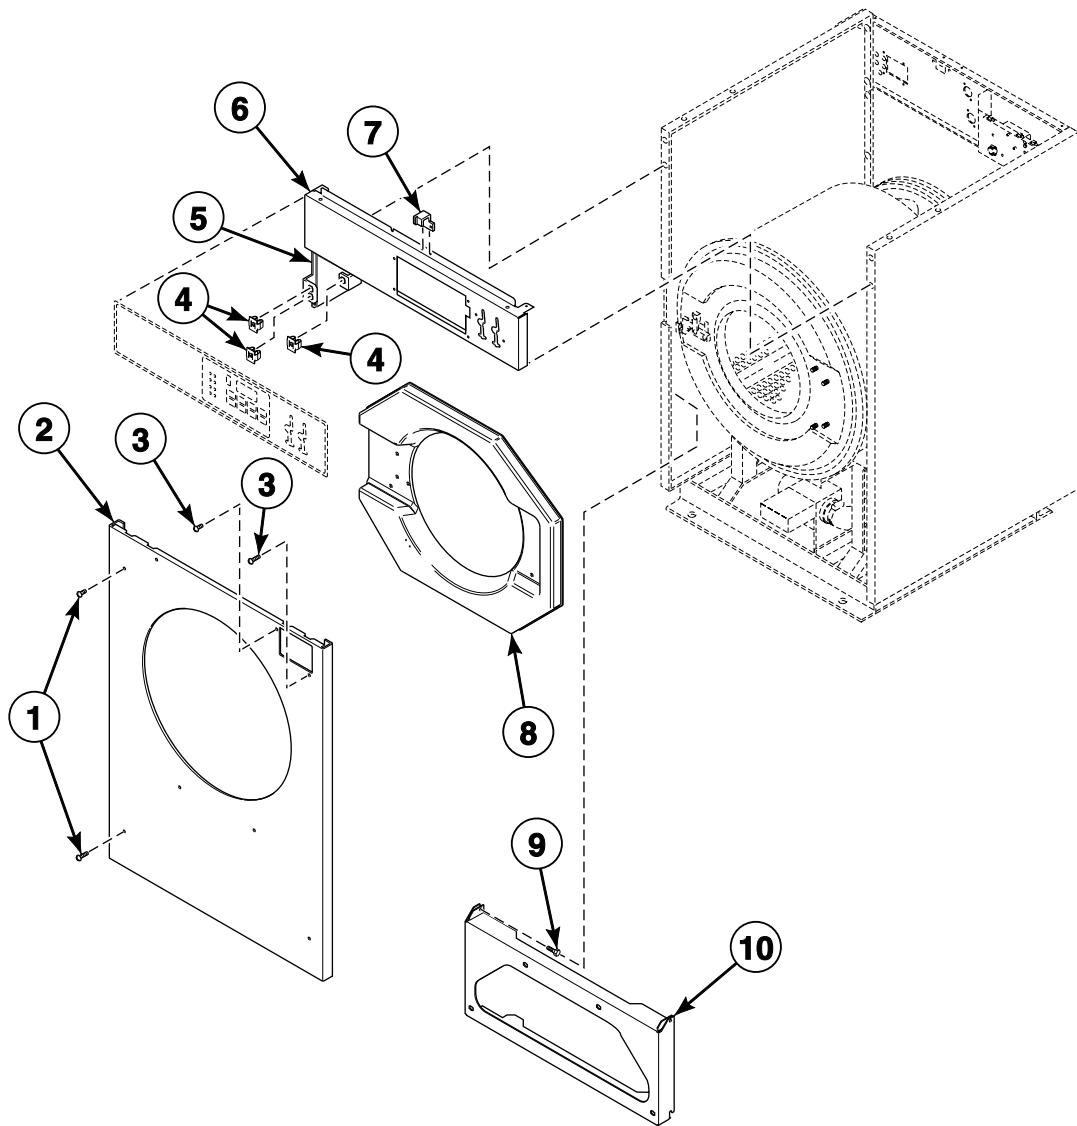


CHM3196P\_F8330701

## Front Panels and Control Panel - Coin Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	F8117601	Screw	
2	F8171301	Front Panel	20 pound models; Design 1 and 2; Stainless steel
	F8492301	Front Panel	20 pound models; Design 3; Stainless steel
	F8173001	Front Panel	30 pound models; Design 1 and 2; Stainless steel
	F8173003	Front Panel	30 pound models; Design 3; Stainless steel
	F8173101P	Front Panel	40 pound models; Stainless steel
	F8173201P	Front Panel	60 pound models; Stainless steel
3	801019	Screw	
4	70030501	Expansion Clip	
5	F8186702	Gusset Plate	
6	F8038502	Control Panel Assembly	20 pound models
	F8038602	Control Panel Assembly	30 pound models
	F8038702	Control Panel Assembly	40 pound models
	F8038802	Control Panel Assembly	60 pound models
7	F8201001	Top Cover Latch	
8	F170416-1	Door Bezel	Black
	F170416-2	Door Bezel	20 pound models; Pantone 403; Models through 1/10/10
	F170416-3	Door Bezel	20 pound models; Gray; Models starting 1/11/10
	F170417-1	Door Bezel	Black
	F170417-3	Door Bezel	30 pound models; Gray
	F0170426-00	Door Bezel	Black
	F0170426-10	Door Bezel	40 and 60 pound models; Pantone 403; Models through 1/10/10
	F0170426-30	Door Bezel	40 and 60 pound models; Gray; Models starting 1/11/10
9	F430174	Screw	
10	F8173801	Front Cabinet Brace	20 pound models
	F8173901	Front Cabinet Brace	30 pound models
	F8174001	Front Cabinet Brace	40 pound models
	F8174101	Lower Cabinet Brace	60 pound models

## Front Panel and Control Panel - Card Reader and OPL Models

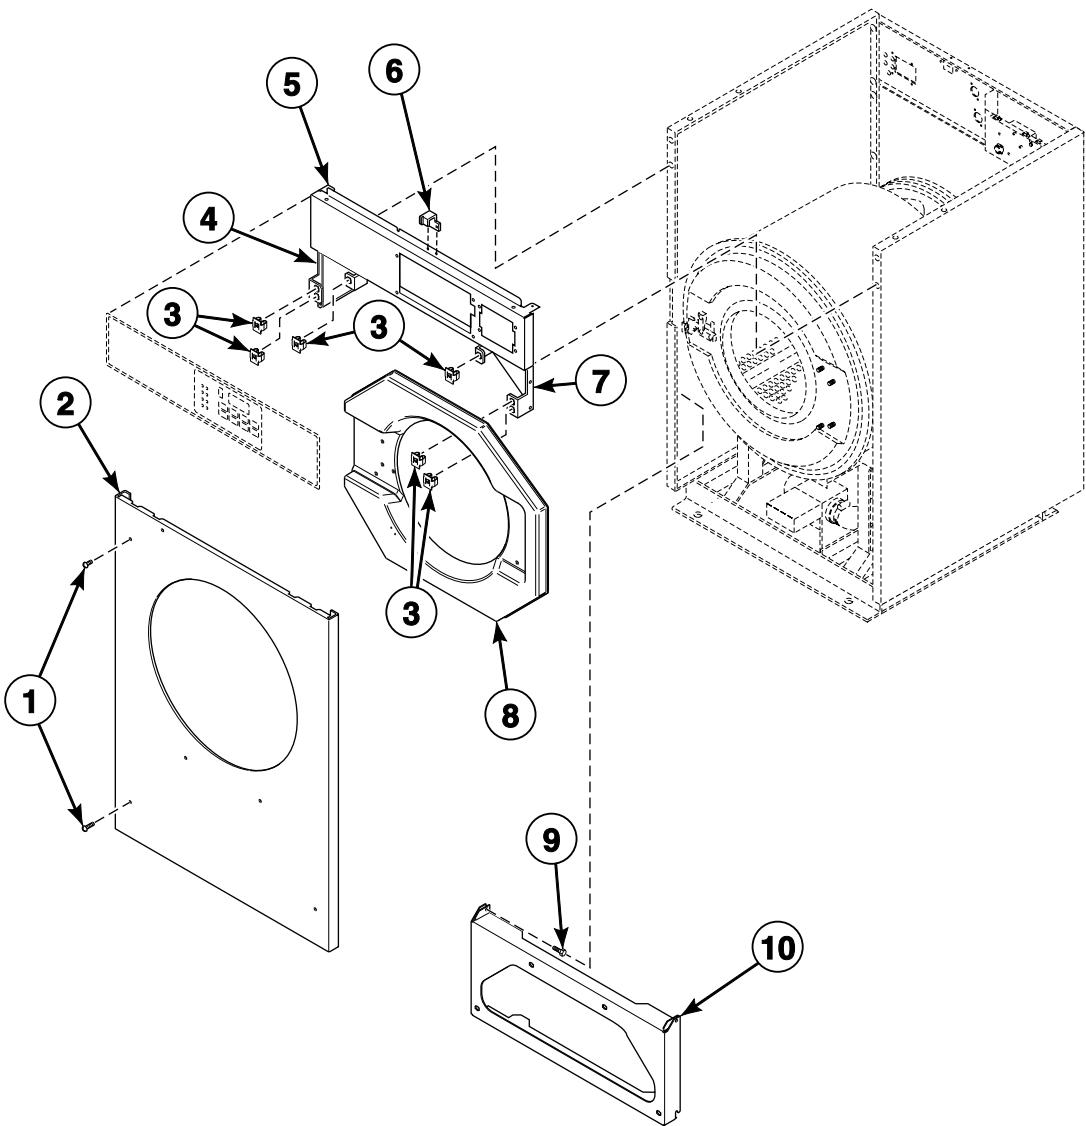


CHM3197P\_F8330701

# Front Panel and Control Panel - Card Reader and OPL Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	F8117601	Screw	
2	F8171302P	Front Panel	20 pound models; Design 1 and 2; Stainless steel
	F8492302	Front Panel	20 pound HC, SC and UC models; Design 3; Stainless steel
	F8173002P	Front Panel	30 pound HC, SC and UC models; Design 1 and 2; Stainless steel
	F8173102P	Front Panel	40 pound HC, SC and UC models; Stainless steel
	F8173202P	Front Panel	60 pound HC, SC and UC models; Stainless steel
	F8492306	Front Panel	20 pound CC and IC models; Stainless steel
	F8492304	Front Panel	20 pound CC and IC models; Black
	F8173005	Front Panel	30 pound CC and IC models; Stainless steel
	F8173007	Front Panel	30 pound CC and IC models; Black
	F8173104	Front Panel	40 pound CC and IC models; Stainless steel
	F8173106	Front Panel	40 pound CC and IC models; Black
	F8173204	Front Panel	60 pound CC and IC models; Stainless steel
	F8173206	Front Panel	60 pound CC and IC models; Black
3	70030501	Expansion Clip	
4	F8186702	Gusset Plate	Left
5	F8038504	Control Panel Assembly	20 pound models
	F8038604	Control Panel Assembly	30 pound models
	F8038704	Control Panel Assembly	40 pound models
	F8038804	Control Panel Assembly	60 pound models
6	F8201001	Top Cover Latch	
7	F8186701	Gusset Plate	Right
8	F170416-1	Door Bezel	SCL, SCN, SCU, UCL, UCN and UCU 20 pound models; Black
	F170416-2	Door Bezel	HCL, HCN, HCU and HCZ 20 pound models; Pantone 403; Models through 1/10/10
	F170416-3	Door Bezel	HCL, HCN, HCU and HCZ 20 pound models; Gray; Models starting 1/11/10
	F170417-1	Door Bezel	SCL, SCN, SCU, UCL, UCN and UCU 30 pound models; Black
	F170417-3	Door Bezel	HCL, HCN, HCU, HCZ and UCZ 30 pound models; Gray
	F0170426-00	Door Bezel	SCB, SCL, SCN, SCU, UCB, UCL, UCN and UCU 40 and 60 pound models; Black
	F0170426-10	Door Bezel	HCL, HCN and HCU 40 and 60 pound models; Pantone 403; Models through 1/10/10
	F0170426-30	Door Bezel	HCB, HCL, HCN and HCU 40 and 60 pound models; Gray; Models starting 1/11/10
9	F430174	Screw	
10	F8173801	Front Cabinet Brace	20 pound models
	F8173901	Front Cabinet Brace	30 pound models
	F8174001	Front Cabinet Brace	40 pound models
	F8174101	Lower Cabinet Brace	60 pound models

## Control Panel Overlays - Coin and Card Ready Models

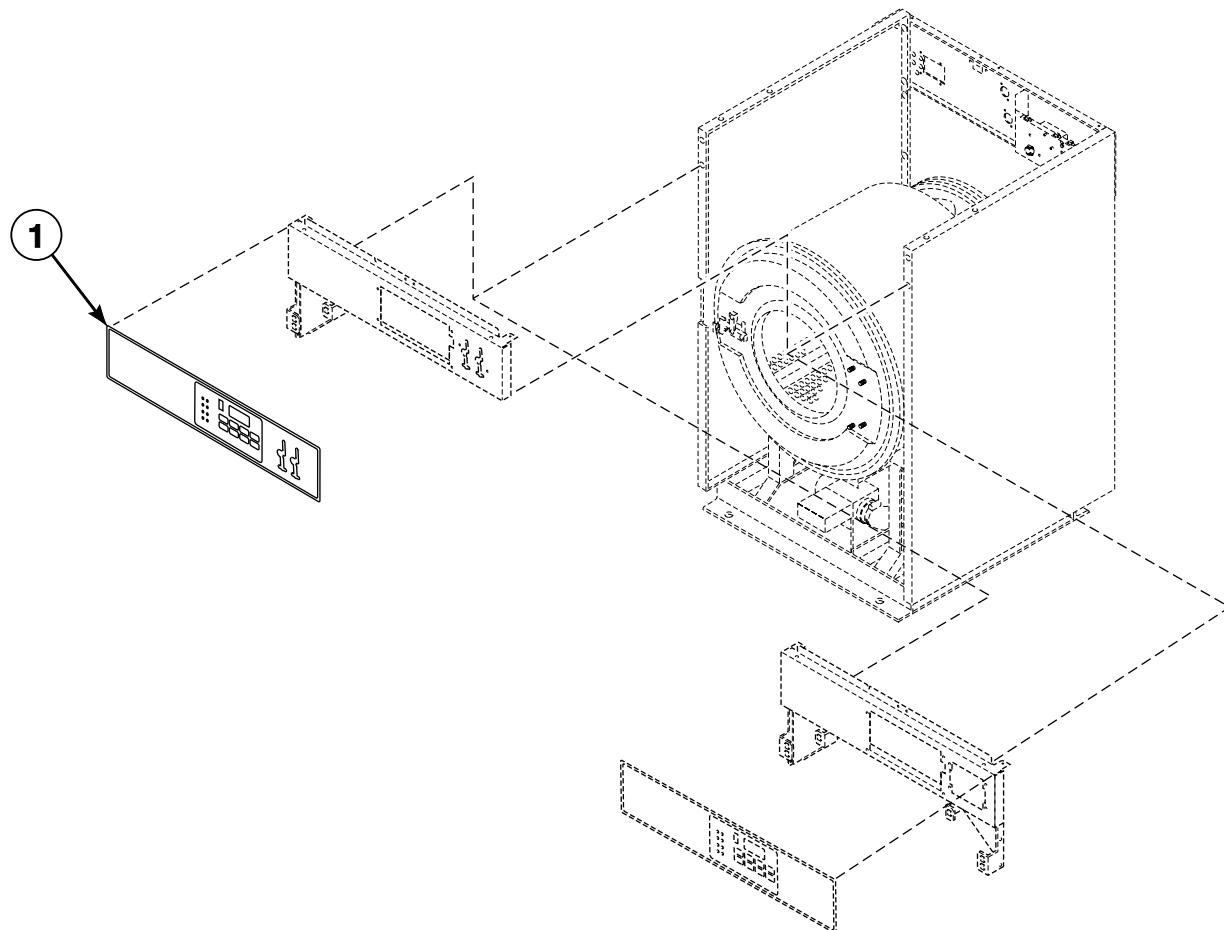


CHM3124P\_F8330701

## Control Panel Overlays - Coin and Card Ready Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	F8294001	Control Panel Overlay	20 pound models; Design 1; Single coin drop
	F8294002	Control Panel Overlay	20 pound models; Design 1; Dual coin drop
	F8294003	Control Panel Overlay	20 pound models; Design 1; Card ready
	F8294101	Control Panel Overlay	30 pound models; Design 1; Single coin drop
	F8294102	Control Panel Overlay	30 pound models; Design 1; Dual coin drop
	F8294103	Control Panel Overlay	30 pound models; Design 1; Card ready
	F8294201	Control Panel Overlay	40 pound models; Design 1; Single coin drop
	F8294202	Control Panel Overlay	40 pound models; Design 1; Dual coin drop
	F8294203	Control Panel Overlay	40 pound models; Design 1; Card ready
	F8294301	Control Panel Overlay	60 pound models; Design 1; Single coin drop
	F8294302	Control Panel Overlay	60 pound models; Design 1; Dual coin drop
	F8294303	Control Panel Overlay	60 pound models; Design 1; Card ready
	F8443901	Control Panel Overlay	20 pound models; Design 2 and 3; Single coin drop
	F8443902	Control Panel Overlay	20 pound models; Design 2 and 3; Dual coin drop
	F8443903	Control Panel Overlay	20 pound models; Design 2 and 3; Card ready
	F8444001	Control Panel Overlay	30 pound models; Design 2 and 3; Single coin drop
	F8444002	Control Panel Overlay	30 pound models; Design 2 and 3; Dual coin drop
	F8444003	Control Panel Overlay	30 pound models; Design 2 and 3; Card ready
	F8444101	Control Panel Overlay	40 pound models; Design 2; Single coin drop
	F8444102	Control Panel Overlay	40 pound models; Design 2; Dual coin drop
	F8444103	Control Panel Overlay	40 pound models; Design 2; Card ready
	F8444201	Control Panel Overlay	60 pound models; Design 2; Single coin drop
	F8444202	Control Panel Overlay	60 pound models; Design 2; Dual coin drop
	F8444203	Control Panel Overlay	60 pound models; Design 2; Card ready

## Control Panel Overlays - OPL Models

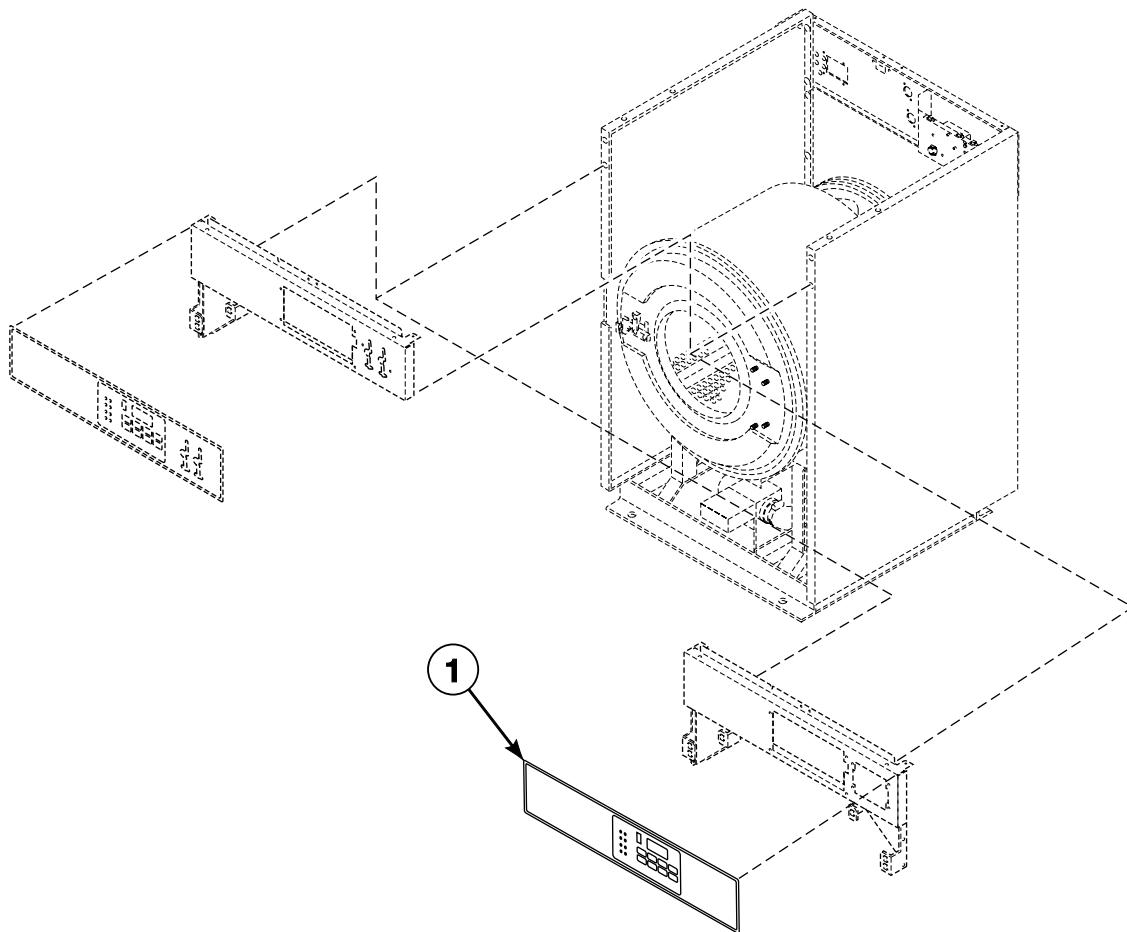


CHM3124PA\_F8330701

## Control Panel Overlays - OPL Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	F8551401	Control Panel Overlay	CC models
	F8551701	Control Panel Overlay	IC models
	F8224301	Control Panel Overlay	HCL, HCN, HCU and HCZ 20 pound models; Design 1
	F8224401	Control Panel Overlay	HCL, HCN, HCU and HCZ 30 pound models; Design 1
	F8224501	Control Panel Overlay	HCL, HCN and HCU 40 pound models; Design 1
	F8224601	Control Panel Overlay	HCL, HCN and HCU 60 pound models; Design 1
	F8443701	Control Panel Overlay	HCB, HCL, HCN, HCU and HCZ models; Design 2 and 3
	F8294501	Control Panel Overlay	SCL, SCN, SCU and SCZ 20 pound models
	F8294601	Control Panel Overlay	SCL, SCN and SCU 30 pound models
	F8294701	Control Panel Overlay	SCB, SCL, SCN and SCU 40 pound models
	F8294801	Control Panel Overlay	SCL, SCN and SCU 60 pound models
	F8224801	Control Panel Overlay	UCL, UCN and UCU 20 pound models
	F8224901	Control Panel Overlay	UCL, UCN, UCU and UCZ 30 pound models
	F8225001	Control Panel Overlay	UCB, UCL, UCN and UCU 40 pound models
	F8225101	Control Panel Overlay	UCL, UCN and UCU 60 pound models

## Panels (Drawing 1 of 2)

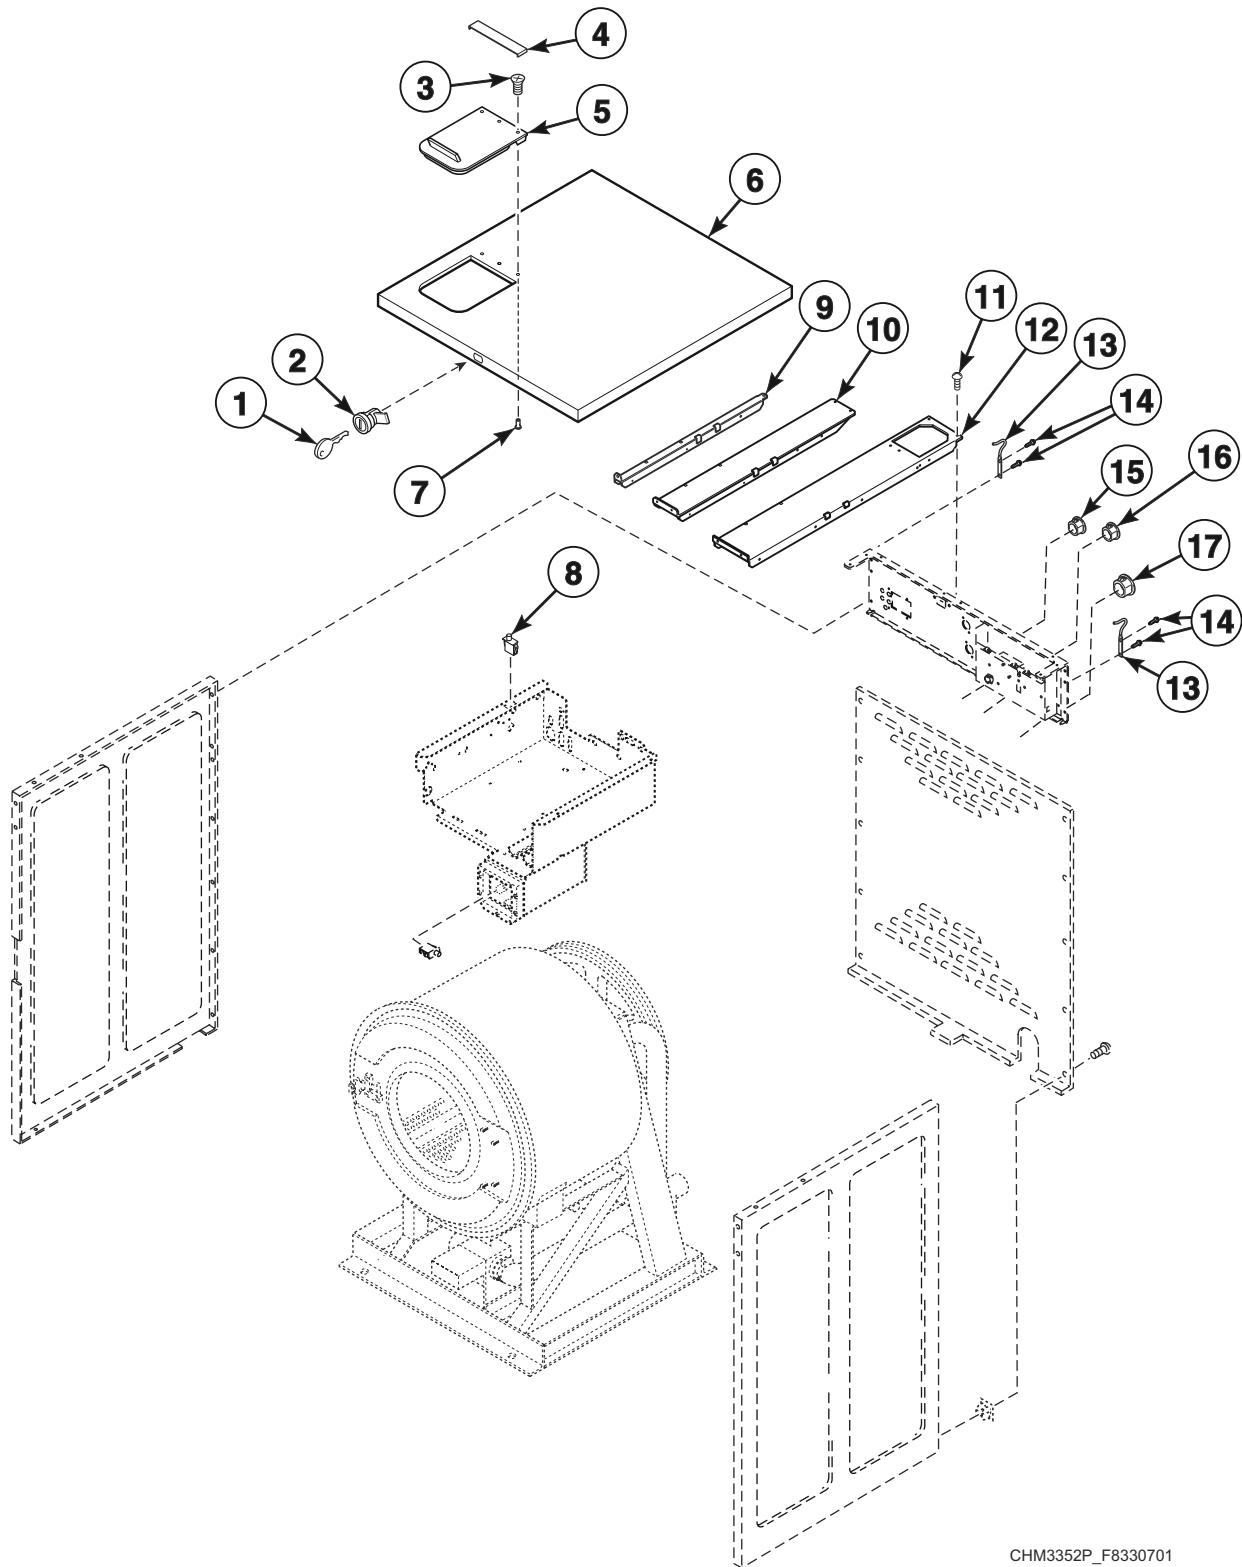


CHM3352P\_F8330701

## Panels (Drawing 1 of 2)

REF	PART NO.	DESCRIPTION	COMMENTS
1	70155603	Key	RL003
2	44089303P	Panel Lock	
3	F8230601	Screw	
4	F8091701	Lid Clamp	
5	F8048102	Dispenser Lid	CC and IC models; Black
	F8048101	Dispenser Lid	HC, SC and UC models; Gray
6	F8040201	Top Cover	20 pound models
	F8017401	Top Cover	30 pound models
	F8040301	Top Cover	40 pound models
	F8040401P	Top Cover	60 pound models
7	F8230501	Bolt	
8	70413301	Pushbutton Switch	
9	F8043501	Top Cabinet Brace	20 pound models
10	F8043701	Top Cabinet Brace	30 pound models
11	F430174	Screw	
12	F8043801	Top Cabinet Brace	40 pound models
	F8043901	Top Cabinet Brace	60 pound models
13	F8258601	Top Cover Hinge	
14	F8206901	Screw	
15	M400985	Plug	Design 2 and 3
16	F8223901	Plug	Design 2 and 3
17	F8223801	Hole Plug	Design 2 and 3

## Panels (Drawing 2 of 2)

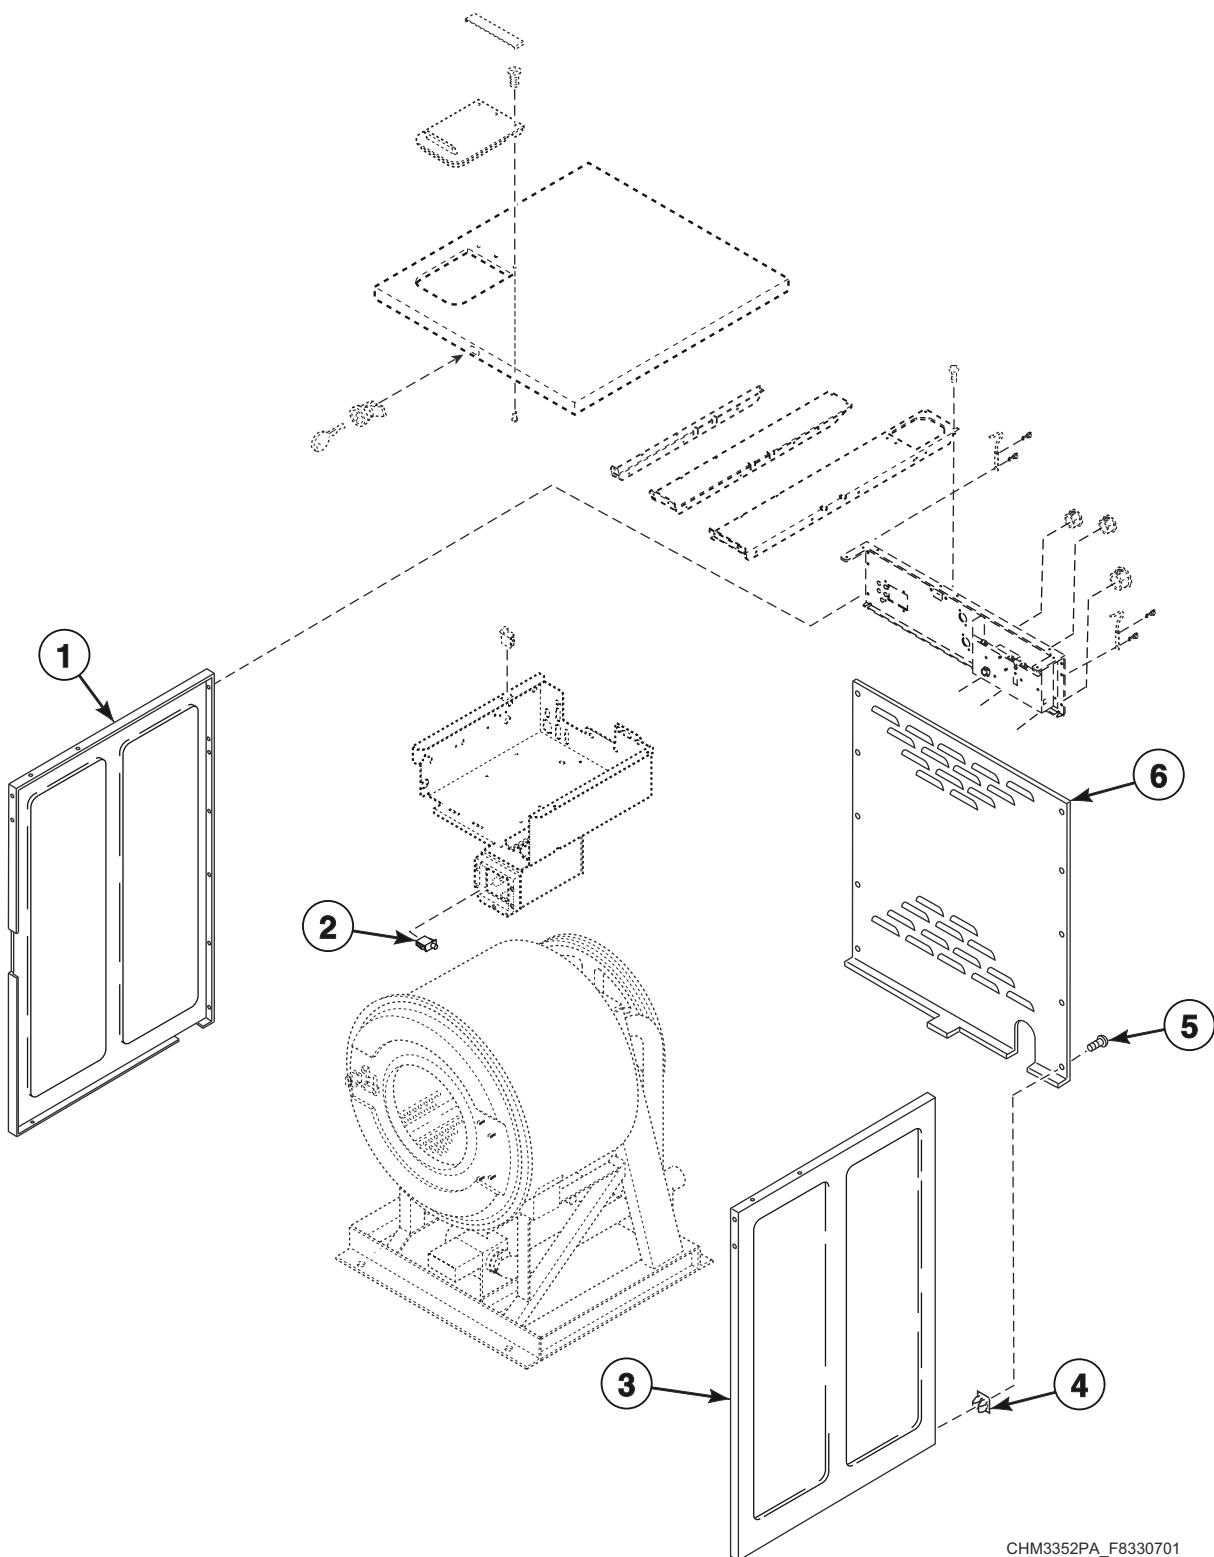


CHM3352PA\_F8330701

## Panels (Drawing 2 of 2)

REF	PART NO.	DESCRIPTION	COMMENTS
1	F8042902P	Left Side Panel	20 pound models; Design 1; Vinyl
	F8043102P	Left Side Panel	30 pound models; Design 1; Vinyl
	F8043202P	Left Side Panel	40 pound models; Design 1; Vinyl
	F8043302P	Left Side Panel	60 pound models; Design 1; Vinyl
	F8399202	Left Side Panel	20 pound models; Design 2; Stainless steel
	F8399302	Left Side Panel	30 pound models; Design 2 and 3; Stainless steel
	F8399402	Left Side Panel	40 pound models; Design 2; Stainless steel
	F8399502P	Left Side Panel	60 pound models; Design 2; Vinyl
	F8399504	Left Side Panel	60 pound models; Design 2; Stainless steel
	F8492402	Left Side Panel	20 pound models; Design 3; Vinyl
2	F8492404	Left Side Panel	20 pound models; Design 3; Stainless steel
	70413301	Pushbutton Switch	Coin models
3	F8042901P	Right Side Panel	20 pound models; Design 1; Vinyl
	F8043101P	Right Side Panel	30 pound models; Design 1; Vinyl
	F8043201P	Right Side Panel	40 pound models; Design 1; Vinyl
	F8043301P	Right Side Panel	60 pound models; Design 1; Vinyl
	F8399201	Right Side Panel	20 pound models; Design 2; Stainless steel
	F8399301	Right Side Panel	30 pound models; Design 2 and 3; Stainless steel
	F8399401	Right Side Panel	40 pound models; Design 2; Stainless steel
	F8399501	Right Side Panel	60 pound models; Design 2; Vinyl
	F8399503	Right Side Panel	60 pound models; Design 2; Stainless steel
	F8492401	Right Side Panel	20 pound models; Design 3; Vinyl
4	F8492403	Right Side Panel	20 pound models; Design 3; Stainless steel
	70030501	Expansion Clip	
5	F8206901	Screw	
6	F8176201P	Rear Panel	20 pound models; Design 1
	F8176301	Rear Panel	30 pound models; Design 1
	F8177701P	Rear Panel	40 pound models; Design 1
	F8177501P	Rear Panel	60 pound models; Design 1
	F8362401	Rear Panel	20 pound models; Design 2
	F8352801	Rear Panel	30 pound models; Design 2 and 3
	F8365201	Rear Panel	40 pound models; Design 2
	F8367101	Rear Panel	60 pound models; Design 2
	F8492501	Rear Panel	20 pound models; Design 3

## Door - 20 and 30 Pound Models

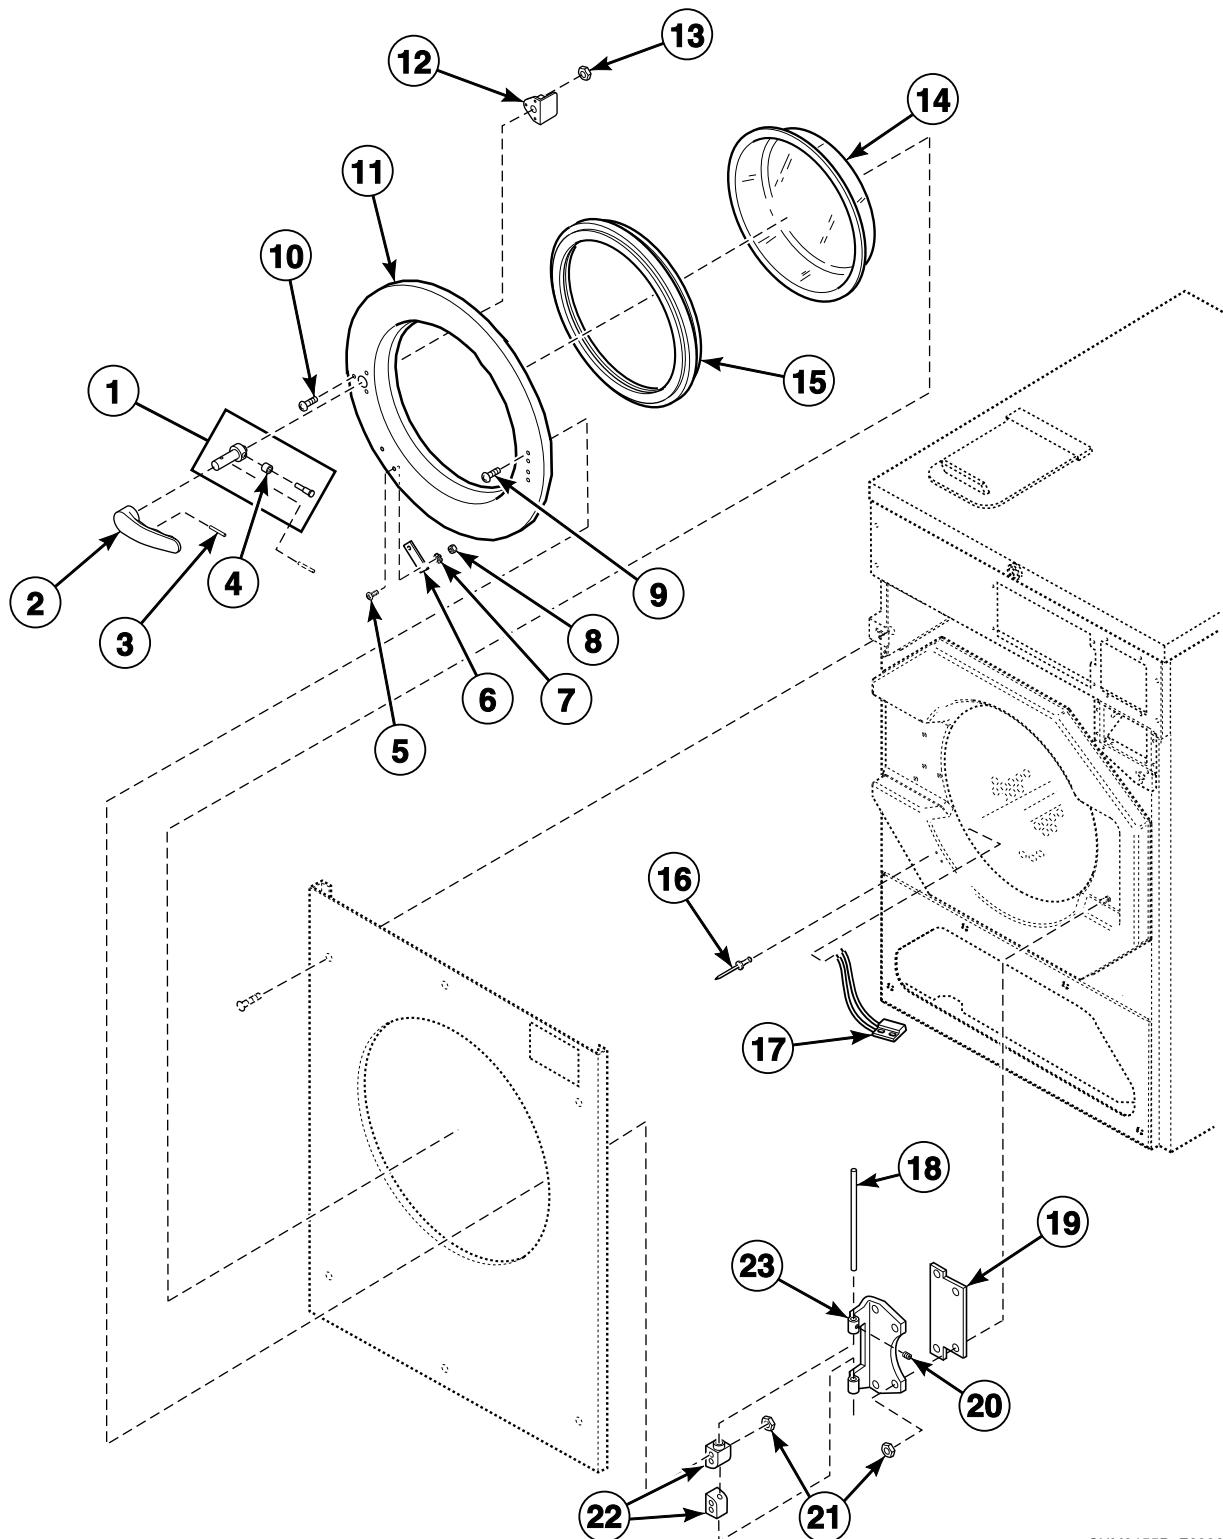


CHM3155P\_F8330701

## Door - 20 and 30 Pound Models

REF	PART NO.	DESCRIPTION	COMMENTS
	F8187202	Door Assembly	20 pound SC and UC models; Includes items 1-14 and 17-22
	F8187203	Door Assembly	20 pound HC models; Includes items 1-14 and 17-22
	F8187210	Door Assembly	20 pound CC and IC models; Includes items 1-15 and 18-23
	F8187211	Door Assembly	20 pound CC and IC models; Chrome; Includes items 1-15 and 18-23
	F8187302	Door Assembly	30 pound SC and UC models; Includes items 1-14 and 17-22
	F8187303	Door Assembly	30 pound HC models; Includes items 1-14 and 17-22
	F8187310	Door Assembly	30 pound CC and IC models; Includes items 1-15 and 18-23
	F8187311	Door Assembly	30 pound CC and IC models; Chrome; Includes items 1-15 and 18-23
<b>1</b>	F8221401	Door Latch Arm Assembly	
<b>2</b>	F8199401P	Door Handle	SC and UC models; Black
	F8199501	Door Handle	HC models; Gray
	F8199502	Door Handle	CC and IC models; Black
<b>3</b>	F431222	Spring Pin	
<b>4</b>	F8221701	Bearing Sleeve	
<b>5</b>	F430916	Screw	
<b>6</b>	F8390801	Magnet	
<b>7</b>	F431113	Washer	
<b>8</b>	F431022	Nut	
<b>9</b>	F430974	Bolt	
	F8508101	Bolt	Chrome
<b>10</b>	F8535501	Screw	
<b>11</b>	F0602431-02	Door	20 pound models
	F8507501	Door	20 pound models; Chrome
	F0602837-02	Door	30 pound models
	F8507601	Door	30 pound models; Chrome
<b>12</b>	F8567501	Door Handle Spacer	
<b>13</b>	F430232	Nut	
<b>14</b>	F290205P	Door Glass Kit	20 pound SC and UC models; 20 pound HC models through 1/10/10
	F8341701	Door Glass	20 pound HC models; Models starting 1/11/10
	F8485301	Door Glass Kit	30 pound SC and UC models; 30 pound HC models through 1/10/10
	F8485302	Door Glass	30 pound HC models; Models starting 1/11/10
<b>15</b>	F200000202	Door Gasket	20 pound models
	F8111602	Door Gasket	30 pound models
<b>16</b>	F8245101	Blind Rivet	
<b>17</b>	F8066802	Reed Switch Assembly	
<b>18</b>	F602813-2	Rod	
<b>19</b>	F200131000	Door Hinge Shim	
<b>20</b>	F430536	Screw	
<b>21</b>	F430215	Nut	
<b>22</b>	F150271	Door Mount	
<b>23</b>	F190216P	Door Hinge	

## Door - 40 and 60 Pound Models

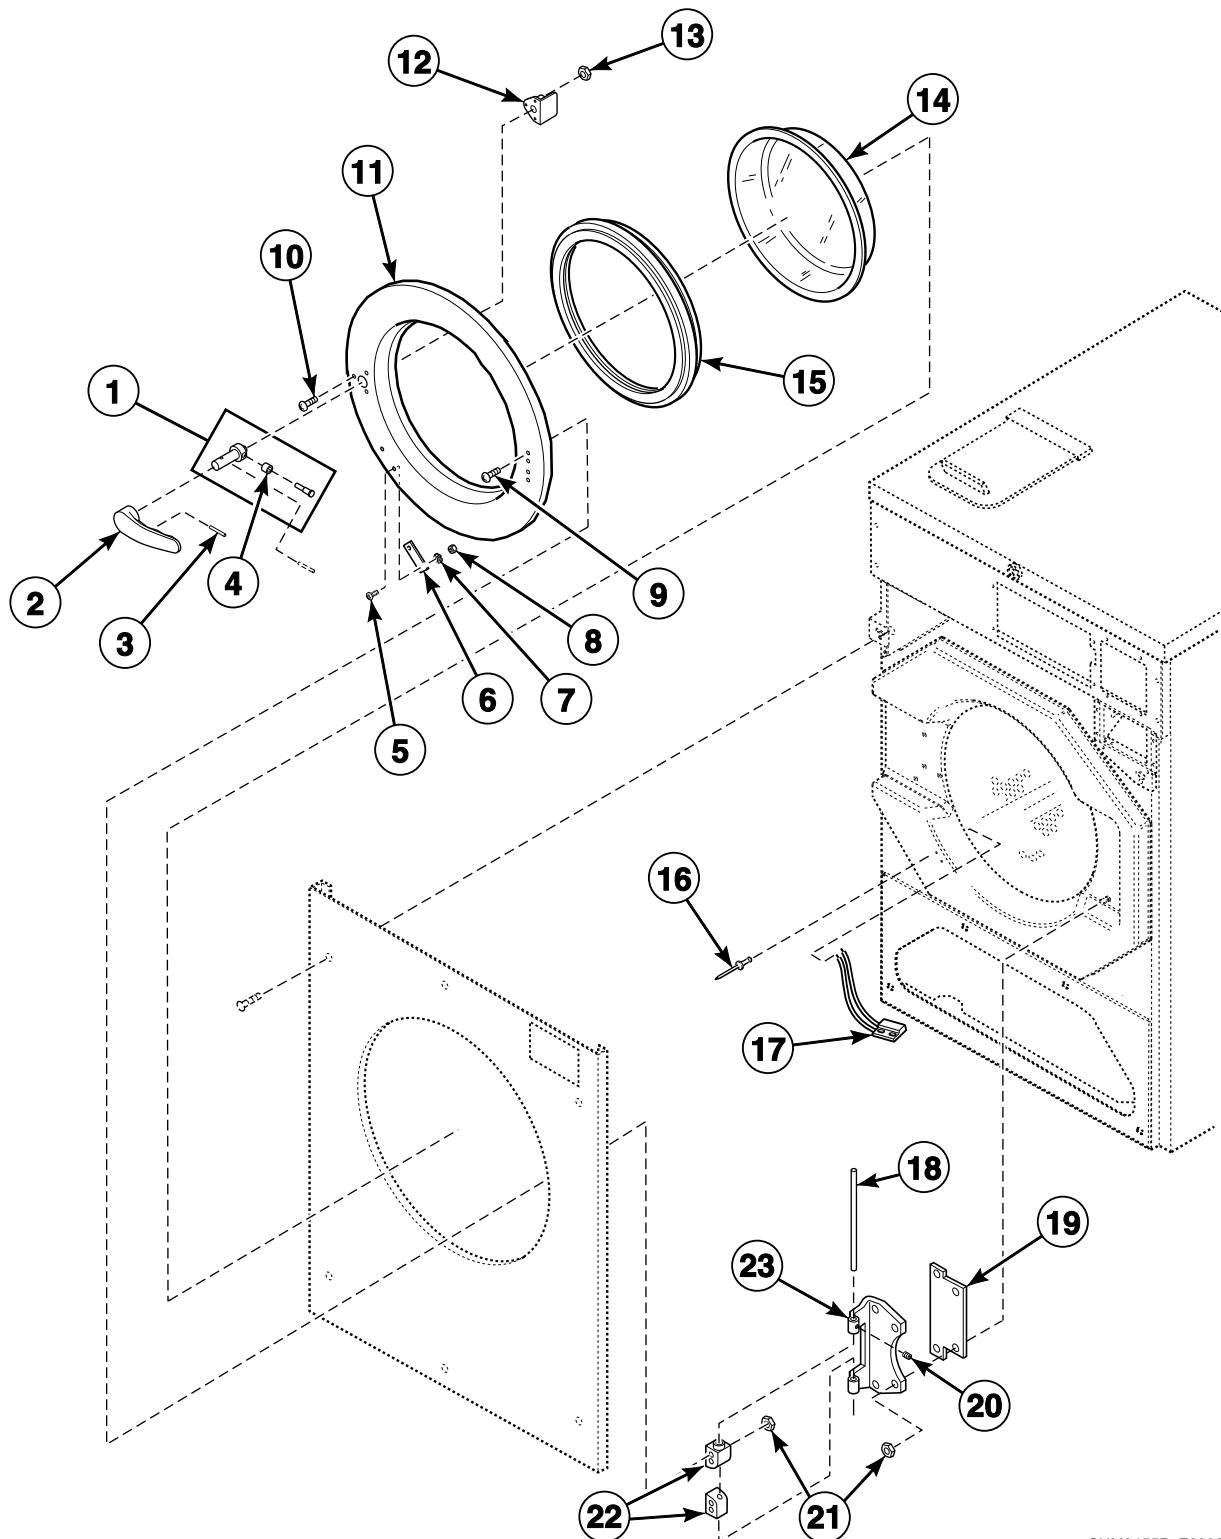


CHM3155P\_F8330701

## Door - 40 and 60 Pound Models

<b>REF</b>	<b>PART NO.</b>	<b>DESCRIPTION</b>	<b>COMMENTS</b>
	F8187402	Door Assembly	SC and UC models; Includes items 1-14 and 17-22
	F8187403	Door Assembly	HC models; Includes items 1-14 and 17-22
	F8187410	Door Assembly	CC and IC models; Includes items 1-15 and 18-23
	F8187411	Door Assembly	CC and IC models; Chrome; Includes items 1-15 and 18-23
<b>1</b>	F8221401	Door Latch Arm Assembly	
<b>2</b>	F8199401P	Door Handle	SC and UC models; Black
	F8199501	Door Handle	HC models; Gray
<b>3</b>	F431222	Spring Pin	
<b>4</b>	F8221701	Bearing Sleeve	
<b>5</b>	F430916	Screw	
<b>6</b>	F8390801	Magnet	
<b>7</b>	F431113	Washer	
<b>8</b>	F431022	Nut	
<b>9</b>	F430974	Bolt	
	F8508101	Bolt	Chrome
<b>10</b>	F8535501	Screw	
<b>11</b>	F602842-2	Door	
	F8507701	Door	Chrome
<b>12</b>	F8567501	Door Handle Spacer	
<b>13</b>	F430232	Nut	
<b>14</b>	F8485401P	Door Glass	SC and UC models; HC models through 1/10/10
	F8485402	Door Glass	HC models; Models starting 1/11/10
<b>15</b>	F8111502	Door Gasket	
<b>16</b>	F8245101	Blind Rivet	
<b>17</b>	F8066802	Reed Switch Assembly	
<b>18</b>	F602813-3	Rod	
<b>19</b>	F200131000	Door Hinge Shim	
<b>20</b>	F430536	Screw	
<b>21</b>	F430215	Nut	
<b>22</b>	F150271	Door Mount	
<b>23</b>	F190216P	Door Hinge	

## Door Lock

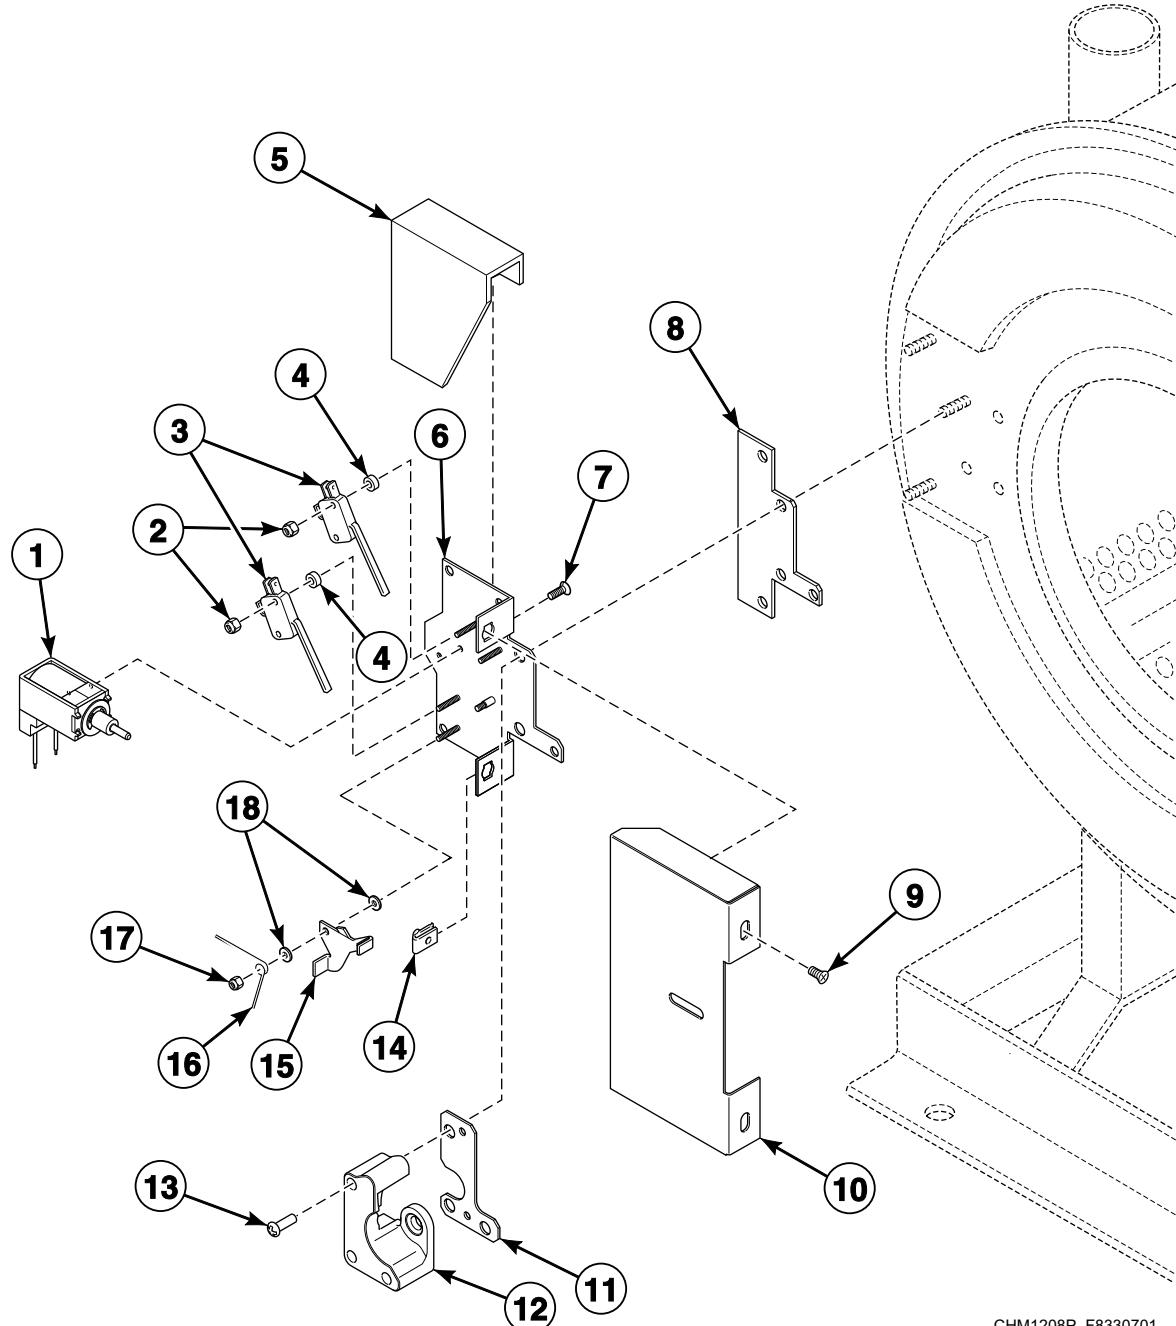


CHM1208P\_F8330701

## Door Lock

REF	PART NO.	DESCRIPTION	COMMENTS
	F8197101	Door Lock Assembly	Includes F8339902 External Door Lock Harness; Models through 10/31/10
	F8340501	Door Lock Assembly	Includes F8340001 External Door Lock Harness; Models starting 11/1/10
	N/A	External Door Lock Harness	Includes F8224201 Solenoid; Models through 10/31/10; Order F977P3 Door Lock Solenoid Replacement Kit
	F8340001	External Door Lock Harness	Models starting 11/1/10
1	F977P3	Door Lock Solenoid Replacement Kit	Includes F8340101 Solenoid
2	F430225	Nut	
3	F200203200	Door Lock Microswitch	
4	F431901	Spacer	
5	F320200	Door Lock Splash Shield	
6	F8223201	Door Lock Plate Assembly	Models through 10/31/10
	F8223202	Door Lock Plate Assembly	Models starting 11/1/10
7	F430977	Screw	
8	F8059701	Door Lock Plate Shim	Models through 9/25/09
	F8344401	Door Lock Plate Shim	Models starting 9/26/09
9	F430956	Screw	
10	F8245001	Door Lock Cover	
11	F8484401	Shim	
12	F8223601	Door Lock Catch	Models through 10/31/10
	F8344501	Door Lock Catch	Models starting 11/1/10
13	F8270701	Bolt	
14	F430264	Nut	
15	F8223401	Door Lock Switch Lever	
16	F8070301	Torsion/Door Lock Spring	
17	F430232	Nut	
18	F431902	Washer	

N/A = Part no longer available

## Basket, Shell, Frame and Trunnion - Design 1 Models (Drawing 1 of 3)

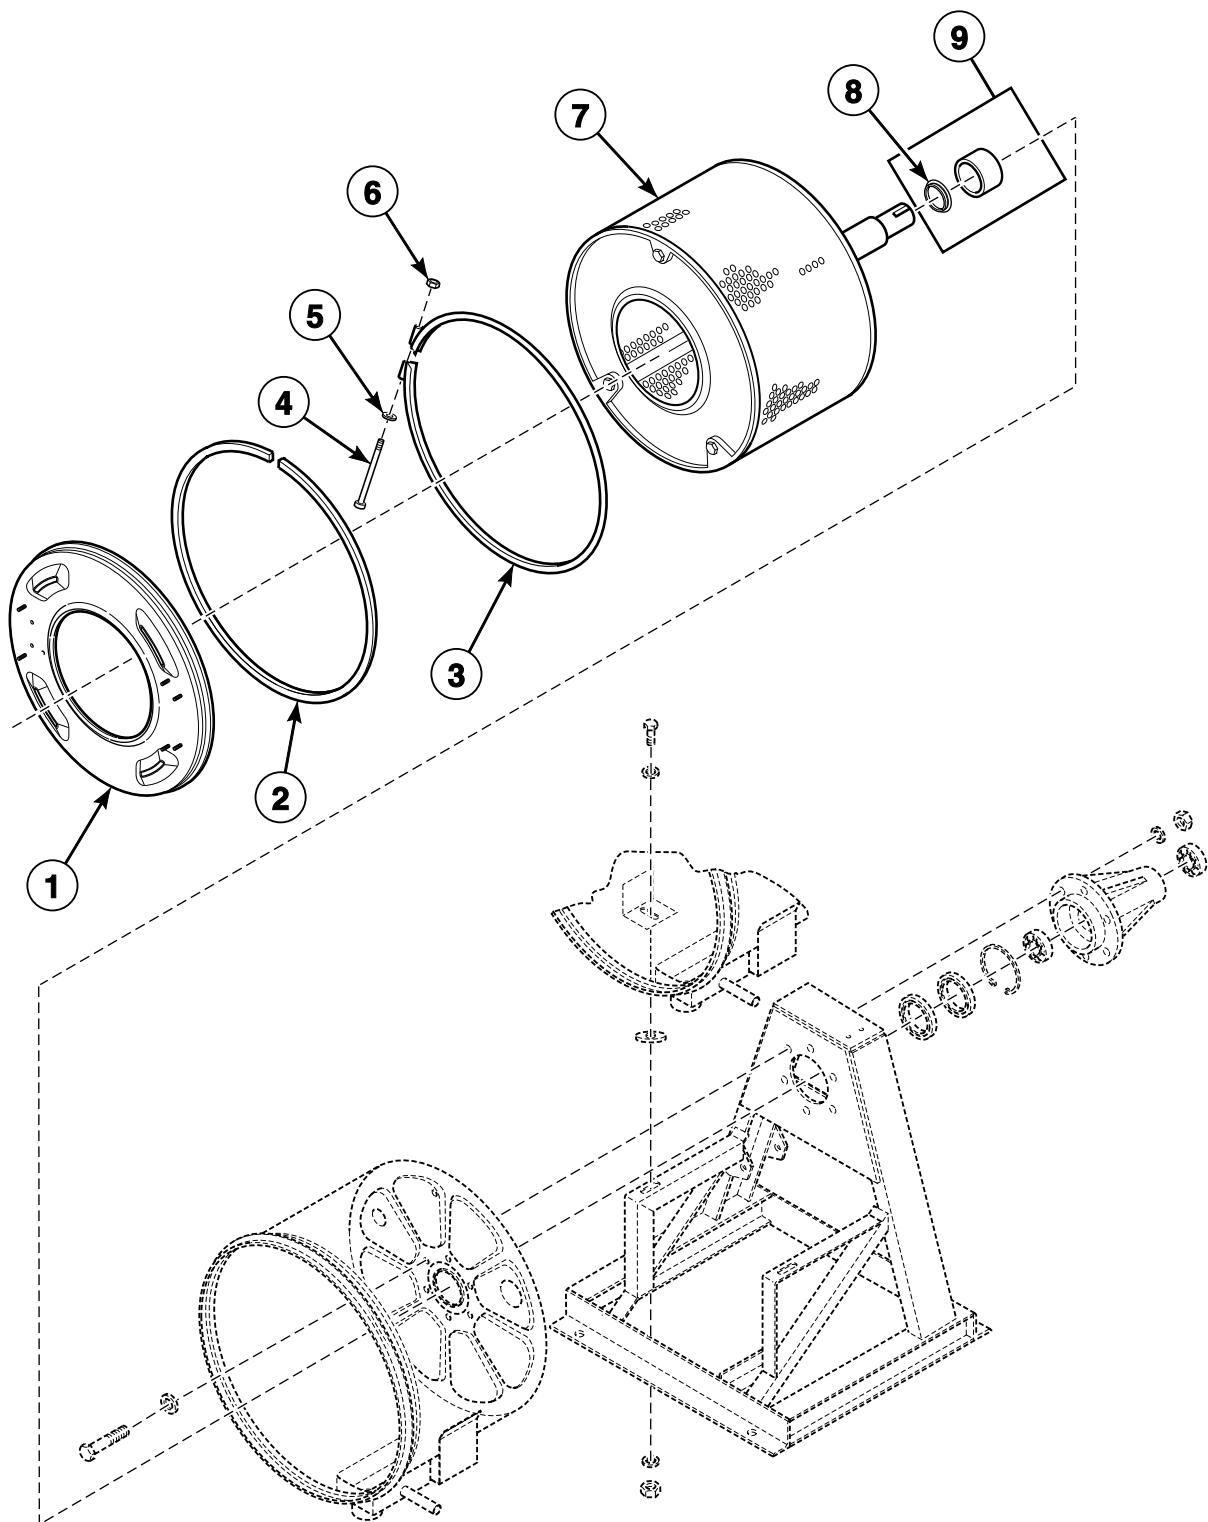


CHM3153P\_F8330701

# Basket, Shell, Frame and Trunnion - Design 1 Models (Drawing 1 of 3)

REF	PART NO.	DESCRIPTION	COMMENTS
	389P4	Basket Tool Kit	Purchase; Use with F935P3, F936P3, F938P3 and F939P3 Pressfit Upgrade Kits; Requires F460129P Bearing Puller Tool
	390P4-1	Basket Rental Tool Kit	Use with F935P3, F936P3, F938P3 and F939P3 Pressfit Upgrade Kits; Requires F460129P Bearing Puller Tool
	F460129P	Bearing Puller Tool	
1	F8229401	Shell Front Assembly	20 pound models
	F8229501	Shell Front Assembly	30 pound models
	F8229601	Shell Front Assembly	40 pound models
	F8229701	Shell Front Assembly	60 pound models
2	F8513501	Shell Front Gasket Kit	
3	F602757	Shell Band Assembly	20 pound models
	F8388002	Clamp Ring Assembly	30 pound models
	F741701	Shell Band Kit	40 pound models
	F741702	Shell Band Kit	60 pound models
4	F430518	Screw	
5	F430317	Washer	
6	F430215	Nut	
7	F935P3	Pressfit Upgrade Kit	20 pound models; Models through 3/31/10; Includes items 8, 9, F8347801 Basket Assembly and F747001 Trunnion Kit
	F936P3	Pressfit Upgrade Kit	30 pound models; Models through 3/31/10; Includes items 8, 9, F8347901 Basket Assembly and F747002 Trunnion Kit
	F938P3	Pressfit Upgrade Kit	40 pound models; Models through 3/31/10; Includes items 8, 9, F8336301 Basket Assembly and F747003 Trunnion Kit
	F939P3	Pressfit Upgrade Kit	60 pound models; Models through 3/31/10; Includes items 8, 9, F8336501 Basket Assembly and F747005 Trunnion Kit
	F8347801P	Basket Assembly	20 pound models; Models that have been upgraded with F935P3 Pressfit Upgrade Kit or models starting 4/1/10; Includes items 8 and 9
	F8347901P	Basket Assembly	30 pound models; Models that have been upgraded with F936P3 Pressfit Upgrade Kit or models starting 4/1/10; Includes items 8 and 9
	F8391701	Basket Assembly	40 pound models; Models that have been upgraded with F938P3 Pressfit Upgrade Kit or models starting 4/1/10; Includes items 8 and 9
	F8391901	Basket Assembly	60 pound models; Models that have been upgraded with F939P3 Pressfit Upgrade Kit or models starting 4/1/10; Includes items 8 and 9
8	F8336801	Excluder Seal	20 pound models; Models that have been upgraded with F935P3 Pressfit Upgrade Kit or models starting 4/1/10
	F8336901	Excluder Seal	30 pound models; Models that have been upgraded with F936P3 Pressfit Upgrade Kit or models starting 4/1/10
	F8337001	Excluder Seal	40 pound models; Models that have been upgraded with F938P3 Pressfit Upgrade Kit or models starting 4/1/10
	F8337101	Excluder Seal	60 pound models; Models that have been upgraded with F939P3 Pressfit Upgrade Kit or models starting 4/1/10
9	F8312001P	Shaft Seal Sleeve	20 pound models; Models that have not been upgraded with F935P3 Pressfit Upgrade Kit or models through 3/31/10
	F8312004P	Shaft Seal Sleeve	30 pound models; Models that have not been upgraded with F936P3 Pressfit Upgrade Kit or models through 3/31/10
	F8312006P	Shaft Seal Sleeve	40 pound models; Models that have not been upgraded with F938P3 Pressfit Upgrade Kit or models through 3/31/10
	F8343901P	Shaft Seal Sleeve Kit	20 pound models; Models that have been upgraded with F935P3 Pressfit Upgrade Kit or models starting 4/1/10; Includes item 8
	F8343904P	Shaft Seal Sleeve Kit	30 pound models; Models that have been upgraded with F936P3 Pressfit Upgrade Kit or models starting 4/1/10; Includes item 8
	F8343906P	Shaft Seal Sleeve Kit	40 pound models; Models that have been upgraded with F938P3 Pressfit Upgrade Kit or models starting 4/1/10; Includes item 8
	F8343909P	Shaft Seal Sleeve Kit	60 pound models; Includes item 8

## Basket, Shell, Frame and Trunnion - Design 1 Models (Drawing 2 of 3)

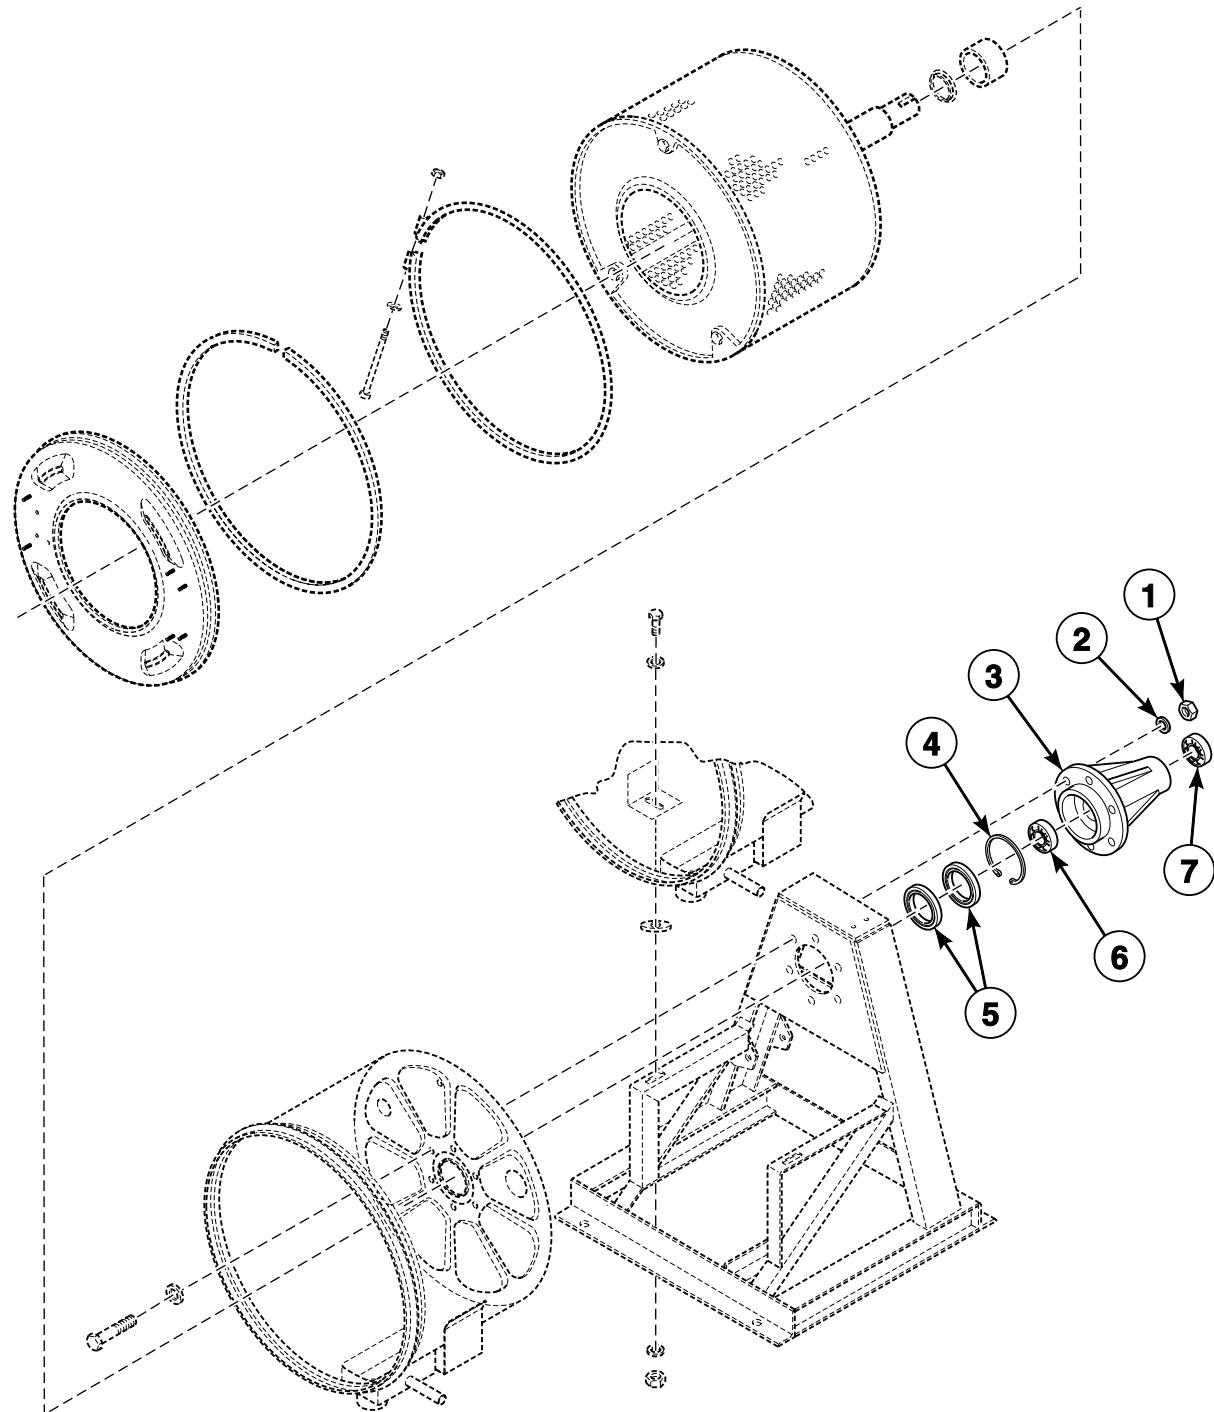


CHM3153PA\_F8330701

## Basket, Shell, Frame and Trunnion - Design 1 Models (Drawing 2 of 3)

REF	PART NO.	DESCRIPTION	COMMENTS
1	F430239	Nut	20 pound models
	F430240	Nut	All other models
2	F431128	Washer	20 pound models
	F431131	Washer	All other models
3	F747001	Trunnion Kit	20 pound models; Includes items 5-7
	F747002	Trunnion Kit	30 pound models; Includes items 5-7
	F747003	Trunnion Kit	40 pound models; Includes items 5-7
	F747005	Trunnion Kit	60 pound models; Includes items 5-7
4	F8344901	Retaining Ring	20 pound models; Models that have been upgraded with F935P3 Pressfit Upgrade Kit or models starting 4/1/10
	F8345001	Retaining Ring	30 pound models; Models that have been upgraded with F936P3 Pressfit Upgrade Kit or models starting 4/1/10
	F8337801	Retaining Ring	40 pound models; Models that have been upgraded with F938P3 Pressfit Upgrade Kit or models starting 4/1/10
	F8337901	Retaining Ring	60 pound models; Models that have been upgraded with F939P3 Pressfit Upgrade Kit or models starting 4/1/10
5	F8203801	Triple Lip Seal	20 pound models
	F8203802	Triple Lip Seal	30 pound models
	F8203803	Triple Lip Seal	40 pound models
	F8203806	Triple Lip Seal	60 pound models
6	F100137P	Bearing	6308 2RS C3; Front; 20 and 40 pound models
	F100123P	Bearing	6309 2RS C3; Front; 30 pound models
	F100135	Bearing	6313 2RS C3; Front; 60 pound models
7	F100136P	Bearing	6307 2RS C3; Rear; 20 pound models
	F100108	Bearing	6208 2RS C3; Rear; 30 pound models
	F100134	Bearing	6310 2RS C3; Rear; 40 and 60 pound models

## Basket, Shell, Frame and Trunnion - Design 1 Models (Drawing 3 of 3)

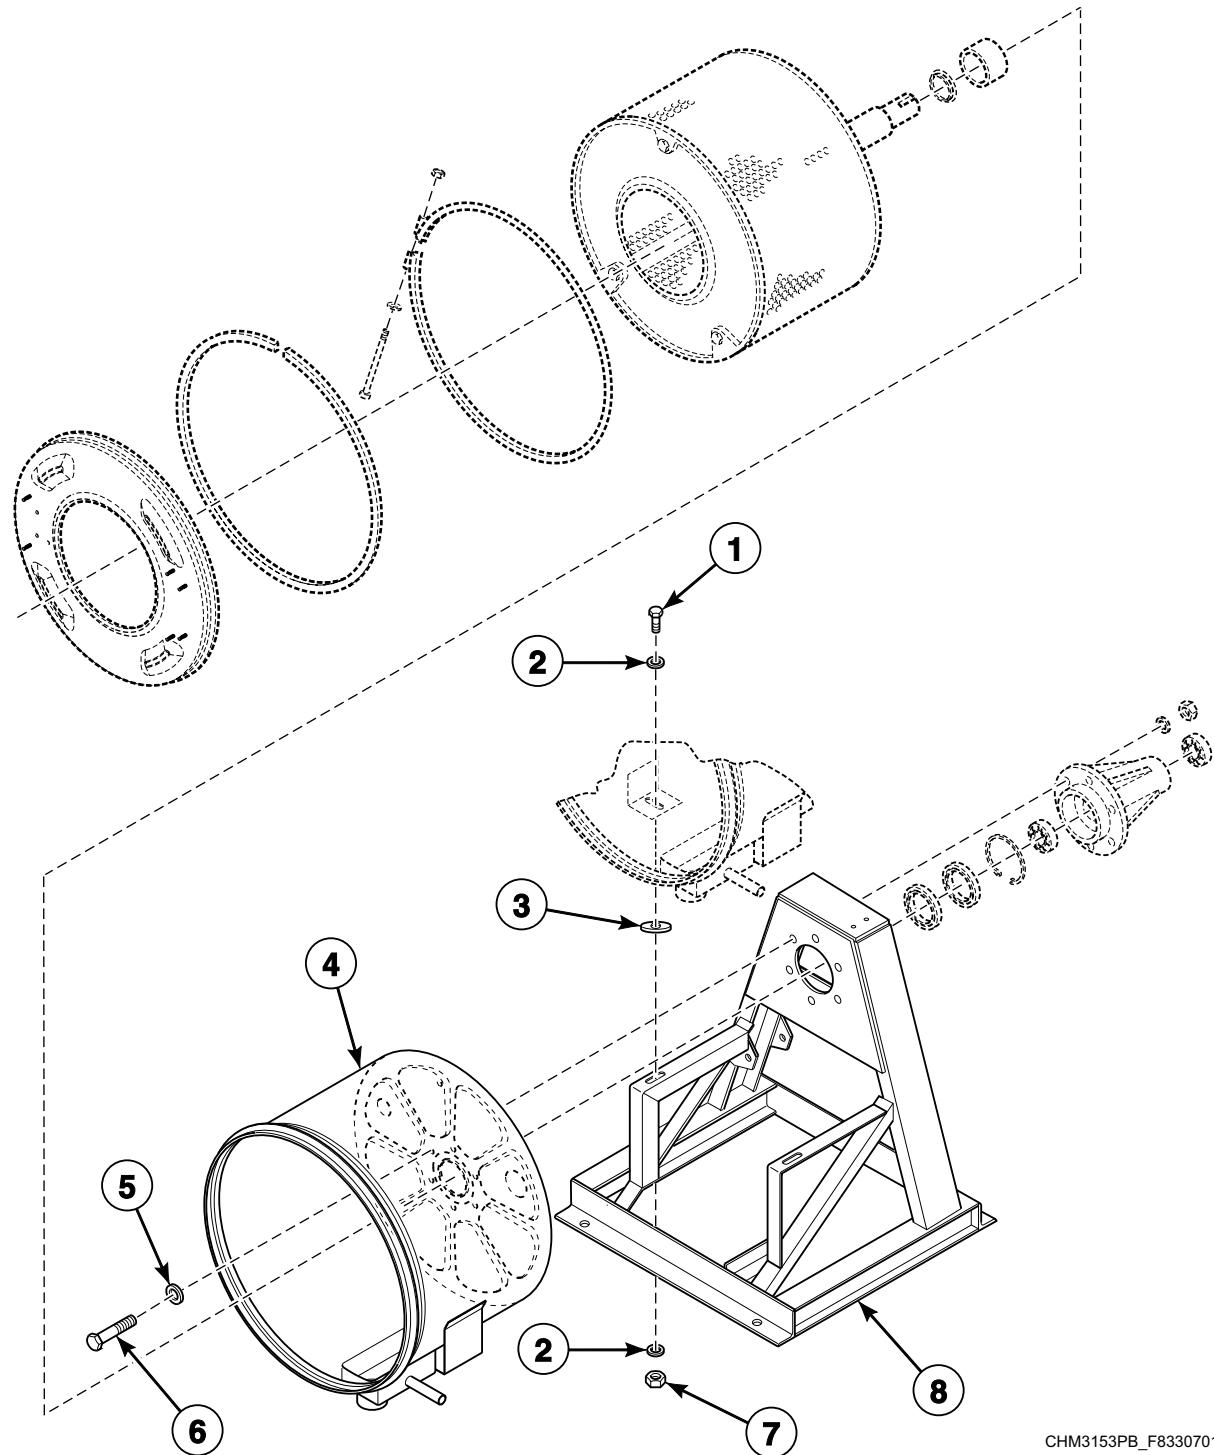


CHM3153PB\_F8330701

# Basket, Shell, Frame and Trunnion - Design 1 Models (Drawing 3 of 3)

REF	PART NO.	DESCRIPTION	COMMENTS
1	F430942	Screw	
2	M400081	Washer	
3	F430303	Washer	
4	F8179201	Shell Weldment	20 pound coin models; Standard
	F8179202	Shell Weldment	20 pound OPL models; Electric heat
	F8179203	Shell Weldment	20 pound OPL models; Standard
	F8179301	Shell Weldment	30 pound coin models; Standard
	F8179302	Shell Weldment	30 pound OPL models; Electric heat
	F8179303	Shell Weldment	30 pound OPL models; Standard
	F8179401	Shell Weldment	40 pound coin models; Standard
	F8179402	Shell Weldment	40 pound OPL models; Electric heat
	F8179403	Shell Weldment	40 pound OPL models; Standard
	F8179501	Shell Weldment	60 pound coin models; Standard
	F8179502	Shell Weldment	60 pound OPL models; Electric heat
	F8179503	Shell Weldment	60 pound OPL models; Standard
5	F431128	Washer	20 pound models
	F431131	Washer	All other models
6	F430949	Screw	20 pound models
	F8442701	Screw	All other models
7	F430218	Nut	
8	F8195901	Frame Weldment	20 pound models
	F8196001	Frame Weldment	30 pound models
	F8196101	Frame Weldment	40 pound models
	F8199101	Frame Weldment	60 pound models


# Basket, Shell, Frame and Bearing Housing - Design 2 and 3 Models (Drawing 1 of 3)

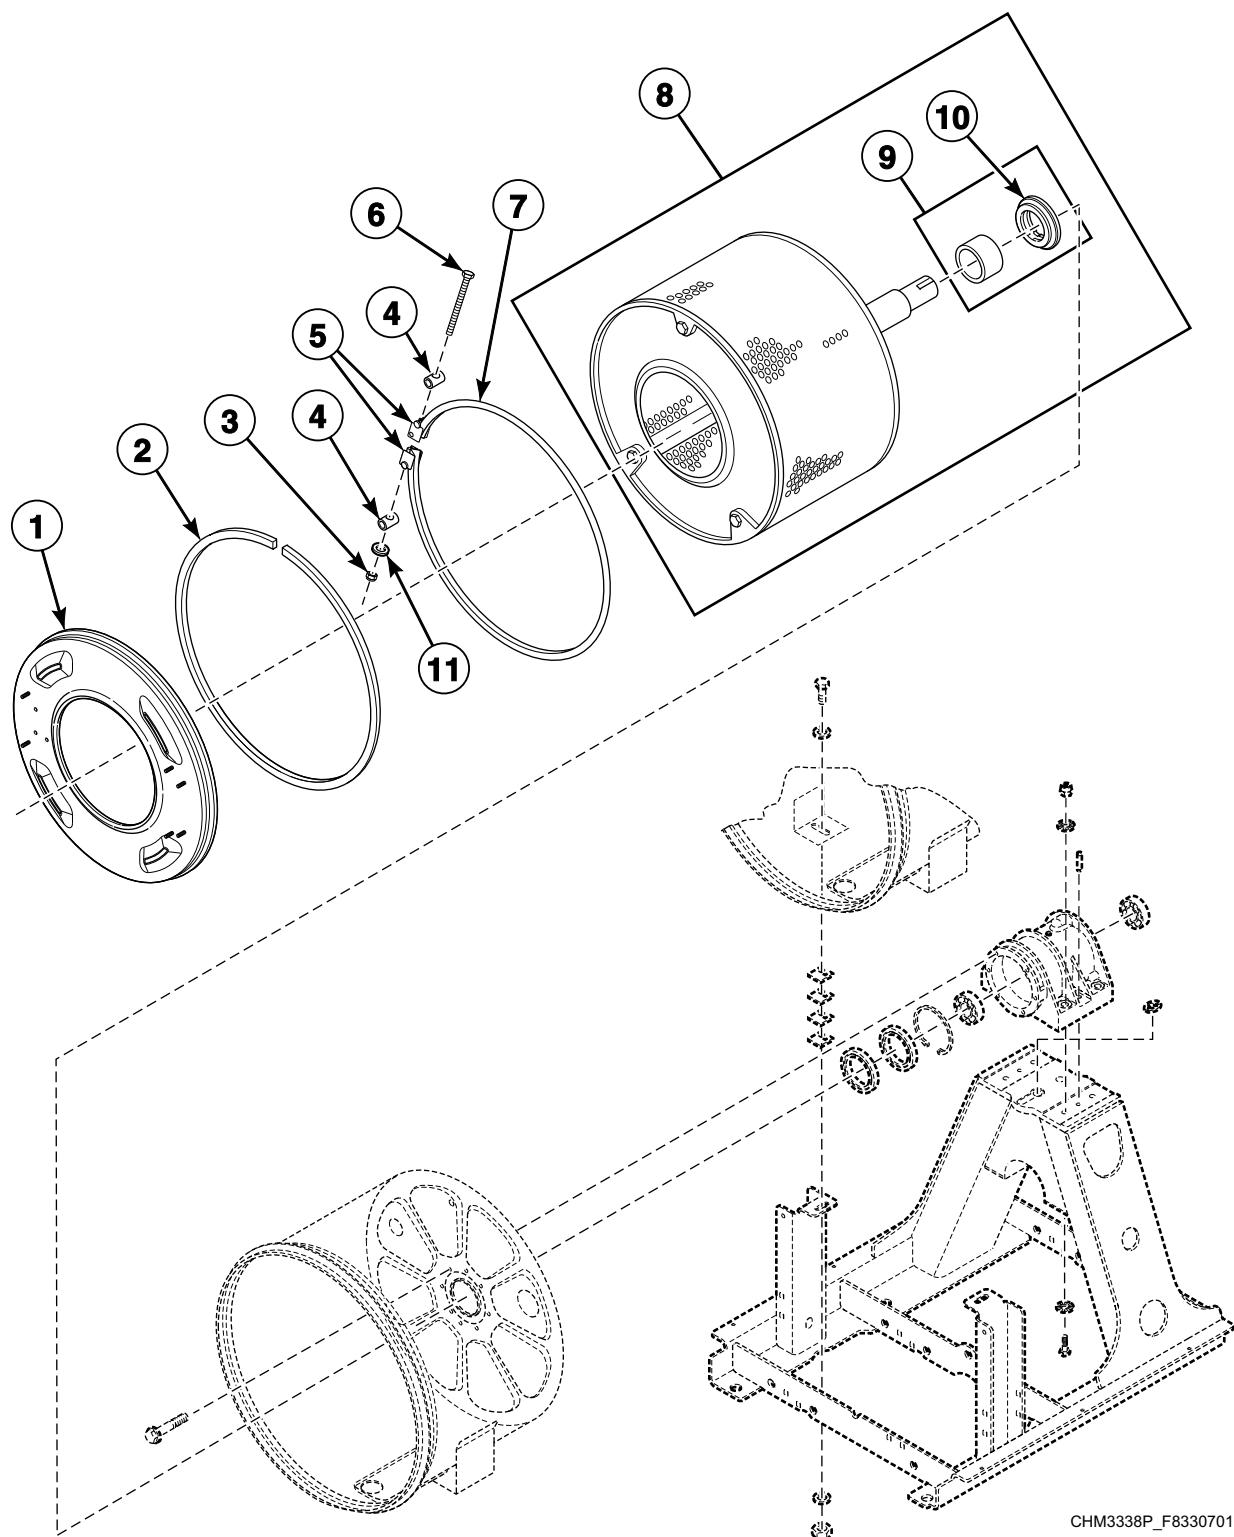

# Basket, Shell, Frame and Bearing Housing - Design 2 and 3 Models (Drawing 1 of 3)

REF	PART NO.	DESCRIPTION	COMMENTS
	389P4	Basket Tool Kit	Purchase; Use with F935P3, F936P3, F938P3 and F939P3 Pressfit Upgrade Kits; Requires F460129P Bearing Puller Tool
	390P4-1	Basket Rental Tool Kit	Use with F935P3, F936P3, F938P3 and F939P3 Pressfit Upgrade Kits; Requires F460129P Bearing Puller Tool
	F460129P	Bearing Puller Tool	
	F8388001	Clamp Ring Assembly	20 pound models; Includes items 5 and 7
	F8388002	Clamp Ring Assembly	30 pound models; Includes items 5 and 7
	F741701	Shell Band Kit	40 pound models; Includes items 5 and 7
	F8388004	Clamp Ring Assembly	60 pound models; Includes items 5 and 7
1	F8229401	Shell Front Assembly	20 pound models
	F8229501	Shell Front Assembly	30 pound models
	F8229601	Shell Front Assembly	40 pound models
	F8229701	Shell Front Assembly	60 pound models
2	F8513501	Shell Front Gasket Kit	
3	F430218	Nut	
4	F8302701	Pin	
5	F8302401	Clamp Ring Bracket	
6	800462	Screw	
7	F741700	Shell Band Kit	20 pound models
	F631838	Outer Shell Band	30 pound models
	F603108	Outer Shell Band	40 pound models
	F603207	Outer Shell Band	60 pound models
8	F8391301	Basket Assembly	20 pound models
	F8391501	Basket Assembly	30 pound models
	F8391701	Basket Assembly	40 pound models
	F8391901	Basket Assembly	60 pound models
9	F8343901P	Shaft Seal Sleeve Kit	20 pound models; Includes item 10
	F8343904P	Shaft Seal Sleeve Kit	30 pound models; Includes item 10
	F8343906P	Shaft Seal Sleeve Kit	40 pound models; Includes item 10
	F8343909P	Shaft Seal Sleeve Kit	60 pound models; Includes item 10
10	F8336801	Excluder Seal	20 pound models; Models that have been upgraded with F935P3 Pressfit Upgrade Kit or models starting 4/1/10
	F8336901	Excluder Seal	30 pound models; Models that have been upgraded with F936P3 Pressfit Upgrade Kit or models starting 4/1/10
	F8337001	Excluder Seal	40 pound models; Models that have been upgraded with F938P3 Pressfit Upgrade Kit or models starting 4/1/10
	F8337101	Excluder Seal	60 pound models; Models that have been upgraded with F939P3 Pressfit Upgrade Kit or models starting 4/1/10
11	M400081	Washer	


## Basket, Shell, Frame and Bearing Housing - Design 2 and 3 Models (Drawing 2 of 3)

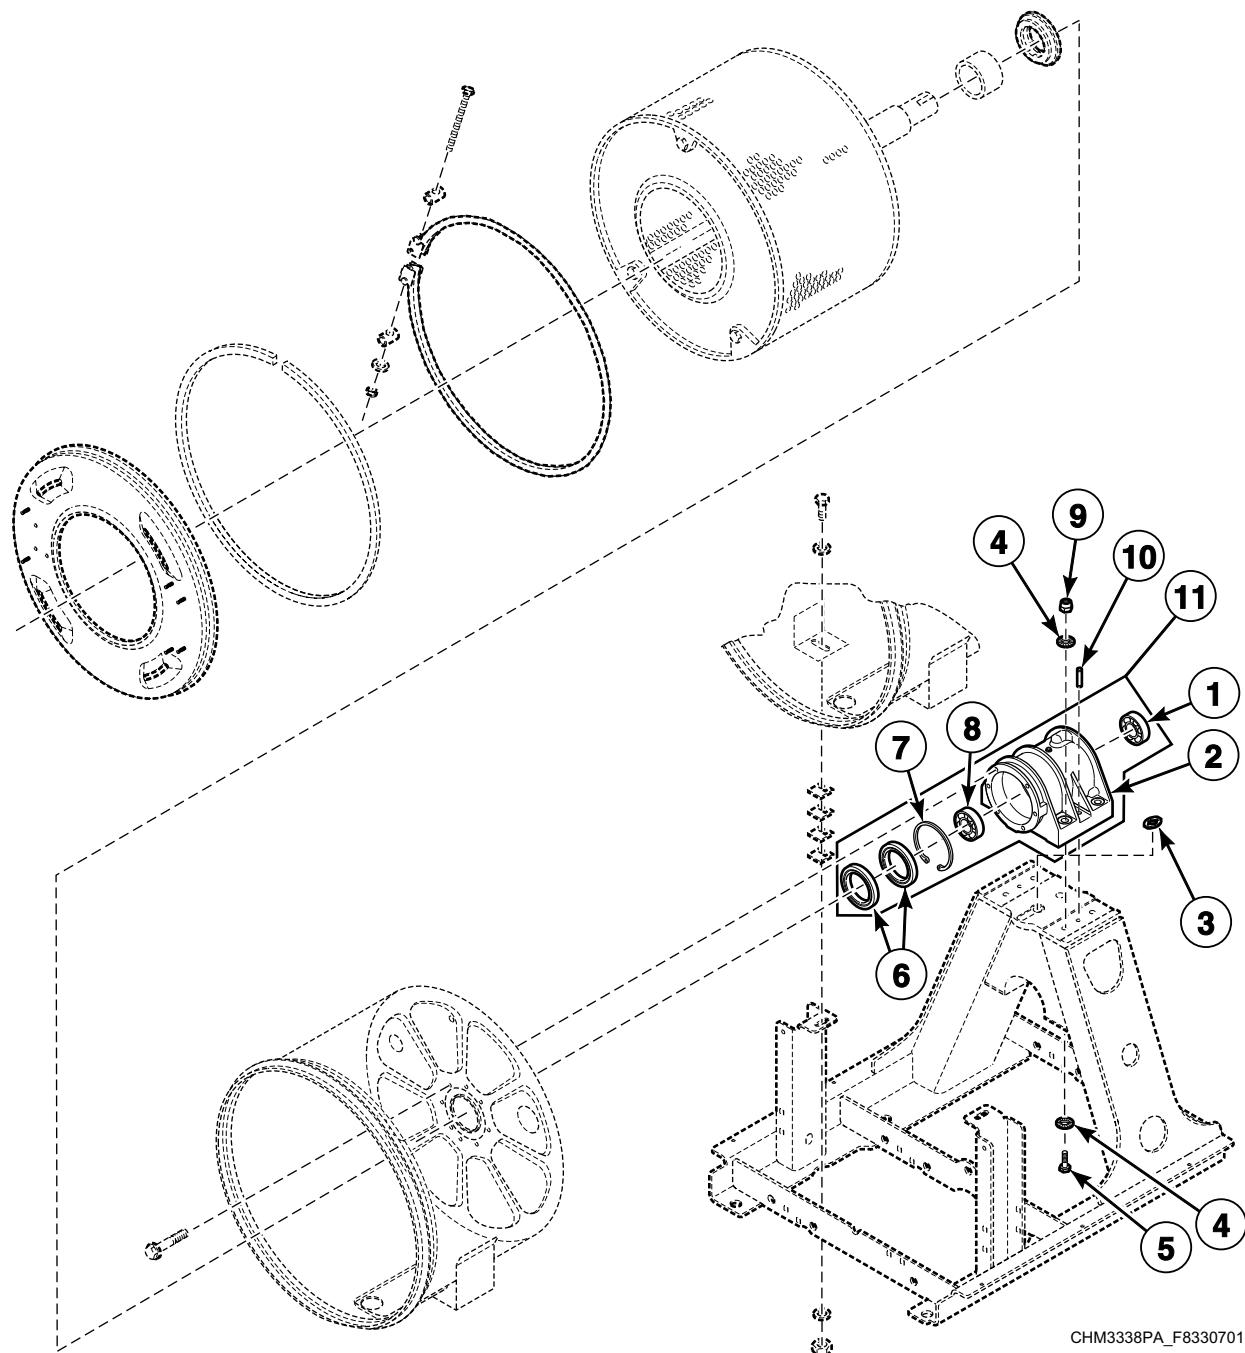

# Basket, Shell, Frame and Bearing Housing - Design 2 and 3 Models (Drawing 2 of 3)

REF	PART NO.	DESCRIPTION	COMMENTS
1	F100137P	Bearing	6308 2RS C3; Front; 20 and 40 pound models
	F100123P	Bearing	6309 2RS C3; Front; 30 pound models
	F100135	Bearing	6313 2RS C3; Front; 60 pound models
2	F8247902	Bearing Housing	20 pound models
	F8246802	Bearing Housing	30 pound models
	F8249902	Bearing Housing	40 pound models
	F8250902	Bearing Housing	60 pound models
3	F8350301	Seal Scupper Pad	20 and 30 pound models
	F8350302	Seal Scupper Pad	40 pound models
	F8350303	Seal Scupper Pad	60 pound models
4	F8366601	Washer	20 pound models
	F430339	Washer	All other models
5	F8368701	Screw	20 pound models
	F8368801	Screw	All other models
6	F8203801	Triple Lip Seal	20 pound models
	F8203802	Triple Lip Seal	30 pound models
	F8203803	Triple Lip Seal	40 pound models
	F8203806	Triple Lip Seal	60 pound models
7	F8344901	Retaining Ring	20 pound models; Models that have been upgraded with F935P3 Pressfit Upgrade Kit or models starting 4/1/10
	F8345001	Retaining Ring	30 pound models; Models that have been upgraded with F936P3 Pressfit Upgrade Kit or models starting 4/1/10
	F8337801	Retaining Ring	40 pound models; Models that have been upgraded with F938P3 Pressfit Upgrade Kit or models starting 4/1/10
	F8337901	Retaining Ring	60 pound models; Models that have been upgraded with F939P3 Pressfit Upgrade Kit or models starting 4/1/10
8	F100136P	Bearing	6307 2RS C3; Rear; 20 pound models
	F100108	Bearing	6208 2RS C3; Rear; 30 pound models
	F100134	Bearing	6310 2RS C3; Rear; 40 and 60 pound models
9	F8387601	Nut	20 pound models
	F8387701	Nut	All other models
10	F8388101	Dowel Pin	20 pound models
	F8388201	Dowel Pin	All other models
11	F8271601	Bearing Housing Assembly	20 pound models
	F8271701	Bearing Housing Assembly	30 pound models
	F8271801	Bearing Housing Assembly	40 pound models
	F8271901	Bearing Housing Assembly	60 pound models

## Basket, Shell, Frame and Bearing Housing - Design 2 and 3 Models (Drawing 3 of 3)

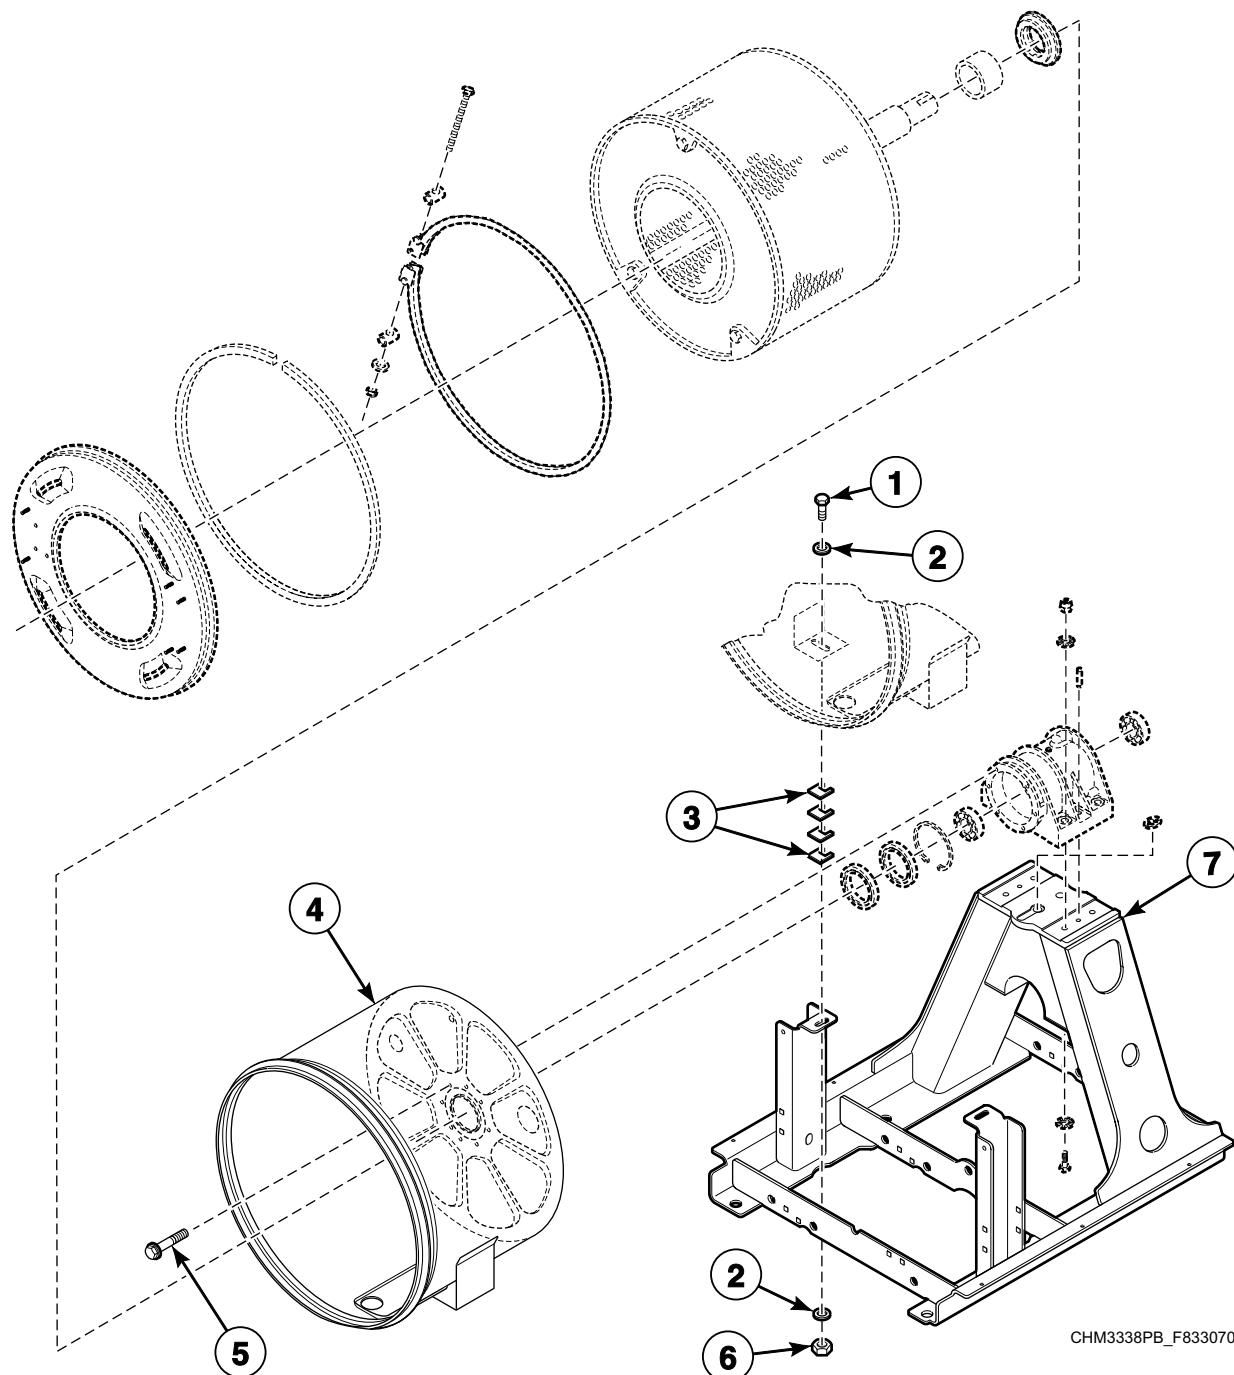


CHM3338PB\_F8330701

# Basket, Shell, Frame and Bearing Housing - Design 2 and 3 Models (Drawing 3 of 3)

REF	PART NO.	DESCRIPTION	COMMENTS
	1111P	Concrete Kit	5/8 inch
	F8498101	Concrete Epoxy Kit	
	F8433301	Frame Template	20 pound models
	F8433401	Frame Template	30 pound models
	F8433501	Frame Template	40 pound models
	F8433601	Frame Template	60 pound models
1	H88213996	Screw	
2	M400081	Washer	
3	F8402701	Washer	
4	F8360601	Shell Weldment	20 pound coin models; Standard
	F8360602	Shell Weldment	20 pound OPL models; Electric heat
	F8360603	Shell Weldment	20 pound OPL models; Standard
	F8360701	Shell Weldment	30 pound coin models; Standard
	F8360702	Shell Weldment	30 pound OPL models; Electric heat
	F8360703	Shell Weldment	30 pound OPL models; Standard
	F8360801	Shell Weldment	40 pound coin models; Standard
	F8360802	Shell Weldment	40 pound OPL models; Electric heat
	F8360803	Shell Weldment	40 pound OPL models; Standard
	F8360901	Shell Weldment	60 pound coin models; Standard
	F8360902	Shell Weldment	60 pound OPL models; Electric heat
	F8360903	Shell Weldment	60 pound OPL models; Standard
5	F8442701	Screw	20 pound models
6	44087301	Nut	
7	F8247001	Frame Weldment	20 pound models
	F8248001	Frame Weldment	30 pound models
	F8249001	Frame Weldment	40 pound models
	F8250001	Frame Weldment	60 pound models

## Drain Plumbing - Design 1 Models

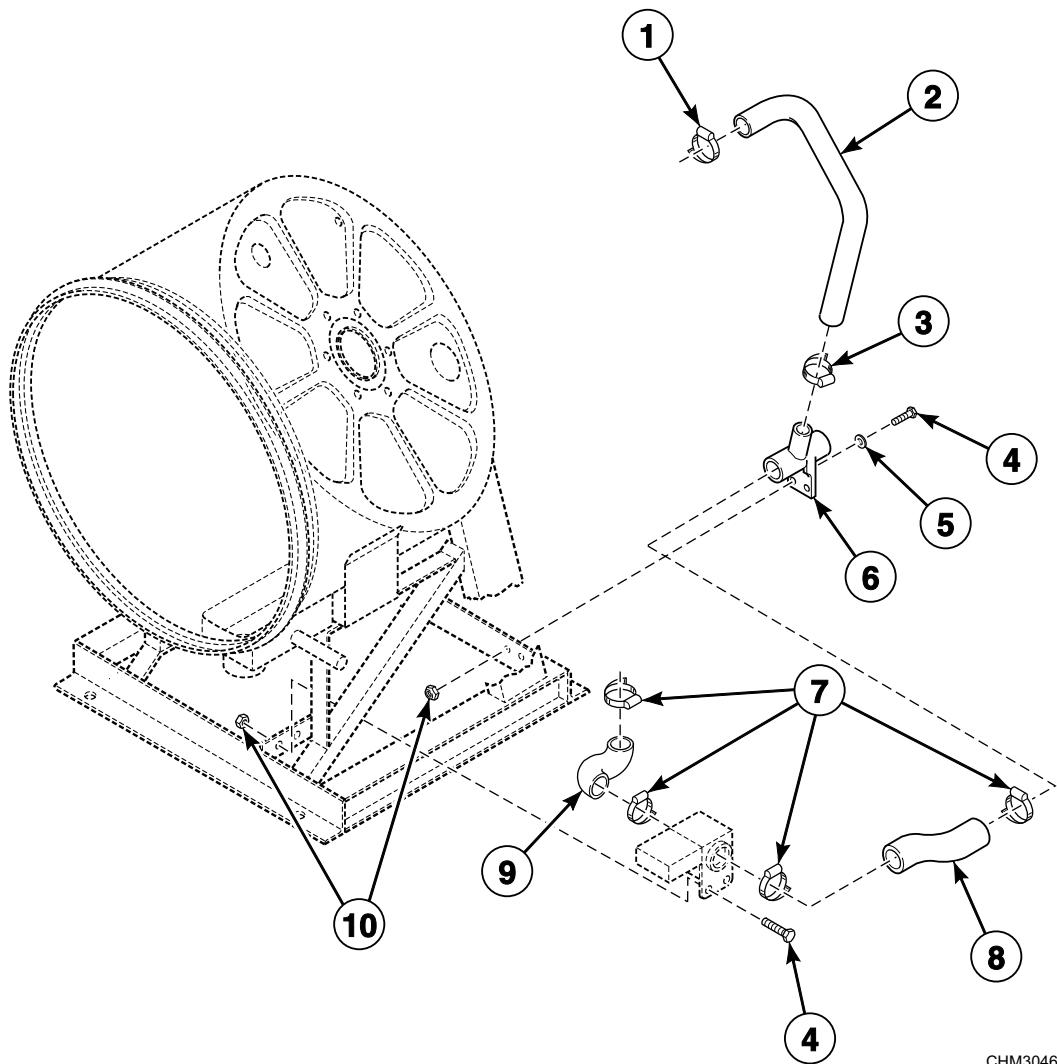


CHM3046P\_F8330701

## Drain Plumbing - Design 1 Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	F200213	Hose Clamp	No. 40
2	F150308	Overflow Hose	20 and 30 pound models
	F0200238-00	Overflow Hose	40 pound models
	F8337701	Overflow Hose	40 pound models; Electric heat
	F150417	Overflow Hose	60 pound models
3	F200215	Hose Clamp	40 pound models
	F200213	Hose Clamp	No. 40; All other models
4	F430107	Screw	
5	F430317	Washer	
6	F150318	Drain Connect Tee	20 and 30 pound models
	F150398	Drain Tee	40 and 60 pound models
7	F200213	Hose Clamp	No. 40; 20 and 30 pound models
	F200201	Hose Clamp	No. 56; 40 and 60 pound models
8	F8233101	Drain Hose	Rear; 20 pound models
	F8233102	Drain Hose	Rear; 30 pound models
	F8231901	Drain Hose	Rear; 40 pound models
	F8231902	Drain Hose	Rear; 60 pound models
9	F8233001	Drain Hose	Front; 20 and 30 pound models
	F8232901	Drain Hose	Front; 40 and 60 pound models
10	F430215	Nut	

## Drain Plumbing - Design 2 and 3 Models

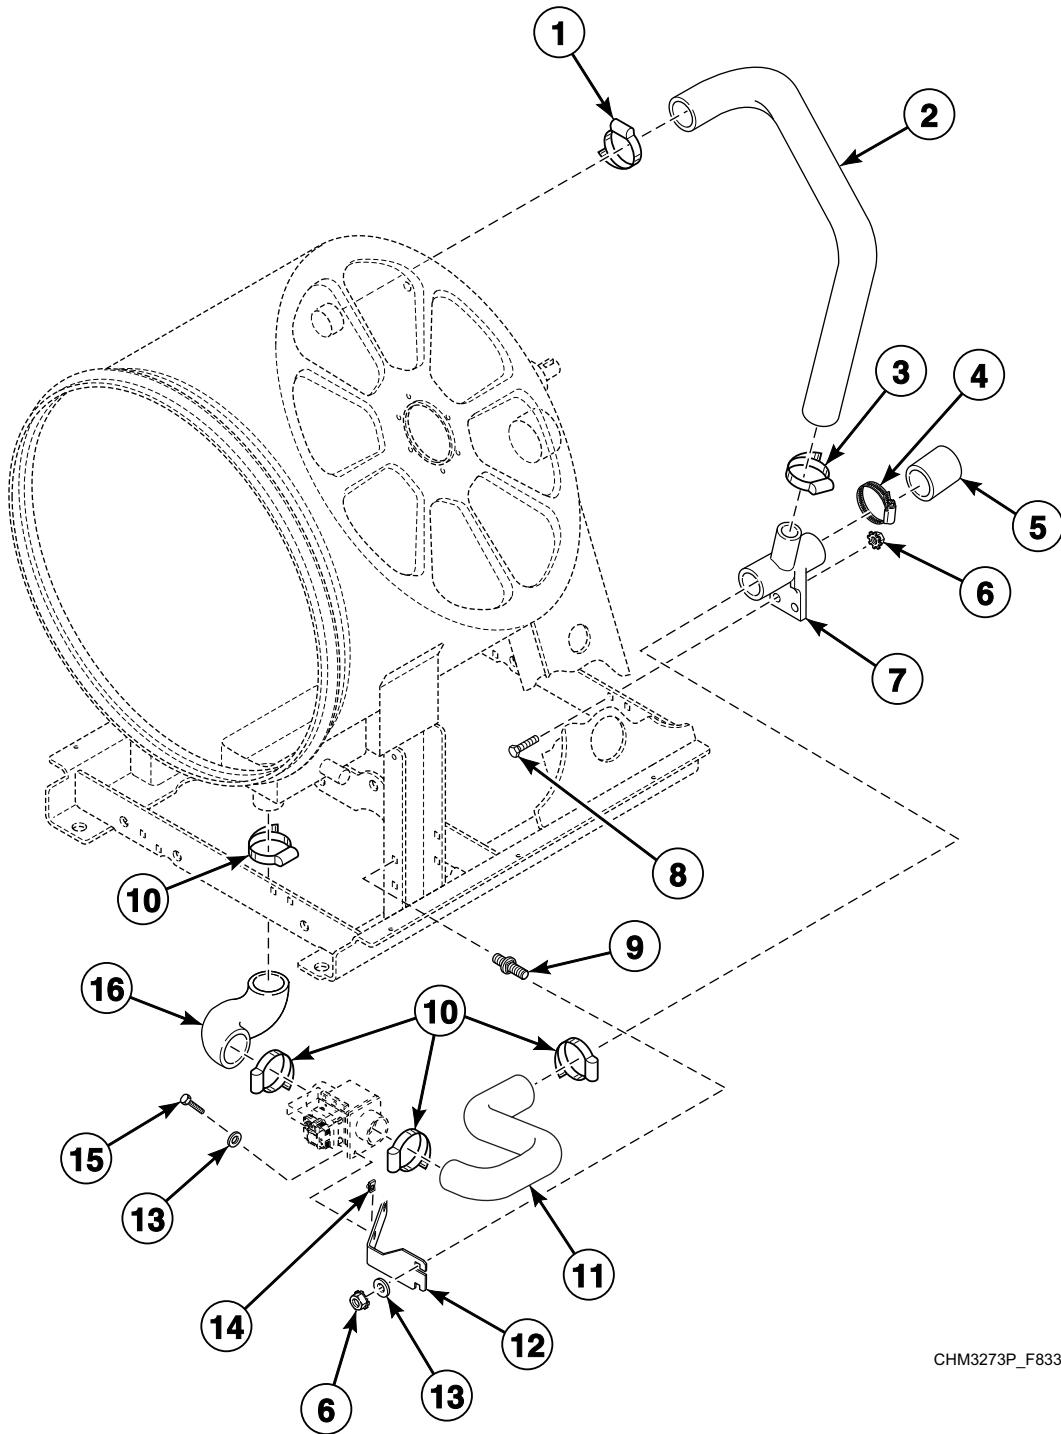


CHM3273P\_F8330701

## Drain Plumbing - Design 2 and 3 Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	F200213	Hose Clamp	No. 40
2	F8367901	Overflow Hose	20 pound models
	F8368001	Overflow Hose	30 pound models
	F8367201	Overflow Hose	40 and 60 pound models
3	F200215	Hose Clamp	No. 28; 20 and 30 pound models
	F200213	Hose Clamp	No. 40; 40 and 60 pound models
4	F200201	Hose Clamp	No. 56; 40 and 60 pound models
5	F200165100	Drain Hose	40 and 60 pound models
6	44087201	Nut	
7	F150318	Drain Connect Tee	20 and 30 pound models
	F150398	Drain Tee	40 and 60 pound models
8	F430522	Bolt	20 and 30 pound models
	F8402801	Bolt	40 and 60 pound models
9	70334702	Stud	
10	F200213	Hose Clamp	No. 40; 20 and 30 pound models
	F200201	Hose Clamp	No. 56; 40 and 60 pound models
11	F8365601	Rear Drain Hose	20 pound models
	F8365602	Rear Drain Hose	30 pound models
	F8231904	Rear Drain Hose	40 pound models
	F8231905	Rear Drain Hose	60 pound models
12	F8365401	Bracket	20 pound models
	F8365402	Bracket	30 pound models
	F8434601	Bracket	40 pound models
	F8434701	Bracket	60 pound models
13	M405535	Washer	
14	70030401	Nut	
15	202175	Screw	
16	F8261302	Drain Hose	20 and 30 pound models
	F8261303	Drain Hose	20 and 30 pound models; Electric heat
	F8232901	Drain Hose	40 and 60 pound models
	F8464701	Drain Hose	40 and 60 pound models; Electric heat

## Drain Valve Assembly - 20 and 30 Pound Models

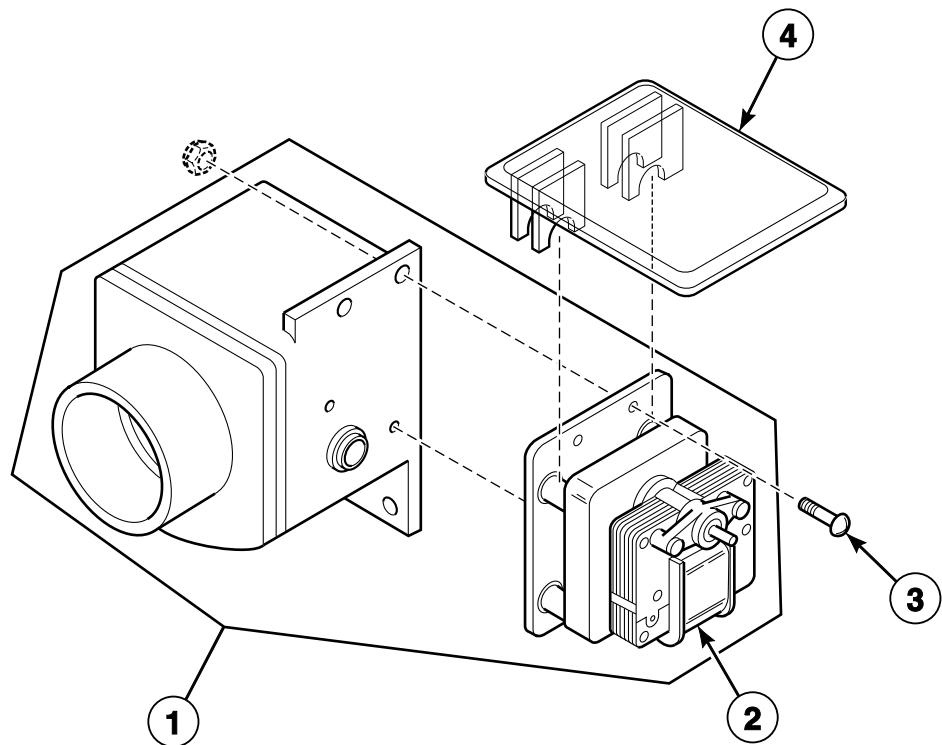


CHM2450P\_F8330701

## **Drain Valve Assembly - 20 and 30 Pound Models**

REF	PART NO.	DESCRIPTION	COMMENTS
1	803292	Gravity Drain Valve	220 Volt
2	F380933P	Drain Valve Motor	Round shaft; 220 Volt
	G159764P	Drain Valve Motor and Gear Box Assembly	Keyed shaft; 220 Volt
3	F200182700	Bolt	
4	F200133600	Drain Valve Cover	

## Drain Valve Assembly - 40 and 60 Pound Models


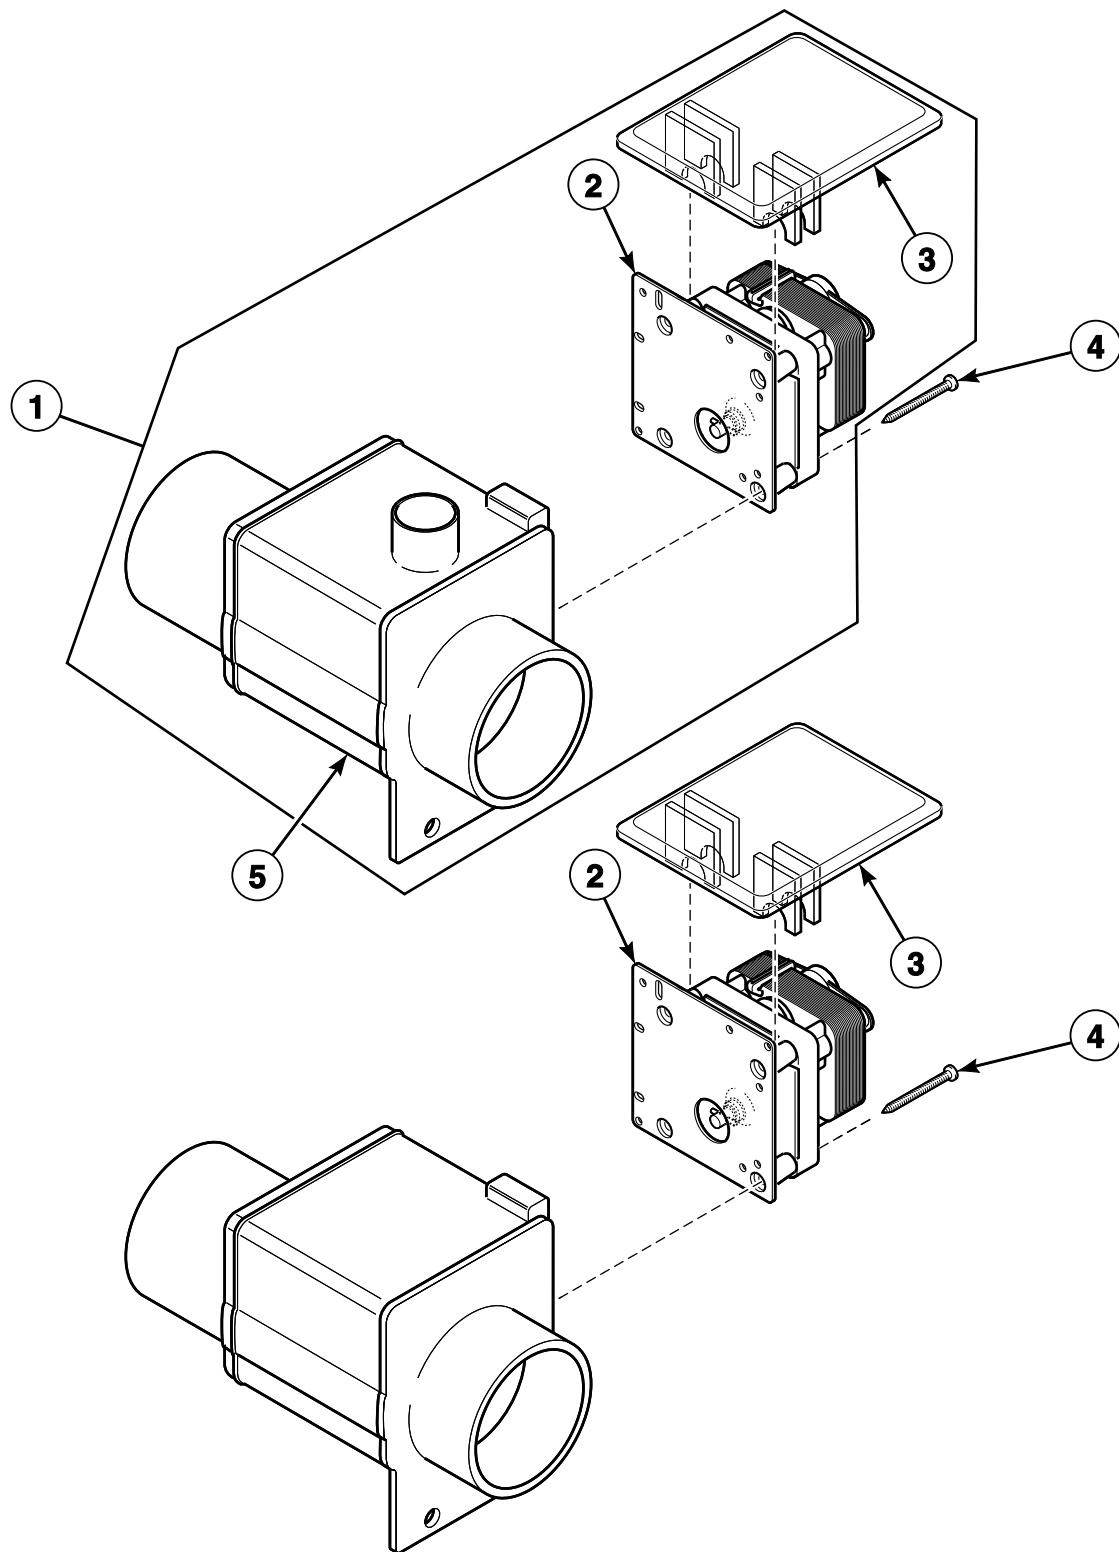


CHM3081P\_F8330701

## **Drain Valve Assembly - 40 and 60 Pound Models**

<b>REF</b>	<b>PART NO.</b>	<b>DESCRIPTION</b>	<b>COMMENTS</b>
1	F200166400	Drain Valve Kit	220 Volt; Electric and steam heat
2	F380933P	Drain Valve Motor	Round shaft; 220 Volt
	G159764P	Drain Valve Motor and Gear Box Assembly	Keyed shaft; 220 Volt
3	F200133600	Drain Valve Cover	
4	F200182700	Bolt	
5	F8406307	Drain Valve	240 Volt; Electric and steam heat

## Steam Filter (Optional) and Water Supply Hose

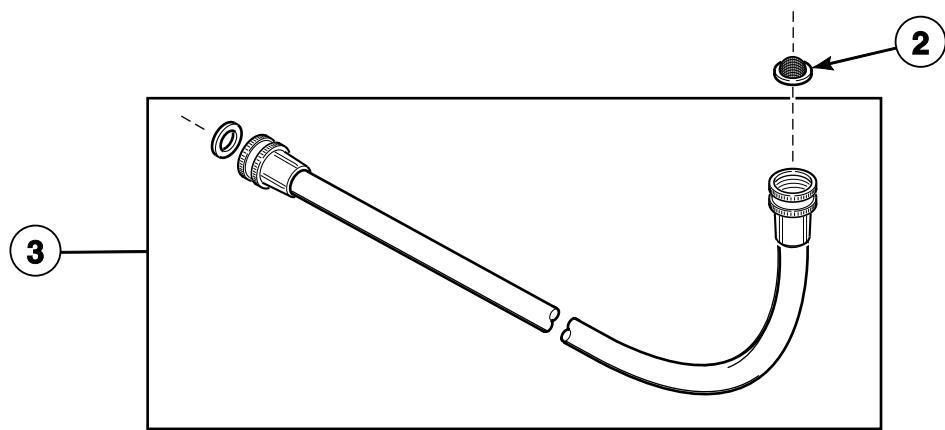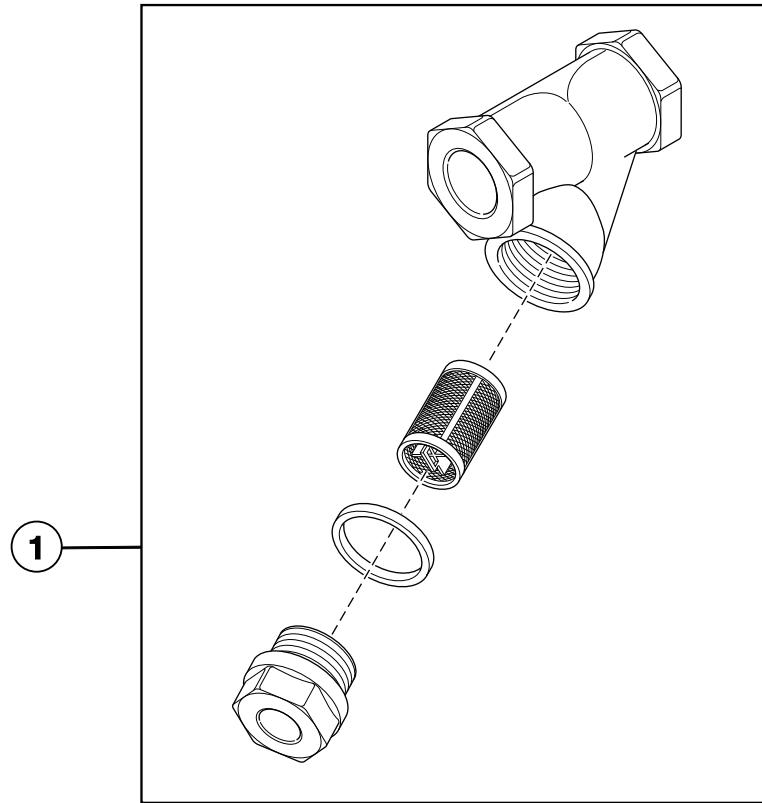


CHM3049P\_F8330701

## **Steam Filter (Optional) and Water Supply Hose**

<b>REF</b>	<b>PART NO.</b>	<b>DESCRIPTION</b>	<b>COMMENTS</b>
1	F270307	Steam Filter	1/2 inch
	F270308	Steam Filter	3/4 inch
2	803615	Washer	Filter
3	F200116	Water Hose	3/8 inch; Standard thread
	F200108P	Water Hose	1/2 inch; Standard or metric thread
	F8544601	Fill Hose Kit	Metric thread

## Fill Plumbing Assembly (Drawing 1 of 2)

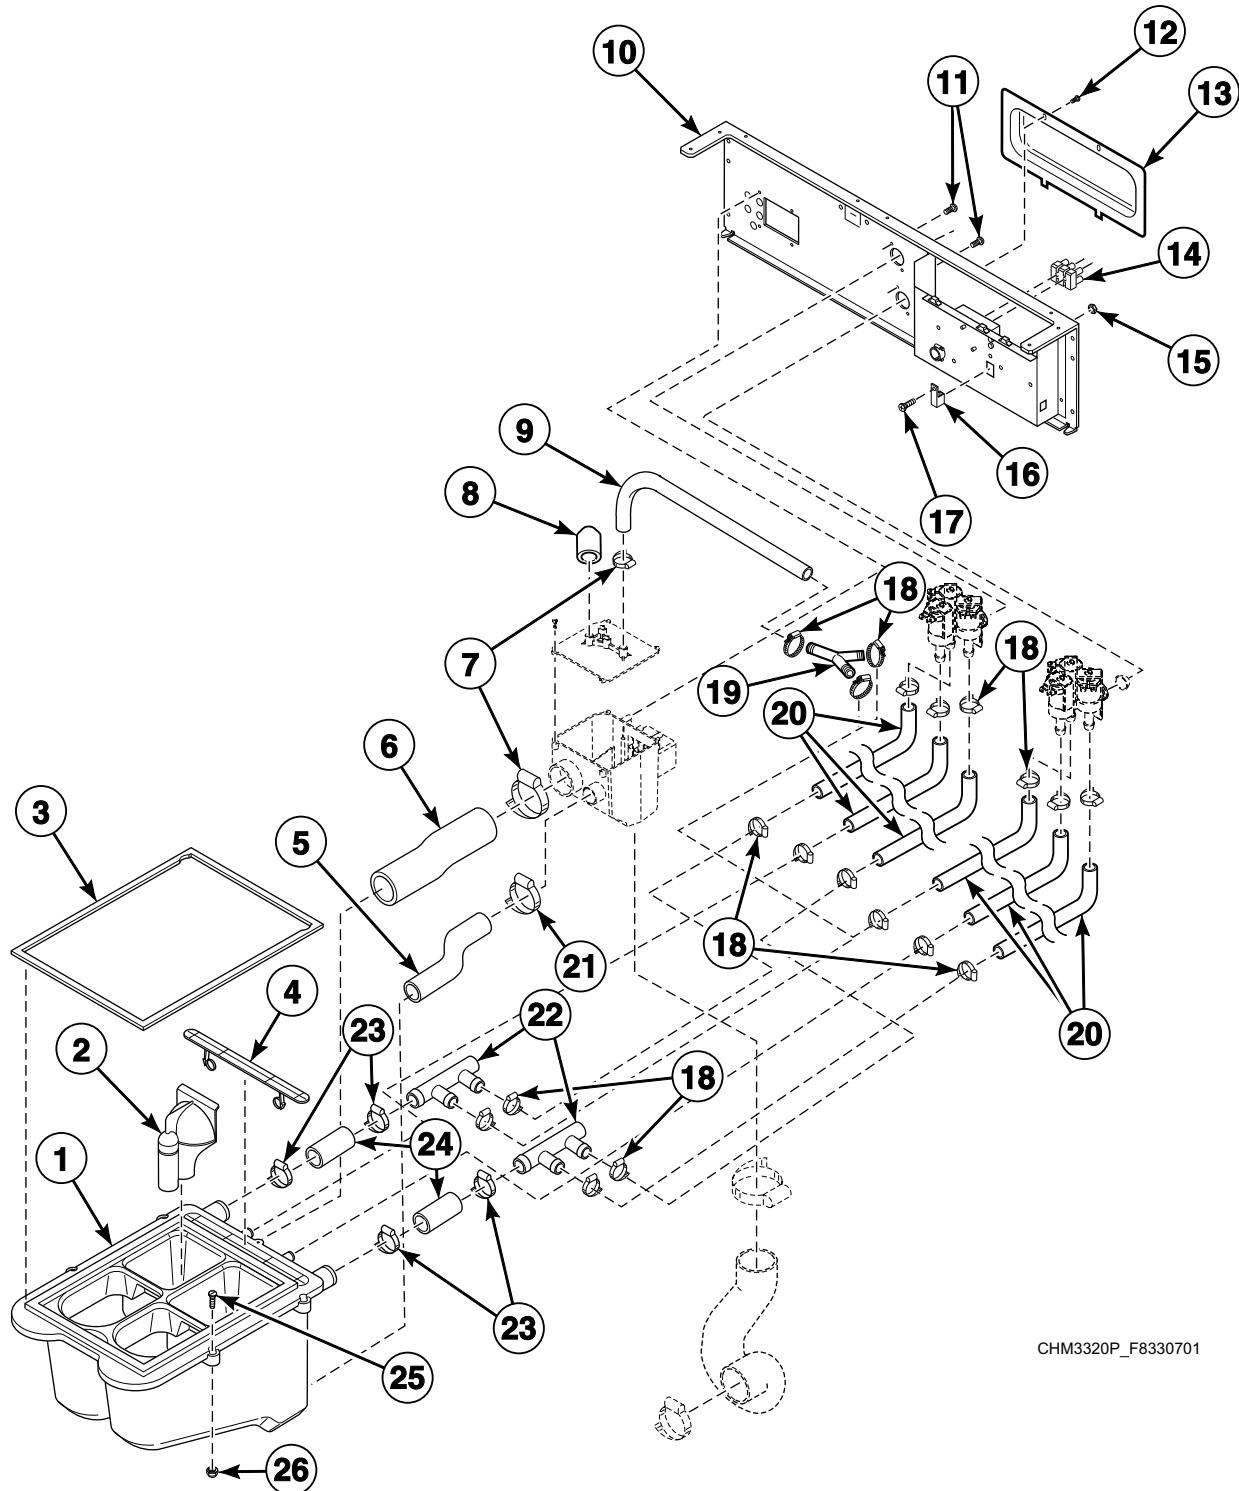


CHM3320P\_F8330701

## Fill Plumbing Assembly (Drawing 1 of 2)

REF	PART NO.	DESCRIPTION	COMMENTS
1	F8047401	Dispenser Assembly	Models through 10/15/12
	F8047402	Dispenser Assembly	Models starting 10/16/12
2	F8047901	Siphon Cover	
3	F8308301	Dispenser Gasket	
4	F8047801	Access Cover	
5	F8043401	Dispenser Overflow Hose	20 pound models
	F8043403	Dispenser Overflow Hose	30 pound models
	F8043404	Dispenser Overflow Hose	40 pound models
	F8043405	Supply Overflow Hose	60 pound models
6	F8042801	Vacuum Supply Hose	20 pound models
	F8042803	Vacuum Supply Hose	30 pound models
	F8042804	Vacuum Supply Hose	40 pound models
	F8042805	Vacuum Supply Hose	60 pound models
7	F200213	Hose Clamp	No. 40
8	F8197701	Cap	
9	F0200244-01	Vacuum Breaker Hose	60 pound models
	F0200244-02	Vacuum Breaker Hose	All other models
10	F8039901	Valve Panel	20 pound models; Design 1
	F8017501	Valve Panel	30 pound models; Design 1
	F8039601	Valve Panel	40 pound models; Design 1
	F8039801	Valve Panel	60 pound models; Design 1
	F8398701	Valve Panel	20 pound models; Design 2 and 3
	F8398801	Valve Panel	30 pound models; Design 2 and 3
	F8398901	Valve Panel	40 pound models; Design 2
	F8399001	Valve Panel	60 pound models; Design 2
11	F8230301	Screw	
12	F8206901	Screw	
13	F8177001	Terminal Tray Cover	
14	430642	Terminal Block	Includes screws
15	F430232	Nut	
16	M411283	Ground Lug Connector	
17	F430909	Screw	
18	36801	Hose Clamp	No. 8; Design 1
19	F422816	Y Connector	Design 1
20	F8232004	Hose	20 pound models
	F8232001	Hose	30 pound models
	F8232002	Hose	40 and 60 pound models
21	20211	Hose Clamp	No. 17
22	F8333201	Manifold	
23	F200222	Hose Clamp	No. 12
24	F606816-1	Hose	
25	F8535601	Screw	
26	F0431807-00	Nut	

## Fill Plumbing Assembly (Drawing 2 of 2)

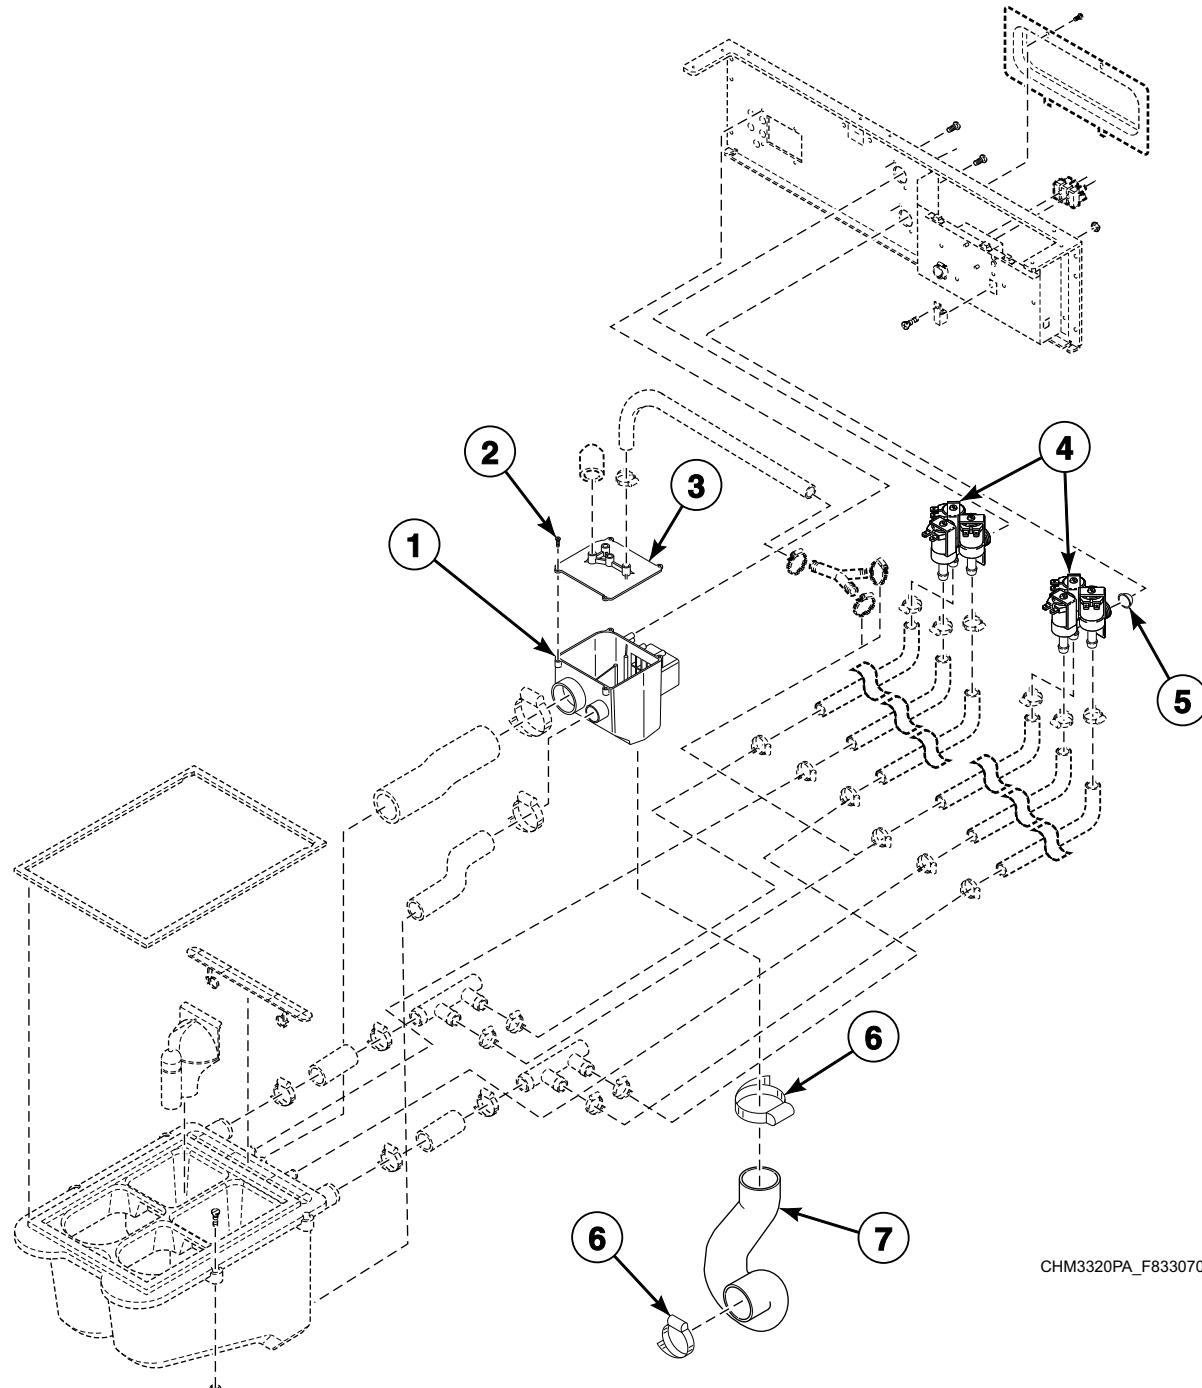


CHM3320PA\_F8330701

## Fill Plumbing Assembly (Drawing 2 of 2)

REF	PART NO.	DESCRIPTION	COMMENTS
	G582P3	Diaphragm and Guide Kit	Use with F8286401P 3-Way Valve and F8286402P 3-Way Valve
1	F8048601	Vacuum Breaker Assembly	Includes items 2 and 3
2	800548	Screw	
3	F8439301	Vacuum Breaker Cover	
4	F8286401P	3-Way Valve	240 Volt/50 or 60 Hertz; U.S.
	F8286402P	3-Way Valve	240 Volt/50 or 60 Hertz; Metric
5	803615	Washer	Filter
6	F200213	Hose Clamp	No. 40
7	F8042201	P-Trap Hose	20 pound models
	F8042202	P-Trap Hose	30 and 40 pound models
	F8042301	P-Trap Hose	60 pound models

## Pulley and Belt - Design 1 Models (Drawing 1 of 3)

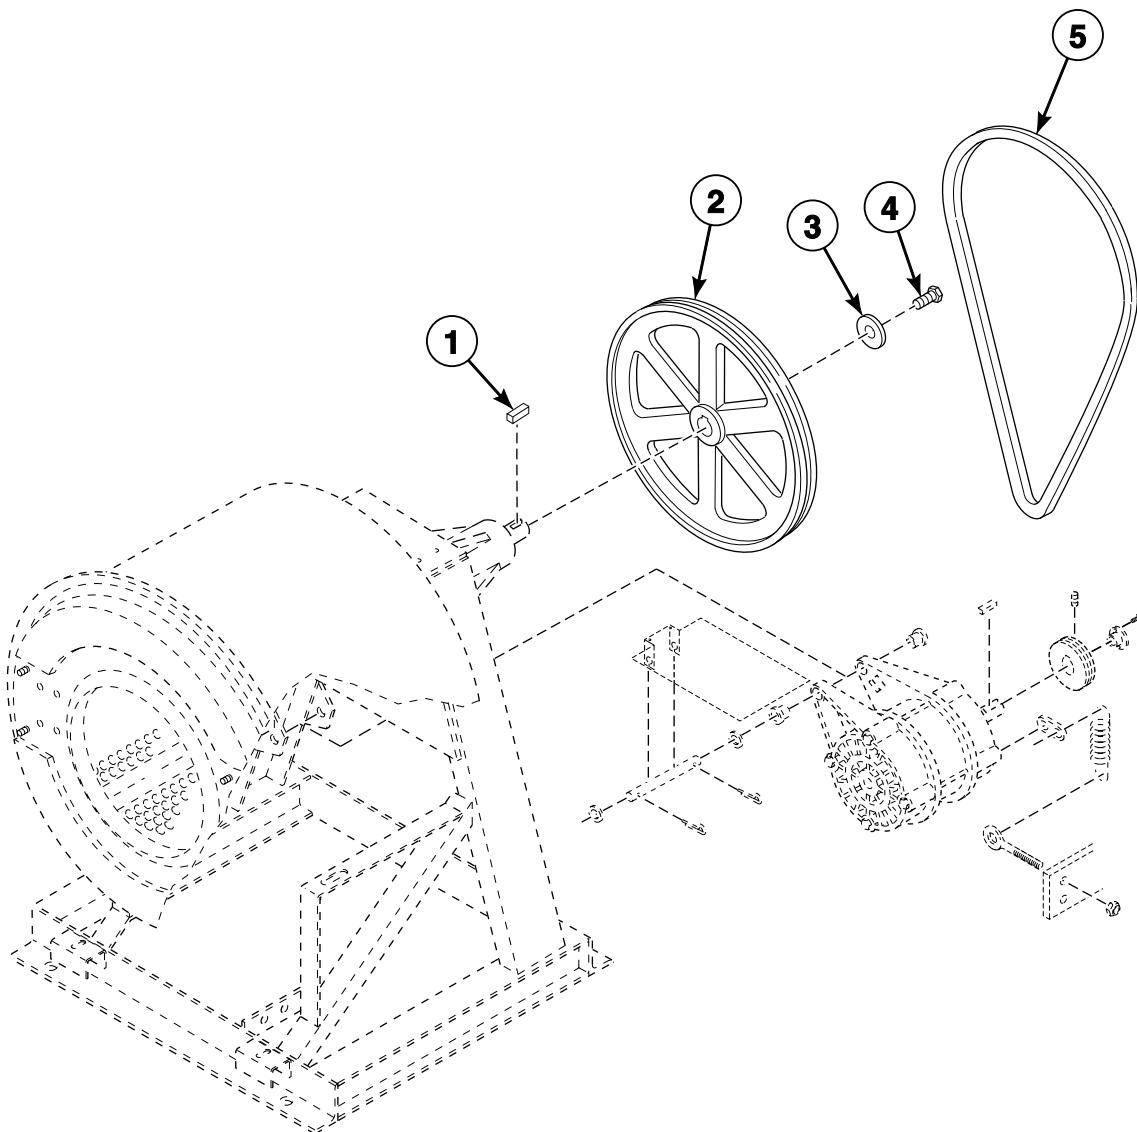


CHM3050P\_F8330701

## Pulley and Belt - Design 1 Models (Drawing 1 of 3)

REF	PART NO.	DESCRIPTION	COMMENTS
1	F430801	Key	
2	F280170	Sheave Pulley	20 pound models; 13V1800
	F280172	Sheave Pulley	30 pound models; 13V2200
	F280197	Pulley	40 pound models; 23V2200
	F200299700	Basket Pulley	60 pound models; X-voltage
	F280173	Pulley	60 pound models; All other voltages; 23V2400
3	F431115	Washer	
4	F430100	Screw	
5	F280343	Belt	3V730; 20 pound 2 speed models; C-voltage
	F280337	Belt	3V710; 20 pound 2 speed models; B, O and Y-voltage
	F280370	Belt	690J4; 20 pound F and V-speed models; X-voltage
	F280321	Belt	3V800; 30 pound 2 speed models; C, F, O and Y-voltage
	F280368P	Belt	785J4; 30 pound F and V-speed models; X-voltage
	F280341	Belt	3V850; 40 pound 2 speed models; C-voltage
	F280342	Belt	3V830; 40 pound 2 speed models; F, O and Y-voltage
	F280369P	Belt	820J6; 40 pound F and V-speed models; X-voltage
	F280373	Belt	3V90.65; 60 pound 2 speed models; C-voltage
	F280304	Belt	3V900; 60 pound 2 speed models; F, O and Y-voltage
	F280366P	Belt	870J6; 60 pound F and V-speed models; R and X-voltage

## Pulley and Belt - Design 1 Models (Drawing 2 of 3)

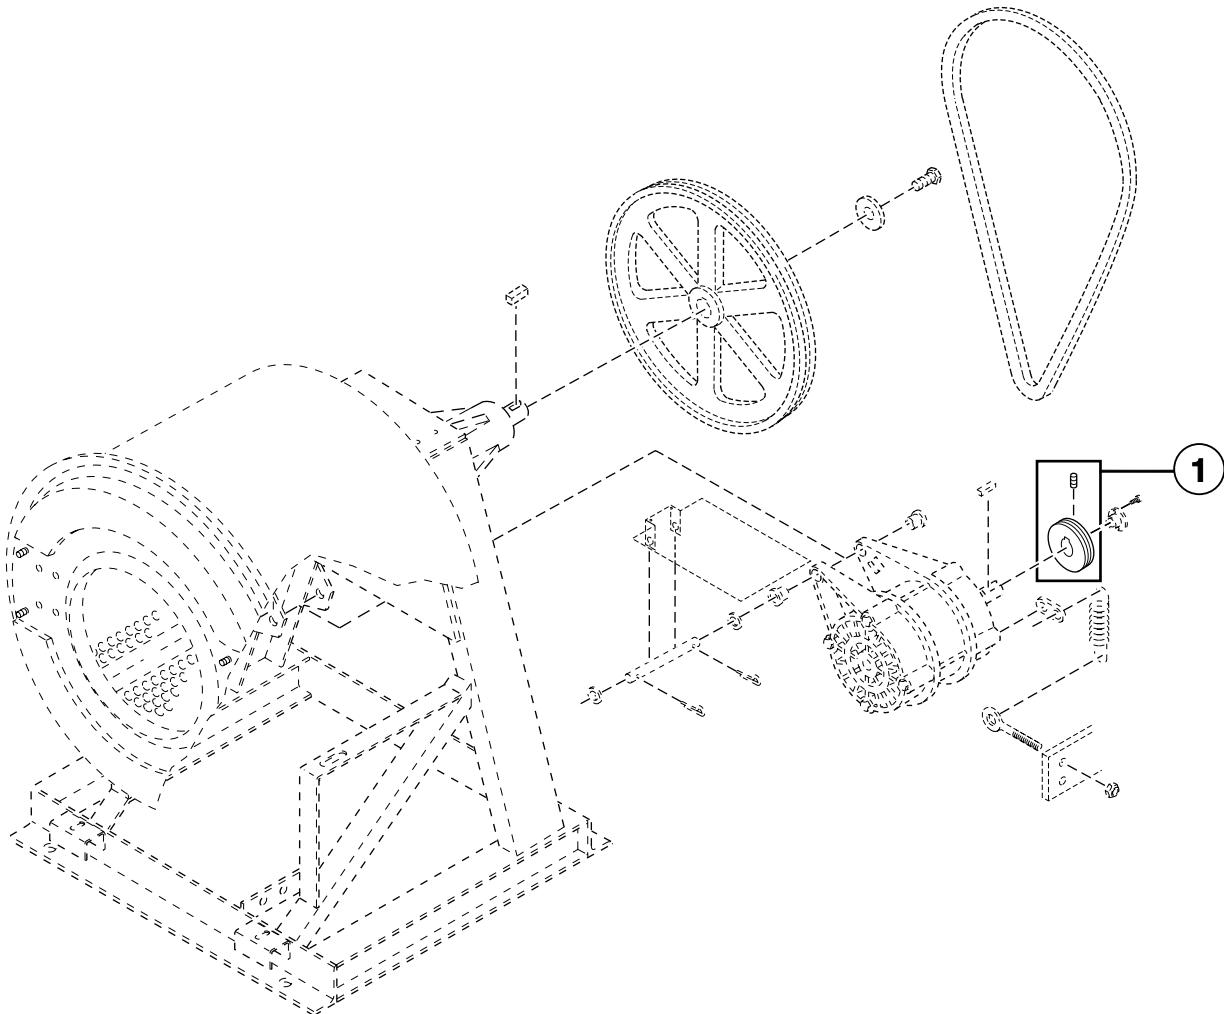


CHM3050PA\_F8330701

## Pulley and Belt - Design 1 Models (Drawing 2 of 3)

REF	PART NO.	DESCRIPTION	COMMENTS
1	F280427P	Pulley	1GR3V3.15JA; Requires JA bushing; 20 pound 2 speed models; C-voltage
	F280170	Sheave Pulley	1GR3V2.65; 20 pound 2 speed models; B, O and Y-voltage
	H87520334	Sheave	1GR3V3.35JA; Requires JA bushing; 30 pound 2 speed models; C-voltage
	F280284	Pulley	1GR3V2.9; 30 pound 2 speed models; F and O-voltage
	F280281	Motor Pulley	1GR3V3.0; 30 pound 2 speed models; Y-voltage
	F280172	Sheave Pulley	1GRV3V22.00; 30 pound 2 speed models; C, F, O and Y-voltage
	F280105P	Pulley	2GR3V3.35SH; Requires SH bushing; 40 pound 2 speed models; C-voltage
	F0280385-00	Sheave	2GR3V3.00; 40 and 60 pound 2 speed models; F, O and Y-voltage
	F280422P	Pulley	2GR3V3.365SH; Requires SH bushing; 60 pound 2 speed models; C-voltage
	F280287P	Sheave Kit	F and V-speed models; X-voltage
	F280173	Pulley	60 pound 2 speed models; F and O-voltage

## Pulley and Belt - Design 1 Models (Drawing 3 of 3)

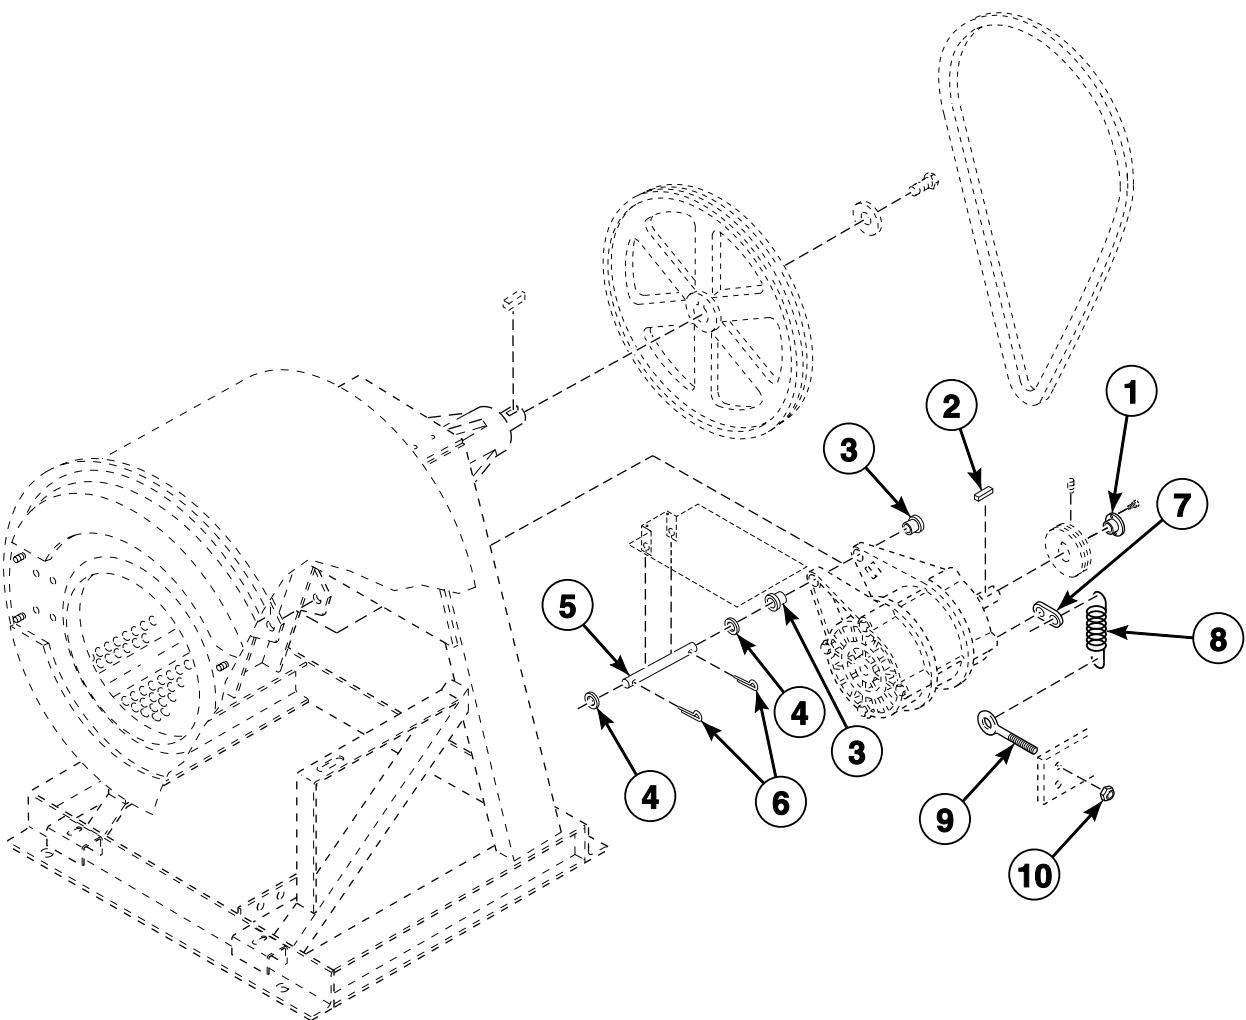


CHM3050PB\_F8330701

## Pulley and Belt - Design 1 Models (Drawing 3 of 3)

REF	PART NO.	DESCRIPTION	COMMENTS
1	H87529111P	Bushing	JA 5/8; 20 and 30 pound models; C-voltage
	F280298P	Pulley Bushing	JA 7/8; F and V-speed models; Q, R and X-voltage
	M412995P	Bushing	SH 7/8; 40 and 60 pound models; C-voltage
2	F430801	Key	30 pound models
	F430802	Key	All other models
3	F200186100	Motor Support Bushing	
4	901690	Washer	
5	F602844	Motor Support Rod	20 pound models; 30 pound models except X-voltage
	F603059	Motor Support Rod	30 pound models X-voltage; 40 pound models
	F603897	Motor Support Rod	60 pound models
6	F430401	Cotter Pin	
7	F633374	Spring Clip	
8	F310148	Tension Spring	40 and 60 pound models; X-voltage
	F310124	Extension Spring	40 and 60 pound models except X-voltage; All other models
9	F430537	Screw	40 and 60 pound models; X-voltage
10	F430218	Nut	

## Pulley and Belt - Design 2 and 3 Models (Drawing 1 of 2)

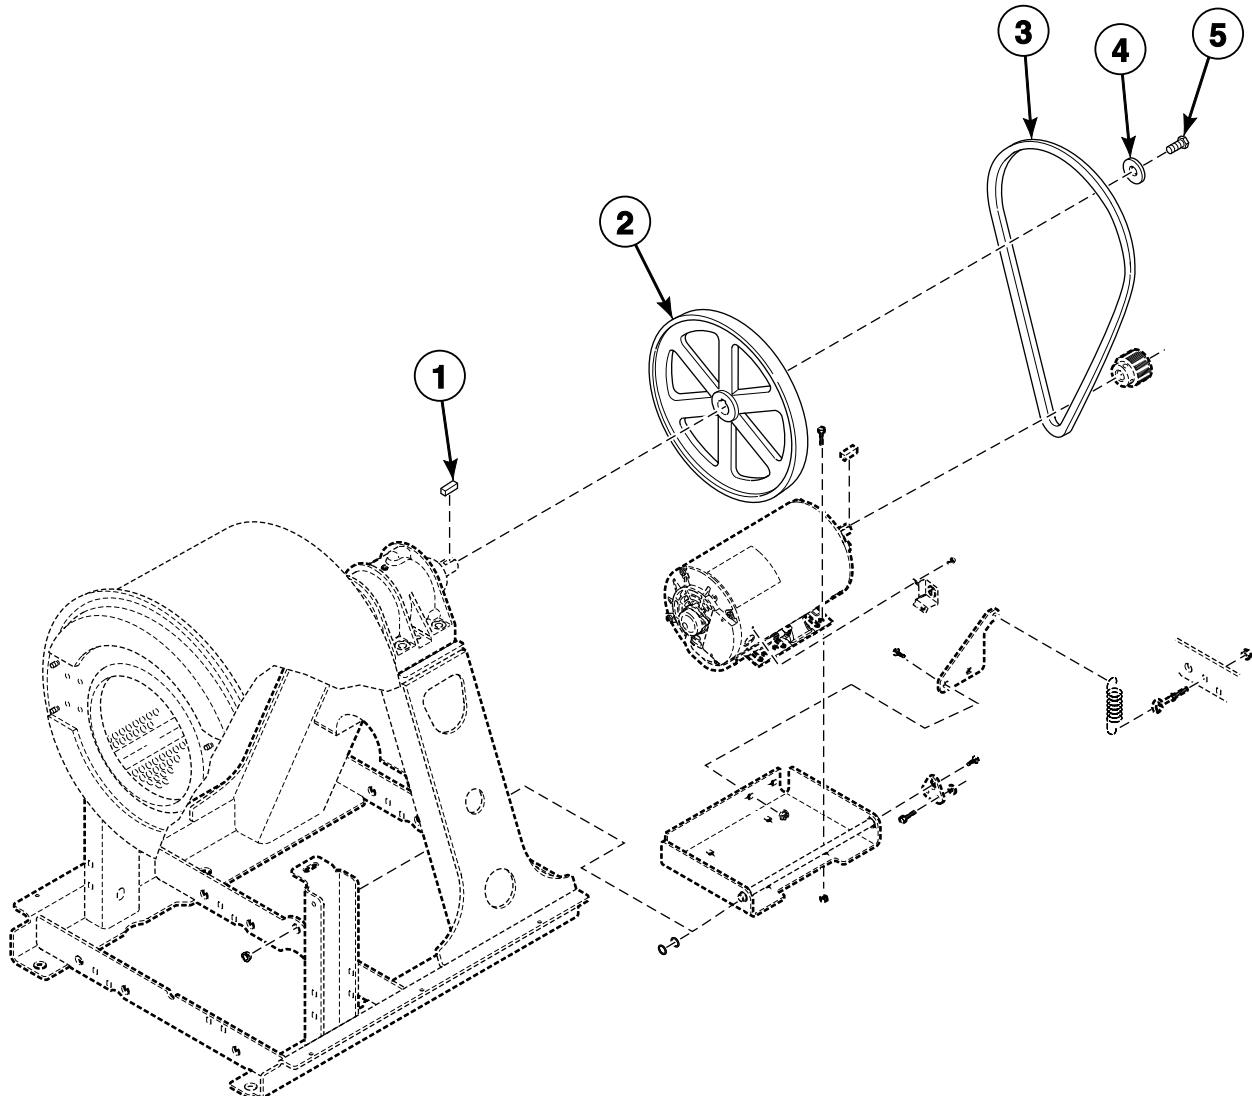


CHM3290P\_F8330701

## Pulley and Belt - Design 2 and 3 Models (Drawing 1 of 2)

REF	PART NO.	DESCRIPTION	COMMENTS
1	F430801	Key	
2	F150270	Basket Pulley	20 pound models
	F150269	Basket Pulley	30 and 40 pound models
	F200299700	Basket Pulley	60 pound models
3	F8382801	Belt	20 pound models; B, Q and X-voltage
	F200201700P	Belt	20 pound models; N and P-voltage
	F8382803	Belt	30 pound models
	F8382804	Belt	40 pound models
	F8382805	Belt	60 pound models
4	F431115	Washer	
5	F430100	Screw	

## Pulley and Belt - Design 2 and 3 Models (Drawing 2 of 2)

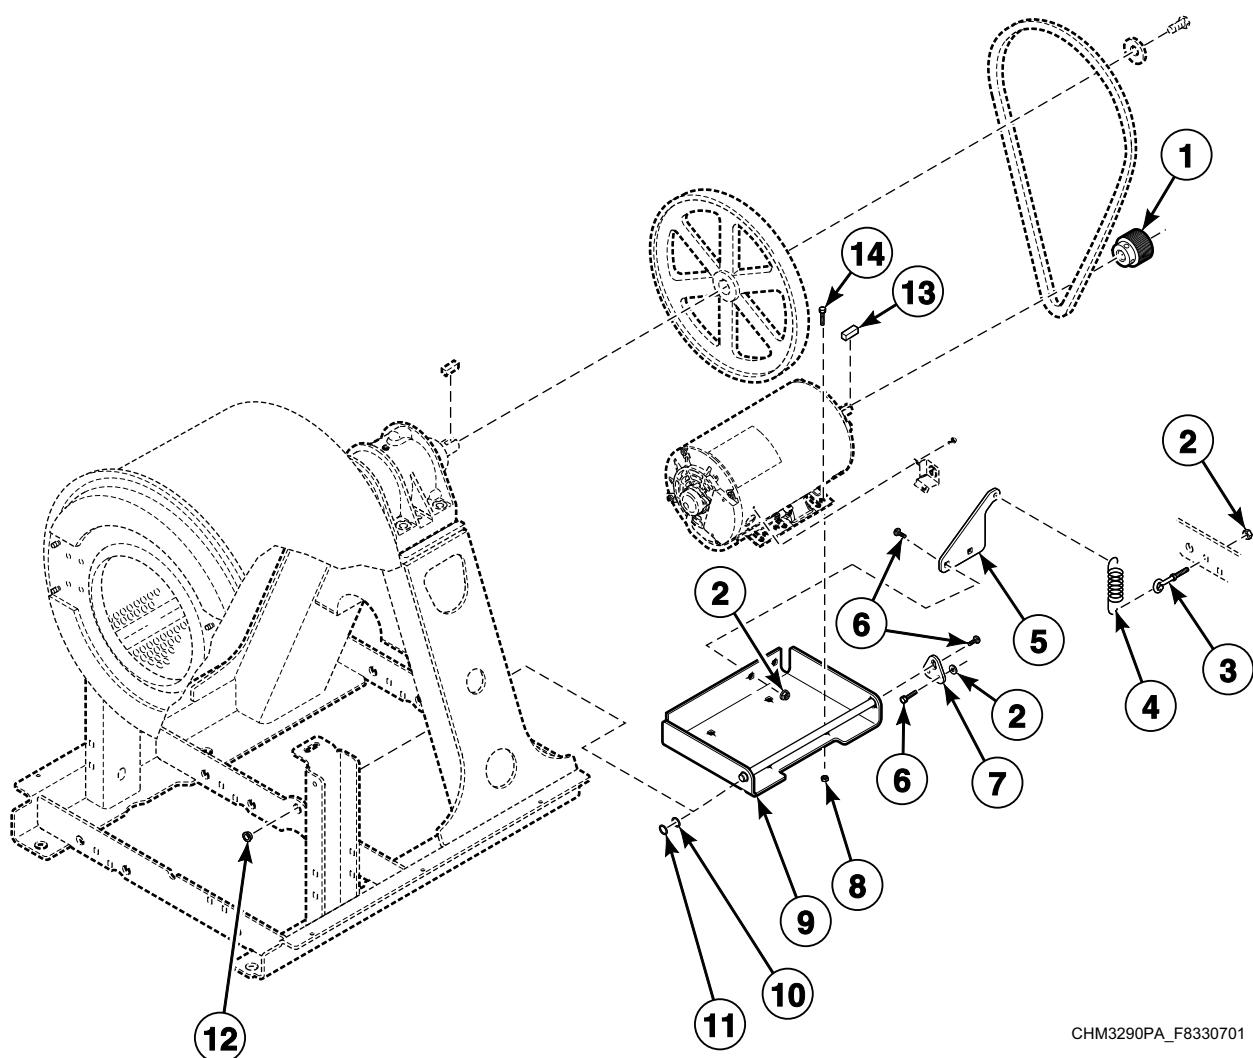


CHM3290PA\_F8330701

## Pulley and Belt - Design 2 and 3 Models (Drawing 2 of 2)

REF	PART NO.	DESCRIPTION	COMMENTS
1	F8362501	Motor Pulley	20 pound models N and P-voltage; 30, 40 and 60 pound models
2	44087201	Nut	
3	F8351901	Eye Bolt	
4	F310124	Extension Spring	
5	F8363901	Spring Plate	
6	F8402801	Bolt	
7	F8441101	Motor Rod Plate	
8	F8387601	Nut	
9	F8441601	Motor Bracket Weldment	20 and 30 pound models
	F8441602	Motor Bracket Weldment	40 and 60 pound models
10	F8451601	Spacer	
11	F8441901	O-Ring	
12	F8333301	Flanged Bushing	
13	F430801	Key	30 pound models
14	800461	Screw	

## Motor - Design 1 Models

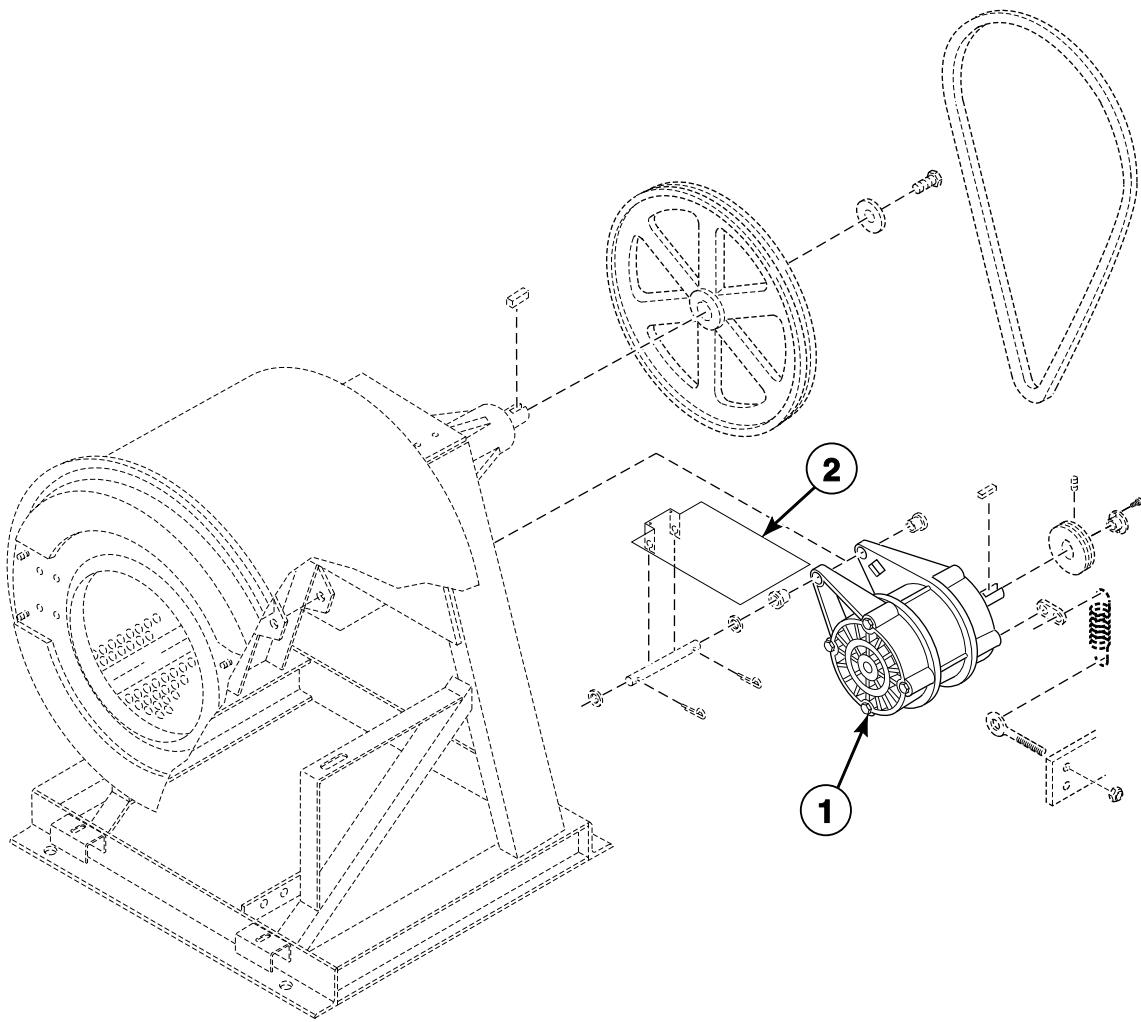


CHM3050PC\_F8330701

## Motor - Design 1 Models

REF	PART NO.	DESCRIPTION	COMMENTS
1	F8329601P	Motor	20 pound 2 speed models; Replaces F220110 Motor; B-voltage; Includes motor support bushing
	F8329401P	Motor	20 pound 2 speed models; Replaces F022032500P and F220325-H Motors; C and F-voltage; Includes motor support bushing
	F8329301P	Motor	20 pound 2 speed models; Replaces F022039600 and F220396-H Motors; J, K and O-voltage; Includes motor support bushing
	F8328901P	Motor Conversion Kit	20 pound F and V-speed models; Replaces F220393 Motor; X-voltage; Includes motor support bushing; **
	F022012800P	Motor	20 pound 2 speed models; Use with F220128-H Motor; Y-voltage; Includes F200186100 Motor Support Bushing
	F8411501	Motor Conversion Kit	20 pound 2 speed models; Models through 6/2009; Y-voltage; Replaces F022012800P Motor
	F8329501P	Motor	20 pound 2 speed models; Models starting 5/2009; Models converted with F8411501 Motor Conversion Kit; Y-voltage
	F8329801P	Motor	30 pound 2 speed models; Replaces F022038800 and F220388-H Motors; C and F-voltage; Includes motor support bushing
	F8329701P	Motor	30 pound 2 speed models; Replaces F022038700 and F220387-H Motors; J, K and O-voltage; Includes motor support bushing
	F8329001P	Motor Conversion Kit	30 pound F and V-speed models; Replaces F220395 Motor; X-voltage; Includes motor support bushing; **
	F8329001	Motor	30 pound F and V-speed models; Models that have been converted with F8329001P Motor Conversion Kit or models starting 3/3/10; X-voltage; Includes motor support bushing
	F8329901P	Motor	30 pound 2 speed models; Replaces F022012400 and F220124-H Motors; Y-voltage; Includes motor support bushing
	F8330101P	Motor	40 pound 2 speed models; Replaces F022032600 and F220326-H Motors; C and F-voltage; Includes motor support bushing
	F8330001P	Motor	40 pound 2 speed models; Replaces F0220321-00 Motor on models through 7/25/10; All other models starting 7/26/10; O-voltage; Includes motor support bushing
	F8330201P	Motor	40 pound 2 speed models; Replaces F0220120-01P Motor on models through 12/31/10; All other models starting 1/1/11; Y-voltage; Includes motor support bushing
	F8329101P	Motor Conversion Kit	40 pound F and V-speed models; Replaces F220394 Motor; X-voltage; Includes motor support bushing; **
	F8329101	Motor	40 pound F and V-speed models; Models that have been converted with F8329101P Motor Conversion Kit or models starting 6/21/10; X-voltage; Includes motor support bushing
	F8330301P	Motor	60 pound 2 speed models; Replaces F022032200 Motor; O-voltage; Includes motor support bushing
	F8329201P	Motor Conversion Kit	60 pound F and V-speed models; Replaces F220234 Motor; X-voltage; Includes motor support bushing; **
	F8329201	Motor	60 pound F and V-speed models; Models that have been converted with F8329201P Motor Conversion Kit or models starting 9/16/10; X-voltage; Includes motor support bushing
2	F200216900	Motor Drip Shield	20 and 30 pound 2 speed models; 40 pound 2 speed models except Y-voltage; 60 pound F and V-speed models
	F200280700	Motor Drip Shield	40 pound models Y-voltage; 60 pound 2 speed models

**\*\* NOTE: AC drive parameters must be compatible with the motor and motor pulley. Please request the AC drive parameter illustration for parameter verification when ordering a motor.**

## Motor - Design 2 and 3 Models

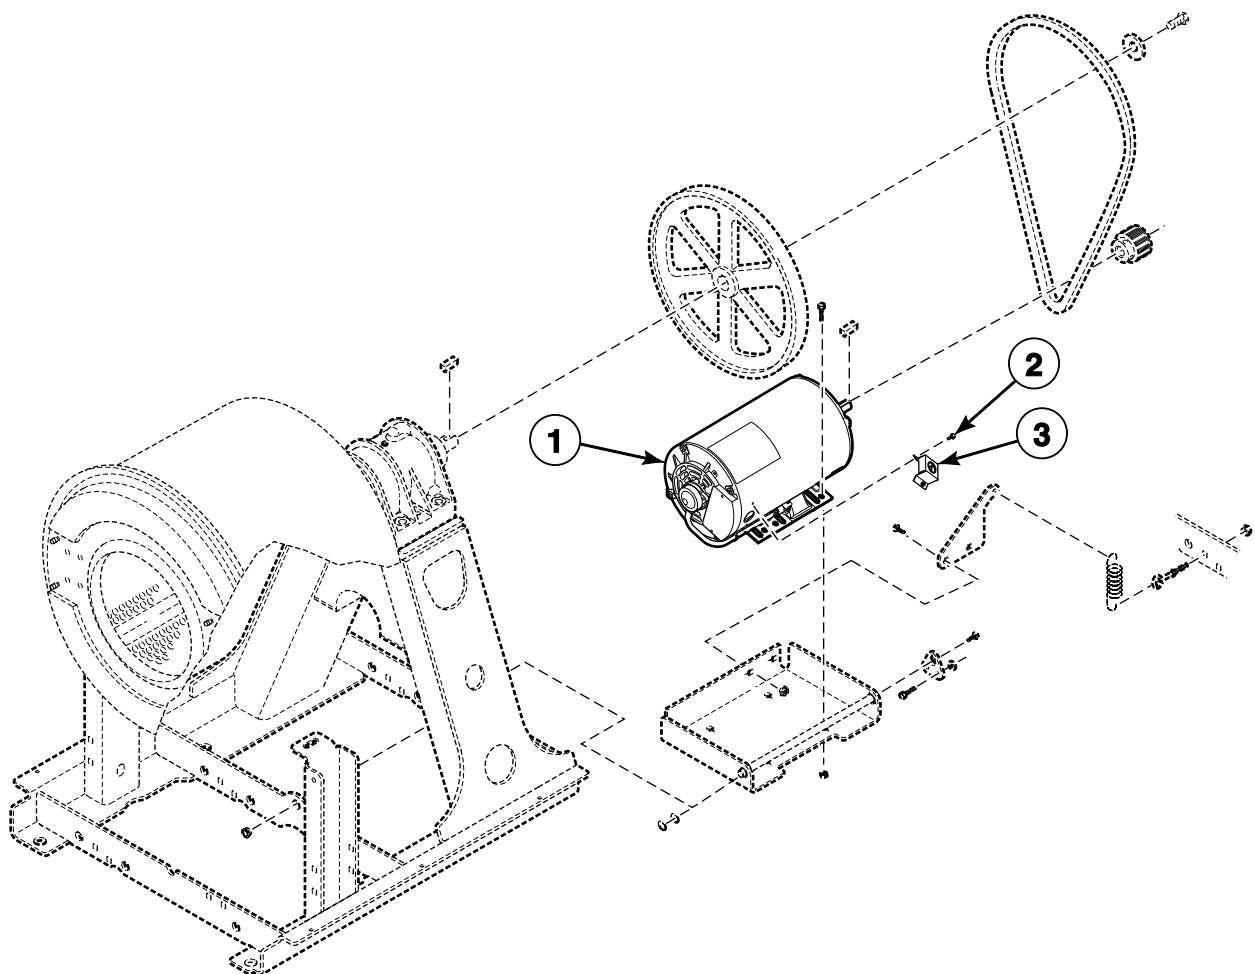


CHM3290PB\_F8330701

## **Motor - Design 2 and 3 Models**

REF	PART NO.	DESCRIPTION	COMMENTS
	F8396601	Motor Harness	20, 30 and 40 pound models N and P-voltage; 60 pound models
	F8384801	Motor Harness	20 pound models; B, Q and X-voltage
	F8384901	Motor Harness	30 and 40 pound models; X and Q-voltage
1	F200216900	Motor Drip Shield	20 pound models; B, Q and X-voltage
	801194P	Induction Motor	20 pound models; B, Q and X-voltage; Includes pulley
	F8335001P	Motor	20 pound models N and P-voltage; 30 and 40 pound models
	F8335101P	Motor	60 pound models
2	23222	Screw	
3	70321701	Motor Conduit Mounting Bracket	

## Electric Heat Option

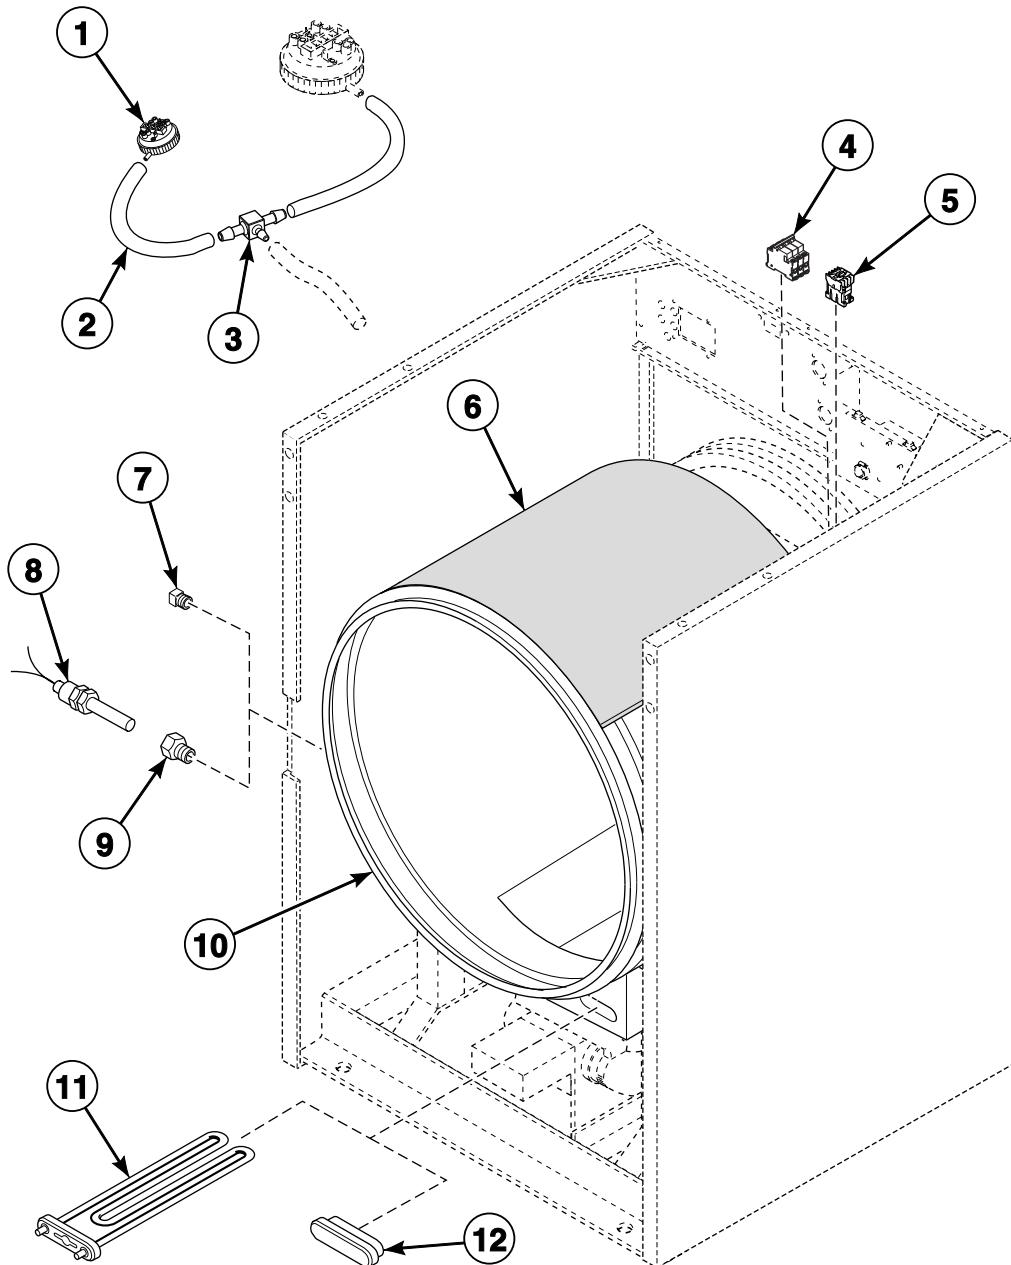


CHM3319P\_F8330701

## Electric Heat Option

REF	PART NO.	DESCRIPTION	COMMENTS
	F8056001	Jumper Wire	P-voltage models require 5; N-voltage models require 3
1	F8223001P	Water Pressure Switch	Heat safety; Design 1 models
	F8404401	Water Pressure Switch	Design 2 models
2	F8153901	Tubing	
3	F8246601	Tee	
4	70256901P	Circuit Breaker	
5	F330188P	Contactor	
6	F410300	Pipe Insulation	
7	F421507	Plug	Design 1 models
	F200202600	Plug	Design 2 models
8	F370609	Thermistor Sensor	
9	F421936	Reducer Bushing	Design 1 models
10	F8179602	Shell Weldment	Design 1 models
	F8179202	Shell Weldment	
	F8179302	Shell Weldment	
	F8179402	Shell Weldment	
	F8179502	Shell Weldment	
	F8360602	Shell Weldment	20 pound models; Design 2 and 3
	F8360702	Shell Weldment	30 pound models; Design 2 and 3
	F8360802	Shell Weldment	40 pound models; Design 2
	F8360902	Shell Weldment	60 pound models; Design 2
11	F360205P	Element	2.6 kW; 3 used in 20 and 30 pound models; 6 used in 40 and 60 pound models
12	F360202	Heating Element Plug	

## Steam Heat Option

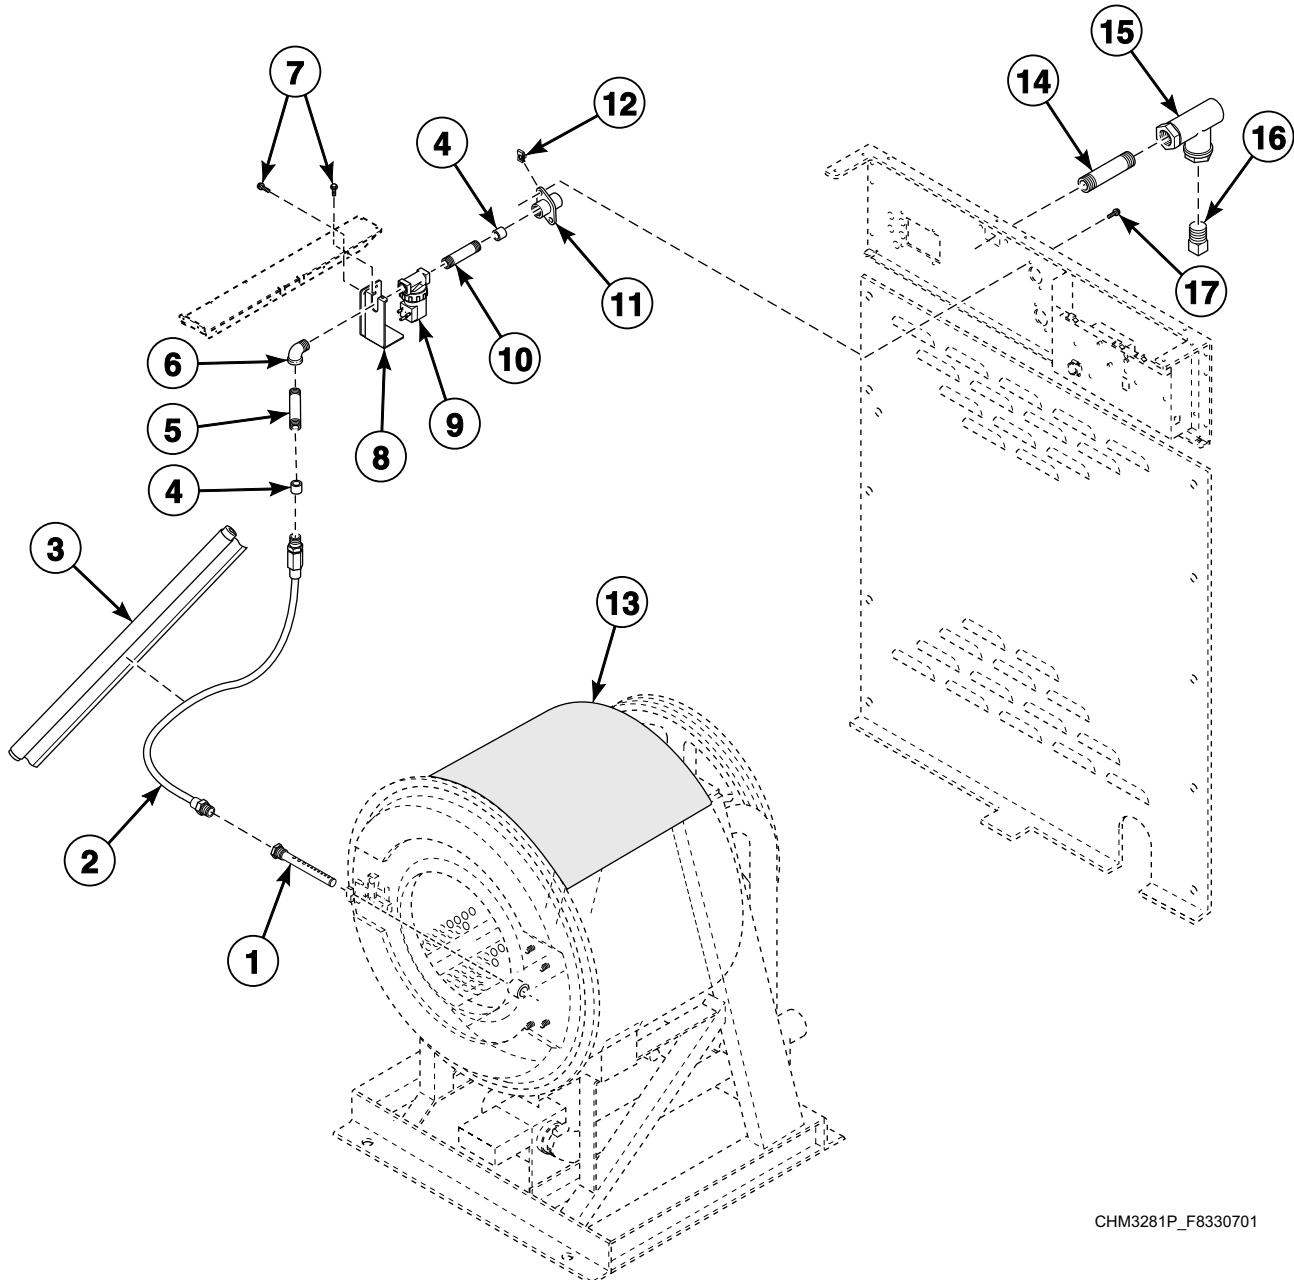

CHM3281P\_F8330701

## Steam Heat Option

REF	PART NO.	DESCRIPTION	COMMENTS
	F953P3	Steam Heat Kit	Includes items 1, 2, 5-12, 14, 16 and 17 and harness
	F380984P	Steam Valve Repair Kit	Use with item 9
	F8382301	DIN Valve Adapter Kit	Design 2 and 3 models; Use with F8322801P Valve
	F8379501	Valve Kit	Use with F8322801P Valve
	F8514601	Coil	Use with F8322801P Valve
<b>1</b>	F603131	Steam Injector Tube Assembly	Design 1 models
	F8368201	Steam Injector Tube Assembly	Design 2 and 3 models
<b>2</b>	F200197	Steam Hose	
<b>3</b>	F8233700	Pipe Insulation	Design 2 and 3 models
<b>4</b>	F8116301	Coupling	Design 2 and 3 models; 60 pound models 2 required
<b>5</b>	F8110601	Nipple	60 pound models
<b>6</b>	H86070034	Street Elbow	
<b>7</b>	F8206901	Screw	
<b>8</b>	F8490301	Steam Bracket	
<b>9</b>	F8521501	DIN Valve Kit	220 Volt; Design 1 models
	F8322801P	Valve	Design 2 and 3; Replaces F380787P Steam Valve on Design 1 models; Includes F8382301 DIN Valve Adapter Kit and F8514601 Coil
<b>10</b>	70263801	Pipe Nipple	
<b>11</b>	F8154501	Coupling	Design 1 models
	F8362701	Coupling	Design 2 and 3 models
<b>12</b>	70030401	Nut	
<b>13</b>	F410300	Pipe Insulation	Design 1 models
<b>14</b>	431486	Pipe Nipple	
<b>15</b>	F270307	Steam Filter	
<b>16</b>	F420409	Plug	
<b>17</b>	20253	Screw	

## Notes

# Parts Index

## A

Access Cover	
F8047801	79
Air Trap Hose	
F020014200	13, 15, 21, 23
Auxiliary Control Assembly	
F8189401P	13, 15, 17

## B

Basket Assembly	
F8347801P	57
F8347901P	57
F8391301	63
F8391501	63
F8391701	57, 63
F8391901	57, 63
Basket Pulley	
F150269	89
F150270	89
F200299700	83, 89
Basket Rental Tool Kit	
390P4-1	57, 63
Basket Tool Kit	
389P4	57, 63
Bearing	
F100108	59, 65
F100123P	59, 65
F100134	59, 65
F100135	59, 65
F100136P	59, 65
F100137P	59, 65
Bearing Housing	
F8246802	65
F8247902	65
F8249902	65
F8250902	65
Bearing Housing Assembly	
F8271601	65
F8271701	65
F8271801	65
F8271901	65
Bearing Puller Tool	
F460129P	57, 63
Bearing Sleeve	
F8221701	51, 53
Belt	
F200201700P	89
F280304	83
F280321	83
F280337	83
F280341	83
F280342	83
F280343	83
F280366P	83
F280368P	83
F280369P	83
F280370	83
F280373	83
F8382801	89

F8382803	89
F8382804	89
F8382805	89

Blind Rivet	
F8245101	51, 53

Bolt	
F200182700	73, 75
F430522	71
F8230501	47
F8270701	55
F8402801	71, 91
F8508101	51, 53

Bracket	
F8365401	71
F8365402	71
F8434601	71
F8434701	71

Bushing	
H87529111P	87
M412995P	87

## C

Cap	
F8197701	79

Capacitor	
F370218P	13, 21
F370220	13, 21
F370221	13, 21
F8411701	13, 21
F8411801	13, 21
F8411901	13, 21

Capacitor Tray Assembly	
F8199601	13, 21
F8199901	13, 21

Card Plate Assembly	
F8201501	35

Card Reader and Bracket Assembly	
510068P	35

Card Reader Harness	
F141887	35

Card Reader Overlay	
70334301	35

Circuit Breaker	
70256901P	19, 27, 97

Clamp Ring Assembly	
F8388001	63
F8388002	57, 63
F8388004	63

Clamp Ring Bracket	
F8302401	63

Coil	
F8514601	99

Coin Box	
F160672	37

Coin Chute	
F8170801	21, 23, 25

Coin Drawer Assembly	
F8182001	37

Coin Drop	
70256402P	31

N/A items do not appear in index.

70441601P.....	29	F8038804 .....	41
Coin Drop Assembly		Control Panel Overlay	
210195 .....	31	F8224301 .....	45
210196 .....	31	F8224401 .....	45
38462P .....	29	F8224501 .....	45
38463 .....	29	F8224601 .....	45
38464P .....	29	F8224801 .....	45
38472 .....	31	F8224901 .....	45
38521 .....	31	F8225001 .....	45
39157 .....	31	F8225101 .....	45
70281102 .....	31	F8294001 .....	43
Coin Identification Paper		F8294002 .....	43
38725 .....	29, 31, 33	F8294003 .....	43
Coin Meter		F8294101 .....	43
F0160737-00.....	31	F8294102 .....	43
Coin Meter Assembly		F8294103 .....	43
F200010000P .....	29	F8294201 .....	43
F200010001 .....	31	F8294202 .....	43
F200010002 .....	31	F8294203 .....	43
F200010003 .....	31	F8294301 .....	43
F200010004 .....	31	F8294302 .....	43
F200010005 .....	31	F8294303 .....	43
F200010006 .....	29	F8294501 .....	45
F200010007 .....	29	F8294601 .....	45
F200010008 .....	31	F8294701 .....	45
F200010009 .....	29	F8294801 .....	45
F200010010 .....	31	F8443701 .....	45
F200010011 .....	29	F8443901 .....	43
F200010012 .....	29	F8443902 .....	43
F200021600P .....	33	F8443903 .....	43
F200021601 .....	33	F8444001 .....	43
F200021602 .....	33	F8444002 .....	43
F200021603 .....	33	F8444003 .....	43
F200021604 .....	33	F8444101 .....	43
F200021605 .....	33	F8444102 .....	43
F8238601 .....	33	F8444103 .....	43
Coin Vault Assembly		F8444201 .....	43
F8182501 .....	21, 23, 25	F8444202 .....	43
F8182601 .....	21, 23, 25	F8444203 .....	43
Concrete Epoxy Kit		F8551401 .....	45
F8498101 .....	67	F8551701 .....	45
Concrete Kit		Control Tray Assembly	
1111P .....	67	F8205901 .....	13
Contact Block Switch		F8205902 .....	15, 21, 23
F200233401 .....	13, 15, 19	F8205903 .....	15, 21, 23
Contact Switch		F8359602 .....	25
F8069501 .....	13, 15, 19	F8359604 .....	25
Contactor		F8359701 .....	17
F330177P .....	13, 19, 21, 27	F8359703 .....	17
F330188P .....	97	F8359707 .....	25
Contactor Tray Assembly		Control Tray Harness	
F8343401 .....	13, 21	F8261501P .....	15, 17, 23
Control Assembly Kit		Cotter Pin	
F980P3 .....	13, 15, 17, 21, 23, 25	F430401 .....	87
Control Kit		Coupling	
F996P3 .....	21, 23	F8116301 .....	99
F997P3 .....	13, 15	F8154501 .....	99
F998P3 .....	13, 15	F8362701 .....	99
Control Panel Assembly		<hr/>	
F8038502 .....	39	<b>D</b>	
F8038504 .....	41	Diaphragm and Guide Kit	
F8038602 .....	39	G582P3 .....	81
F8038604 .....	41	DIN Rail	
F8038702 .....	39	F8200101 .....	13, 21
F8038704 .....	41	F8385301 .....	19, 27
F8038802 .....	39		

N/A items do not appear in index.

DIN Valve Adapter Kit	
F8382301 .....	99
DIN Valve Kit	
F8521501 .....	99
Dispenser Assembly	
F8047401 .....	79
F8047402 .....	79
Dispenser Gasket	
F8308301 .....	79
Dispenser Lid	
F8048101 .....	47
F8048102 .....	47
Dispenser Overflow Hose	
F8043401 .....	79
F8043403 .....	79
F8043404 .....	79
Door	
F0602431-02 .....	51
F0602837-02 .....	51
F602842-2 .....	53
F8507501 .....	51
F8507601 .....	51
F8507701 .....	53
Door Assembly	
F8187202 .....	51
F8187203 .....	51
F8187210 .....	51
F8187211 .....	51
F8187302 .....	51
F8187303 .....	51
F8187310 .....	51
F8187311 .....	51
F8187402 .....	53
F8187403 .....	53
F8187410 .....	53
F8187411 .....	53
Door Bezel	
F0170426-00 .....	39, 41
F0170426-10 .....	39, 41
F0170426-30 .....	39, 41
F170416-1 .....	39, 41
F170416-2 .....	39, 41
F170416-3 .....	39, 41
F170417-1 .....	39, 41
F170417-3 .....	39, 41
Door Gasket	
F200000202 .....	51
F8111502 .....	53
F8111602 .....	51
Door Glass	
F8341701 .....	51
F8485302 .....	51
F8485401P .....	53
F8485402 .....	53
Door Glass Kit	
F290205P .....	51
F8485301 .....	51
Door Handle	
F8199401P .....	51, 53
F8199501 .....	51, 53
F8199502 .....	51
Door Handle Spacer	
F8567501 .....	51, 53
Door Hinge	
F190216P .....	51, 53
Door Hinge Shim	
F200131000 .....	51, 53
Door Latch Arm Assembly	
F8221401 .....	51, 53
Door Lock Assembly	
F8197101 .....	55
F8340501 .....	55
Door Lock Catch	
F8223601 .....	55
F8344501 .....	55
Door Lock Cover	
F8245001 .....	55
Door Lock Microswitch	
F200203200 .....	55
Door Lock Plate Assembly	
F8223201 .....	55
F8223202 .....	55
Door Lock Plate Shim	
F8059701 .....	55
F8344401 .....	55
Door Lock Solenoid Replacement Kit	
F977P3 .....	55
Door Lock Splash Shield	
F320200 .....	55
Door Lock Switch Lever	
F8223401 .....	55
Door Mount	
F150271 .....	51, 53
Dowel Pin	
F8388101 .....	65
F8388201 .....	65
Drain Connect Tee	
F150318 .....	69, 71
Drain Hose	
F200165100 .....	71
F8231901 .....	69
F8231902 .....	69
F8232901 .....	69, 71
F8233001 .....	69
F8233101 .....	69
F8233102 .....	69
F8261302 .....	71
F8261303 .....	71
F8464701 .....	71
Drain Tee	
F150398 .....	69, 71
Drain Valve	
F8406307 .....	75
Drain Valve Cover	
F200133600 .....	73, 75
Drain Valve Kit	
F200166400 .....	75
Drain Valve Motor	
F380933P .....	73, 75
Drain Valve Motor and Gear Box Assembly	
G159764P .....	73, 75
Drive Assembly	
F8204701P .....	19, 27
F8303601P .....	19, 27
F8327301P .....	19, 27
Drive Mounting Bracket	
F8322401 .....	19, 27
Drive Tray Assembly	
F8359801 .....	19, 27
F8359802 .....	19, 27

N/A items do not appear in index.

**E**

Earth Terminal Sticker	
M412096	11
Electric Shock Danger Label	
F8115501	11
Electronic Coin Drop Assembly	
70294103P	33
70294104	33
70294105P	33
70294106	33
70294107	33
70294109	33
70294111	33
70294119	33
Electronic Coin Drop Kit	
CK099	33
CK100	33
CK101	33
CK103	33
CK106	33
CK109	33
CK110	33
CK113	33
CK115	33
CK119	33
CK500	33
Element	
F360205P	97
Emergency Stop Harness	
F8060501	13, 15, 17
Emergency Stop Plate	
F8201301	13, 15, 19
Emergency Stop Pushbutton	
F200233500	13, 15, 19
EMI Filter	
F8053901P	15, 19, 23, 27
F8053902	15, 19, 23, 27
End Stop	
F8449801	19
70121001	27
Excluder Seal	
F8336801	57, 63
F8336901	57, 63
F8337001	57, 63
F8337101	57, 63
Expansion Clip	
70030501	13, 15, 17, 19, 21, 23, 25, 27, 39, 41, 49
Extension Spring	
F310124	87, 91
External Door Lock Harness	
F8340001	55
External Supply Connection Decal	
F8150201	11
External Supply Harness	
F8191201P	13, 15, 17, 21, 23, 25, 27
External Supply Kit	
F937P3	13, 15, 17, 21, 23, 25, 27
Eye Bolt	
F8351901	91

N/A items do not appear in index.

**F**

Fill Hose Kit	
F8544601	77
Flanged Bushing	
F8333301	91
Frame Template	
F8433301	67
F8433401	67
F8433501	67
F8433601	67
Frame Weldment	
F8195901	61
F8196001	61
F8196101	61
F8199101	61
F8247001	67
F8248001	67
F8249001	67
F8250001	67
Front Cabinet Brace	
F8173801	39, 41
F8173901	39, 41
F8174001	39, 41
Front End Control	
F8549008	17
F8549018	17
Front End Control Kit	
F115P3	17
F116P3	17
F118P3	25
F120P3	17
F121P3	17
Front Panel	
F8171301	39
F8171302P	41
F8173001	39
F8173002P	41
F8173003	39
F8173005	41
F8173007	41
F8173101P	39
F8173102P	41
F8173104	41
F8173106	41
F8173201P	39
F8173202P	41
F8173204	41
F8173206	41
F8492301	39
F8492302	41
F8492304	41
F8492306	41
Fuse	
802493	13, 15, 17, 21, 23

**G**

Gravity Drain Valve	
803292	73
Grommet	
F8433001	17, 25
Ground Decal	
F230739	11

Ground Lug Connector	
M411283 .....	79

Gusset Plate	
F8186701 .....	41
F8186702 .....	39, 41

---

## H

Harness	
F631973-2 .....	35

Heating Element Plug	
F360202 .....	97

Hole Plug	
F8223801 .....	47

Hose	
F606816-1 .....	79
F8232001 .....	79
F8232002 .....	79
F8232004 .....	79
F8405301 .....	17, 25

Hose Barb Connector	
F8431001 .....	17, 25

Hose Clamp	
F200201 .....	69, 71
F200213 .....	69, 71, 79, 81
F200215 .....	69, 71
F200222 .....	13, 15, 21, 23, 79
20211 .....	79
36801 .....	79

Hot Surface Warning Plate	
F8211901 .....	11

---

## I

Induction Motor	
801194P .....	95

Interlock Contactor	
F330186P .....	13, 21

---

## J

Jumper Configuration Assembly	
M413507 .....	13, 15, 17, 21, 23, 25, 27

Jumper Harness Assembly	
M413506 .....	13, 15, 17, 21, 23, 25, 27

Jumper Wire	
F8056001 .....	97

---

## K

Key	
F160420 .....	37
F430801 .....	83, 87, 89, 91
F430802 .....	87
70155603 .....	47

## L

Left Side Panel	
-----------------	--

F8042902P .....	49
F8043102P .....	49
F8043202P .....	49
F8043302P .....	49
F8399202 .....	49
F8399302 .....	49
F8399402 .....	49
F8399502P .....	49
F8399504 .....	49
F8492402 .....	49
F8492404 .....	49

Lid Clamp	
F8091701 .....	47

Lower Cabinet Brace	
F8174101 .....	39, 41

Lower Drive Mounting Bracket	
F8310101 .....	19, 27

---

## M

Machine Size Configuration Harness	
------------------------------------	--

F8028101P .....	13, 15, 17, 21, 23, 25, 27
F8028103P .....	13, 15, 17, 21, 23, 25, 27
F8028104P .....	13, 15, 17, 21, 23, 25, 27
F8028105P .....	13, 15, 17, 21, 23, 25, 27

Magnet	
F8390801 .....	51, 53

Manifold	
F8333201 .....	79

Motor	
F022012800P .....	93
F8329001 .....	93
F8329101 .....	93
F8329201 .....	93
F8329301P .....	93
F8329401P .....	93
F8329601P .....	93
F8329701P .....	93
F8329801P .....	93
F8329901P .....	93
F8330001P .....	93
F8330101P .....	93
F8330201P .....	93
F8330301P .....	93
F8335001P .....	95
F8335101P .....	95

Motor Bracket Weldment	
F8441601 .....	91
F8441602 .....	91

Motor Conduit Mounting Bracket	
70321701 .....	95

Motor Conversion Kit	
F8328901P .....	93
F8329001P .....	93
F8329101P .....	93
F8329201P .....	93

Motor Drip Shield	
F200216900 .....	93, 95
F200280700 .....	93

Motor Harness	
F8384801 .....	95

N/A items do not appear in index.

F8384901 .....	95
F8396601 .....	95
Motor Pulley	
F280281 .....	85
F8362501 .....	91
Motor Rod Plate	
F8441101 .....	91
Motor Support Bushing	
F200186100 .....	87
Motor Support Rod	
F602844 .....	87
F603059 .....	87
F603897 .....	87
Motor Switch	
F340002 .....	13, 21
Mount on Concrete Warning Label	
F8246401 .....	11
Mounting Plate	
70208801 .....	35

---

## N

Nipple	
F8110601 .....	99
Nut	
F0431807-00 .....	79
F430215 .....	51, 53, 57, 69
F430218 .....	61, 63, 87
F430225 .....	55
F430232 .....	13, 15, 17, 19, 21, 23, 51, 53, 55, 79
F430239 .....	59
F430240 .....	59
F430264 .....	55
F431017 .....	13, 15, 19, 25
F431022 .....	51, 53
F8387601 .....	65, 91
F8387701 .....	65
24205 .....	13, 15, 19
44087201 .....	71, 91
44087301 .....	67
685846 .....	29, 31, 33
70030401 .....	71, 99

---

## O

Opto Coupler	
200674P .....	29, 31
O-Ring	
F8441901 .....	91
Outer Shell Band	
F603108 .....	63
F603207 .....	63
F631838 .....	63
Output/Logic Harness	
F8028701 .....	13, 15, 17, 21, 23, 25, 27
Overflow Hose	
F0200238-00 .....	69
F150308 .....	69
F150417 .....	69
F8337701 .....	69
F8367201 .....	71
F8367901 .....	71
F8368001 .....	71

N/A items do not appear in index.

Overlay	
70295301 .....	33

Overload Contactor	
F8176101P .....	13, 21

---

## P

Panel Lock	
44089303P .....	47
Pin	
F8302701 .....	63
Pipe Insulation	
F410300 .....	97, 99
F8233700 .....	99
Pipe Nipple	
431486 .....	99
70263801 .....	99
Plug	
F200202600 .....	97
F420409 .....	99
F421507 .....	97
F8223901 .....	47
M400985 .....	47
Pop Rivet	
70058501 .....	13, 17, 19, 21, 23, 25, 29, 31
PowerFlex 40 Drive	
F8169401 .....	15, 23
F8169402 .....	15, 23
F8169403 .....	15, 23
F8169404 .....	15, 23
F8169405 .....	15, 23
F8169406 .....	15, 23
F8169407 .....	15, 23
F8169408 .....	15, 23
F8169434 .....	15, 23
F8169435 .....	15, 23
F8169436 .....	15, 23
F8169437 .....	15, 23
F8169438 .....	15, 23
F8169439 .....	15, 23
F8169440 .....	15, 23
F8169441 .....	15, 23
Pressfit Upgrade Kit	
F935P3 .....	57
F936P3 .....	57
F938P3 .....	57
F939P3 .....	57
Pressure Bulb	
30907 .....	17, 25
P-Trap Hose	
F8042201 .....	81
F8042202 .....	81
F8042301 .....	81
Pulley	
F280105P .....	85
F280173 .....	83, 85
F280197 .....	83
F280284 .....	85
F280422P .....	85
F280427P .....	85
Pulley Bushing	
F280298P .....	87
Pulse Expander Assembly	
F8034701P .....	33

Pushbutton Switch	
70413301 .....	47, 49

---

## R

Rear Drain Hose	
F8231904 .....	71
F8231905 .....	71
F8365601 .....	71
F8365602 .....	71
Rear Panel	
F8176201P .....	49
F8176301 .....	49
F8177501P .....	49
F8177701P .....	49
F8352801 .....	49
F8362401 .....	49
F8365201 .....	49
F8367101 .....	49
F8492501 .....	49
Reducer Bushing	
F421936 .....	97
Reed Switch Assembly	
F8066802 .....	51, 53
Retaining Ring	
F8337801 .....	59, 65
F8337901 .....	59, 65
F8344901 .....	59, 65
F8345001 .....	59, 65
Right Side Panel	
F8042901P .....	49
F8043101P .....	49
F8043201P .....	49
F8043301P .....	49
F8399201 .....	49
F8399301 .....	49
F8399401 .....	49
F8399501 .....	49
F8399503 .....	49
F8492401 .....	49
F8492403 .....	49
Rod	
F602813-2 .....	51
F602813-3 .....	53

---

## S

Screw	
F430100 .....	83, 89
F430107 .....	69
F430174 .....	35, 39, 41, 47
F430518 .....	57
F430536 .....	51, 53
F430537 .....	87
F430903 .....	13, 15, 17
F430909 .....	79
F430916 .....	51, 53
F430942 .....	61
F430947 .....	51, 53
F430949 .....	61
F430956 .....	55
F430977 .....	55
F8117601 .....	39, 41
F8206901 .....	13, 15, 17, 19, 21, 23, 25, 27, 47, 49, 79, 99

F8230301 .....	79
F8230601 .....	47
F8368701 .....	65
F8368801 .....	65
F8442701 .....	61, 67
F8535501 .....	51, 53
F8535601 .....	79
H88213996 .....	67
202175 .....	71
20253 .....	99
23222 .....	95
503688 .....	19, 27
800461 .....	91
800462 .....	63
800548 .....	81
801019 .....	39
Seal Scupper Pad	
F8350301 .....	65
F8350302 .....	65
F8350303 .....	65
Shaft Seal Sleeve	
F8312001P .....	57
F8312004P .....	57
F8312006P .....	57
Shaft Seal Sleeve Kit	
F8343901P .....	57, 63
F8343904P .....	57, 63
F8343906P .....	57, 63
F8343909P .....	57, 63
Sheave	
F0280385-00 .....	85
H87520334 .....	85
Sheave Kit	
F280287P .....	85
Sheave Pulley	
F280170 .....	83, 85
F280172 .....	83, 85
Shell Band Assembly	
F602757 .....	57
Shell Band Kit	
F741700 .....	63
F741701 .....	57, 63
F741702 .....	57
Shell Front Assembly	
F8229401 .....	57, 63
F8229501 .....	57, 63
F8229601 .....	57, 63
F8229701 .....	57, 63
Shell Front Gasket Kit	
F8513501 .....	57, 63
Shell Weldment	
F8179201 .....	61
F8179202 .....	61, 97
F8179203 .....	61
F8179301 .....	61
F8179302 .....	61, 97
F8179303 .....	61
F8179401 .....	61
F8179402 .....	61, 97
F8179403 .....	61
F8179501 .....	61
F8179502 .....	61, 97
F8179503 .....	61
F8179602 .....	97
F8360601 .....	67
F8360602 .....	67, 97
F8360603 .....	67

N/A items do not appear in index.

F8360701	67
F8360702	67, 97
F8360703	67
F8360801	67
F8360802	67, 97
F8360803	67
F8360901	67
F8360902	67, 97
F8360903	67
Shim	
F8484401	55
Siphon Cover	
F8047901	79
Snap Bushing	
44071501	13, 15, 17, 21, 23, 25
Spacer	
F431901	55
F8451601	91
Spring Clip	
F633374	87
Spring Pin	
F431222	51, 53
Spring Plate	
F8363901	91
Steam Bracket	
F8490301	99
Steam Filter	
F270307	77, 99
F270308	77
Steam Heat Kit	
F953P3	99
Steam Hose	
F200197	99
Steam Injector Tube Assembly	
F603131	99
F8368201	99
Steam Valve Repair Kit	
F380984P	99
Street Elbow	
H86070034	99
Stud	
70334702	71
Supply Overflow Hose	
F8043405	79
Support Bracket	
F8195803	15, 23
Switch Clamp	
F0340722-00	13, 21
<b>T</b>	
Tee	
F8246601	13, 15, 17, 21, 23, 25, 97
Tension Spring	
F310148	87
Terminal Block	
430642	79
Terminal Tray Cover	
F8177001	79
Thermistor Sensor	
F370609	97
Top Cabinet Brace	
F8043501	47
F8043701	47
F8043801	47
F8043901	47
Top Cover	
F8017401	47
F8042021	47
F804301	47
F804401P	47
Top Cover Hinge	
F8258601	47
Top Cover Latch	
F8201001	39, 41
Torsion/Door Lock Spring	
F8070301	55
Transformer	
F360157P	13, 15, 21, 23
F8401301	19, 27
201616P	13, 15, 17
803527P	13, 15, 17, 21, 23, 25
Tray Support Bracket	
F8375201	17, 25
Triple Lip Seal	
F8203801	59, 65
F8203802	59, 65
F8203803	59, 65
F8203806	59, 65
Trunnion Kit	
F747001	59
F747002	59
F747003	59
F747005	59
Tubing	
F8153901	13, 15, 17, 21, 23, 25, 97
<b>U</b>	
USB IR Device Assembly	
F8167901	13, 15, 17, 21, 23, 25, 27
Use Copper Conductors Only Caution Label	
F8242201	11
<b>V</b>	
Vacuum Breaker Assembly	
F8048601	81
Vacuum Breaker Cover	
F8439301	81
Vacuum Breaker Hose	
F0200244-01	79
F0200244-02	79
Vacuum Supply Hose	
F8042801	79
F8042803	79
F8042804	79
F8042805	79
Valve	
F8322801	99
Valve Kit	
F8379501	99
Valve Panel	
F8017501	79
F8039601	79
F8039801	79

N/A items do not appear in index.

F8039901 .....	79
F8398701 .....	79
F8398801 .....	79
F8398901 .....	79
F8399001 .....	79
Valve, 3-Way	
F8286401P .....	81
F8286402P .....	81

---

## **W**

Warning Label	
F8207901 .....	11
F8233501 .....	11
44127701 .....	11
Washer	
F430303 .....	61
F430317 .....	57, 69
F430339 .....	65
F431113 .....	51, 53
F431115 .....	83, 89
F431128 .....	59, 61
F431131 .....	59, 61
F431902 .....	55
F8366601 .....	65
F8402701 .....	67
M400081 .....	61, 63, 67
M405535 .....	71
803615 .....	77, 81
901690 .....	87
Water Hose	
F200108P .....	77
F200116 .....	77
Water Pressure Switch	
F8223001P .....	13, 15, 21, 23, 97
F8404401 .....	17, 25, 97

---

## **Y**

Y Connector	
F422816 .....	79

---

N/A items do not appear in index.

## Notes