

Optical Passage Confirmation Sensors

PG Series



Built-in automatic sensitivity-compensating circuit

The sensitivity of the receiver is automatically adjusted by the built-in compensating circuit, even when the amount of light reaching the receiver is reduced due to dust or debris.

Self-diagnostic output simplifies maintenance

In addition to the stable operation indicator, the PG features an alarm output, which is triggered by a sharp decrease in incident light quantity, or when the sensor cable is disconnected, allowing speedy correction.

OFF-delay time selector switch

Can be set to 0.5 ms or 70 ms.

The sensor head window can be opened or closed

The sensor head can be easily mounted to an installed pipe with no open end.


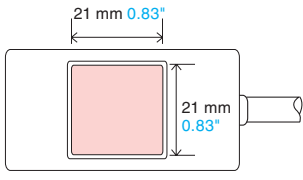



FREE DOWNLOAD

www.keyence.com/GQR

Free downloads for product and technical support are readily available in one convenient location




Lineup				
Type	Appearance	Sensor window	Smallest detectable object	Model
Sensor head			0.5 mm 0.02" dia. min. opaque materials	PG-602
Amplifier				PG-610

Specifications

Model	Sensor head	Amplifier	NPN	PG-602	PG-610
Sensor window					21 x 21 mm 0.83"
Smallest detectable object					0.5 mm 0.02" dia. min. opaque materials
Light source					Infrared LED
Sensitivity adjustment					1-turn trimmer
Indicator					Output: Red LED, Stable operation: Green LED
Output ¹	Control output ²	NPN: 100 mA max. (40 V max.) Residual voltage: 1 V max.			
	Self-diagnostic output	NPN: 100 mA max. (40 V max.) Residual voltage: 1 V max.			
	Response time	0.2 ms			
Off-delay time					0.5/70 ms (selectable)
Power supply					12 to 24 VDC ±10%
Current consumption					40 mA max.
Ambient light					Fluorescent lamp: 10,000 lux max., Sunlight: 1,500 lux max.
Ambient temperature					Sensor head: -10 to +60°C (14 to 140°F), Amplifier: -10 to +50°C (14 to 122°F), No freezing
Relative humidity					35 to 85%, No condensation
Housing					Polycarbonate
Weight					Sensor head (including 2-m 6.6' cable): Approx. 40 g, Amplifier (including 3-m 9.8' cable): Approx. 100 g

1. NPN output can easily be converted to PNP output by connecting the optional **OP-5148** PNP Output Converter.
 2. One-shot output (ON when target passes through sensor)

Connections

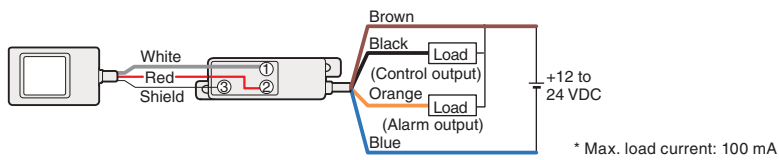

Dimensions Unit: mm inch

