



NEW Digital Fiberoptic Sensor
FS-N Series



In addition to its MEGA power,
the FS-N Series introduces unprecedented setup ease
with one click operation.

FS-neo





Certainty and simplicity

There are two major qualities that are important in fiber sensors.

First, the sensor must have improved basic performance, including ample beam power and accuracy, for greater detection stability.

Second, the sensor must be easy for anyone to setup and operate.

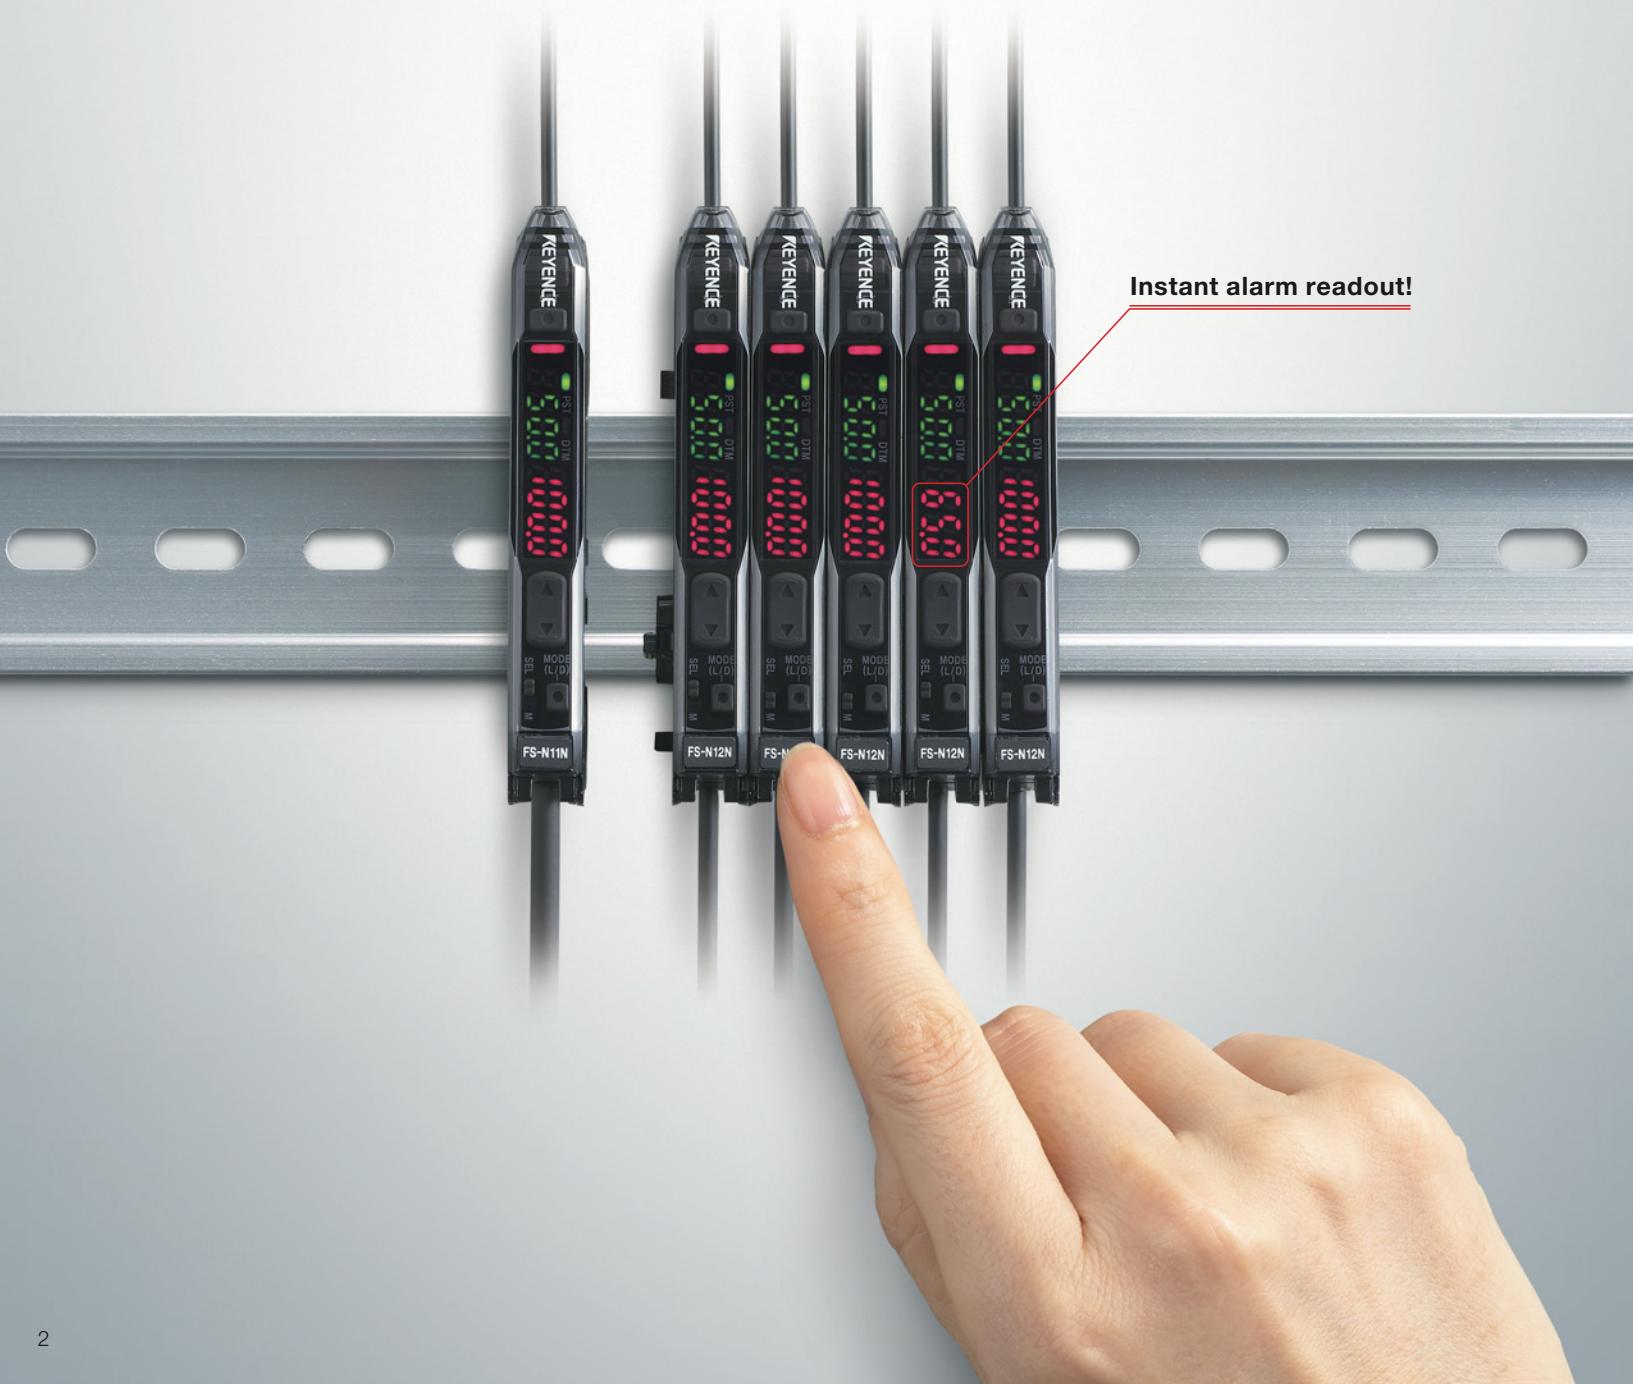



FS-neo

New Concept

Complete setting in just one click

ONE CLICK PRESET

An entirely new concept in setup ease. Just one click calibrates the sensitivity and resets the display.



New Concept

Automatic maintenance

DATUM

The sensor automatically detects reduced light intensity due to debris build-up and automatically re-calibrates to the original display state.




Simple, Convenient

High power reduces labor hours

NEO-MEGA

Increased sensor power greatly reduces maintenance and setup time.



NEO is supported by the world's highest level of performance

World's most powerful beam	World's most accurate	World's highest ambient-light resistance
Achieves 250 times more light intensity	Detects wire as small as $\varnothing 0.6 \mu\text{m}$ (0.024 mil)	Unaffected up to 30,000 lux

New Concept

Complete setting in just one click



Click the button once to simultaneously set the sensitivity and reset the display value to 100.

What customers are saying

“ I usually just set the sensitivity.

It would be nice if I could reset all of the settings and current values,

but I wouldn't use this feature if it's complicated. ”

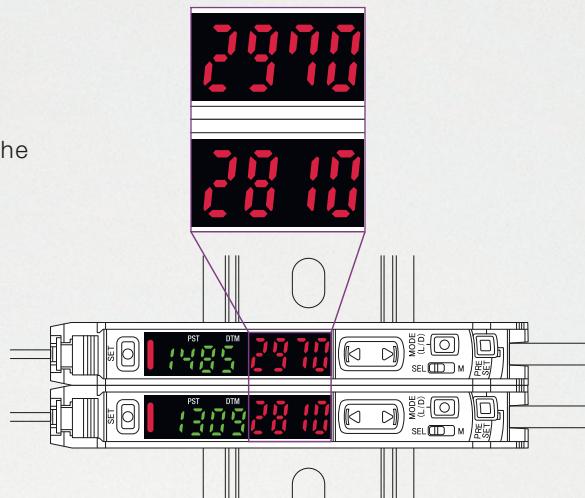


“ With the NEO, just one click sets the sensitivity and resets the display! ”




Point 1 ➤ Easy to detect changes (preventive maintenance)


The NEO provides an easy-to-read indication when the light intensity drops due to dirt or other environment related causes.

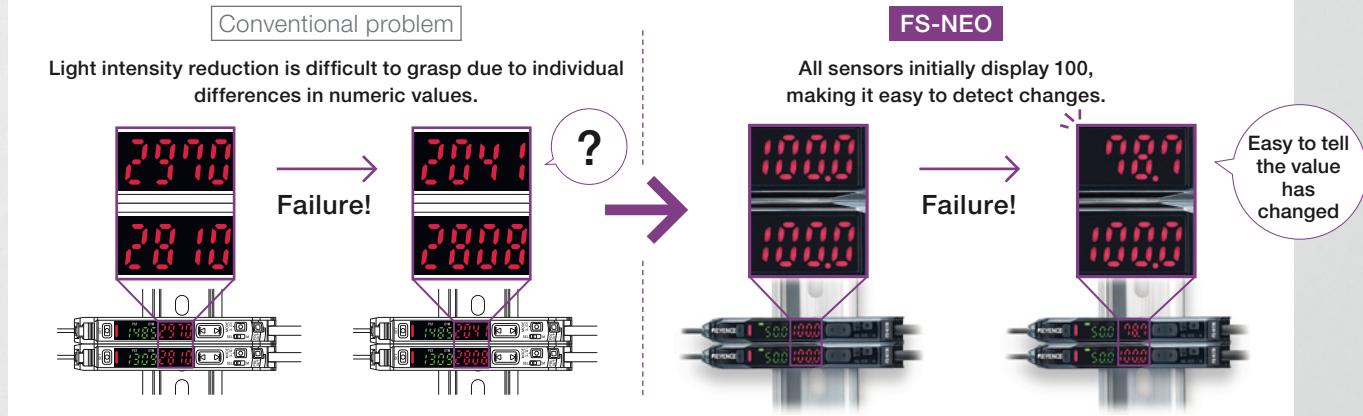

Point 2 ➤ The digital value resets to exactly 100

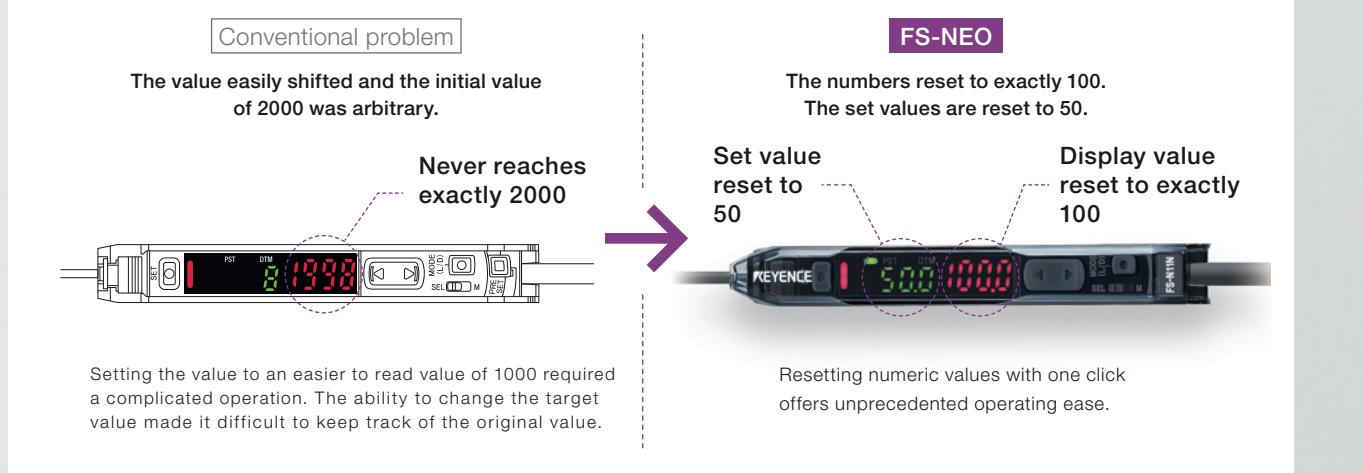

Point 3 ➤ Greater convenience when using multiple sensors

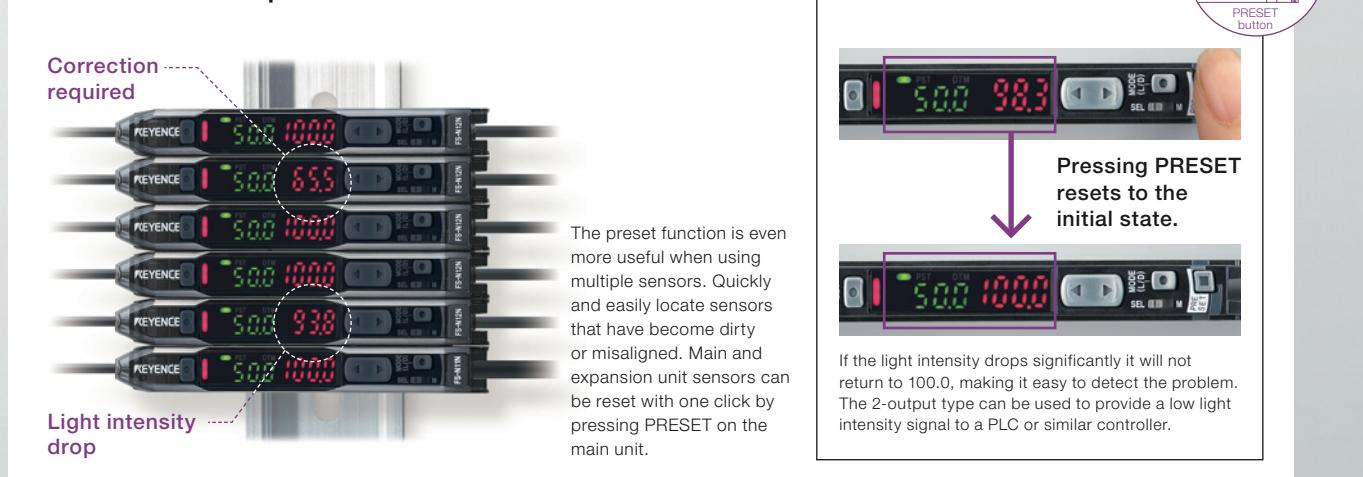




FS-neo

New Concept


Automatic maintenance

The automatic maintenance function detects light intensity reduction due to dirt or misalignment, and returns the sensor to its original display state. This feature can cancel the effects of the ambient environment, enabling the sensor to continue to perform highly accurate detections.

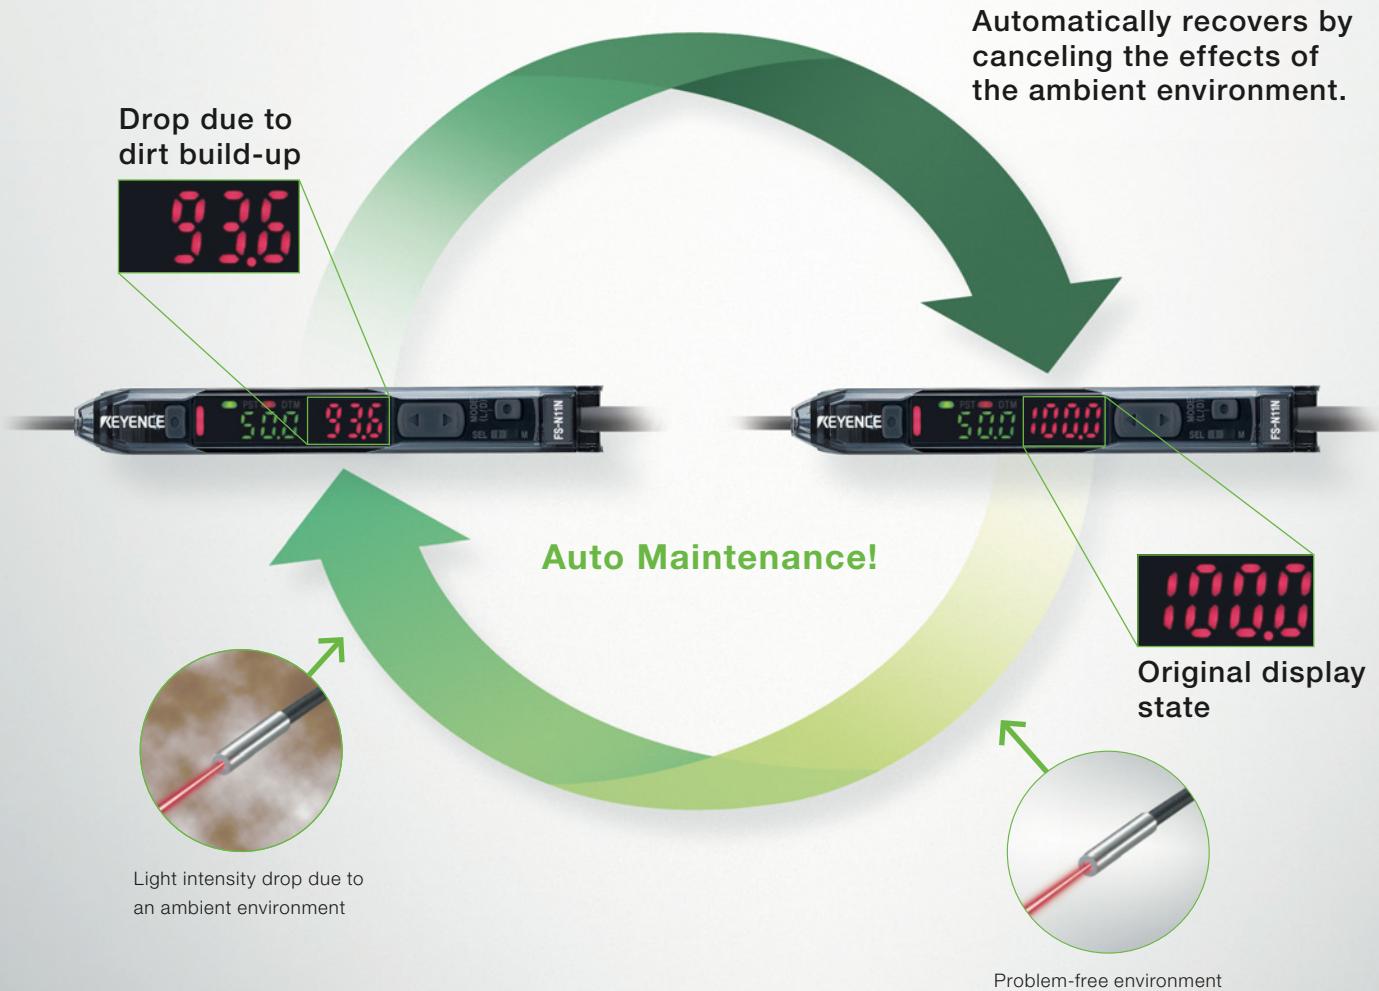

Automatic maintenance function: DATUM

The setting value changes according to the intensity as shown in the figure to the right. This function corrects the setting value based on a running average of the received light intensity value. The correction cycle is the same as the sampling cycle and can be selected from three levels.

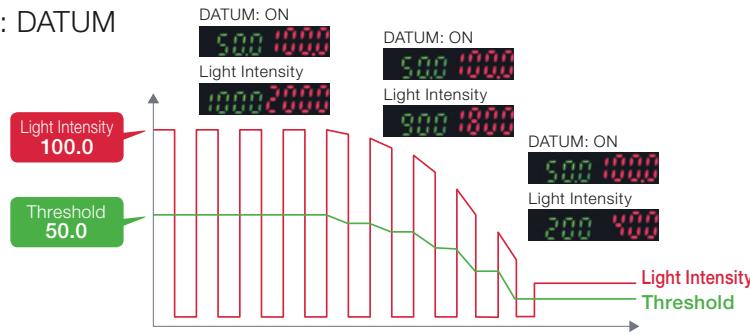

Simple, Convenient

World's highest power reduces maintenance time

"High power" = "large excess gain" that not only reduces the need for maintenance but also expands sensor head capabilities, which reduces setup time.

1

Switch selectable MEGA power

Hassle-free operation allows easy changeover between standard and high power.



Long distance [MEGA]



Short distance [FINE]


**3**

Prevent light saturation with a simple operation

Strong light may result in reduced contrast. In this case, simply press the "MODE" + "SET" buttons to automatically adjust the NEO to the proper light intensity.




Detecting the seam between transparent films

**2**

Reduced light intensity variations

With conventional models, amplifying the projected beam of condensed light causes the focus of the beam to be sensitive to minute positioning errors in the light-emitting device. The NEO-LED solves this positioning problem by using a reflector around the light emitting source. The reflector reduces light intensity variations.

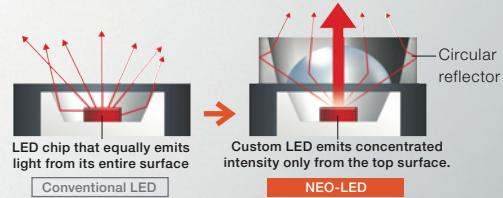


The circular reflector helps compensate for light positioning errors by redirecting any stray light back into the fiber.

World's most powerful beam: NEO-MEGA

Guideline for received light intensity

250 times greater than conventional models

NEO-MEGA

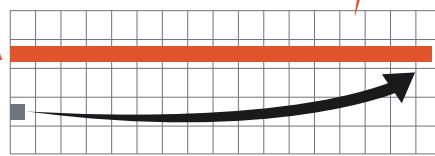
Conventional standard^{*1}

The emitted light intensity is about 4 times stronger than conventional models.


^{*1} FS-V30 Series in FINE mode

NEO-MEGA, the world's most powerful beam, allows for significant improvement of repeatability and hysteresis.

Repeatability (Typical)




Hysteresis characteristics (Typical)



Convenient functionality designed for ease of use in the field

Using the external calibration input*

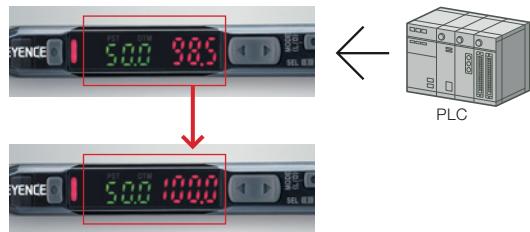

The sensor can be calibrated from a PLC or other external device. Regularly executing the Preset function from an external input ensures uninterrupted, stable detection, even in harsh environments. The 2-output type can be used to provide a low light intensity signal if the sensor becomes extremely dirty.

* Available on models with external input support.

Easy sensitivity setting (two-point tuning)



Set by simply pressing the SET button once with the target present, and once without it.

Wire saving when adding sensors



When adding sensors, the power is supplied from the connector on the side. This reduces wiring by two cables per sensor, allowing for a neater, quicker installation.

Note: Only supports FS-N Series amplifiers.

Reliable even when using multiple sensors

All models equipped with a standard heat sink. The heat sink reduces the temperature of the amplifier, and reduces the stress on the LED light source as well as other internal parts.



Zero Shift

Setting the current value to "0" just got easier. Simply press the PRESET and RIGHT button at the same time.



Using a NEO amplifier with an external input, the Zero Shift adjustment can be performed on a regular basis using a PLC or other external device.


Network support COMING SOON

KEYENCE engineers are currently developing a communication unit that will connect the FS-NEO directly to an open field network. This will provide easy read and write access for various settings.



Complete lineup

Cable Type



Type	Model		Control outputs	External input	Analog output
	NPN output	PNP output			
Standard	Main unit	FS-N11N	FS-N11P	1	0
	Expansion unit	FS-N12N	FS-N12P		
2-output	Main unit	FS-N13N	FS-N13P	2	1
	Expansion unit	FS-N14N	FS-N14P		
Analog	Main unit	FS-N11MN	—	1	0
					1

Connector Type (M8)



Type	Model		Control outputs	External input	Analog output
	NPN output	PNP output			
Standard	Main unit	FS-N11CN	FS-N11CP	1	1
	Expansion unit	FS-N12CN	FS-N12CP		
2-output	Main unit	—	FS-N13CP	2	0
	Expansion unit	—	FS-N14CP		

Optional (sold separately)

Amplifier securing bracket
(for main unit)



Description	Model
Can be installed without a DIN-rail. Can be installed from above or from the side.	OP-73880

End unit
(when using expansion units)



Used to secure the main and expansion units. (Two per set)	OP-26751 (Two per set)
---	----------------------------------

M8 connector cable
(2 m (6.56')/10 m (32.81'))



Used to connect to the M8 connector type amplifier (model numbers end with a "CN" or "CP"). Connector cables are not included with the amplifier.	2 m (6.56') type OP-73864
	10 m (32.81') type OP-73865


Fiber Unit FU Series

Fiber Unit [FU Series]

Choose from our selection of more than 100 types of fiber units.



Standard Type



▶ P.13

Integrated Bracket

The sensor is integrated into an L-shaped bracket, which simplifies installation.

Standard Type



▶ P.13

Flat

This thin profile sensor comes with mounting holes for installation where space is limited.

Standard Type




▶ P.14

Threaded and Hex-shaped Fibers

Threaded for easy mounting onto brackets and machine equipment.

Standard Type



▶ P.16

Cylinder

Small size is suitable for installation in locations where space is limited. Installed by drilling a hole and using a set screw.

Standard Type



▶ P.17

Sleeve

The fiber tip is a thin sleeve. Eliminate problems caused by limited mounting space. Lineup includes side-view and bendable sleeve types.

Focused Beam Type




▶ P.18

Small Spot Reflective

Ideal for detecting small objects. Spot size and focal distance are adjustable, so there is no need to change the distance between the sensor and the target.

High-power Beam Type




▶ P.19

Area

This sensor forms a wide-area beam, making it ideal for moving-target applications, such as detection of falling objects.

High-power Beam Type



▶ P.19

Retro-reflective

The use of a reflector in place of the receiver used with thrubeam sensors simplifies installation and optical axis alignment. This sensor is suitable for detecting transparent objects.



▶ P.20

Narrow Beam/High-power

Narrow field of view based on focused aperture angle. This sensor reduces stray light for stable target detection. The high-power reflective type with an 8° aperture angle is suitable for detecting objects at longer distances.




▶ P.20

Fixed Range Type

Definite-reflective

Detects within a fixed distance. Reduces the effect of background, and features a space-saving thin-profile design.



▶ P.21

High-flex*

The R2 (R0.08") ToughFlex fiber achieves excellent flexing characteristics with the same bend radius.


* 10 million bends



▶ P.21

Oil/Chemical Resistant

The PTFE coating allows these fibers to be used in almost any environment, including oil- or chemical-splash conditions.



▶ P.22

Heat Resistant

Ideal for use in high temperature applications. Withstands temperatures up to 350°C (662°F).




▶ P.23

Application-specific Type

Liquid-level

Detects liquid levels when immersed or attached to a transparent tube.



▶ P.23

Liquid Crystal/ Semiconductors

Perfect for glass substrate detection. Lineup offers distance alignment, edge detection, and wafer mapping types.

Model search

Model	Page
FU-10	▶ P.18
FU-11	
FU-12	
FU-13	▶ P.19
FU-15	
FU-16	
FU-16Z	▶ P.20
FU-18	
FU-18M	▶ P.20, 23
FU-20	▶ P.18
FU-21X	▶ P.15
FU-22X	▶ P.16, 17
FU-23X	▶ P.16
FU-24X	▶ P.15
FU-25	
FU-31	
FU-32	
FU-33	▶ P.17
FU-34	
FU-35FA	
FU-35FG	
FU-35FZ	▶ P.15
FU-35TG	
FU-35TZ	
FU-37	
FU-38	▶ P.20
FU-38H	
FU-38K	▶ P.22, 23
FU-38L	▶ P.23
FU-38LK	▶ P.22, 23
FU-38R	
FU-38S	▶ P.23
FU-38V	▶ P.20, 23
FU-4F	
FU-4FZ	▶ P.16
FU-40	
FU-40G	▶ P.20
FU-40S	▶ P.23
FU-41TZ	▶ P.13
FU-42TZ	
FU-43	▶ P.17
FU-44TZ	▶ P.13
FU-45X	▶ P.16, 17
FU-46	
FU-47TZ	▶ P.13
FU-48	▶ P.16, 21

Model	Page
FU-48U	▶ P.21
FU-49U	
FU-49X	▶ P.16, 21
FU-5F	▶ P.16
FU-5FZ	
FU-50	▶ P.20
FU-51TZ	
FU-52TZ	▶ P.13
FU-53TZ	
FU-54TZ	
FU-55	▶ P.16
FU-56	▶ P.16, 17
FU-57TE	▶ P.21
FU-57TZ	▶ P.13
FU-58	▶ P.16
FU-58U	▶ P.21
FU-59	▶ P.16, 21
FU-59U	▶ P.21
FU-6F	
FU-61	▶ P.15
FU-61Z	
FU-63	
FU-63T	▶ P.17
FU-63Z	
FU-65X	
FU-66	
FU-66TZ	
FU-66Z	
FU-67	▶ P.15
FU-67G	
FU-67TG	
FU-67TZ	
FU-67V	
FU-68	
FU-69U	▶ P.21
FU-69X	
FU-7F	▶ P.14
FU-70U	▶ P.21
FU-71	▶ P.14
FU-71Z	
FU-73	
FU-75F	▶ P.17
FU-76F	
FU-77	
FU-77G	▶ P.14
FU-77TG	

Model	Page
FU-77TZ	
FU-77V	▶ P.14
FU-78	
FU-79	
FU-79U	▶ P.21
FU-81C	
FU-82C	
FU-83C	
FU-84C	
FU-85A	
FU-85H	
FU-85Z	▶ P.22
FU-86A	
FU-86H	
FU-86Z	
FU-87	
FU-87K	
FU-88	
FU-88K	
FU-91	▶ P.21
FU-92	
FU-93	
FU-93Z	
FU-95	
FU-95HA	▶ P.23
FU-95S	
FU-95W	
FU-95Z	
FU-96	▶ P.21
FU-A05	
FU-A05D	
FU-A10	
FU-A10D	▶ P.19
FU-E11	
FU-E40	
FU-L50Z	
FU-L51Z	
FU-L52Z	▶ P.13
FU-L53Z	
FU-L54Z	
FU-L41Z	

Integrated Bracket

Integrated bracket and sensor simplifies installation.

Thrubeam/reflective types

Type			Fiber unit length (Diameter) Ambient temperature	Appearance (mm inch)	Minimum bend radius (mm inch)	Detecting distance (mm inch)*1			Optical axis diameter (mm inch) (Standard target to be detected)	Model Weight
Detector method	Beam emitting direction	Optical axis height (mm inch)				MEGA FINE	Other power modes			
Thrubeam	Top	10 0.39°	2 m 6.56' Free-cut (ø2.2 ø0.09") -40 to +50°C -40 to +122°F 0.48" 12.2"		R2 R0.08" ToughFlex	MEGA: 2200 86.61" FINE: 450 17.72"	ULTRA: 1700 66.93" SUPER: 1000 39.37" TURBO: 760 29.92" HSP: 290 11.42"	Ø1.13 ø0.04"	FU-L51Z Approx. 30 g	
		15 0.59°	2 m 6.56' Free-cut (ø2.2 ø0.09") -40 to +50°C -40 to +122°F 0.67" 17 0.67"							
		20 0.79°	2 m 6.56' Free-cut (ø2.2 ø0.09") -40 to +50°C -40 to +122°F 0.77" 17 0.67"							
	Top (lens)	10 0.39°	2 m 6.56' Free-cut (ø2.2 ø0.09") -40 to +50°C -40 to +122°F 0.51" 13 0.55"			MEGA: 3600 141.73" FINE: 3100 122.05"	ULTRA: 3600 141.73" SUPER: 3600 141.73" TURBO: 3600 141.73" HSP: 2100 82.68"	Ø3.5 ø0.14"	FU-L50Z Approx. 30 g	
	Side	10 0.39°	2 m 6.56' Free-cut (ø2.2 ø0.09") -40 to +50°C -40 to +122°F 2-ø3.4 ø0.13" 0.67" 17 12.8 0.50"			MEGA: 1900 74.80" FINE: 410 16.14"	ULTRA: 1500 59.06" SUPER: 900 35.43" TURBO: 700 27.56" HSP: 270 10.63"	Ø1.13 ø0.04"	FU-L54Z Approx. 30 g	
Reflective	Top	10 0.39°	2 m 6.56' Free-cut (ø2.2 ø0.09") -40 to +50°C -40 to +122°F 0.51" 13 0.55" 0.55" 14 2-ø3.4 ø0.13" 0.67" 17			MEGA: 760 29.92" FINE: 170 6.69"	ULTRA: 580 22.83" SUPER: 430 16.93" TURBO: 320 12.60" HSP: 90 3.54"	-	FU-L41Z Approx. 25 g	

*1 Detecting distance for reflective fibers is based on a standard target: White matte paper.

Flat

Mount directly in locations where space is limited.

Thrubeam/reflective types

Type			Fiber unit length (Diameter) Ambient temperature	Appearance (mm inch)	Minimum bend radius (mm inch)	Detecting distance (mm inch)*1			Optical axis diameter (mm inch) (Standard target to be detected)	Model Weight
Detector method	Beam emitting direction	Optical axis height (mm inch)				MEGA FINE	Other power modes			
Thrubeam	Top	1m 3.28' Free-cut (ø1.0 ø0.04") -40 to +50°C -40 to +122°F 0.39" 10 Thickness: 3 0.12"	R2 R0.08" ToughFlex		MEGA: 810 31.89" FINE: 170 6.69"	ULTRA: 520 20.47" SUPER: 340 13.39" TURBO: 260 10.24" HSP: 90 3.54"	Ø0.5 ø0.02"	FU-51TZ Approx. 5 g		
		2 m 6.56' Free-cut (ø1.3 ø0.05") 0.55" 14 2-ø2.1 ø0.13" Thickness: 3.5 0.14"				MEGA: 2900 114.17" FINE: 610 24.02"	ULTRA: 1900 74.80" SUPER: 1200 47.24" TURBO: 850 33.46" HSP: 260 10.24"	Ø1 ø0.04"	FU-52TZ Approx. 15 g	
		1 m 3.28' Free-cut (ø1.0 ø0.04") -40 to +50°C -40 to +122°F 10.5 0.41" 0.24" 0.08" 2-ø2.1 Thickness: 2.5 0.10"				MEGA: 740 29.13" FINE: 140 5.51"	ULTRA: 480 18.90" SUPER: 280 11.02" TURBO: 200 7.87" HSP: 70 2.76"	Ø0.5 ø0.02"	FU-57TZ Approx. 5 g	
	Side	1 m 3.28' Free-cut (ø1.0 ø0.04") -40 to +50°C -40 to +122°F 0.28" 2-ø2.1 0.51" 13 0.08" 2-ø2.1 Thickness: 2 0.08"				MEGA: 500 19.69" FINE: 140 5.51"	ULTRA: 340 13.39" SUPER: 230 9.06" TURBO: 180 7.09" HSP: 80 3.15"	Ø0.5 ø0.02"	FU-53TZ Approx. 10 g	
		2 m 6.56' Free-cut (ø2.2 ø0.09") -40 to +50°C -40 to +122°F 0.28" 2-ø2.1 0.59" 15 0.08" 2-M3 Thickness: 4 0.16"				MEGA: 2900 114.17" FINE: 610 24.02"	ULTRA: 1900 74.80" SUPER: 1200 47.24" TURBO: 850 33.46" HSP: 260 10.24"	Ø1 ø0.04"	FU-54TZ Approx. 25 g	
		1 m 3.28' Free-cut (ø1.0 ø0.04" x 2) -40 to +50°C -40 to +122°F 6.5 0.26" 8 0.32" Thickness: 2 0.08"				MEGA: 1 to 160 0.04" to 6.30" FINE: 1 to 36 0.04" to 1.42"	ULTRA: 1 to 120 0.04" to 4.72" SUPER: 1 to 81 0.04" to 3.19" TURBO: 1 to 60 0.04" to 2.36" HSP: 1 to 13 0.04" to 0.51"	FU-44TZ Approx. 3 g		
Reflective	Top	1 m 3.28' Free-cut (ø1.0 ø0.04" x 2) -40 to +50°C -40 to +122°F 2-ø2.1 ø0.08" 0.51" 13 0.08" 2-ø2.1 0.28" 7.2 Thickness: 2.5 0.10"				MEGA: 1 to 160 0.04" to 6.30" FINE: 1 to 36 0.04" to 1.42"	ULTRA: 1 to 120 0.04" to 4.72" SUPER: 1 to 81 0.04" to 3.19" TURBO: 1 to 60 0.04" to 2.36" HSP: 1 to 18 0.04" to 0.71"		FU-47TZ Approx. 4 g	
		1 m 3.28' Free-cut (ø1.0 ø0.04") -40 to +50°C -40 to +122°F 10.5 0.41" 0.28" 7.2 Thickness: 2.5 0.10"				MEGA: 2 to 120 0.08" to 4.72" FINE: 2 to 24 0.08" to 0.94"	ULTRA: 2 to 77 0.08" to 3.03" SUPER: 2 to 50 0.08" to 1.97" TURBO: 2 to 32 0.08" to 1.26" HSP: 2 to 8 0.08" to 0.32"		FU-41TZ Approx. 5 g	
	Side	1 m 3.28' Free-cut (ø1.0 ø0.04") -40 to +50°C -40 to +122°F 0.51" 13 0.08" 2-ø2.1 0.28" 2 0.08" Thickness: 2 0.08"				MEGA: 1 to 500 0.04" to 19.69" FINE: 1 to 70 0.04" to 2.76"	ULTRA: 1 to 320 0.04" to 12.60" SUPER: 1 to 190 0.04" to 7.48" TURBO: 1 to 130 0.04" to 5.12" HSP: 1 to 50 0.04" to 1.97"		FU-42TZ Approx. 24 g	
		2 m 6.56' Free-cut (ø2.2 ø0.09" x 2) -40 to +50°C -40 to +122°F 0.79" 20 0.28" 4 0.16" Thickness: 4 0.16"								

*1 Detecting distance for reflective fibers is based on a standard target: White matte paper.

Threaded and Hex-shaped Fibers

Most common fiber sensor.
Easily mounts onto brackets or machine equipment.

Thrubeam

Detecting method	Type	Size/Shape	Fiber unit length (Diameter) Ambient temperature	Appearance (mm inch)	Minimum bend radius (mm inch)	Detecting distance (mm inch)		Optical axis diameter (mm inch) (Standard target to be detected)	Model Weight
						MEGA FINE	Other power modes		
Thrubeam	M4	Hex-shaped	2 m 6.56" Free-cut (ø2.2 ø0.09") -40 to +50°C -40 to +122°F		R2 R0.08" ToughFlex	MEGA: 3100 122.05" FINE: 640 25.20"	ULTRA: 2100 82.68" SUPER: 1300 51.18" TURBO: 880 34.65" HSP: 320 12.60"	ø1.13 ø0.04"	FU-77TZ Approx. 43 g
			1 m 3.28" cut not allowed. -40 to +50°C -40 to +122°F		R10 R0.39" Stainless Steel	MEGA: 1800 70.87" FINE: 640 25.20"	ULTRA: 1800 70.87" SUPER: 1300 51.18" TURBO: 880 34.65" HSP: 320 12.60"		FU-77TG Approx. 43 g
		Threaded	2 m 6.56" Free-cut (ø2.2 ø0.09") -40 to +50°C -40 to +122°F		R0.5 R0.02" ToughFlex	MEGA: 3600 141.73" FINE: 880 34.65"	ULTRA: 3000 118.11" SUPER: 1800 70.87" TURBO: 1300 51.18" HSP: 430 16.93"		FU-77V Approx. 25 g
			1 m 3.28" cut not allowed. -40 to +50°C -40 to +122°F		R2 R0.08" ToughFlex		ULTRA: 1800 70.87" SUPER: 1300 51.18" TURBO: 880 34.65" HSP: 430 16.93"		FU-77 Approx. 21 g
			2 m 6.56" Free-cut (ø2.2 ø0.09") -40 to +70°C -40 to +158°F		R25 R0.98"	MEGA: 3600 141.73" FINE: 1100 43.31"	ULTRA: 3200 125.98" SUPER: 2200 86.61" TURBO: 1500 59.06" HSP: 540 21.26"		FU-7F Approx. 21 g
	M6	Threaded	2 m 6.56" Free-cut (ø1.3 ø0.05") -40 to +70°C -40 to +158°F		R4 R0.16"	MEGA: 2200 86.61" FINE: 440 17.32"	ULTRA: 1400 55.12" SUPER: 860 33.86" TURBO: 600 23.62" HSP: 220 8.66"	ø1 ø0.04"	FU-78 Approx. 9 g
			2 m 6.56" Free-cut (ø2.2 ø0.09") FU-71Z: -40 to +50°C -40 to +122°F FU-71: -40 to +70°C -40 to +158°F		R2 R0.07" ToughFlex	MEGA: 3600 141.73" FINE: 1100 43.31"	ULTRA: 3600 141.73" SUPER: 2300 90.55" TURBO: 1600 62.99" HSP: 590 23.23"		FU-71Z Approx. 25 g
		Threaded	2 m 6.56" Free-cut (ø2.2 ø0.09") FU-71Z: -40 to +50°C -40 to +122°F FU-71: -40 to +70°C -40 to +158°F		R25 R0.98"	MEGA: 3600 141.73" FINE: 1300 51.2"	ULTRA: 3600 141.73" SUPER: 2600 90.55" TURBO: 1800 70.87" HSP: 650 25.59"		FU-71 Approx. 25 g

Thrubeam Lenses









Type	Ambient temperature Appearance (mm inch)	Model Weight	Applicable fiber units	Detecting distance (mm inch)* ¹					
				MEGA	ULTRA	SUPER	TURBO	FINE	HSP
Ultra-long detecting distance Narrow field of view Aperture Angle: Approx. 8°		F-4 Approx. 1 g	FU-77TZ/77V/77	3600 141.73*	2700 106.30*	3200 125.98*	2200 86.61*	1800 70.87*	700 34.65*
			FU-7F						
			FU-78						
			FU-77G/77TG						
Long-detecting distance Aperture Angle: Approx. 15°		F-2 Approx. 2 g	FU-77TZ/77V/77/ 84C/88K	3600 141.73*	2100 82.68	3200 125.98*	2200 86.61*	1800 70.87*	700 34.65*
			FU-7F/86A	3600 141.73*	2500 98.43*				
			FU-86Z	3600 141.73*	1900 74.80*				
			FU-78	3600 141.73*	3300 129.92*				
			FU-77G/77TG	3600 141.73*	1600 62.99*				
Side-view with mounting holes		F-5 Approx. 10 g	FU-77V/77	3600 141.73*	2600 102.36*	3100 122.05*	2900 114.17*	2300 90.55*	1800 70.87*
			FU-7F/86A						
			FU-86Z						
			FU-78						
			FU-77G						
Side-view		F-1 Approx. 2 g	FU-77V/77	3600 141.73*	3100 122.05*	1900 74.80*	1300 51.18*	900 35.43*	530 20.87*
			FU-77G	3600 141.73*	1800 70.87*	1300 51.18*	900 35.43*	630 20.87*	400 14.17*
			FU-7F/86A	3600 141.73*	3100 122.05*	2100 82.68*	1300 51.18*	900 35.43*	630 24.80*
			FU-86Z	3600 141.73*	3300 129.92*	900 59.06*	1100 43.31*	500 19.69*	360 14.17*
			FU-78/84C/88K	3200 125.98*	2500 98.43*	1600 62.99*	1100 43.31*	800 31.50*	360 14.17*

*1 The maximum sensing distance of 3600 mm 141.73" (1800 mm 70.87") is possible because the fiber length on each side is 2 m 6.56" (1 m 3.28").

*2 When using the F-1 at 70°C 158°F or more, specify the "Heat-resistant F-1". Be sure to use the "Heat-resistant F-1" at a constant temperature.



Reflective

Detecting method	Type		Fiber unit length (Diameter) Ambient temperature	Appearance (mm inch)	Minimum bend radius (mm inch)	Detecting distance (mm inch)*1			Model Weight	
	Size/Shape	Detecting arrangement				MEGA FINE	Other power modes			
M3	Hex-shaped	Coaxial	1 m 3.28' Free-cut (ø1.3 ø0.05 x 2) -40 to +50°C -40 to +122°F		R2 R0.08° ToughFlex	MEGA: 400 15.75* FINE: 70 2.76*	ULTRA: 270 10.63* SUPER: 170 6.69* TURBO: 110 4.33* HSP: 32 1.26*		FU-35TZ Approx. 7 g	
			1 m 3.28' Free-cut (ø1.3 ø0.05 x 2) -40 to +50°C -40 to +122°F			MEGA: 450 17.72* FINE: 72 2.76*	ULTRA: 290 11.42* SUPER: 190 7.48* TURBO: 115 4.53* HSP: 36 1.42*			
		Threaded	1 m 3.28' Free-cut (ø1.3 ø0.05 x 2) Spiral 30 cm -40 to +50°C -40 to +122°F		R10 R0.39° Stainless Steel	Lens attachment: P.18			FU-35FG Approx. 15 g	
			1 m 3.28' Free-cut (ø1.3 ø0.05 x 2) -40 to +70°C -40 to +158°F			MEGA: 550 21.65* FINE: 110 4.33*	ULTRA: 400 15.75* SUPER: 250 9.84* TURBO: 160 6.30* HSP: 45 1.77*			
			50 cm 1.64' cut not allowed. FU-21X: -40 to +70°C -40 to +158°F FU-24X: -40 to +50°C -40 to +122°F			MEGA: 130 5.12* FINE: 36 1.42*	ULTRA: 90 3.54* SUPER: 54 2.13* TURBO: 40 1.57* HSP: 23 0.91*			
	M4	Hex-shaped	2 m 6.56' Free-cut (ø1.3 ø0.05 x 2) -40 to +50°C -40 to +122°F		R2 R0.08° ToughFlex	MEGA: 640 25.2* FINE: 140 5.51*	ULTRA: 420 16.54* SUPER: 320 12.60* TURBO: 220 8.66* HSP: 70 2.76*		FU-66TZ Approx. 10 g	
			2 m 6.56' Free-cut (ø1.3 ø0.05 x 2) FU-66Z: -40 to +50°C -40 to +122°F FU-66: -40 to +70°C -40 to +158°F			MEGA: 770 30.32* FINE: 190 7.48*	ULTRA: 560 22.05* SUPER: 380 14.96* TURBO: 260 10.24* HSP: 80 3.15*			
		Threaded	2 m 6.56' Free-cut (ø2.2 ø0.09 x 2) -40 to +50°C -40 to +122°F		R25 R0.98°	MEGA: 1100 43.31* FINE: 300 11.81*	ULTRA: 860 33.86* SUPER: 570 22.44* TURBO: 410 16.14* HSP: 140 5.51*		FU-66 Approx. 10 g	
			2 m 6.56' Free-cut (ø2.2 ø0.09 x 2) -40 to +50°C -40 to +122°F			MEGA: 710 27.95* FINE: 210 8.27*	ULTRA: 550 21.65* SUPER: 470 18.50* TURBO: 310 12.20* HSP: 90 3.54*			
			1 m 3.28' cut not allowed. -40 to +50°C -40 to +122°F			MEGA: 400 15.75* FINE: 70 2.76*	ULTRA: 270 10.63* SUPER: 170 6.69* TURBO: 110 4.33* HSP: 32 1.26*			
Reflective	M6	Hex-shaped	2 m 6.56' Free-cut (ø2.2 ø0.09 x 2) -40 to +50°C -40 to +122°F		R2 R0.08° ToughFlex	MEGA: 900 35.43* FINE: 210 8.27*	ULTRA: 740 29.13* SUPER: 490 19.29* TURBO: 320 12.60* HSP: 110 4.33*		FU-67V Approx. 25 g	
			2 m 6.56' Free-cut (ø2.2 ø0.09 x 2) -40 to +50°C -40 to +122°F			MEGA: 1200 47.24* FINE: 300 11.81*	ULTRA: 900 35.43* SUPER: 590 23.23* TURBO: 430 16.93* HSP: 140 5.51*			
		Coaxial	2 m 6.56' Free-cut (ø2.2 ø0.09 x 2) -40 to +50°C -40 to +122°F		R2 R0.08° ToughFlex	MEGA: 900 35.43* FINE: 210 8.27*	ULTRA: 740 29.13* SUPER: 490 19.29* TURBO: 320 12.60* HSP: 110 4.33*		FU-61Z Approx. 22 g	
			1 m 3.28' cut not allowed. -40 to +50°C -40 to +122°F			MEGA: 1300 51.18* FINE: 380 14.96*	ULTRA: 1000 39.37* SUPER: 820 32.28* TURBO: 500 19.69* HSP: 160 6.30*			
			2 m 6.56' Free-cut (ø2.2 ø0.09 x 2) -40 to +70°C -40 to +158°F			MEGA: 1100 43.31* FINE: 300 11.81*	ULTRA: 860 33.86* SUPER: 570 22.44* TURBO: 410 16.14* HSP: 140 5.51*			
		Parallel	2 m 6.56' Free-cut (ø2.2 ø0.09 x 2) -40 to +70°C -40 to +158°F		R25 R0.98°	MEGA: 720 28.35* FINE: 160 6.30*	ULTRA: 630 24.8* SUPER: 410 16.14* TURBO: 270 10.63* HSP: 130 5.12*		FU-25 Approx. 18 g	
			2 m 6.56' Free-cut (ø2.2 ø0.09 x 2) -40 to +70°C -40 to +158°F			MEGA: 1300 51.18* FINE: 380 14.96*	ULTRA: 1000 39.37* SUPER: 820 32.28* TURBO: 500 19.69* HSP: 160 6.30*			

*1 Detecting distance for reflective fibers is based on a standard target: White matte paper.

Cylinder

Small size is suitable for installation in locations where space is limited.
Installed by drilling a hole and using a set screw.

Thrubeam/reflective types













Type	Size (mm inch)	Fiber unit length (Diameter) Ambient temperature	Appearance (mm inch)	Minimum bend radius (mm inch)	Detecting distance (mm inch)*1				Optical axis diameter (mm inch) (Standard target to be detected)	Model Weight		
					MEGA FINE		Other power modes					
Thrubeam	ø1.0 ø0.04"	50 cm 1.64" cut not allowed. -40 to +50°C -40 to +122°F		R10 R0.39"	MEGA: FINE:	380 85	14.96" 3.35"	ULTRA: SUPER: TURBO: HSP:	270 180 120 40	10.63" 7.09" 4.72" 1.57"	ø0.265 ø0.01"	FU-58 Approx. 8 g
	ø1.5 ø0.06"	1 m 3.28" Free-cut (ø1.0 ø0.04) ø0.06" ø1.5 -40 to +70°C -40 to +158°F		R4 R0.16" High-flex	MEGA: FINE:	1200 230	47.24" 9.06"	ULTRA: SUPER: TURBO: HSP:	810 590 410 130	31.89" 23.23" 16.14" 5.12"	ø0.7 ø0.03"	FU-59 Approx. 3 g
	ø2.5 ø0.10"	50 cm 1.64" cut not allowed. -40 to +70°C -40 to +158°F		R10 R0.39"	MEGA: FINE:	45 13	1.77" 0.51"	ULTRA: SUPER: TURBO: HSP:	32 23 18 -	1.26" 0.91" 0.71" -	ø0.125 ø0.005"	FU-55 Approx. 3 g
	ø2.5 ø0.10"	50 cm 1.64" cut not allowed. -40 to +70°C -40 to +158°F ø0.10" ø2.5 ø0.01" ø0.3 Do not bend sleeve		R10 R0.39"	MEGA: FINE:	45 13	1.77" 0.51"	ULTRA: SUPER: TURBO: HSP:	32 23 18 -	1.26" 0.91" 0.71" -	ø0.125 ø0.005"	FU-56 Approx. 3 g
Reflective	ø3 ø0.12"	2 m 6.56" Free-cut (ø2.2 ø0.09) ø0.12" ø3 -40 to +70°C -40 to +158°F		R2 R0.08" ToughFlex	MEGA: FINE:	3600 880	171.73" 34.65"	ULTRA: SUPER: TURBO: HSP:	3000 1800 1300 430	118.11" 70.87" 51.18" 16.93"	ø1.13 ø0.04"	FU-5FZ Approx. 19 g
	ø3 ø0.12"	2 m 6.56" Free-cut (ø2.2 ø0.09) ø0.12" ø3 -40 to +70°C -40 to +158°F		R25 R0.98"	MEGA: FINE:	3600 1100	171.73" 43.30"	ULTRA: SUPER: TURBO: HSP:	3200 2200 1500 540	125.98" 86.61" 59.06" 21.26"	ø1 ø0.04"	FU-5F Approx. 19 g
	ø1.5 ø0.06"	1 m 3.28" cut not allowed -40 to +70°C -40 to +158°F ø0.59" 15 ø1.5 ø0.06"		R4 R0.16" High-flex	MEGA: FINE:	150 32	5.91" 1.26"	ULTRA: SUPER: TURBO: HSP:	100 80 54 22	3.94" 3.15" 2.13" 0.87"		FU-49X Approx. 3 g
	ø1.5 ø0.06"	1 m 3.28" cut not allowed -40 to +70°C -40 to +158°F ø0.12" 15 ø0.5 15 ø0.06" 0.06" Do not bend sleeve		R10 R0.39"	MEGA: FINE:	27 4.8	1.06" 0.19"	ULTRA: SUPER: TURBO: HSP:	18 13 10 2.4	0.71" 0.51" 0.39" 0.09"		FU-46 Approx. 2 g
	ø2.5 ø0.10"	50 cm 1.64" cut not allowed -40 to +70°C -40 to +158°F ø0.24" 14 ø0.17" 14 ø0.10" 10 ø0.07" 7 Do not bend sleeve		R25 R0.98"	MEGA: FINE:	72 23	2.83" 0.91"	ULTRA: SUPER: TURBO: HSP:	59 45 32 12	2.32" 1.77" 1.26" 0.47"		FU-22X Approx. 4 g
	ø3 ø0.12"	2 m 6.56" Free-cut (ø1.3 ø0.05 x 2) FU-4FZ: -40 to +50°C -40 to +122°F FU-4F: -40 to +70°C -40 to +158°F ø0.67" 17 ø3 ø0.12"		R2 R0.08" ToughFlex	MEGA: FINE:	770 190	30.32" 7.48"	ULTRA: SUPER: TURBO: HSP:	560 380 260 80	22.05" 14.96" 10.24" 3.15"		FU-4FZ Approx. 8 g
	ø3 ø0.12"	2 m 6.56" Free-cut (ø1.0 ø0.04 x 2) -40 to +70°C -40 to +158°F ø0.59" 15 ø3 ø0.12"		R25 R0.98"	MEGA: FINE:	1100 300	43.30" 11.81"	ULTRA: SUPER: TURBO: HSP:	860 570 410 140	33.86" 22.44" 16.14" 5.51"		FU-4F Approx. 8 g
	ø3 ø0.12"	2 m 6.56" Free-cut (ø1.0 ø0.04 x 2) -40 to +70°C -40 to +158°F ø0.59" 15 ø3 ø0.12"		R4 R0.16" High-flex	MEGA: FINE:	290 63	11.42" 2.48"	ULTRA: SUPER: TURBO: HSP:	200 130 80 32	7.87" 5.12" 3.15" 1.26"		FU-48 Approx. 7 g
	ø3 ø0.12"	50 cm 1.64" cut not allowed -40 to +70°C -40 to +158°F ø0.67" 17 ø3 ø0.12"		R25 R0.98"	MEGA: FINE:	830 180	32.68" 7.09"	ULTRA: SUPER: TURBO: HSP:	680 470 320 130	26.77" 18.50" 12.60" 5.12"		FU-23X Approx. 4 g
	ø3 ø0.12"	50 cm 1.64" cut not allowed -40 to +70°C -40 to +158°F ø0.20" 15 ø0.82 15 ø0.05" 0.05" Do not bend sleeve		R4 R0.16"	MEGA: FINE:	68 18	2.68" 0.71"	ULTRA: SUPER: TURBO: HSP:	54 40 27 8	2.13" 1.57" 1.06" 0.32"		FU-45X Approx. 4 g

*1 Detecting distance for reflective fibers is based on a standard target: White matte paper.

Sleeve

Eliminate problems caused by limited mounting space.

Thrubeam/reflective types

Type	Fiber unit length (Diameter) Ambient temperature	Appearance (mm inch)	Minimum bend radius (mm inch)	Detecting distance (mm inch)*1			Optical axis diameter (mm inch) (Standard target to be detected)	Model Weight
Detecting method	Beam emitting direction			MEGA FINE	Other power modes			
Thrubeam	Side-view		R25 R0.98"	MEGA: FINE: 520 100	20.47" 3.94"	ULTRA: 380 SUPER: 230 TURBO: 160 HSP: 55	14.96" 9.06" 6.30" 2.17"	ø0.6 ø0.02" FU-32 Approx. 5 g
				MEGA: FINE: 1600 330	62.99" 12.99"	ULTRA: 1100 SUPER: 660 TURBO: 470 HSP: 140	43.31" 25.98" 18.50" 5.51"	ø1 ø0.04" FU-34 Approx. 17 g
	Top view		R10 R0.39"	MEGA: FINE: 3600 1100	141.73" 43.31"	ULTRA: 3200 SUPER: 2200 TURBO: 1500 HSP: 540	125.98" 86.61" 59.06" 21.26"	 FU-73 Approx. 24 g
				MEGA: FINE: 690 170	27.17" 6.69"	ULTRA: 500 SUPER: 340 TURBO: 240 HSP: 72	19.69" 13.39" 9.45" 2.83"	ø0.5 ø0.02" FU-75F Approx. 10 g
				MEGA: FINE: 370 85	14.57" 3.35"	ULTRA: 260 SUPER: 180 TURBO: 120 HSP: 40	10.24" 7.09" 4.72" 1.57"	ø0.265 ø0.01" FU-76F Approx. 10 g
				MEGA: FINE: 45 13	1.77" 0.51"	ULTRA: 32 SUPER: 23 TURBO: 18 HSP: -	1.26" 0.91" 0.71" -	ø0.125 ø0.004" FU-56 Approx. 3 g
Reflective	Side		R10 R0.39"	MEGA: FINE: 180 32	7.09" 1.26"	ULTRA: 130 SUPER: 81 TURBO: 50 HSP: 18	5.12" 3.19" 1.97" 0.71"	 FU-31 Approx. 5 g
				MEGA: FINE: 320 45	12.60" 1.77"	ULTRA: 250 SUPER: 140 TURBO: 90 HSP: 32	9.84" 5.51" 3.54" 1.26"	 FU-33 Approx. 10 g
	Top		R4 R0.16"	MEGA: FINE: 68 18	2.68" 0.71"	ULTRA: 54 SUPER: 40 TURBO: 27 HSP: 8	2.13" 1.57" 1.06" 0.32"	 FU-65X Approx. 5 g
				MEGA: FINE: 290 54	11.42" 2.13"	ULTRA: 190 SUPER: 120 TURBO: 80 HSP: 23	7.48" 4.72" 3.15" 0.91"	 FU-63Z Approx. 10 g
				MEGA: FINE: 330 72	12.99" 2.83"	ULTRA: 230 SUPER: 150 TURBO: 100 HSP: 36	9.06" 5.91" 3.94" 1.42"	 FU-63 Approx. 10 g
				MEGA: FINE: 68 18	2.68" 0.71"	ULTRA: 54 SUPER: 40 TURBO: 27 HSP: 8	2.13" 1.57" 1.06" 0.32"	 FU-63T Approx. 10 g
	Coaxial, narrow beam 10°		R4 R0.16"	MEGA: FINE: 330 72	12.99" 2.83"	ULTRA: 230 SUPER: 150 TURBO: 100 HSP: 36	9.06" 5.91" 3.94" 1.42"	 FU-45X Approx. 4 g
				MEGA: FINE: 27 4.8	1.06" 0.19"	ULTRA: 18 SUPER: 13 TURBO: 10 HSP: 2.4	0.71" 0.51" 0.39" 0.09"	 FU-43 Approx. 8 g
				MEGA: FINE: 72 23	2.83" 0.91"	ULTRA: 59 SUPER: 45 TURBO: 32 HSP: 12	2.32" 1.77" 1.26" 0.47"	 FU-46 Approx. 2 g
				MEGA: FINE: 72 23	2.83" 0.91"	ULTRA: 59 SUPER: 45 TURBO: 32 HSP: 12	2.32" 1.77" 1.26" 0.47"	 FU-22X Approx. 4 g

*1 Detecting distance for reflective fibers is based on a standard target: White matte paper.

Small Spot Reflective

Ideal for detecting small objects.
Select the sensor according to the size of the object.

Parallel Beam Spot

Lens + Fiber Unit


Type	Beam spot diameter (mm inch)	Lens		Fiber units		Detecting distance (mm inch)*1	
		Appearance (mm inch) Weight	Model	Minimum bend radius (mm inch)	Appearance	Model	MEGA FINE
Parallel beam	Approx. Ø4 Ø0.16" (within the detecting distance of 0 to 20 mm Ø to 0.79")	 Tip: Ø4.3 9.5 0.37" Approx. 2 g	F-3HA	R2 R0.08" ToughFlex		FU-35FZ	MEGA: 45 FINE: 36
				R10 R0.39" Stainless Steel		FU-35FG	1.77" 1.42"
				R25 R0.98"		FU-35FA	MEGA: 65 FINE: 54
				R2 R0.08" ToughFlex		FU-35TZ	2.56" 2.13"
				R10 R0.39" Stainless Steel		FU-35TG	ULTRA: 65 FINE: 27
							SUPER: 45 TURBO: 40 HSP: 45



*1 Detecting distance for reflective fibers is based on a standard target: White matte paper.

Small Beam Spot

Lens + Fiber Unit

Type	Beam spot diameter (mm inch)	Focal distance (mm inch)	Lens		Fiber units		Model		
			Appearance (mm inch) Weight	Model	Minimum bend radius (mm inch)	Appearance			
Small spot	Approx. Ø0.1 Ø0.004"	7±2 0.28"±0.08"	 Tip: Ø4.3 15.6 0.61" Approx. 1 g	F-2HA	R10 R0.39"		FU-24X		
					R25 R0.98"		FU-21X		
					R2 R0.08" ToughFlex		FU-35FZ		
	Approx. Ø0.4 Ø0.02"	15±2 0.59"±0.08"			R10 R0.39" Stainless Steel		FU-35FG		
					R25 R0.98"		FU-35FA		
					R2 R0.08" ToughFlex		FU-35TZ		
	Approx. Ø0.5 Ø0.02"	35±3 1.38"±0.12"	 Tip: Ø7.4 27 1.06" Approx. 2 g	F-4HA	R10 R0.39" Stainless Steel		FU-35TG		
					R2 R0.08" ToughFlex		FU-35FZ		
					R2 R0.08" ToughFlex		FU-35FG		
	Approx. Ø1.0 Ø0.04"	35±3 1.38"±0.12"			R10 R0.39" Stainless Steel		FU-35TZ		
					R25 R0.98"		FU-35FA		
					R2 R0.08" ToughFlex		FU-21X		



Built-in Lens Fiber Unit

Type	Beam spot diameter (mm inch)	Focal distance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Appearance (mm inch)	Model	Weight	Minimum bend radius (mm inch)
Small spot	Approx. Ø0.1 Ø0.004"	5 0.20"	50 cm 1.64" cut not allowed -40 to +70°C -40 to +158°F	Tip: Ø3 Ø0.12" 18 0.71"	FU-20	Approx. 2 g	R25 R0.98"


Adjustable Beam Spot

Built-in Lens Fiber Unit

Type	Beam spot diameter (mm inch)	Focal distance (mm inch)	Fiber unit length (Diameter) Ambient temperature	Appearance (mm inch)	Model	Weight	Minimum bend radius (mm inch)
Adjustable beam spot	Ø0.9 to 3.5 Ø0.04" to 0.14"	10 to 30 0.39" to 1.18"	2 m 6.56" Free-cut (Ø1.3 Ø0.05" x 2) -40 to +70°C -40 to +158°F	M6 26.4 1.04" to 31.5 1.24"	FU-10	Approx. 5 g	R25 R0.98"



Lens + Fiber Unit

Type	Beam spot diameter (mm inch)	Focal distance (mm inch)	Lens		Fiber units		Model
			Appearance (mm inch) Weight	Model	Minimum bend radius (mm inch)	Appearance	
Side-view adjustable spot	Ø0.5 to 3 Ø0.02" to 0.12"	8 to 30 0.32" to 1.18"	 8.7 0.34" 5.6 0.22" 15 0.59" Approx. 2 g	F-5HA	R2 R0.08" ToughFlex		FU-35FZ
					R10 R0.39" Stainless Steel		FU-35FG
					R25 R0.98"		FU-35FA

Area

Great for applications where target position varies or for detecting targets with complicated shapes or rough surface finish.

Thrubeam/reflective types

Detecting method	Type	Optical axis width (mm inch)	Fiber unit length (Diameter) Ambient temperature	Appearance (mm inch)	Minimum bend radius (mm inch)	Detecting distance (mm inch) ^{*1}			Optical axis diameter (mm inch)	Model Weight
						MEGA FINE	Other power modes			
Thrubeam	Area	10 0.39"	2 m 6.56' Free-cut (ø2.2 ø0.09") -40 to +50°C -40 to +122°F		R2 R0.08" ToughFlex	MEGA: 3400 133.86" FINE: 1400 55.12"	ULTRA: 2800 110.24" SUPER: 2400 94.49" TURBO: 1700 66.93" HSP: 640 25.20"		10x3 0.39"×0.12"	FU-12 Approx. 23 g
		11 0.43"	2 m 6.56' Free-cut (ø2.2 ø0.09") -40 to +50°C -40 to +122°F			MEGA: 3600 141.73" FINE: 2700 106.30"	ULTRA: 3600 141.73" SUPER: 3600 141.73" TURBO: 3600 141.73" HSP: 1300 51.18"		11x2 0.43"×0.08"	FU-E11 Approx. 20 g
		40 1.57"	2 m 6.56' Free-cut (ø2.2 ø0.09") -40 to +50°C -40 to +122°F			MEGA: 3600 141.73" FINE: 3600 141.73"	ULTRA: 3600 141.73" SUPER: 3600 141.73" TURBO: 3600 141.73" HSP: 2500 98.43"		40x3 1.57"×0.12"	FU-E40 Approx. 30 g
	Array	5 0.20"	2 m 6.56' Free-cut (ø2.2 ø0.09") -40 to +70°C -40 to +158°F		R4 R0.16"	MEGA: 2200 86.61" FINE: 440 17.32"	ULTRA: 1400 55.12" SUPER: 840 33.07" TURBO: 540 21.25" HSP: 200 7.87"	Approx. 6 x 0.3 0.24"×0.01"	FU-A05 Approx. 20 g	
		10 0.39"	2 m 6.56' Free-cut (ø2.2 ø0.09") -40 to +70°C -40 to +158°F							
		15 0.59" (at distance 15 0.59")	2 m 6.56' Free-cut (ø2.2 ø0.09" x 2) -40 to +70°C -40 to +158°F			MEGA: 5 to 200 0.20" to 7.87" FINE: 5 to 140 0.20" to 5.51"	ULTRA: 5 to 200 0.20" to 7.87" SUPER: 5 to 200 0.20" to 7.87" TURBO: 5 to 160 0.20" to 6.30" HSP: 5 to 110 0.20" to 4.33"	-	FU-11 Approx. 19 g	
Reflective	Area	10 0.39" (at distance 4 0.16")	2 m 6.56' Free-cut (ø2.2 ø0.09" x 2) -40 to +70°C -40 to +158°F		R25 R0.98"	MEGA: 740 29.13" FINE: 140 5.51"	ULTRA: 460 18.11" SUPER: 260 10.24" TURBO: 180 7.09" HSP: 60 2.36"	-	FU-A05D Approx. 20 g	
		15 0.59" (at distance 4 0.16")	2 m 6.56' Free-cut (ø2.2 ø0.09" x 2) -40 to +70°C -40 to +158°F							
		15 0.59" (at distance 4 0.16")	2 m 6.56' Free-cut (ø2.2 ø0.09" x 2) -40 to +70°C -40 to +158°F					-	FU-A10D Approx. 20 g	

*1 Detecting distance for reflective fibers is based on a standard target: White matte paper.

Retro-reflective

Useful for detecting transparent objects.

Retro-reflective type

Detecting method	Type	Beam emitting direction	Fiber unit length (Diameter) Ambient temperature	Appearance (mm inch)	Minimum bend radius (mm inch)	Detecting distance (mm inch) ^{*1}			Model Weight
						MEGA FINE	Other power modes		
Retro-Reflective	M6	M6	2 m 6.56' Free-cut (ø1.0 ø0.04" x 2) -40 to +50°C -40 to +122°F		R2 R0.08" ToughFlex	MEGA: 10 to 960 0.39" to 37.80" FINE: 10 to 120 0.39" to 4.72"	ULTRA: 10 to 760 0.39" to 29.92" SUPER: 10 to 380 0.39" to 14.96" TURBO: 10 to 230 0.39" to 9.06" HSP: - -		FU-13 Approx. 8 g
			2 m 6.56' Free-cut (ø1.0 ø0.04" x 2) -40 to +50°C -40 to +122°F			MEGA: 100 to 6400 4.72" to 251.97" FINE: 100 to 1260 4.72" to 49.61"	ULTRA: 100 to 5000 4.72" to 196.85" SUPER: 100 to 2500 4.72" to 98.43" TURBO: 100 to 1690 4.72" to 66.54" HSP: 100 to 1000 4.72" to 39.37"		FU-15 Approx. 12 g

*1 Detecting distance for reflective fibers is based on a standard target: White matte paper.

Reflector/Reflective Tape Specifications (Optional Parts)

Model	Power modes	Detecting distance (mm inch) ^{*1}					Model Weight
		R-2 (OP-95388)		R-3 (OP-96436)		R-5	
FU-13	MEGA	10 to 1880	0.39" to 74.02"	10 to 1540	0.39" to 60.63"	10 to 1060	0.39" to 41.73"
	ULTRA	10 to 1500	0.39" to 59.06"	10 to 1240	0.39" to 48.82"	10 to 860	0.39" to 33.86"
	SUPER	10 to 760	0.39" to 29.92"	10 to 640	0.39" to 25.20"	10 to 440	0.39" to 17.32"
	TURBO	10 to 450	0.39" to 17.72"	10 to 360	0.39" to 14.17"	10 to 230	0.39" to 9.06"
	FINE	10 to 250	0.39" to 9.84"	10 to 200	0.39" to 7.87"	10 to 130	0.39" to 5.12"
	HSP	-	-	-	-	-	-
FU-15*	MEGA	100 to 6400	3.94" to 251.97"	100 to 4400	3.94" to 173.23"	100 to 2600	3.94" to 102.36"
	ULTRA	100 to 5000	3.94" to 196.85"	100 to 3600	3.94" to 141.73"	100 to 2200	3.94" to 86.61"
	SUPER	100 to 2500	3.94" to 98.43"	100 to 2000	3.94" to 78.43"	100 to 1500	3.94" to 59.06"
	TURBO	100 to 1690	3.94" to 66.54"	100 to 1350	3.94" to 53.15"	100 to 1200	3.94" to 47.24"
	FINE	100 to 1260	3.94" to 47.61"	100 to 1000	3.94" to 39.37"	100 to 1000	3.94" to 39.37"
	HSP	100 to 1000	3.94" to 39.37"	100 to 860	3.94" to 33.86"	100 to 860	3.94" to 33.86"

*1 Detecting distance for reflective fibers is based on a standard target: White matte paper.

*2 Reflective tape cannot be used.

Narrow Beam/High-power

Built-in lens reduces beam width
and helps reduce stray light.

Thrubeam/reflective types

Type			Fiber unit length (Diameter) Ambient temperature	Appearance (mm inch)	Minimum bend radius (mm inch)	Detecting distance (mm inch)*1		Optical axis diameter (mm inch) (Standard target to be detected)	Model Weight		
Detector method	Beam emitting direction	Aperture angle				MEGA FINE	Other power modes				
Thrubeam	Side	Approx. 6°	2 m 6.56' Free-cut (ø1.0 ø0.04') -40 to +50°C -40 to +122°F FU-16Z: -40 to +70°C -40 to +158°F		R2 R0.08* ToughFlex	MEGA: 3600 141.73* FINE: 1260 49.61*	ULTRA: 3600 141.73* SUPER: 2600 102.36* TURBO: 1800 70.87* HSP: 760 29.92*	ø2.5 ø0.10*	FU-16Z Approx. 8 g		
						MEGA: 3600 141.73* FINE: 1900 74.80*	ULTRA: 3600 141.73* SUPER: 3600 141.73* TURBO: 2700 106.30* HSP: 1000 39.37*				
		Approx. 2°	2 m 6.56' Free-cut (ø1.0 ø0.04') -40 to +50°C -40 to +122°F FU-16: -40 to +70°C -40 to +158°F			MEGA: 3600 141.73* FINE: 1600 62.99*	ULTRA: 3600 141.73* SUPER: 3000 118.11* TURBO: 2100 92.68* HSP: 960 37.80*				
						MEGA: 1300 51.18* FINE: 330 12.99*	ULTRA: 900 35.43* SUPER: 680 26.77* TURBO: 530 20.87* HSP: 210 8.27*				
	Top	Approx. 3°	2 m 6.56' Free-cut (ø1.0 ø0.04') -40 to +50°C -40 to +122°F FU-18: -40 to +70°C -40 to +158°F		R10 R0.39*	MEGA: 3600 141.73* FINE: 3600 141.73*	ULTRA: 3600 141.73* SUPER: 3600 141.73* TURBO: 3600 141.73* HSP: 2400 94.49*	ø1 ø0.04"	FU-18M Approx. 8 g		
						MEGA: 1300 51.18* FINE: 330 12.99*	ULTRA: 3600 141.73* SUPER: 3600 141.73* TURBO: 3600 141.73* HSP: 2400 94.49*				
		Approx. 6°	2 m 6.56' Free-cut (ø1.0 ø0.04') -40 to +50°C -40 to +122°F FU-50: -40 to +70°C -40 to +158°F		R2 R0.08* ToughFlex	MEGA: 3600 141.73* FINE: 3600 141.73*	ULTRA: 3600 141.73* SUPER: 3600 141.73* TURBO: 3600 141.73* HSP: 2400 94.49*				
						MEGA: 3600 141.73* FINE: 3600 141.73*	ULTRA: 3600 141.73* SUPER: 3600 141.73* TURBO: 3600 141.73* HSP: 2400 94.49*				
Reflective	Top	Approx. 8°	2 m 6.56' Free-cut (ø2.2 ø0.09" x 2) -40 to +50°C -40 to +122°F FU-40: -40 to +70°C -40 to +158°F		R2 R0.08* ToughFlex	MEGA: 30 to 2300 1.18" to 90.55" FINE: 30 to 290 1.18" to 11.42"	ULTRA: 30 to 1600 1.18" to 62.99" SUPER: 30 to 760 1.18" to 29.92" TURBO: 30 to 410 1.18" to 16.14" HSP: 30 to 160 1.18" to 6.30"	-	FU-40 Approx. 23 g		
						MEGA: 30 to 2300 1.18" to 90.55" FINE: 30 to 290 1.18" to 11.42"	ULTRA: 30 to 1600 1.18" to 62.99" SUPER: 30 to 760 1.18" to 29.92" TURBO: 30 to 410 1.18" to 16.14" HSP: 30 to 160 1.18" to 6.30"				
						MEGA: 30 to 2300 1.18" to 90.55" FINE: 30 to 290 1.18" to 11.42"	ULTRA: 30 to 1600 1.18" to 62.99" SUPER: 30 to 760 1.18" to 29.92" TURBO: 30 to 410 1.18" to 16.14" HSP: 30 to 160 1.18" to 6.30"				

*1 3600 mm 141.73" is assumed as maximum because the fiber cable has a length of 2 m 6.56".

Detected distance for reflective fibers is based on a standard target: White matte paper.

Definite-reflective types

Type			Fiber unit length (Diameter) Ambient temperature	Appearance (mm inch)	Minimum bend radius (mm inch)	Detecting distance (mm inch)*1		Beam spot diameter (mm inch)	Model Weight
Detector method	Beam emitting direction	Aperture angle				MEGA FINE	Other power modes		
Definite-reflective	Side	Approx. 6°	2 m 6.56' Free-cut (ø1.0 ø0.04" x 2) -40 to +50°C -40 to +122°F FU-37: -40 to +70°C -40 to +158°F		R10 R0.39*	MEGA: 3 (0.12") center of detecting distance FINE: 3 (0.12") center of detecting distance	ULTRA: 3 (0.12") center of detecting distance SUPER: 3 (0.12") center of detecting distance TURBO: 3 (0.12") center of detecting distance HSP: 3 (0.12") center of detecting distance	Approx. ø4.5 ø0.18" (at distance of 3 0.12")	FU-37 Approx. 6 g
						MEGA: 6 (0.24") center of detecting distance FINE: 6 (0.24") center of detecting distance	ULTRA: 6 (0.24") center of detecting distance SUPER: 6 (0.24") center of detecting distance TURBO: 6 (0.24") center of detecting distance HSP: 6 (0.24") center of detecting distance		
		Approx. 8°	2 m 6.56' Free-cut (ø2.2 ø0.09" x 2) -40 to +50°C -40 to +122°F FU-38: -40 to +70°C -40 to +158°F		R10 R0.39*	MEGA: 6 (0.24") center of detecting distance FINE: 6 (0.24") center of detecting distance	ULTRA: 6 (0.24") center of detecting distance SUPER: 6 (0.24") center of detecting distance TURBO: 6 (0.24") center of detecting distance HSP: 6 (0.24") center of detecting distance	Approx. ø1.5 ø0.06" (at distance of 6 0.24")	FU-38 Approx. 5 g
	Top	Approx. 6°	2 m 6.56' Free-cut (ø1.0 ø0.04" x 2) -40 to +50°C -40 to +122°F FU-38V: -40 to +70°C -40 to +158°F		R10 R0.39*	MEGA: 0 to 4 0" to 0.16" FINE: 0 to 4 0" to 0.16"	ULTRA: 0 to 4 0" to 0.16" SUPER: 0 to 4 0" to 0.16" TURBO: 0 to 4 0" to 0.16" HSP: 2±1.4 0.08"±0.06"	-	FU-38V Approx. 5 g
						MEGA: 0 to 4 0" to 0.16" FINE: 0 to 4 0" to 0.16"	ULTRA: 0 to 4 0" to 0.16" SUPER: 0 to 4 0" to 0.16" TURBO: 0 to 4 0" to 0.16" HSP: 2±1.4 0.08"±0.06"		

*1 Detecting distance for reflective fibers is based on a standard target: White matte paper.

High-flex

Provides higher flexibility than electric wire.
R2 (R0.08") types are resistant to repeated bends up to 10 million bends.

Thrubeam/reflective types

Type	Size (mm inch)	Fiber unit length (Diameter) Ambient temperature	Appearance (mm inch)	Minimum bend radius (mm inch)	Detecting distance (mm inch)*1			Optical axis diameter (mm inch) (Standard target to be detected)	Model Weight
					MEGA FINE	Other power modes			
Thrubeam	ø1.5 ø0.06"	1 m 3.28' Free-cut (ø1.0 ø0.04") -40 to +70°C -40 to +158°F		R4 R0.16" High-flex	MEGA: 1200 FINE: 230	47.24" 9.06"	ULTRA:	810 31.89"	FU-59 Approx. 3 g
	M3	1 m 3.28' Free-cut (ø1.0 ø0.04") -40 to +70°C -40 to +158°F					SUPER:	590 23.23"	
	6×10.5×2.5 0.24"×0.41"×0.10"	1 m 3.28' Free-cut (ø1.0 ø0.04") -40 to +70°C -40 to +158°F					TURBO:	410 16.14"	
	ø1.0 ø0.04"	1 m 3.28' Free-cut (ø1.0 ø0.04") -40 to +50°C -40 to +122°F		R2 R0.08" ToughFlex High-flex	MEGA: 590 FINE: 140	23.23" 5.51"	HSP:	130 5.12"	FU-79 Approx. 6 g
	ø1.5 ø0.06"	1 m 3.28' Free-cut (ø1.0 ø0.04") -40 to +50°C -40 to +122°F					ULTRA:	490 19.29"	
	M3	1 m 3.28' Free-cut (ø1.0 ø0.04") -40 to +50°C -40 to +122°F					SUPER:	290 11.42"	
Reflective	M4 Built-in lens	1 m 3.28' Free-cut (ø1.0 ø0.04") -40 to +50°C -40 to +122°F		R2 R0.08" ToughFlex High-flex	MEGA: 1800 FINE: 850	70.87" 33.46"	TURBO:	180 7.09"	FU-57TE Approx. 5 g
	ø1.5 ø0.06"	1 m 3.28' cut not allowed -40 to +70°C -40 to +158°F					HSP:	55 2.17"	
	M3	1 m 3.28' cut not allowed -40 to +70°C -40 to +158°F					ULTRA:	430 16.93"	
	ø3 ø0.12"	2 m 6.56' Free-cut (ø1.0 ø0.04" x 2) -40 to +70°C -40 to +158°F			MEGA: 290 FINE: 63	11.42" 2.48"	SUPER:	300 11.81"	FU-58U Approx. 4 g
	M4	2 m 6.56' Free-cut (ø1.0 ø0.04" x 2) -40 to +70°C -40 to +158°F					TURBO:	1200 47.24"	
	ø2 ø0.08"	1 m 3.28' Free-cut (ø1.0 ø0.04" x 2) -40 to +50°C -40 to +122°F					HSP:	370 14.57"	
	ø3 ø0.12"	1 m 3.28' Free-cut (ø1.0 ø0.04" x 2) -40 to +50°C -40 to +122°F		R2 R0.08" ToughFlex High-flex	MEGA: 140 FINE: 40	5.51" 1.57"	ULTRA:	110 4.33"	FU-79U Approx. 4 g
	M3	1 m 3.28' Free-cut (ø1.0 ø0.04" x 2) -40 to +50°C -40 to +122°F					SUPER:	80 5.12"	

*1 Detecting distance for reflective fibers is based on a standard target: White matte paper.

Oil/Chemical Resistant

PTFE coating allows for use in almost any environment.

Thrubeam/Reflective types

Type	Type	Size (mm inch)	Fiber unit length (Diameter) Ambient temperature	Appearance (mm inch)	Minimum bend radius (mm inch)	Detecting distance (mm inch)*1			Optical axis diameter (mm inch) (Standard target to be detected)	Model Weight
						MEGA FINE	Other power modes			
Thrubeam	Top	ø5 ø0.20"	2 m 6.56' Free-cut (ø2.2 ø0.09") -40 to +70°C -40 to +158°F		R40 R1.57"	MEGA: 3600 FINE: 2800	141.73" 110.24"	ULTRA:	3600 141.73"	FU-92 Approx. 71 g
	Side	ø5 ø0.20"	2 m 6.56' Free-cut (ø2.2 ø0.09") -40 to +70°C -40 to +158°F					SUPER:	3600 141.73"	
Reflective	Top	ø4.5 ø0.18"	2 m 6.56' Free-cut (ø1.3 ø0.05" x 2) -40 to +70°C -40 to +158°F		R40 R1.57"	MEGA: 310 FINE: 140	12.20" 5.51"	ULTRA:	290 11.42"	FU-91 Approx. 32 g
	Side	ø4.5 ø0.18"	2 m 6.56' Free-cut (ø1.3 ø0.05" x 2) -40 to +70°C -40 to +158°F					SUPER:	250 9.84"	

*1 3600 mm 141.73" is assumed as maximum because the fiber cable has a length of 2 m 6.56". Detecting distance for reflective fibers is based on a standard target: White matte paper.

Heat Resistant

Resists temperatures up to 350°C (662°F).

A wide variety of heat-resistant types are available, including the easy-to-install R5(R0.20) type and the high-temperature type, resistant to temperatures up to 350°C (662°F). Fibers used in sensors resistant to temperatures of 200°C (392°F) or more are made from multi-component glass.

Thrubeam/reflective types

Type	Detecting method	Heat resistant temperatures* ²	Fiber unit length (Diameter) Ambient temperature	Appearance (mm inch)	Minimum bend radius (mm inch)	Detecting distance (mm inch)* ¹			Optical axis diameter (mm inch) (Standard target to be detected)	Model Weight
						MEGA FINE		Other power modes		
Thrubeam	100°C 212°F ³	2 m 6.56 Free-cut (ø2.2 ø0.9") -40 to +100°C -40 to +212°F	M4		R5 R0.20* ToughFlex	MEGA: 3600 141.73" FINE: 680 26.77" Lens attachment: P14	ULTRA: 2200 86.61" SUPER: 1600 62.99" TURBO: 900 35.43" HSP: 390 15.35"	ø1 ø0.04*	FU-86Z Approx. 25 g	
	105°C 221°F ³	2 m 6.56 Free-cut (ø2.2 ø0.9") -40 to +105°C -40 to +221°F	M4		R25 R0.98*	MEGA: 3600 141.73" FINE: 1100 43.31" Lens attachment: P14	ULTRA: 3200 125.98" SUPER: 2200 86.61" TURBO: 1500 59.06" HSP: 540 21.26"	ø1 ø0.04*	FU-86A Approx. 22 g	
	150°C 302°F ⁴	2 m 6.56 Free-cut (ø2.2 ø0.9") -40 to +150°C -40 to +302°F	M4		R20 R0.79*	MEGA: 2700 106.30" FINE: 520 20.47"	ULTRA: 1800 70.87" SUPER: 1100 43.31" TURBO: 720 28.35" HSP: 340 13.39"	ø1.5 ø0.06*	FU-86H Approx. 35 g	
	180°C 356°F ⁵	2 m 6.56 Free-cut (ø2.2 ø0.9") -60 to +180°C -76 to +356°F	M4		R35 R1.38*	MEGA: 2700 106.30" FINE: 570 22.44"	ULTRA: 1900 74.80" SUPER: 1200 47.24" TURBO: 790 31.10" HSP: 380 14.96"	ø1.5 ø0.06*	FU-88 Approx. 36 g	
	200°C 392°F	2 m 6.56 cut not allowed. -40 to +200°C -40 to +392°F	M4		R8 R0.32*	MEGA: 1800 70.87" FINE: 390 15.35"	ULTRA: 1300 51.18" SUPER: 900 35.43" TURBO: 680 26.77" HSP: 250 9.84"	ø1 ø0.04*	FU-88K Approx. 30 g	
	300°C 572°F	2 m 6.56 cut not allowed. -40 to +300°C -40 to +572°F	M4		R25 R0.98*	Lens attachment: P14			FU-84C Approx. 66 g	
Reflective	100°C 212°F ³	2 m 6.56 Free-cut (ø2.2 ø0.9" x 2) -40 to +100°C -40 to +212°F	M6		R5 R0.20* ToughFlex	MEGA: 740 29.13" FINE: 160 6.30"	ULTRA: 580 22.83" SUPER: 410 16.14" TURBO: 320 12.60" HSP: 90 3.54"	-	FU-85Z Approx. 25 g	
	105°C 221°F ³	2 m 6.56 Free-cut (ø2.2 ø0.9" x 2) -40 to +105°C -40 to +221°F	M6		R25 R0.98*	MEGA: 1100 43.31" FINE: 230 9.06"	ULTRA: 860 33.86" SUPER: 590 23.23" TURBO: 410 16.14" HSP: 140 5.51"	-	FU-85A Approx. 21 g	
	150°C 302°F ⁴	2 m 6.56 Free-cut (ø2.2 ø0.9" x 2) -40 to +150°C -40 to +302°F	M6		R20 R0.79*	MEGA: 720 28.35" FINE: 160 6.30"	ULTRA: 560 22.05" SUPER: 410 16.14" TURBO: 320 12.60" HSP: 90 3.54"	-	FU-85H Approx. 35 g	
	180°C 356°F ⁵	2 m 6.56 Free-cut (ø2.2 ø0.9" x 2) -60 to +180°C -76 to +356°F	M6		R35 R1.38*	MEGA: 860 33.86" FINE: 200 7.87"	ULTRA: 710 27.95" SUPER: 470 18.50" TURBO: 350 13.78" HSP: 100 3.94"	-	FU-87 Approx. 33 g	
	200°C 392°F	1 m 3.28 cut not allowed. -40 to +200°C -40 to +392°F	M4		R8 R0.32*				FU-87K Approx. 15 g	
	300°C 572°F	1 m 3.28 cut not allowed. -40 to +300°C -40 to +572°F ø0.08" ø2.1	M4		R25 R0.98*	MEGA: 770 30.32" FINE: 190 7.48"	ULTRA: 650 25.59" SUPER: 450 17.72" TURBO: 340 13.38" HSP: 100 3.94"	-	FU-82C Approx. 29 g	
	350°C 662°F	1 m 3.28 cut not allowed. -30 to +350°C -22 to +572°F ø0.08" ø2.1	M4			MEGA: 650 25.59" FINE: 140 5.51"	ULTRA: 560 22.05" SUPER: 390 15.35" TURBO: 290 11.42" HSP: 86 3.39"	-	FU-83C Approx. 23 g	
	250°C 482°F	2 m 6.56 cut not allowed. -40 to +250°C -40 to +482°F Thickness: 5 0.20"	M4		R25 R0.98*	MEGA: 8 to 37 0.32" to 1.46" FINE: 8 to 30 0.32" to 1.18"	ULTRA: 8 to 34 0.32" to 1.34" SUPER: 8 to 32 0.32" to 1.26" TURBO: 8 to 30 0.32" to 1.18" HSP: 10 to 18 0.39" to 0.71"	-	FU-81C Approx. 24 g	
	180°C 356°F	2 m 6.56 Free-cut (ø2.2 ø0.9" x 2) -60 to +180°C -76 to +356°F Thickness: 5 0.20"	M4			MEGA: 2.5 to 65 0.10" to 2.56" FINE: 2.5 to 16 0.10" to 0.63"	ULTRA: 2.5 to 55 0.10" to 2.17" SUPER: 2.5 to 27 0.10" to 1.06" TURBO: 2.5 to 22 0.10" to 0.87" HSP: 2.5 to 10 0.10" to 0.39"	-	FU-38LK Approx. 70 g	
									FU-38K Approx. 45 g	
									FU-38H Approx. 45 g	

*1 Detecting distance for reflective fibers is based on a standard target: White matte paper.(For the FU-38LK, the distances are based on a glass substrate ($t = 0.7 \text{ mm } 0.03"$) detected in the planar direction.)

*2 Use the fiber sensor under dry conditions. Allow some margin for the temperature upper limit when selecting a heat-resistant fiber unit.

*3 The recommended maximum ambient temperature during operation is 90°C 194°F when constantly using a fiber unit in a high-temperature environment.

*4 The recommended maximum ambient temperature during operation is 130°C 266°F when constantly using a fiber unit in a high-temperature environment.

*5 The recommended maximum ambient temperature during operation is 150°C 302°F when constantly using a fiber unit in a high-temperature environment.

Liquid-level

Liquid-level detection sensors.
Available in tube-mountable and immersible types.

Reflective

Type	Detecting method	Transparent tube diameter (mm inch)	Beam axis	Fiber unit length (Diameter) Ambient temperature	Appearance (mm inch)	Minimum bend radius (mm inch)	Accessory	Model Weight
Tube-mountable type	ø4 to 26 ø0.16" to 1.02"	16	16	2 m 6.56' Free-cut (ø2.2 ø0.09" x 2) -40 to +70°C -40 to +158°F		R5 R0.20*	Binding band x 2 Nonslip rubber x 2	FU-95S Approx. 23 g
				2 m 6.56' Free-cut (ø1.0 ø0.04" x 2) FU-95Z: -40 to +50°C -40 to +122°F FU-95HA: -40 to +105°C -40 to +221°F FU-95: -40 to +70°C -40 to +158°F		R2 R0.08* ToughFlex	Binding band x 2 Nonslip rubber x 2 Spacer x 2 Screw x 2 Nut x 2	FU-95Z Approx. 7 g
		1	1	2 m 6.56' Free-cut (ø2.2 ø0.09" x 2) FU-95Z: -40 to +50°C -40 to +122°F FU-95HA: -40 to +105°C -40 to +221°F FU-95: -40 to +70°C -40 to +158°F		R25 R0.98*		FU-95HA Approx. 7 g
				2 m 6.56' Free-cut (ø1.0 ø0.04" x 2) -40 to +70°C -40 to +158°F		R10 R0.39*		FU-95 Approx. 7 g
	ø26 ø1.02" or more recommended	16	16	2 m 6.56' Free-cut (ø2.2 ø0.09" x 2) -40 to +70°C -40 to +158°F		R5 R0.20*	None (Optionally available)	FU-95W Approx. 20 g
Immersion	Type	Fiber unit length (Diameter) Ambient temperature	Appearance (mm inch)	Minimum bend radius (mm inch)			Model Weight	
				PFA-sheathed section	Fiber		R0.5 R0.02* ToughFlex	
				R40 R1.57*	R25 R0.98*		FU-93Z Approx. 78 g	
		ø6 (PFA) ø0.24"		R25 R0.98*			FU-93 Approx. 78 g	

* Not bendable up to 80 mm
(3.15") from the tip.

Liquid Crystal/Semiconductors

Perfect for detecting glass substrates.
Lineup offers distance alignment, edge detection, and wafer mapping types.

Thrubeam

Type	Application	Beam emitting direction	Aperture angle	Fiber unit length (Diameter) Ambient temperature	Appearance (mm inch)	Minimum bend radius (mm)	Detecting distance (mm inch)*1	Optical axis diameter (mm inch) (Standard target to be detected)	Model Weight
							MEGA FINE	Other power modes	
Mapping	Mapping	Side	Approx. 3°	2 m 6.56' Free-cut (ø1.0 ø0.04") -40 to +70°C -40 to +158°F		R10 R0.39*	MEGA: 1300 51.18" FINE: 330 12.99"	ULTRA: 900 35.43" SUPER: 680 26.77" TURBO: 530 20.87" HSP: 210 8.27"	ø1 ø0.04" Approx. 6 g

Reflective

Type	Application	Beam emitting direction	Heat resistant** temperatures	Fiber unit length (Diameter) Ambient temperature	Appearance (mm inch)	Minimum bend radius (mm inch)	Detecting distance (mm inch)*1	Model Weight	
							MEGA FINE	Other power modes	
Glass substrate mapping	Glass substrate mapping	Top	-	2 m 6.56' Free-cut (ø2.2 ø0.09" x 2) -40 to +70°C -40 to +158°F		R25 R0.98*	MEGA: 15 to 70 0.59" to 2.76" FINE: 15 to 30 0.59" to 1.18"	ULTRA: 15 to 60 0.59" to 2.36" SUPER: 15 to 46 0.59" to 1.81" TURBO: 15 to 38 0.59" to 1.50" HSP: - -	FU-40S Approx. 25 g
				2 m 6.56' Free-cut (ø2.2 ø0.09" x 2) -10 to +60°C 14 to +140°F			MEGA: 8 to 38 0.32" to 1.50" FINE: 8 to 32 0.32" to 1.26"	ULTRA: 8 to 36 0.32" to 1.42" SUPER: 8 to 35 0.32" to 1.38" TURBO: 8 to 34 0.32" to 1.34" HSP: 10 to 26 0.39" to 1.02"	FU-38L Approx. 20 g
	Glass substrate alignment	Flat	-	2 m 6.56' Free-cut (ø2.2 ø0.09" x 2) -40 to +70°C -40 to +158°F		R5 R0.20*	MEGA: 0 to 25 0" to 0.98" FINE: 0 to 25 0" to 0.98"	ULTRA: 0 to 25 0" to 0.98" SUPER: 0 to 25 0" to 0.98" TURBO: 0 to 25 0" to 0.98" HSP: - -	FU-38S Approx. 20 g
				2 m 6.56' Free-cut (ø2.2 ø0.09" x 2) -40 to +70°C -40 to +158°F			MEGA: 0 to 14 0" to 0.55" FINE: 0 to 14 0" to 0.55"	ULTRA: 0 to 14 0" to 0.55" SUPER: 0 to 14 0" to 0.55" TURBO: 0 to 14 0" to 0.55" HSP: 0 to 12 0" to 0.47"	FU-38R Approx. 20 g
Seating check	Heat-resistant glass substrate alignment	Flat	250°C 482°F	2 m 6.56' Free-cut (ø1.0 ø0.04" x 2) -40 to +70°C -40 to +158°F		R10 R0.39*	MEGA: 0 to 4 0" to 0.16" FINE: 0 to 4 0" to 0.16"	ULTRA: 0 to 4 0" to 0.16" SUPER: 0 to 4 0" to 0.16" TURBO: 0 to 4 0" to 0.16" HSP: 2±1.4 0.08"±0.06"	FU-38V Approx. 5 g
Heat-resistant glass substrate alignment				2 m 6.56' cut not allowed. -40 to +250°C -40 to +482°F 0.67" 17.1 Thickness: 1.17" 5 0.20"			MEGA: 8 to 37 0.32" to 1.46" FINE: 8 to 30 0.32" to 1.46"	ULTRA: 8 to 34 0.32" to 1.34" SUPER: 8 to 32 0.32" to 1.26" TURBO: 8 to 30 0.32" to 1.18" HSP: 10 to 18 0.39" to 0.71"	FU-38LK Approx. 70 g
Heat-resistant seating, presence check				1 m 3.28' cut not allowed. -40 to +250°C -40 to +482°F 0.75" 19 Thickness: 2.7" 5 0.20"			MEGA: 2.5 to 65 0.10" to 2.56" FINE: 2.5 to 50 0.10" to 0.63"	ULTRA: 2.5 to 55 0.10" to 2.17" SUPER: 2.5 to 50 0.10" to 2.06" TURBO: 2.5 to 22 0.10" to 0.87" HSP: 2.5 to 10 0.10" to 0.39"	FU-38K Approx. 45 g
				2 m 6.56' Free-cut (ø2.2 ø0.09" x 2) -40 to +180°C -40 to +356°F 1.75" 19 Thickness: 2.7" 5 0.20"			R35 R1.38*	ULTRA: 2.5 to 55 0.10" to 2.17" SUPER: 2.5 to 50 0.10" to 2.06" TURBO: 2.5 to 22 0.10" to 0.87" HSP: 2.5 to 10 0.10" to 0.39"	FU-38H Approx. 45 g

*1 Detecting distance for reflective fibers is based on a standard target: White matte paper.(For the FU-38LK, the distances are based on a glass substrate (t = 0.7 mm 0.03") detected in the planar direction.)

*2 Use the fiber sensor under dry conditions. Allow some margin for the temperature upper limit when selecting a heat-resistant fiber unit.

*3 The recommended maximum ambient temperature during operation is 150°C 302°F when constantly using a fiber unit in a high-temperature environment.

Specifications

Type		Standard 1 output				High functionality 2 output				Monitor output
		Cable		M8 connector*1		Cable		M8 connector*1		Cable
Model	NPN	FS-N11N	FS-N12N	FS-N11CN	FS-N12CN	FS-N13N	FS-N14N	-	-	FS-N11MN
	PNP	FS-N11P	FS-N12P	FS-N11CP	FS-N12CP	FS-N13P	FS-N14P	FS-N13CP	FS-N14CP	-
Main unit/Expansion unit	Main unit	Expansion unit	Main unit	Expansion unit	Main unit	Expansion unit	Main unit	Expansion unit	Main unit	Main unit
Control output	1	1	1	1	2	2	2	2	1	
Monitor output (1~5 V)	-	-	-	-	-	-	-	-	1	
External input	-	-	1	1	1	1	-	-	-	
Response time	50 µs (HIGH SPEED)/250 µs (FINE)/500 µs (TURBO)/1 ms (SUPER)/4 ms (ULTRA)/16 ms (MEGA)									
Control output	NPN output	NPN open collector 30 V; 1 output max: 100 mA or less; 2 output total: 100 mA or less (used stand-alone)/20 mA or less (multiple connections); residual voltage 1 V or less								
	PNP output	PNP open collector 30 V; 1 output max: 100 mA or less; 2 output total: 100 mA or less (used stand-alone)/20 mA or less (multiple connections); residual voltage 1 V or less								
Monitor output*2	1 to 5 V voltage output; load resistance 10 kΩ or more; repeat precision ±0.5% of F.S.; 1 ms response time (HIGH SPEED, FINE, TURBO)*3									
External input	input time 2 ms (ON)/20 ms (OFF) or more									
Multiple connections to Expansion units	Up to 16 units can be connected total (two output type is treated as two units)									
Light source	Red, 4-element LED									
APC	ON/OFF switchable (Factory setting: OFF)									
Number of interference prevention units	0 for HIGH SPEED; 4 for FINE; 8 for TURBO/SUPER/ULTRA/MEGA (When set to double, the number of interference-prevention units will be doubled.)									
Rating	Power voltage	12 - 24 V DC ±10% ripple (P-P) 10% or less								
	NPN Amplifier Current Consumption	Normal: 900 mW or less (36 mA max. at 24 V, 48 mA max. at 12 V)*4 Eco on mode: 800 mW or less (32 mA max. at 24 V, 39 mA max. at 12 V)*4 Eco Full mode: 470 mW or less (19 mA max. at 24 V, 23 mA max. at 12 V)								
	PNP Amplifier Current Consumption	Normal: 950 mW or less (39 mA max. at 24 V, 52 mA max. at 12 V)*4 Eco on mode: 850 mW or less (35 mA max. at 24 V, 44 mA max. at 12 V)*4 Eco Full mode: 520 mW or less (21 mA max. at 24 V, 26 mA max. at 12 V)								
Environmental resistance	Operating ambient luminance	Incandescent lamp: 20000 lux or less; Sunlight: 30000 lux or less								
	Operating ambient temperature	-20 to +55 °C (-4 to +131 °F) (no freezing)*5								
	Operating ambient humidity	35 to 85% RH (no condensation)								
	Vibration resistance	10 to 55 Hz Compound amplitude 1.5 mm 0.06*, 2 hours for each of X,Y,Z axis								
	Shock resistance	500 m/s² 3 times for each of X,Y,Z axis								
Case material		Both main unit and expansion unit housing material: Polycarbonate								
Weight		Approx. 75 g	Approx. 45 g	Approx. 22 g	Approx. 22 g	Approx. 80 g	Approx. 70 g	Approx. 22 g	Approx. 22 g	Approx. 75 g

*1 Use a cable length of 30m (98.43') or less for M8 connector types.

*2 FS-N11MN only

*3 SUPER: 1.2 ms, ULTRA: 1.8 ms, MEGA: 4.2 ms


*4 Increases 100 mW (4.0 mA) for High Speed mode

*5 One or two more units connected: -20 to +55°C (-4 to +131°F); 3 to 10 more units connected: -20 to +50°C (-4 to +122°F); 11 to 16 more units connected: -20 to +45°C (-4 to +113°F). When using 2-outputs, one unit is counted as two units. All temperature regulations are for when the unit is mounted on a DIN rail and installed on metal sheeting.


Input and Output Circuit Diagrams

FS-N11N / N12N / N11MN / N13N / N14N

Output Circuit Diagram

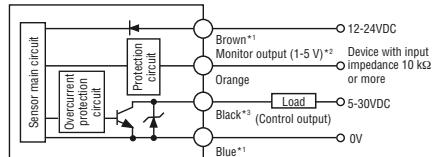

Input Circuit Diagram (FS-N13N/N14N only)




*1 FS-N11N/N11MN/N13N only

*2 FS-N11MN only


*3 The FS-N13N/N14N has a white cable as separate output 2.

FS-N11P / N12P / N13P / N14P / N13CP / N14CP

Output Circuit Diagram

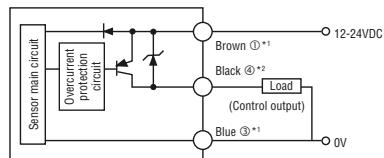

Input Circuit Diagram (FS-N13P/N14P only)




*1 FS-N11P/N13P/N13CP only

*2 The FS-N13P/N14P has a white cable as separate output. The FS-N13CP/N14CP has pin ② as separate output 2.




FS-N11CN / N12CN

Output Circuit Diagram

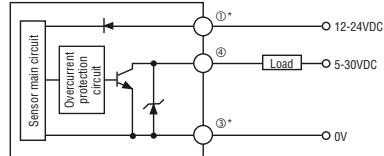

Input Circuit Diagram




M8 connector pin layout




* FS-N11CN only

FS-N11CP / N12CP

Output Circuit Diagram

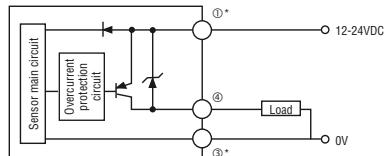

Input Circuit Diagram



M8 connector pin layout




* FS-N11CP only

Socket Cable (sold separately)

For FS-N11CN / N11CP / N12CN / N12CP / N13CP / N14CP

OP-73864
(Cable length: 2 m 6.56')

OP-73865
(Cable length: 10 m 32.81')



Pin – wire color


Connected pin number	Core wire cover color
①	Brown
②	White
③	Blue
④	Black

Dimensions

Unit: mm inch




FS-N11N / N11P / N13N / N13P / N11MN
Main unit (lead wire type)

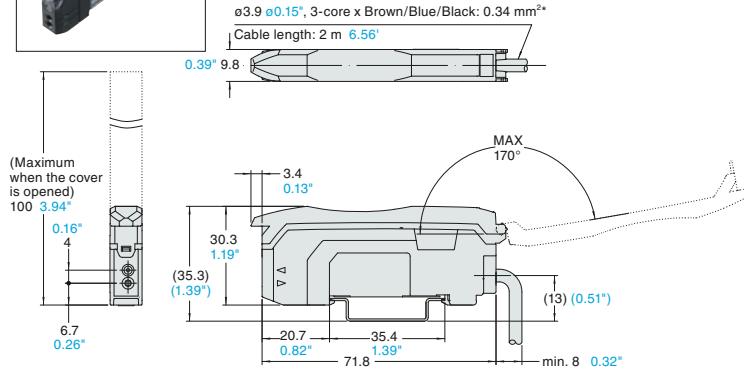

* FS-N11MN: ø3.9 ø0.15", 4-core x Brown/Blue: 0.34 mm² Black/Orange: 0.18 mm²
FS-N13N/N13P: ø3.9 ø0.15", 5-core x Brown/Blue: 0.34 mm² Black/White/Pink: 0.18 mm²




FS-N12N / N12P / N14N / N14P
Expansion unit (lead wire type)

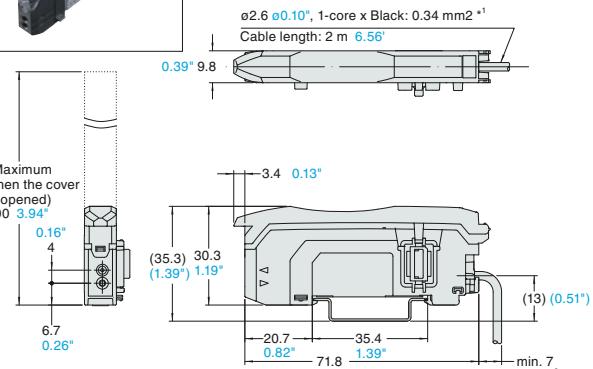


*1 FS-N14N/N14P: ø3.9 ø0.15", 3-core x Black/White/Pink: 0.18 mm²
*2 FS-N14N/N14P: min. 8 0.32"


When the mounting bracket is attached
(OP-73880 sold separately)

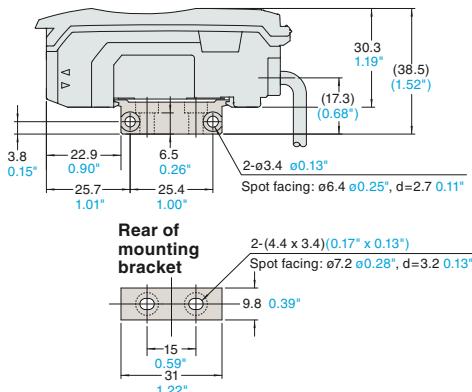






When several units are connected

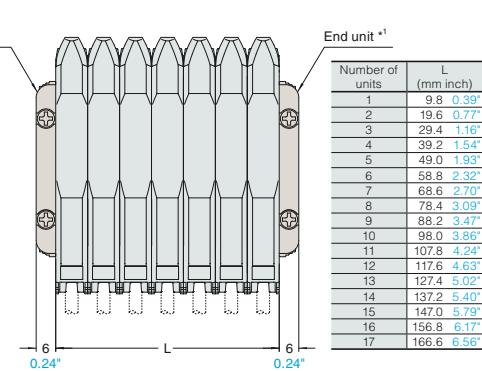



End unit
(OP-26751 sold separately)



Unit: mm inch

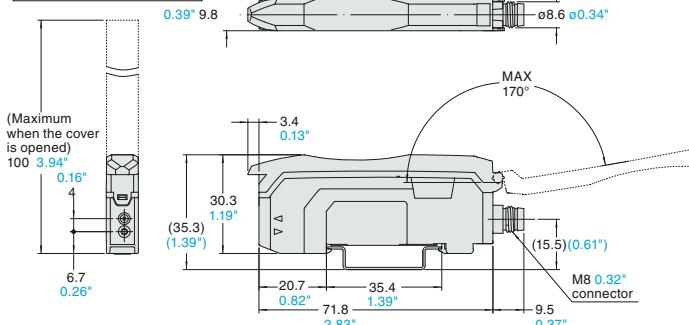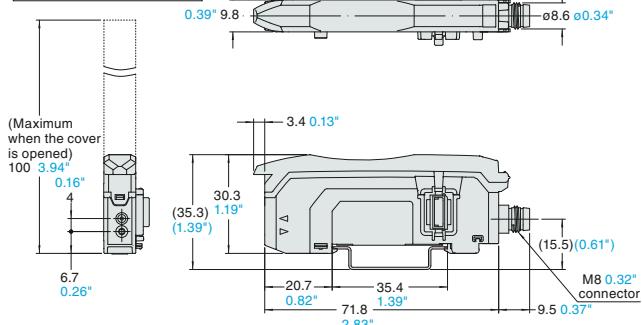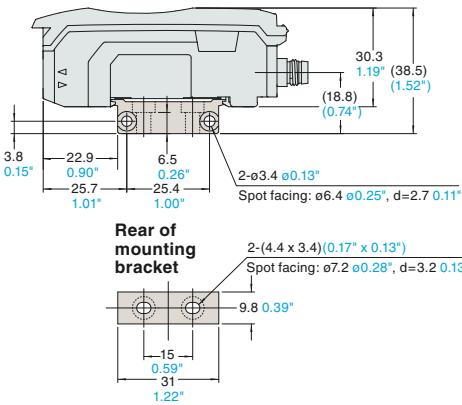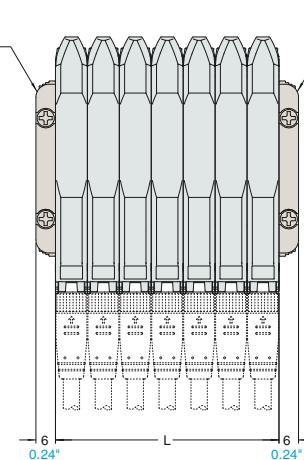
FS-N11CN / N11CP / N13CP
 Main unit (M8 connector type)

FS-N12CN / N12CP / N14CP
 Expansion unit (M8 connector type)

M8 socket cable (separately sold option)

**When the mounting bracket is attached
(OP-73880 sold separately)**

When several units are connected


Number of units	L (mm inch)
1	9.8 0.39"
2	19.6 0.77"
3	29.4 1.16"
4	39.2 1.54"
5	49.0 1.93"
6	58.8 2.32"
7	68.6 2.70"
8	78.4 3.09"
9	88.2 3.47"
10	98.0 3.86"
11	107.8 4.24"
12	117.6 4.63"
13	127.4 5.02"
14	137.2 5.40"
15	147.0 5.79"
16	156.8 6.17"
17	166.6 6.56"

**End unit
(OP-26751 sold separately)**

DIN-rail mounting


*1 When using expansion units, be sure to use the end unit. (Optional)

New! Improved FIBER CUTTER

Leaves a clean cut edge which prevents uneven light intensity.

The new cutter comes with the FS-N Series (amplifier). The cutter included with the fiber unit will be phased out from the old type to the new type. Once the changeover is complete, cutters will no longer be included with amplifier units.



CALL
TOLL
FREE

TO CONTACT YOUR LOCAL OFFICE
1-888-KEYENCE
1 - 8 8 8 - 5 3 9 - 3 6 2 3

www.keyence.com



SAFETY INFORMATION

Please read the instruction manual carefully in order to safely operate any KEYENCE product.

KEYENCE CORPORATION OF AMERICA

Corporate Office 50 Tice Blvd., Woodcliff Lake, NJ 07677 PHONE: 201-930-0100 Fax: 201-930-0099 E-mail: keyence@keyence.com

■ Regional offices	CO	Denver	IN	Indianapolis	MI	Detroit	NJ	Woodcliff Lake	OH	Cincinnati	SC	Greenville	VA	Richmond	
AL	Birmingham	FL	Tampa	KS	Kansas City	MI	Grand Rapids	NY	Rochester	OH	Cleveland	TN	Nashville	WA	Seattle
CA	N.California	GA	Atlanta	KY	Louisville	MN	Minneapolis	NC	Charlotte	OR	Portland	TN	Knoxville		
CA	Los Angeles	IL	Chicago	MA	Boston	MO	St. Louis	NC	Raleigh	PA	Philadelphia	TX	Dallas		

KEYENCE CANADA INC.

Head Office PHONE: 905-696-9970 Fax: 905-696-8340 E-mail: keyencecanada@keyence.com
Montreal PHONE: 514-694-4740 Fax: 514-694-3206

KEYENCE GLOBAL HEADQUARTERS

1-3-14, Higashi-Nakajima, Higashi-Yodogawa-ku, Osaka, 533-8555, Japan PHONE: +81-6-6379-2211

The information in this publication is based on KEYENCE's internal research/evaluation at the time of release and is subject to change without notice.
Copyright (c) 2010 KEYENCE CORPORATION. All rights reserved.

FSN-KA-C-E 1030-2 [611307] Printed in Japan



KA1-1010