


**FEATURES**

- Extremely low loss, internal resistance, and inductance.
- Stable operation with a lifespan of 100000 hours and unchanged sound quality.
- The outer sealing material has a shielding effect.
- Application: Bravery amplifier, Home audio, car audio, stage audio and other audio equipment.

**STRUCTURE**

- Imported 6N copper foil inner core.
- High tin content tin zinc alloy welding layer.
- PET metal coating, flame retardant epoxy resin encapsulation.
- Silver plated copper wire.

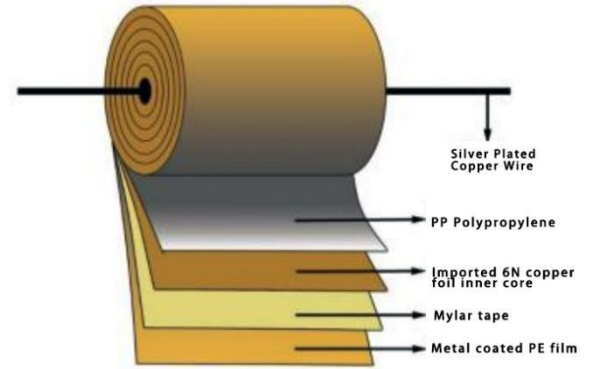


**TECHNOLOGY**

- German high-temperature industrial oil impregnation technology.
- High temperature vacuum heat treatment technology.
- Independently develops the "13 layer" gold spraying technology.



**DRAWING (mm)**

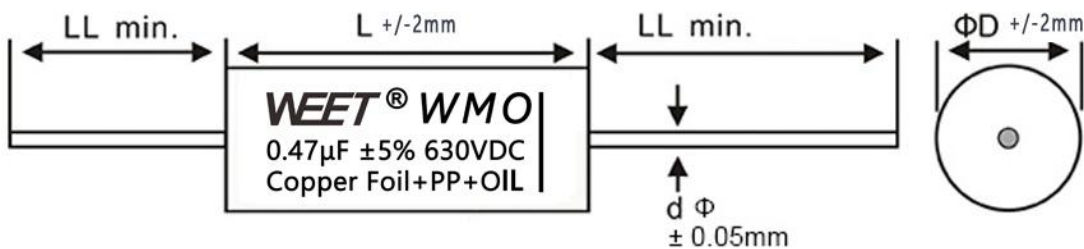

\*Note: Longer lead , Black line marking side for Outside Foil End.

**PICTURE**




**SPECIFICATIONS**

Items	Characteristics	Characteristics	Characteristics
Rated Voltage	630VDC	400VDC	250VDC
Capacitance Range	0.022μF~0.47μF	0.1μF~3.3μF	4.7μF~5.6μF
Capacitance Tolerance	±5% (J)	±5% (J)	±5% (J)
Voltage Proof	630VDC	400VDC	250VDC
Dissipation Factor	See size table	See size table	See size table

**SIZE TABLE (mm)**

(Unit: μF)	(×10 <sup>-4</sup> )	OD	L	d	Lead Length
Capacitance	Dissipation Factor	±2mm	±2mm	±0.05mm	±0.05mm
<b>630VDC</b>					
0.01	3	11.5	21	1.0Ag-Cu	40/50
0.012	3	12	21	1.0Ag-Cu	40/50
0.015	3	13	21	1.0Ag-Cu	40/50
0.018	3	14	21	1.0Ag-Cu	40/50
0.022	3	15	21	1.0Ag-Cu	40/50
0.033	3	17	21	1.0Ag-Cu	40/50
0.047	3	20	21	1.0Ag-Cu	40/50
0.068	3	24	21	1.0Ag-Cu	40/50
0.1	3	25	21	1.0Ag-Cu	40/50
0.22	3	22	36	1.0Ag-Cu	40/50
0.33	3	20	58	1.0Ag-Cu	40/50
0.47	3	23	58	1.0Ag-Cu	60/70
0.56	5	26	58	1.0Ag-Cu	60/70
0.68	5	28	58	1.0Ag-Cu	60/70
0.82	5	30	58	1.0Ag-Cu	60/70
1	5	33	58	1.0Ag-Cu	60/70
<b>400VDC</b>					
0.1	3	20	21	1.0Ag-Cu	40/50
0.22	3	23	26	1.0Ag-Cu	40/50
0.33	3	23	36	1.0Ag-Cu	40/50
0.47	3	25	41	1.0Ag-Cu	40/50
1	5	30	58	1.0Ag-Cu	60/70
1.2	5	33	58	1.0Ag-Cu	60/70
1.5	5	37	58	1.0Ag-Cu	60/70
1.8	5	41	58	1.0Ag-Cu	60/70
2	5	42	58	1.0Ag-Cu	60/70
2.2	5	44	58	1.0Ag-Cu	60/70
2.5	5	40	58	1.0Ag-Cu	60/70
2.7	5	43	58	1.0Ag-Cu	60/70
3	5	46	58	1.0Ag-Cu	60/70
3.3	5	46	58	1.0Ag-Cu	60/70
<b>250VDC</b>					
3.9	5	34	58	1.0Ag-Cu	60/70
4.3	5	38	58	1.0Ag-Cu	60/70
4.7	5	40	58	1.0Ag-Cu	60/70
5.6	5	44	58	1.0Ag-Cu	60/70
<b>100VDC</b>					
6.8	5	41	58	1.0Ag-Cu	60/70
8.2	5	44	58	1.0Ag-Cu	60/70





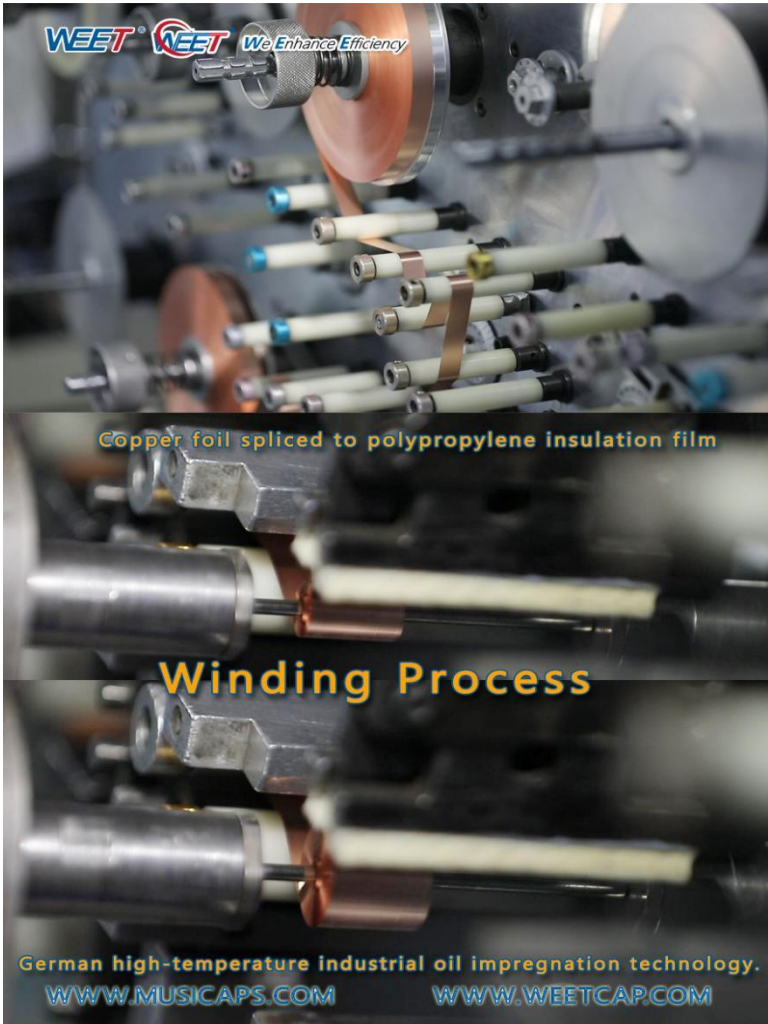

**WEET**<sup>®</sup> **WEET**<sup>®</sup> We Enhance Efficiency  
Access Hi-Fi Music For Audiophiles






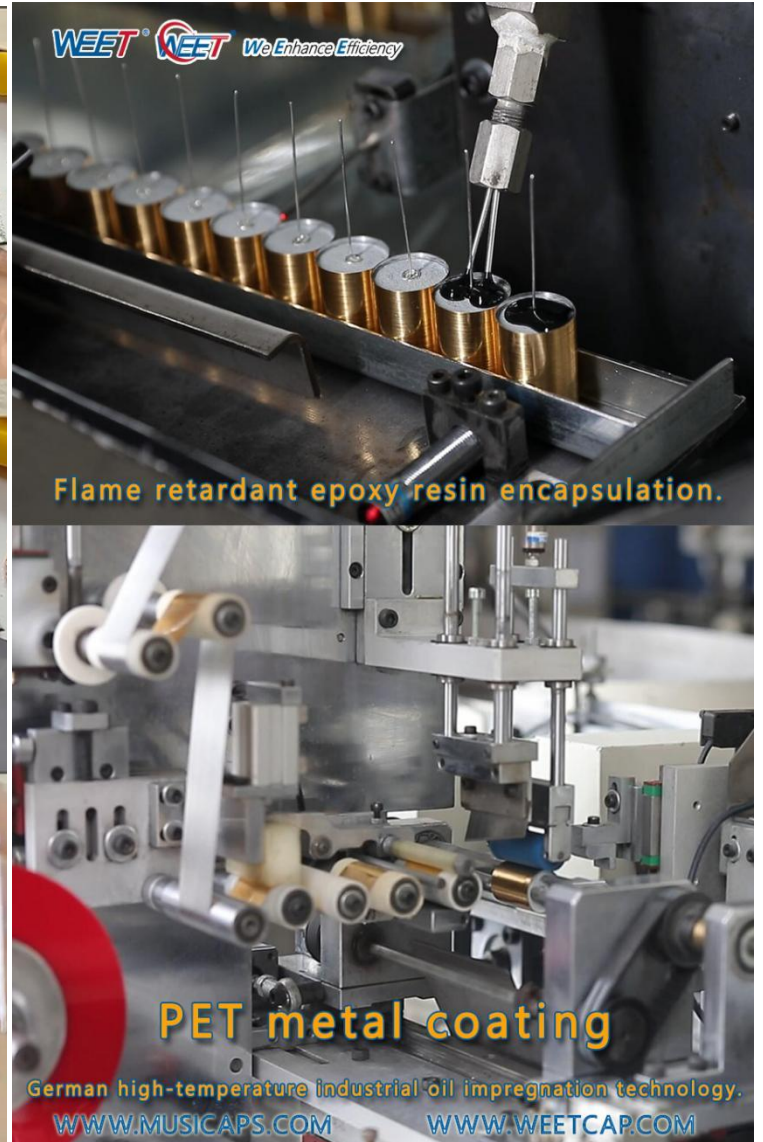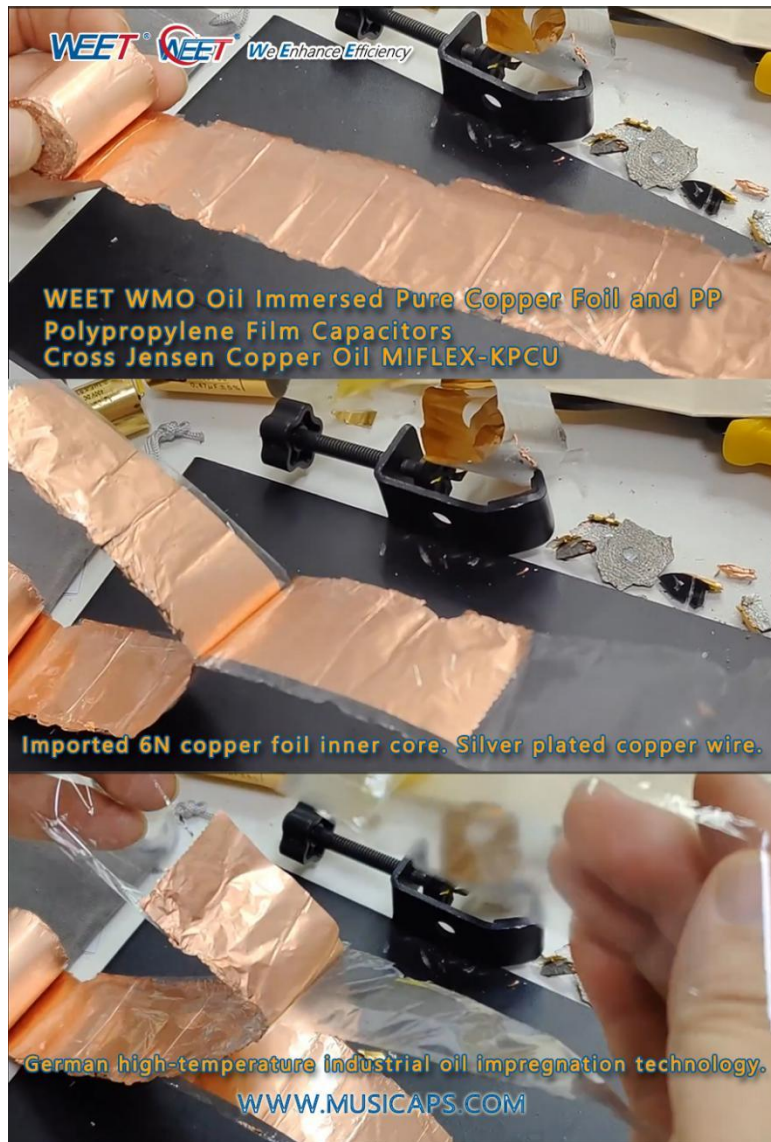

**Audio Grade Capacitors for Audiophiler**



[WWW.WEETCAP.COM](http://WWW.WEETCAP.COM)

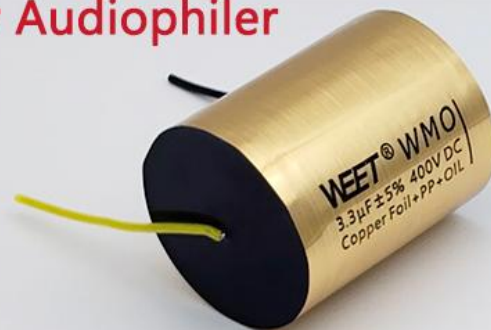

**Note: Other Values are available on request. WEET is capable of doing custom service for you.**



**WEE Technology Company Limited**  
ROOM 1405, 14/F, LUCKY CENTRE,  
171 WANCHAI ROAD,  
WANCHAI, HONG KONG  
[www.musicaps.com](http://www.musicaps.com)  
[sales@musicaps.com](mailto:sales@musicaps.com)

All details in this data sheet are subject to change without notice.  
For more details and updates, please visit our website.

Copyright © 2000 WEE Technology, All rights reserved.

