

Contents

Preface

1 Presentation of the InfraRed activity

1.1 Innovation

1.2 Expertise

1.3 Partnership

1.4 Quality

1.5 InfraRed principles

2 InfraRed applications

2.1 Zone heating

2.2 InfraRed cabin

2.3 Healthcare/Bodycare

2.4 Cooking

2.5 Plastics

2.6 Semiconductors

2.7 Animal rearing

2.8 Various industrial applications

3 Appendix



“Our aim is to enable you to maximize the added value you offer your customers.”

Dear Customer,

Welcome to the Philips Lighting InfraRed Catalogue! As the world leader in the lighting market, we have a strong focus on InfraRed as the technology of choice for a wide range of applications like heating, drying, curing, cooking and many more.

InfraRed heat sources provide instantly controllable heat, where and when it's needed. They are compact, clean and outstandingly energy-efficient. That's why increasing numbers of end-users are discovering the benefits of InfraRed in applications from animal rearing to semiconductor manufacturing, from InfraRed cabins to food preparation, and from paint drying to plastics forming.

Our aim is to enable you – as a specialized distributor, heater manufacturer or complete-system integrator – to maximize the added value you offer your own customers in all those applications and more. To do that, our Business Line InfraRed is an integrated team that is dedicated to meeting your needs: from innovation and development through production, logistics, marketing and sales right up to continuing customer support.


We are committed to offering you a world class service in every aspect of our business. That includes not only the best InfraRed lamp solutions, but also the matching technical and application support and customer service. That combination of products, support and service is what makes us today's market leader. And it forms the basis for our constant efforts to further strengthen the partnerships with our key customers.

This catalogue provides you with most of the information you need about the Philips InfraRed products and their applications. You will also find the same product information in our on-line catalogue. Or if you need any more details, your contact person at Philips will be happy to answer any questions you may have.

We look forward to receiving your feedback and to working together with you.

With best regards,

Marc Binder
General Manager, InfraRed Lamps

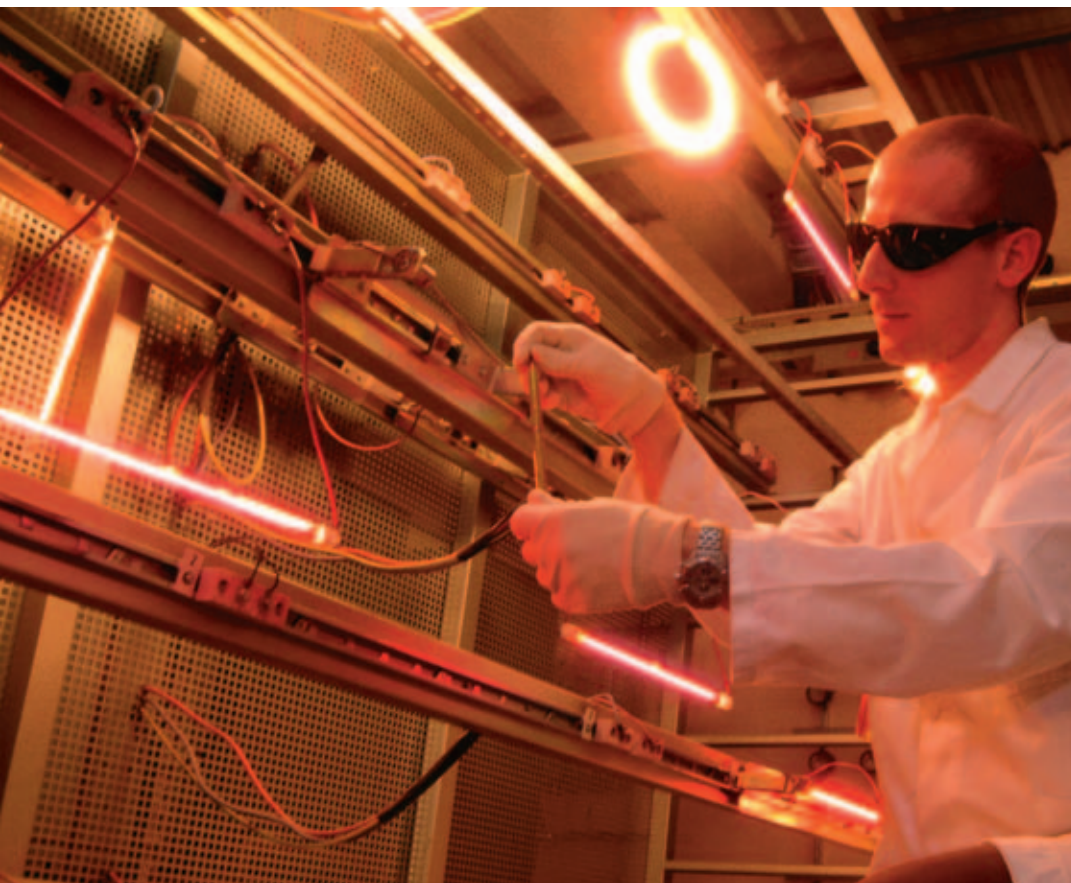

1.1 Innovation

For more than 100 years, Philips Lighting has been a pioneer and constant innovator in every area of lighting. Today, as the world's largest manufacturer of lighting products, Philips applies its expertise and advanced technology to the creation of innovative InfraRed solutions for all kinds of heating, drying and cooking applications.

High efficiency lamps with low glare: HeLeN lamps

The revolutionary Philips HeLeN lamp is a unique heat lamp based on our world-leading technology and knowledge to meet the demanding needs of applications requiring direct heat and low-glare performance, such as zone heating.

The Philips HeLeN heat lamps is a simple, effective and reliable heat source which is both energy-efficient and comfortable. These lamps are set to make a significant difference in the world of zone heating.

Discover the outstanding benefits of Philips Vitae lamps in InfraRed cabins

Philips Vitae lamps are specially designed for body relaxation applications such as InfraRed cabins. They deliver the optimum balance across the InfraRed emission spectrum to provide diffuse, pleasant body warming. Philips Vitae lamps heat the body directly in a way that matches best human skin properties.

Speedium for new industrial breakthrough

Philips Speedium lamps use a new filament design to offer the best solution in plastic and curing applications. These lamps


deliver more medium-wave heat to materials that are more sensitive to this wavelength. At the same time the Philips Speedium lamps feature the key benefits of all our InfraRed lamp range: fast response, optimal controllability and focusing.

InfraRed halogen turns up the heat in semiconductor production

To optimize energy-efficiency and process control, Philips Lighting offers a range of quartz InfraRed halogen lamps as heat sources for use in critical processes such as Chemical Vapor Deposit and Rapid Thermal Process applications. Their unique combination of high performance, fast heating and excellent controllability brings all the benefit of shorter process times, increased production versatility and lower reject rates.

ClicFit : New solutions in InfraRed lamp connectivity

Philips InfraRed has developed a full range of connections and has also developed the ClicFit solution for those applications where lamp replacement is a bigger issue. ClicFit is a solution that makes it quick and easy to mount and replace double-ended InfraRed halogen lamps. The new ClicFit solution means less assembly time, less replacement time and less hassle!

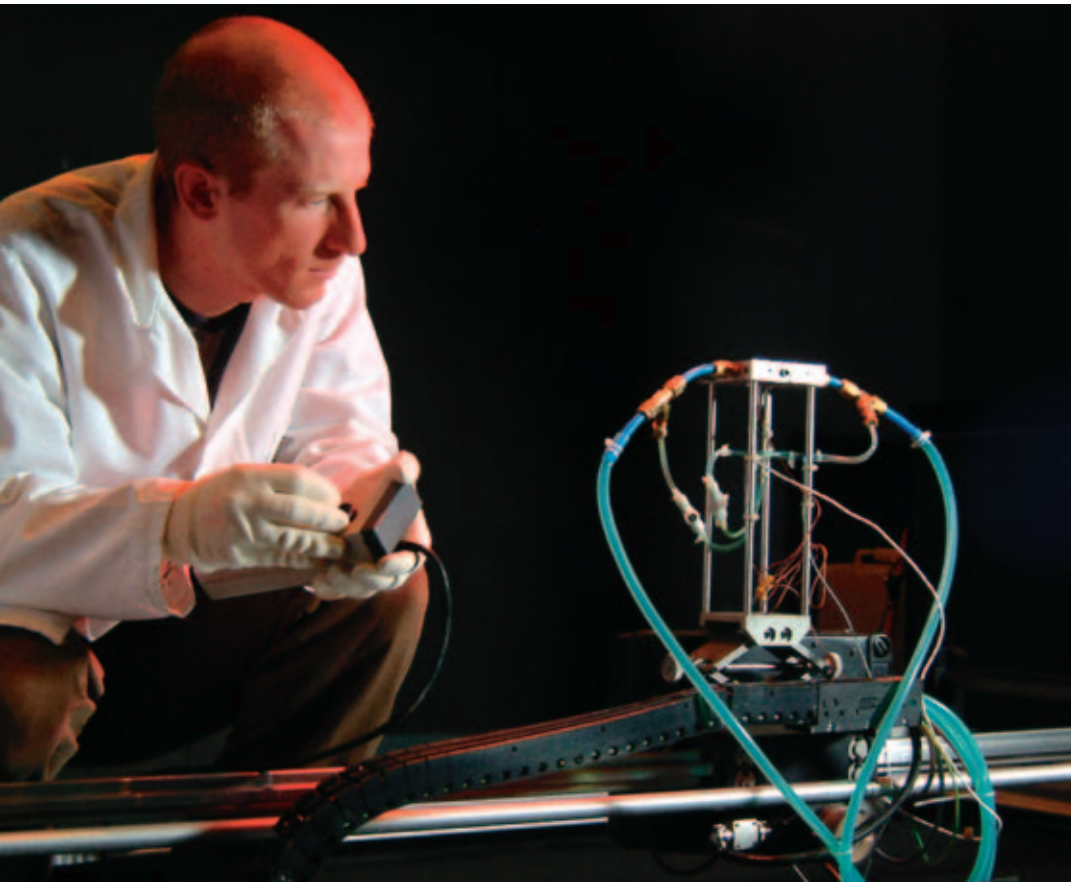

1.2 Expertise

Our expertise in InfraRed applications can support your innovations in helping you designing heating solutions. Our InfraRed application and system support pool was created to give you the best possible InfraRed lamp solutions and technical support in designing your heating solution.

Heating system irradiance measurement


When designing an InfraRed heater, it is vitally important to evaluate its performance against the application requirements. To support our customers in designing InfraRed heater, Philips InfraRed has developed specific knowledge in irradiance measurement, which allows accurate assessment of heat output.

The Philips InfraRed Business Line headquarters (in Pont-à-Mousson, France), is equipped with a unique Spatial Irradiance Measurement bench (XY bench). This enables us to evaluate and qualify the irradiance (heat output) of lamps, heaters and industrial InfraRed systems. Based on the needs of our customers, we are able to provide advice on specific matters such as reflector geometric optimization.

The accuracy of the results is ensured by the use of a specific measurement control system. Measurements are conducted in a black chamber to eliminate any disturbances. The lamp voltage and fluxmeter temperature are under constant control during measurements.

Heating system creation and optimization thanks to Philips modeling support

Reducing time to market in the development of new systems is key. Philips InfraRed is able accurately to estimate the irradiance levels (heat output) and spatial distribution of InfraRed heater in the design phase. The specific Philips PH3D optical modeling software, based on efficient 3D ray tracing method, is used to provide our customers with modeling to achieve high-performance InfraRed systems and solutions and systems for their own specific applications.

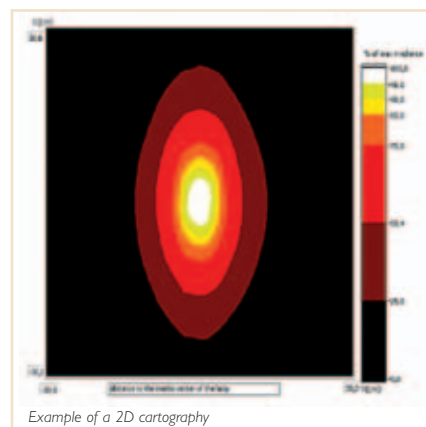

This software is completed with a large technical database as reference: system geometry, halogen lamps and reflector optical properties. Then modeling outputs are assured by regular calibration. This enables predictive quantitative results, to be achieved at minimal cost, leading to the system irradiance (heat output) by simulation without the need for tooling or prototyping realization, in the preliminary development phase.


Using these tools, Philips InfraRed modeling support activities can address three main topics:

- Improvement or upgrading of existing reflectors or systems to reach better heat output, homogeneity, efficiency and uniformity
- System configuration issues, such as lamp specifications and arrangement, installed power, sizing etc.
- Design of new reflectors to reach the defined heating specifications

Philips InfraRed modeling support allows our customers to predict system irradiance (heat output) by simulation without the need for any tooling or prototyping. This enables predictive, quantitative results to be achieved at a reasonable cost. The validity of modeling outputs is assured by regular calibration.

The InfraRed Business Line will provide you accurate quotation for each of project you will have.

Example of a Philips modeling simulation for industrial system improvement:

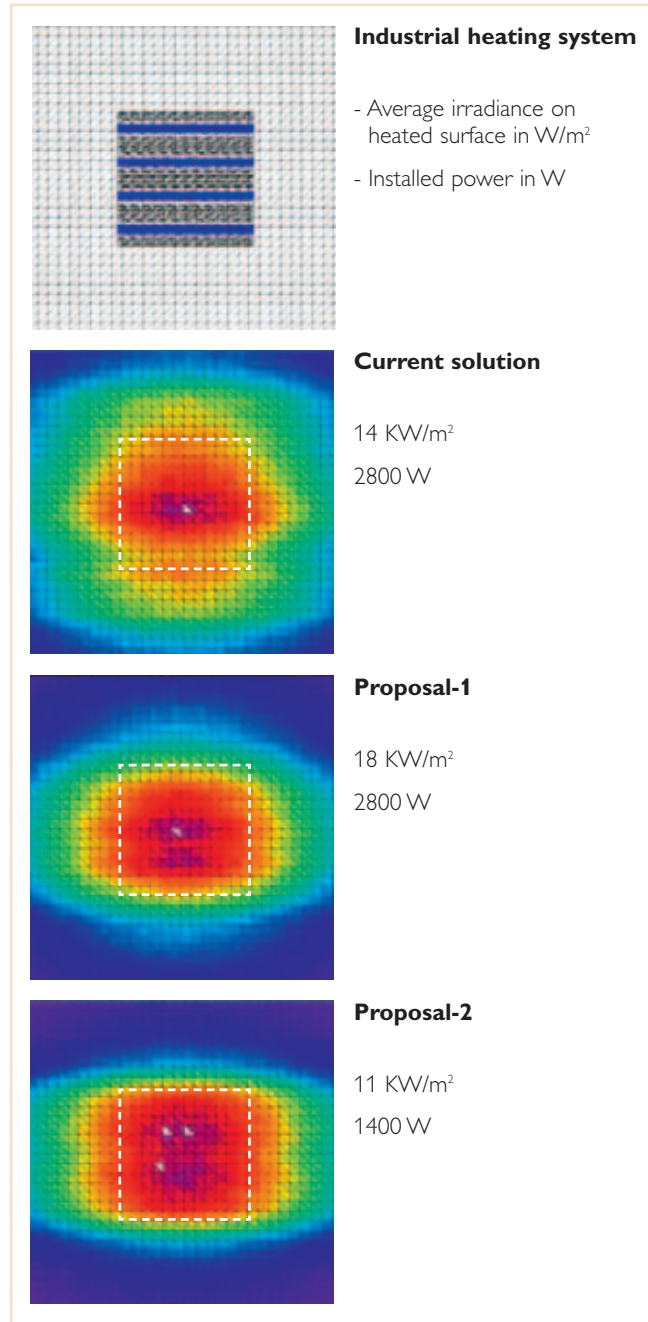

Conclusion:

Optimal lamp setting with use of dedicated reflectors drastically improve a heat system efficiency.



1.3 Partnership

Philips Lighting is more than just a supplier of high-quality InfraRed lamps.

Our experience, our product and application knowledge and our various customer services are available to you, our partner, to enable you to maximize your competitive strength. Our worldwide presence and resources make us the ideal partner in the global marketplace.

Philips InfraRed has chosen to act in strong partnership with a selected number of companies. We believe that working together in close collaboration is the best way for us to understand your products, and your service and innovation needs. This is why our approach is based on a close working relationship to enable us to meet your needs most effectively.



1.4 Quality

Quality is of major importance for us. Our InfraRed lamp production facilities are conform to the ISO 9001 V2000 and ISO 14001 standards.

Our quality department closely monitors technological developments in InfraRed lamp integration during product design and manufacturing, to enable us to provide you with optimal support in continuous product improvement.

BEST - The Philips way to make things better

Philips continuously explores new ways to improve products and to offer innovative products to its consumers. That's why Philips InfraRed has created a program through which we will reach higher and higher quality levels in all products and services. In fact, this quality improvement program affects all our employees and all our processes, in every country, division or department, encompassing everyone from Board of Management-level to the shop floor

We call it: "BEST" - BUSINESS EXCELLENCE THROUGH SPEED AND TEAMWORK .

The BEST program is Philips' chosen path to achieve business excellence. It describes a set of methods and tools by which we continuously improve our efforts. Previous successful initiatives are incorporated in the program to

make sure we learn as much as possible from our successes in the past.

Business Excellence.

We are all committed to improving processes in-line with the company's strategic targets. To this end, Philips has adopted BEST to reach this goal. It is our ambition to be one of the best companies in the world: the best to trade with, work for, and invest in.

Our Measures:

- Customers are fully satisfied by the quality of Philips' products and services
- Employees develop and use their full potential
- Shareholders get a premium return on their investment
- Suppliers choose to work with us as this generates superior value for both
- The larger community appreciates our contribution to the quality of life




1.5 InfraRed principles

Philips InfraRed lamps are designed and used for all kinds of heating, drying and cooking applications.

Heating principle


Basically there are 3 main heating principles:

Conduction




Heat transfer is by direct contact between the source and the object.

Convection

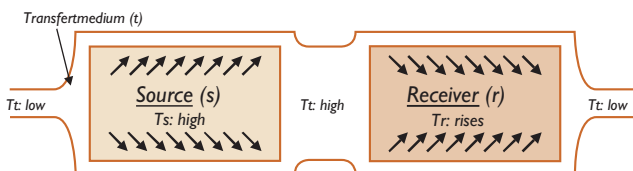

Heat transfer is by a flow of liquid or gas which is itself heated by a heat source.


Radiation



Heat transfer is by the emission of radiation from a hotter object – such as the sun, an open fire or an InfraRed lamp – to its cooler surrounding environment. Objects which receive this radiation from the heat source absorb it and become hotter:

Philips InfraRed lamps use this radiation principle : they directly heat an object or person at which they are directed without heating the surrounding air. This is what makes them highly efficient heat sources.


InfraRed within the optical spectrum

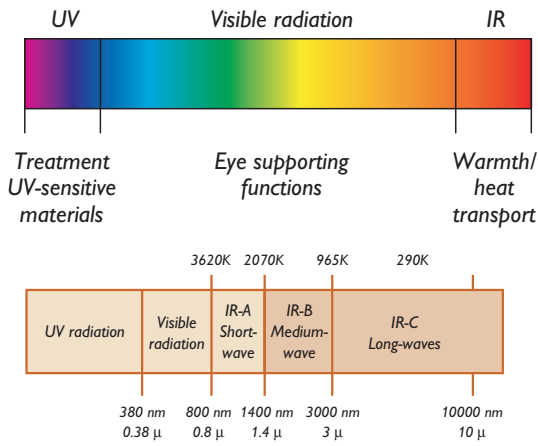

The InfraRed part of the optical spectrum is split into

- 3 parts: Short wave: IR-A
- Medium wave: IR-B
- Long wave: IR-C

Philips InfraRed lamps have a broad spectrum (see graph below), but most of the radiation they produce is in the IR-A part. For most industrial heating applications this is the region that gives the highest heating efficiency.

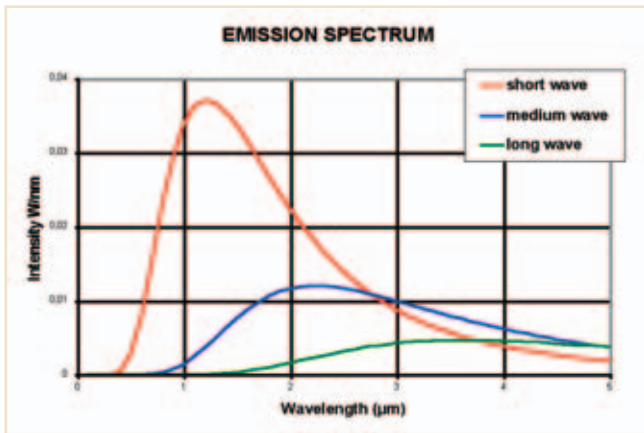

The radiation in the 3 wavelength ranges has a number of differences which are shown in figure 1.

This table shows that InfraRed emitters (heat sources) radiate their energy over a range of wavelengths. The main range of Philips InfraRed lamps mainly emit radiation in the short wavelengths. This means that medium and long wave emitters (e.g. steel tube and ceramic radiators) have a higher thermal inertia and lower temperature than our short wave InfraRed lamps.

| Infrared wave | Short wave | Medium wave | Long wave |
|---------------------------------|--|-------------------------------|-------------------------------------|
| Emitter | InfraRed halogen and incandescent lamp | Quartz emitter | Resistance |
| Material | Tungsten coil in sealed quartz tube | Fe-Cr-Al alloy in quartz tube | Fe-Cr-Al alloy in closed steel tube |
| Radiant efficiency | 92% | 60% | 40% |
| Switch ON/OFF time (90% output) | 1 sec | 30 sec | 5 min |
| Emission peak | 1,2 μm | 2,2 μm | 4,0 μm |
| Visible | 6% | 0,5% | 0,05% |
| IR-A | 34% | 3,5% | 1% |
| IR-B | 50% | 50% | 14% |
| IR-C | 10% | 46% | 85% |
| Colour temperature | 2500 K | 1300 K | 800 K |
| Heating principle | Radiation | Radiation and convection | Convection |
| Air draught sensitivity | No | High | Very high |
| Focusing with reflectors | Good focusing recommended | Possible | Hardly not relevant |
| Colour sensitivity | High | Medium | Low |

figure 1

Basically Philips InfraRed offers 2 types of InfraRed lamps:

InfraRed Halogen lamps:

the main lamp range, used for a wide range of industrial applications, such as zone-heating, semiconductor industry, bottle-blowing, thermoforming, infrared heating cabins, car paint drying, cooking etc.



InfraRed Incandescent lamps:

lamps used for healthcare applications, animal rearing, and various other industrial applications.

Our InfraRed catalogue presents all our InfraRed lamps and accessories for various applications. In addition to these standard products, we also supply a number of lamps designed to meet the specific requirements of our key partners.

Key benefits of Philips InfraRed lamps:

| Benefits | Features |
|-----------------------------------|---|
| Instant heat | >90% emission reached within 1 second |
| Clean | No emissions or pollution |
| Safe | Quartz envelope for InfraRed halogens lamps, heat-shock resistant |
| Economical | >90% of consumed energy is transmitted as Infrared heat |
| Fully dimmable | Instant, accurate control of heat output over full range (from 0 to 100%) |
| Ability to use presence detection | On/off switching does not affect lamp lifetime |
| Low maintenance | Long life |
| Heat can be focused | Same optical properties as light; heat output can be directed by reflectors |
| Compact lamps | Allows design of compact heat sources and systems |


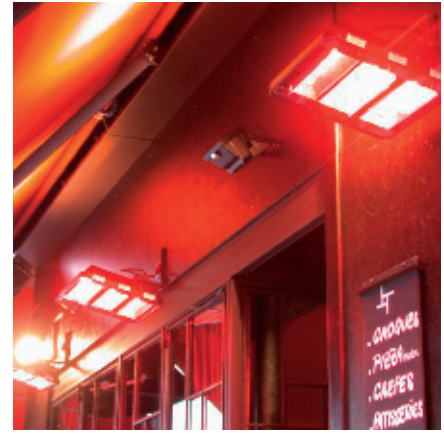



Zone heating

- Comfortable heating all year round
- Instant heat when you need it
- High efficiency
- As flexible as your needs
- Clean and safe
- Low maintenance

2.1 Zone heating

Philips HeLeN lamps





2.1 Philips HeLeN Zone heating lamps for comfort and direct heat

- No preheating means effective, energy-efficient heating
- Easy-to-install, instant heating
- Dimmable for heat that matches your needs
- Direct heat – warms people, not the air
- Doesn't take up space on your tables
- No emissions or noise

The revolutionary Philips HeLeN lamps are based on Philips' world-leading technology to meet the specific demands of zone heating and other applications that require low glare. These tubular halogen lamps offer numerous important benefits.

Their instant response means heat is delivering fast, so people feel warm in seconds. These lamps heat people, not the air, and are controlled at the flick of a switch. Philips HeLeN heat lamps have all the flexibility, economy and energy-efficiency of a modern heating system. There are no emissions, no flammable contents and no fuel storage problems. They do not disturb or deposit dust, helping to keep a clean environment.

Philips HeLeN lamps take up less space than other forms of heating. They run

on the normal electric mains supply. And they are highly energy-efficient: because they convert virtually all the electrical power into heat, hardly any energy is wasted. They can be switched on and off instantly, so they can be used whenever and wherever they are needed.



Philips HeLeN lamps are a simple, effective, reliable, economical and comfortable heat source, which are set to make a significant difference to the world of zone heating.

Applications

- Outdoor zone heating, restaurant and café terraces and other outdoor seating
- Space heating in factories, sports halls, exhibition halls, work areas, churches, large halls, warehouses, storage areas, garages, greenhouses, open-air applications, stadiums, camp sites, de-icing and many more



Picture by Weinor


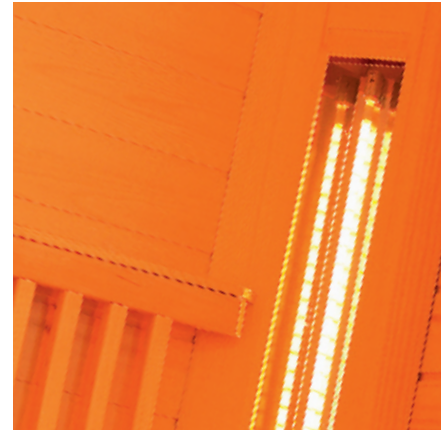



- Comfortable heat
- Short, effective sessions
- Designed to match the body
- Easy to install

InfraRed cabin

2.2 InfraRed cabin

Philips VitaE lamps





2.2 Philips Vitae InfraRed cabin lamps for comfort and well-being

- The healthy and comfortable way to relax
- No preheating for shorter, more effective sessions and higher energy-efficiency
- Short-wave technology matches the skin and muscles for an ultimate result
- Easy to install, even in smaller spaces




Philips Vitae tubular double-ended heat lamps are designed for body relaxation applications such as InfraRed cabins. These lamps are based on Philips' world-leading technology, allowing operators to deliver a better and faster service, more conveniently, in less space. Philips Vitae lamps deliver the optimum balance across the InfraRed emission spectrum (see graph: Philips Vitae lamps emission spectra).

The lamp emissions reach the subcutaneous layer of the skin (see graph: Depth of penetration into the skin), where heat is dissipated more efficiently. This gives a more diffuse and pleasant warming effect. Philips Vitae lamps provide direct body heating, matching the characteristics of the skin.



Applications

- InfraRed cabins



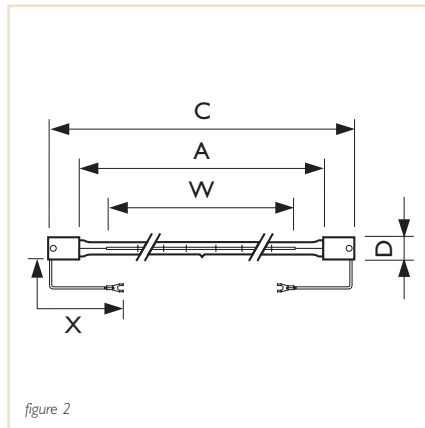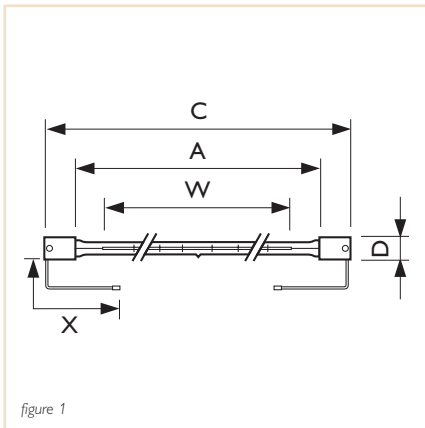

Enjoy the benefits of InfraRed in your cabin

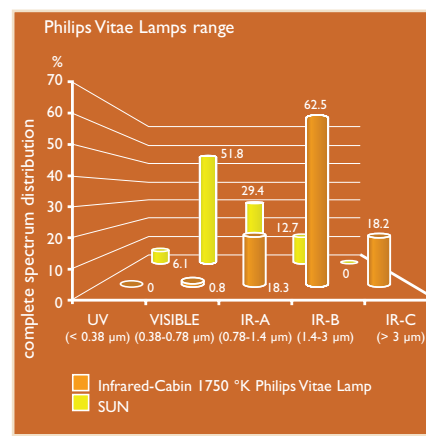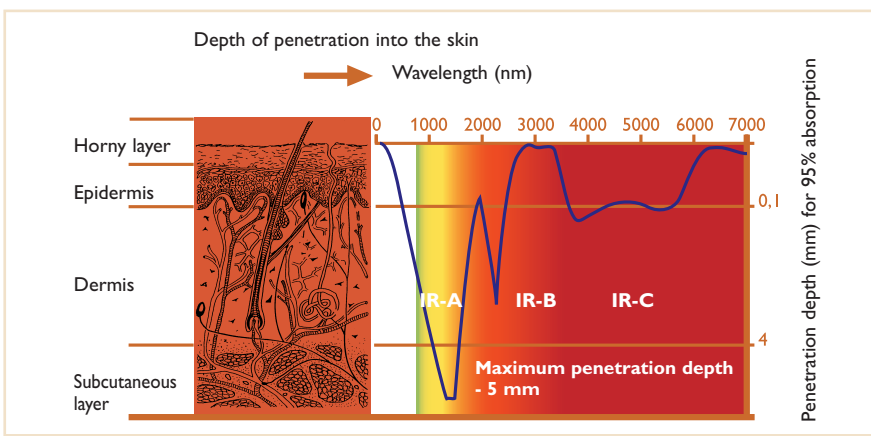



Lamp specifications InfraRed cabin

| Type | Lamp wattage (in W) | Voltage (in V) | Fig. | Cap/ Base | Total Lamp length (mm) C | Heating length (mm) W | Diameter (mm) D | Finish | Burning position | Average Lamp life (in h) | Colour temp. (K) | Cable (mm) X1 | Cable (mm) X2 | Cable connection | 12 nc | EOC |
|--------|---------------------|----------------|------|-----------|--------------------------|-----------------------|-----------------|-------------|------------------|--------------------------|------------------|---------------|---------------|------------------|----------------|-----------------|
| 14142Z | 500 | 235 | 1 | SK15 | 787,5 | 700,0 | 11,0 | Translucent | Universal | 5.000 | 1750 | 1200 | 230 | Splice | 9245.556.44916 | 871150018555625 |
| 14157Z | 500 | 235 | 1 | SK15 | 628,5 | 550,0 | 11,0 | Translucent | Universal | 5.000 | 1750 | 1200 | 230 | Splice | 9245.629.44916 | 871150018671325 |
| 14117Z | 750 | 235 | 1 | SK15 | 787,5 | 700,0 | 11,0 | Clear | Universal | 5.000 | 2000 | 1200 | 230 | Splice | 9245.405.44216 | 871150051856925 |
| 14124Z | 750 | 235 | 1 | SK15 | 787,5 | 700,0 | 11,0 | Translucent | Universal | 5.000 | 1750 | 1200 | 230 | Splice | 9245.479.44216 | 871150051972625 |
| 14155Z | 750 | 235 | 1 | SK15 | 787,5 | 700,0 | 11,0 | Clear | Universal | 5.000 | 1750 | 1200 | 230 | Splice | 9245.622.44216 | 871150018651525 |
| 13393Z | 1.300 | 235 | 2 | SK15 | 787,5 | 700,0 | 11,0 | Clear | Universal | 5.000 | 2000 | 200 | 200 | Fork | 9239.454.44516 | 871150005532325 |



Please check out our e-catalogue
www.philips.com/infraredcabin








- Localized heat therapy
- Gentle, pleasant warming effect
- Instant heat

Healthcare

2.3 Healthcare and Bodycare

Philips Healthcare heat lamps





2.3 Philips InfraRed Lamps for effective healthcare and bodycare treatment

- Provides instant heat to relieve muscular pain
- Economic heat source (90% of energy is transmitted as InfraRed heat)
- Delivers concentrated heat where it is needed

Philips InfraRed heat lamps are designed for healthcare and bodycare applications such as treating deep-seated muscular ailments and sports injuries. These incandescent reflector lamps are an excellent solution to provide localized heat treatment to relieve muscular pain. They can also be used to treat ailments like lumbago, neuralgia and myalgia and colds.

This form of heat therapy has also been shown to speed the healing of different kinds of injuries such as sports injuries and non-infected wounds, in many cases providing rapid and effective pain relief.




The benefits of this form of heat therapy are based on locally enhanced blood circulation in the skin caused by vasodilatory response. This results in an increased transport rate of metabolites and other essential biochemical

compounds. Benefits are also gained by deeper penetration of heat, which provides a gentle and pleasant warming effect.


Applications

- Relieving muscular pain, rheumatism, lumbago, neuralgia, colds and other ailments
- Promoting recovery from injury
- Providing comfort and cosmetic care
- Can be used with any suitable equipment



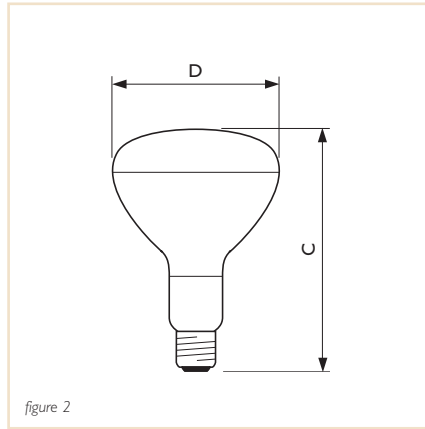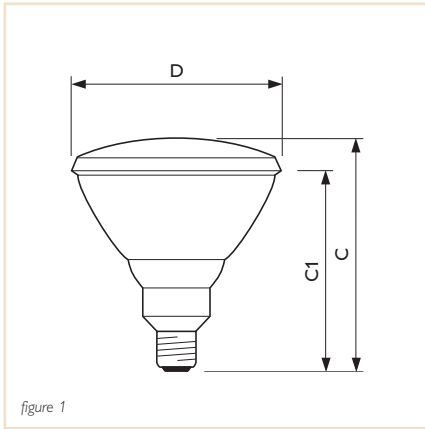



Optimal heat source for treating deeper-seated muscular ailments and sports injuries

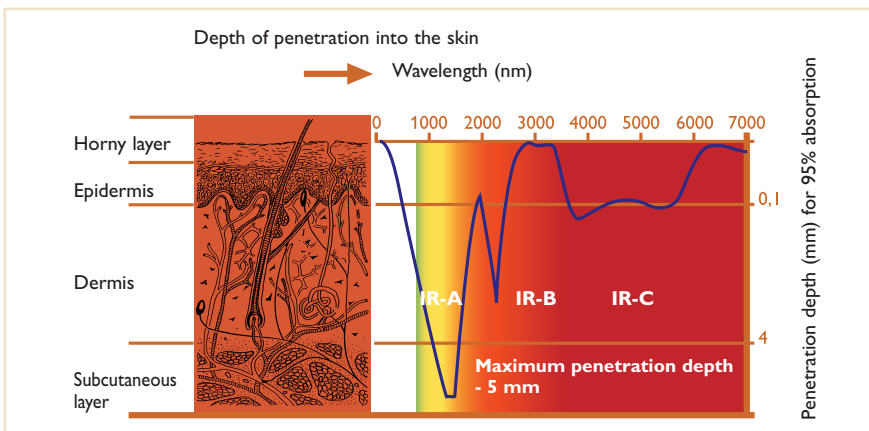


Lamp specifications Healthcare / Bodycare

| Type | Lamp wattage (in W) | Voltage (in V) | Fig. | Cap/ Base | Total Lamp length (mm) C | Lamp length (mm) C1 | Diameter length D | Bulb material | Finish | Burning position | Average Lamp life (in h) | 12 nc | EOC |
|----------------|---------------------|----------------|------|-----------|--------------------------|---------------------|-------------------|---------------|--------|------------------|--------------------------|--------------|-----------------|
| R95 UNP/144 | 100 | 230 | 2 | E27 | 130.0 | - | 95.0 | Soft Glass | Red | Universal | 300 | 92324424201 | 871150016634097 |
| R95 1CT/25 | 100 | 230 | 2 | E27 | 130.0 | - | 95.0 | Soft Glass | Red | Universal | 300 | 923244244203 | 871150014559840 |
| PAR 38E UNP | 150 | 230 | 1 | E27 | 136.0 | 123.0 | 121.0 | Hard Glass | Red | Universal | 300 | 923806644205 | 871150016675398 |
| PAR 38E 1CT/15 | 150 | 230 | 1 | E27 | 136.0 | 123.0 | 121.0 | Hard Glass | Red | Universal | 300 | 923806644207 | 87115001288742 |







- Instant and direct heat
- High efficiency
- Tasty cooking
- Visible grilling
- Clean and safe



2.4 Cooking

Philips InfraRed heat lamps



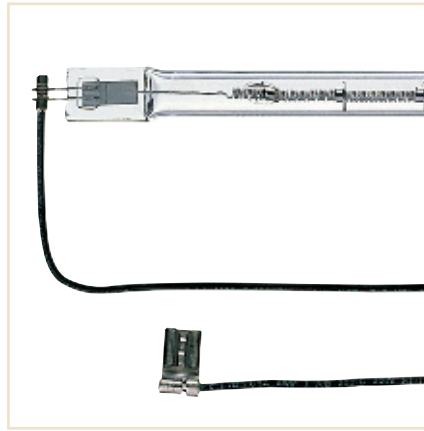

2.4 Philips InfraRed Cooking lamps for controllable, economical heating

- Optimal heat balance for cooking
- Heat-shock resistant thanks to the quartz envelope
- Economic heat source (90% of energy is transmitted as InfraRed heat)
- Fully dimmable: output accurately controllable from 0 to 100%
- Compact heat source
- Low maintenance

Philips InfraRed cooking lamps are designed specifically for cooking applications such as microwave ovens, food warming and catering. These tubular halogen heat lamps are highly economical as more than 90% of the consumed electrical power is converted into heat. Full power is reached within just one second and cooling is rapid. Philips InfraRed halogen lamps allow stylish, appealing equipment designs. Their visible light output gives a clear indication of the heat setting, which is accurately controllable. These compact heat sources have a long life, and they are easy to keep clean.








Philips **Clear Sleeve** lamps feature a double-jacket quartz envelope for total security and easy handling in food warming and catering applications. Maintenance is simplified as the lamp can easily be cleaned with a duster. And thanks to the low internal tube pressure, there is no risk of lamp explosion. Safety is key in the food preparation market!

Philips **Stela** lamps provide an ideal solution for the latest generation of high-performance cooking appliances with enhanced grill options. These lamps feature a specific medium-wave spectrum to ensure even heating.

Applications

- Preparation of food in vitro-ceramic cookers and ovens
- Grilling function in microwave and conventional ovens
- Catering and food warming
- Fast baking




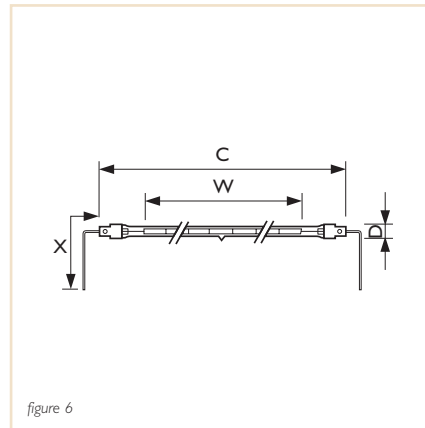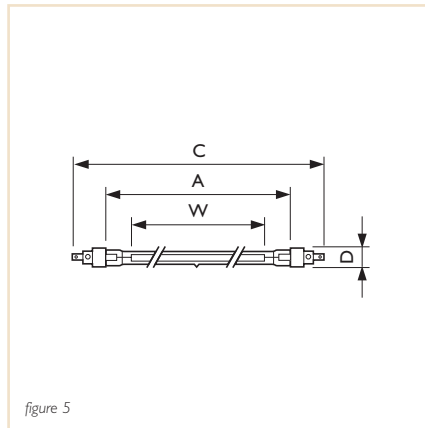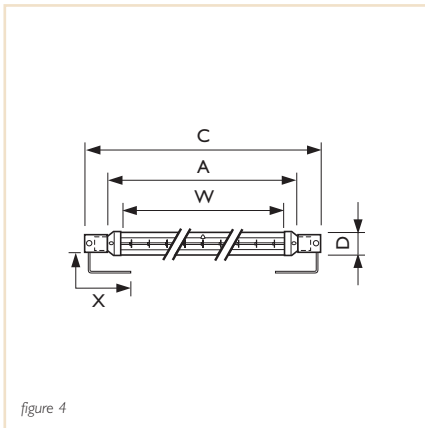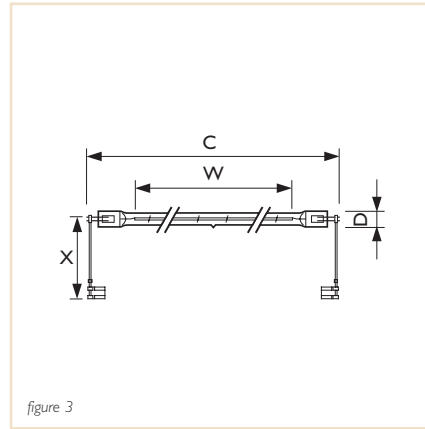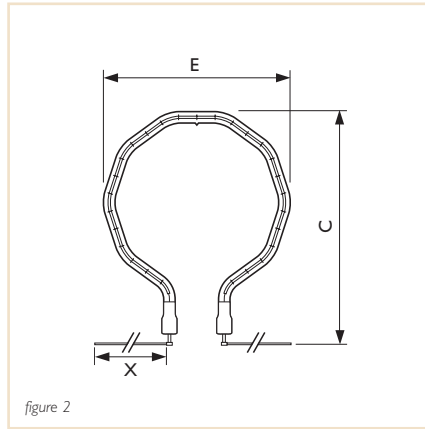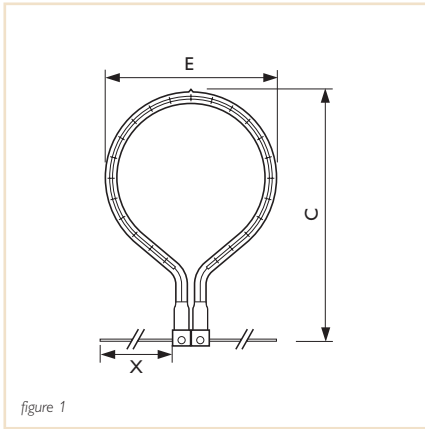


Instant heat at switch-on

Lamp specifications Cooking

| Type | Lamp wattage (in W) | Voltage (in V) | Fig. | Cap/ Base | Total Lamp length (mm) C | Heating length (mm) W | Diameter (mm) D | Lamp diameter E | Finish | Burning position | Average Lamp life (in h) | Colour temp. (K) | Cable (mm) X | Cable connection | 12 nc | EOC |
|-----------------------------|---------------------|----------------|------|-------------|--------------------------|-----------------------|-----------------|-----------------|-------------|------------------|--------------------------|------------------|--------------|------------------|----------------|-----------------|
| Cooking round | | | | | | | | | | | | | | | | |
| | 750 | 120 | 1 | V | 153 | - | 11,0 | 153 | Clear | Horizontal | 5000 | 2350 | 90 | splice | - | - |
| | 1050 | 120 | 1 | V | 118 | - | 11,0 | 118 | Clear | Horizontal | 5000 | 2350 | 90 | splice | - | - |
| | 1300 | 120 | 1 | V | 164 | - | 11,0 | 164 | Clear | Horizontal | 5000 | 2350 | 90 | splice | - | - |
| Cooking Facetted | | | | | | | | | | | | | | | | |
| 13939F-VB | 400 | 110 | 2 | V | 94,0 | - | 11,0 | - | Clear | Horizontal | 5.000 | 2000 | 105 | Faston | 9245.137.31916 | 871150005592740 |
| 13939F-VB | 400 | 230 | 2 | V | 94,0 | - | 11,0 | - | Clear | Horizontal | 5.000 | 2250 | 105 | Faston | 9245.137.44216 | 871150005593440 |
| Cooking straight | | | | | | | | | | | | | | | | |
| 13395V | 415 | 135 | 3 | V | 187,0 | 105,0 | 11,0 | - | Clear | Horizontal | 5.000 | 2350 | 209 | Faston | 9238.509.36616 | 871150005464728 |
| 13396V | 450 | 110 | 3 | V | 217,0 | 136,0 | 11,0 | - | Clear | Horizontal | 5.000 | 2350 | 209 | Flag | 9239.256.31916 | 871150005490628 |
| 13271V | 645 | 230 | 3 | V | 179,0 | 95,0 | 11,0 | - | Clear | Horizontal | 5.000 | 2350 | 209 | Flag | 9239.064.43316 | 871150005482128 |
| Cooking Clear Sleeve | | | | | | | | | | | | | | | | |
| 13169Z/850 | 500 | 235 | 4 | SK 15 | 225,0 | 160,0 | 20,0 | - | Clear | Horizontal | 5.000 | 2400 | 230 | Splice | 9245.523.44924 | 871150005583525 |
| Cooking Stela | | | | | | | | | | | | | | | | |
| 17014/99 | 550 | 235 | 5 | SK9 | 314,0 | 211,0 | 11,0 | - | Translucent | Universal | 5.000 | 1750 | - | - | 9245.624.44916 | 871150018679965 |
| 17007/99 | 600 | 230 | 6 | SK 9 + LEAD | 425,0 | 345,0 | 11,0 | - | Translucent | Horizontal | 5.000 | 1700 | 350 | Splice | 9245.476.44216 | 871150051971965 |
| 17015/99 | 600 | 235 | 5 | SK9 | 445,0 | 341,0 | 11,0 | - | Translucent | Universal | 5.000 | 1700 | - | - | 9245.632.44916 | 871150018681265 |
| 17016/99 | 1.000 | 235 | 5 | SK9 | 445,0 | 341,0 | 11,0 | - | Translucent | Universal | 5.000 | 1850 | - | - | 9245.633.44916 | 871150018683665 |








- High-power and high-efficiency heat source
- Instant heat
- Easy control
- Optimal InfraRed spectrum

2.5 Plastics

Philips InfraRed heat lamps



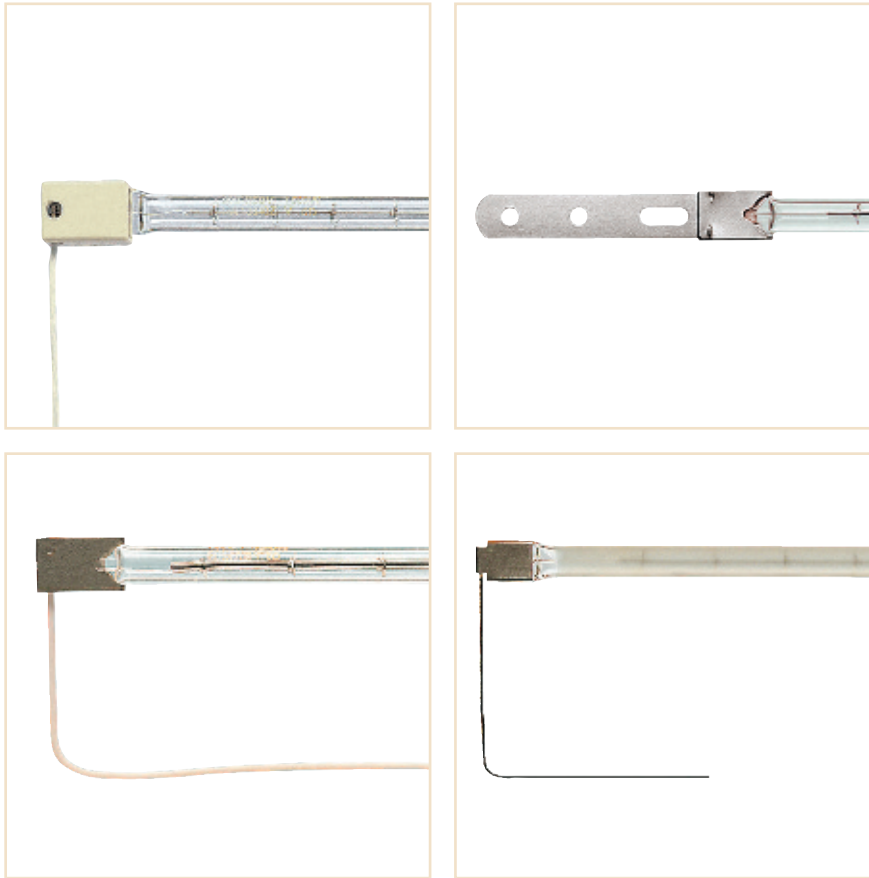

2.5 Philips InfraRed Lamps for versatile, energy-efficient forming of plastics

- Efficient heat source (90% of energy is transmitted as InfraRed heat)
- Heat can be focused by using reflectors
- Fully dimmable: output accurately controllable from 0 to 100%
- Compact heat source
- Low maintenance

Philips InfraRed lamps provide productive, energy-efficient heating for a wide range of plastics forming applications, such as bottle blowing, thermoforming and many more. New sheet processing technologies and the use of thermoformable materials greatly extend the range of products that can be formed. Thermoforming therefore maximizes creativity and versatility, making it a preferred process for plastic forming. Philips tubular halogen heat lamps increase productivity, with optimal versatility, safety and energy savings. Thanks to their high irradiance output, Philips InfraRed lamps require lower installed power to transmit the same level of heat. This high efficiency means less power is required to provide the same material temperature compared with quartz or ceramic emitters. The instant heat reduces cycle time and increases higher process speed. Philips

InfraRed halogen lamps give a better temperature gradient through the plastic thickness for enhanced temperature homogeneity, which is a key factor in plastics processing. These InfraRed lamps can be instantly adjusted to the required heat level simply by dimming, which means a more accurate, versatile process.








Philips InfraRed lamps save time and money by improving and optimizing heating processes.

Applications

- Blowing of plastic bottles
- Plastics thermoforming
- Softening and melting of plastics




Picture by Sidel

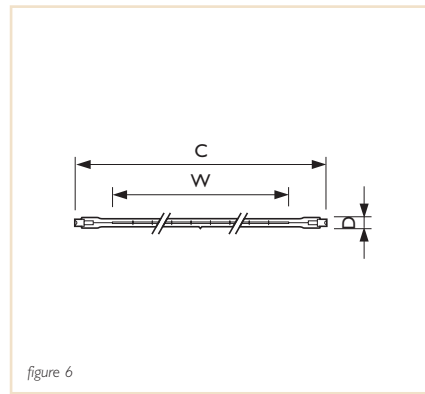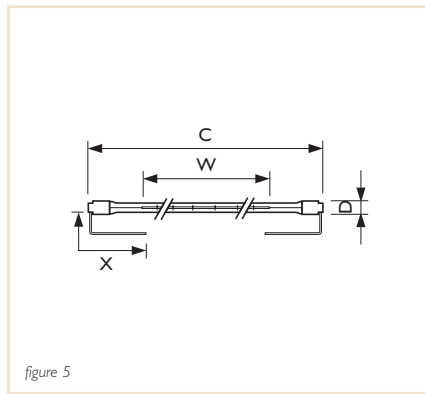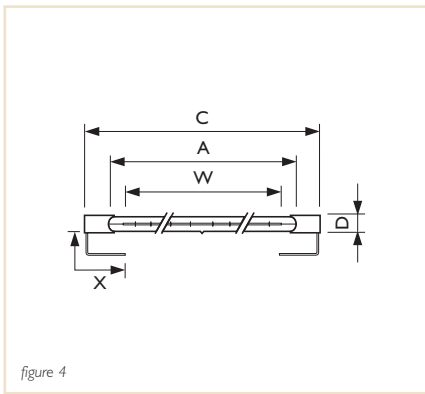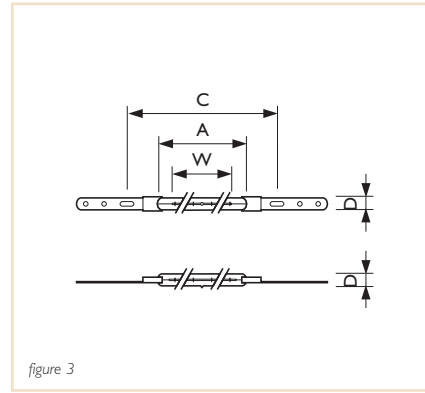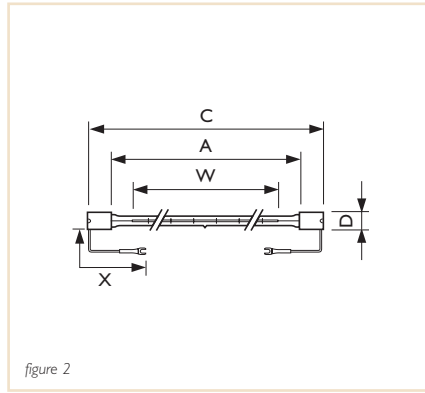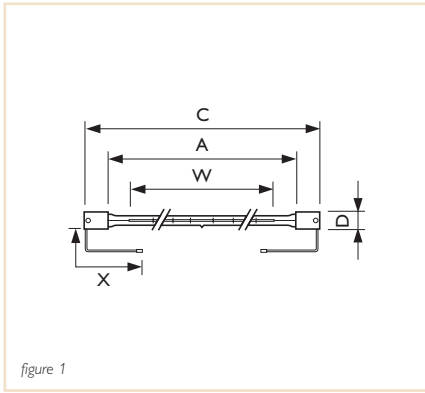



The instant, efficient way to form plastics

Lamp specifications Plastics

| Type | Lamp wattage (in W) | Voltage (in V) | Fig. | Cap/Base | Total Lamp length (mm) C | Heating length (mm) W | Diameter (mm) D | Finish | Burning position | Average Lamp life (in h) | Colour temp. (K) | Cable (mm) X | Cable connection | 12 nc | EOC | US Product Number |
|-----------------|---------------------|----------------|------|----------|--------------------------|-----------------------|-----------------|-------------|------------------|--------------------------|------------------|--------------|------------------|----------------|-----------------|-------------------|
| 13908Z | 300 | 230 | 1 | SK15 | 122,0 | 60,0 | 11,0 | Clear | Horizontal | 1.000 | 2500 | 140 | Splice | 9245.271.44216 | 871150049609625 | |
| 13169X | 500 | 120 | 3 | X | 242,0 | 142,0 | 11,0 | Clear | Horizontal | 5.000 | 2500 | - | - | 9238.500.32316 | 871150021679325 | 312033 |
| 13169Y | 500 | 120 | 4 | Y | 221,0 | 142,0 | 11,0 | Clear | Horizontal | 5.000 | 2500 | 160 | Splice | 9238.501.32316 | 871150049631725 | 312074 |
| 13169X/98 | 500 | 120 | 3 | X | 242,0 | 142,0 | 11,0 | Reflector | Horizontal | 5.000 | 2500 | - | - | 9238.502.32316 | 871150021740025 | 312058 |
| 500T3 | 500 | 120 | 5 | U | 224,0 | 127,0 | 11,0 | Translucent | Horizontal | 5.000 | 2500 | 146 | Splice | 9245.176.36316 | 871150051763025 | 216515 |
| 500T3/7 | 500 | 120 | 6 | R75 | 219,1 | 127,0 | 11,0 | Translucent | Horizontal | 5.000 | 2500 | - | - | 9245.177.34616 | 871150051764725 | 209940 |
| 13169Z/98 | 500 | 235 | 2 | SK15 | 227,0 | 159,0 | 11,0 | Reflector | Horizontal | 5.000 | 2400 | 200 | Fork | 9238.527.44516 | 871150021741725 | - |
| 13842Z/98 | 700 | 235 | 1 | SK15 | 216,0 | 150,0 | 11,0 | Reflector | Horizontal | 5.000 | 2600 | 140 | Splice | 9245.459.45516 | 871150051940525 | - |
| 13842Z | 700 | 240 | 1 | SK15 | 216,0 | 150,0 | 11,0 | Clear | Horizontal | 5.000 | 2600 | 140 | Splice | 9245.270.45516 | 871150049608925 | - |
| 13195X | 1.000 | 235 | 3 | X | 370,0 | 280,0 | 11,0 | Clear | Horizontal | 5.000 | 2500 | - | - | 9238.510.43916 | 871150021742425 | 312132 |
| 1000T3 | 1.000 | 240 | 5 | U | 351,0 | 254,0 | 11,0 | Translucent | Horizontal | 5.000 | 2500 | 146 | Splice | 9245.178.43816 | 871150051765425 | 209957 |
| 1000T3/CL | 1.000 | 240 | 5 | U | 303,0 | 254,0 | 11,0 | Clear | Horizontal | 5.000 | 2500 | 146 | Splice | 9245.179.43816 | 871150051766125 | 210005 |
| 14134Z/98 | 1.200 | 235 | 2 | SK15 | 224,0 | 155,0 | 11,0 | Reflector | Horizontal | 5.000 | 2700 | 150 | Fork | 9245.371.44916 | 871150005842325 | - |
| 14135Z/98 | 1.600 | 235 | 2 | SK15 | 228,0 | 155,0 | 11,0 | Reflector | Horizontal | 5.000 | 2700 | 150 | Fork | 9245.372.44916 | 871150018450425 | - |
| 13168X | 2.000 | 235 | 3 | X | 370,0 | 288,0 | 11,0 | Clear | Universal | 5.000 | 2500 | - | - | 9238.525.43916 | 871150021677925 | 311985 |
| 2MT3/ICL/HT/UBO | 2.000 | 240 | 5 | U | 303,0 | 254,0 | 11,0 | Clear | Universal | 5.000 | 2500 | 146 | Splice | 9245.185.45516 | 871150051772225 | 216481 |





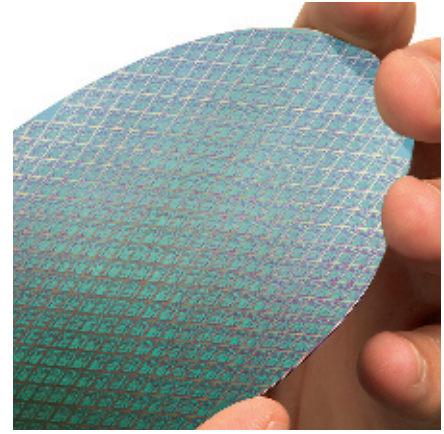


- High-power, high-efficiency heat source
- Long life
- Accurate temperature control
- High process reproducibility
- Instant heat

2.6 Semiconductors

Philips InfraRed heat lamps



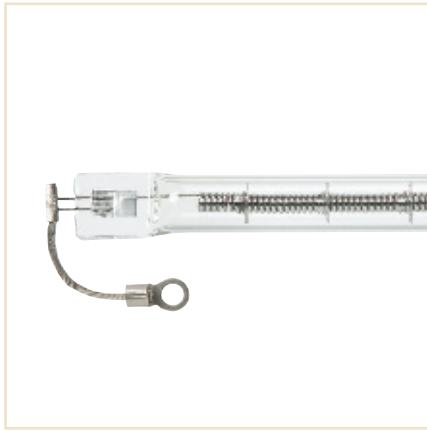

2.6 Philips InfraRed Lamps for precisely controllable semi-conductor heating


- Efficient heat source: 90% of energy is transmitted as InfraRed heat
- Heat can be focused by using reflectors
- Instant heat: full power within a few hundred milliseconds after switch-on
- Fully dimmable: output accurately controllable from 0 to 100%
- Clean, emission-free heating
- Compact heat source





Philips InfraRed halogen lamps are designed specifically for heating applications in the semiconductor industry such as epitaxy, CVD, RTP and ion implant annealing. These lamps are high-power heat sources. Tube blackening and resulting reduction in InfraRed output are negligible, ensuring very high stability throughout the lamp lifetime for semiconductor processing. High radiant energy concentrations are provided by InfraRed

lamps. Full power is reached within a few hundred milliseconds of switch-on. Lamp power is fully controllable, with instant adjustment of the required radiation level between 0 and 100%. This means that silicon wafer temperature can be modulated accurately over a wide range to meet process specifications precisely. Process reproducibility is ensured by the ability to deliver exactly the same heat dose to the silicon wafer every time.

Applications

- Epitaxy
- CVD (Chemical Vapor Deposit)
- RTP (Rapid Thermal Process)
- Ion implant annealing
- Etching

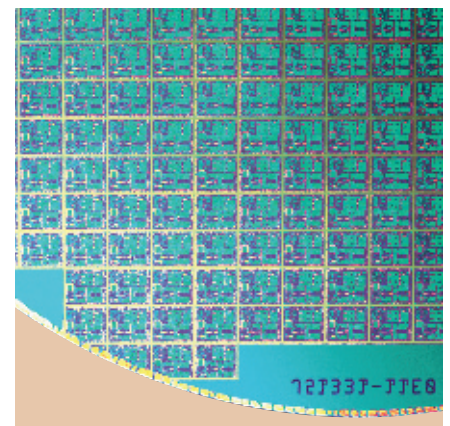


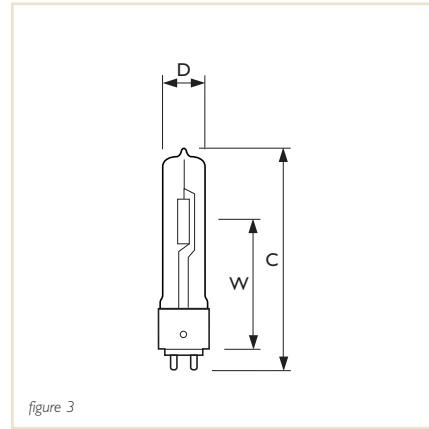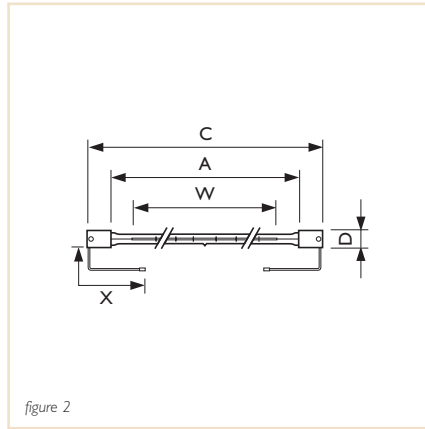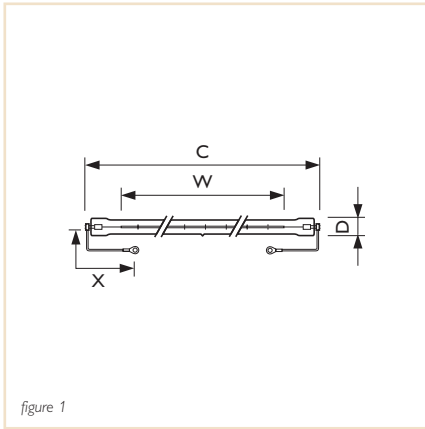


Stable, reproducible InfraRed heating for the semiconductor industry

Lamp specifications Semiconductors

| Type | Lamp wattage (in W) | Voltage (in V) | Fig. | Cap/ Base | Total Lamp length (mm) C | Heating length (mm) W | Diameter (mm) D | Finish | Burning position | Average Lamp life (in h) | Colour temp. (K) | Cable (mm) X | Cable connection | 12 nc | EOC | US Product Number |
|----------------|---------------------|----------------|------|-----------|--------------------------|-----------------------|-----------------|--------|------------------|--------------------------|------------------|--------------|------------------|----------------|-----------------|-------------------|
| 13941Z | 1500 | 235 | 2 | SK15 | 352,0 | 274,0 | 11,0 | Clear | Horizontal | 1.000 | 2900 | 1200 | Splice | 9245.268.43916 | 871150049600325 | - |
| 13136V | 4.600 | 400 | 1 | V | 303,0 | 242,0 | 12,0 | Clear | Horizontal | 1.000 | 2900 | 35 | Ring | 9238.508.49124 | 871150049156525 | 256545 |
| 13170V | 6.000 | 480 | 1 | V | 350,0 | 284,0 | 12,0 | Clear | Horizontal | 1.000 | 2900 | 35 | Ring | 9245.298.51724 | 871150049161925 | 291146 |
| 13138V | 6.000 | 480 | 1 | V | 303,0 | 236,0 | 12,0 | Clear | Horizontal | 1.000 | 3000 | 35 | Ring | 9245.340.51724 | 871150049826725 | 291237 |
| 14131V | 6.000 | 480 | 1 | V | 350,0 | 284,0 | 11,0 | Clear | Horizontal | 1.000 | 3000 | 35 | Ring | 9245.514.51724 | 871150005581125 | - |
| 14118V | 6.850 | 480 | 1 | V | 303,0 | 242,0 | 12,0 | Clear | Horizontal | 1.000 | 3000 | 35 | Ring | 9245.412.51724 | 871150051863725 | 291708 |
| 14166V | 6000 | 480 | 1 | V | 350 | 284 | 12,0 | clear | Horizontal | 1000 | 3000 | 35 | ring | 924568951724 | - | - |
| 14167V | 6000 | 480 | 1 | V | 303 | 236 | 11,0 | clear | Horizontal | 1000 | 3000 | 150 | ring | 924569751724 | - | - |
| 14139 | 750 | 120 | - | - | 113,7 | 72 | 13,0 | clear | Universal | 1000 | 3000 | - | - | 9245.539.36324 | 871150018495525 | - |
| 6990P metal | 1000 | 120 | 3 | G95 | 104 | 60 | 19,0 | clear | Universal | 1000 | 3000 | - | - | 9245.208.36328 | 871150049850225 | 291070 |
| 14302P ceramic | 1000 | 120 | 3 | G95 | 104 | 60 | 19,0 | clear | Universal | 1000 | 3000 | - | - | 9245.382.36328 | 871150049866325 | - |







- Optimum heating economy and high energy-efficiency
- Robust, sturdy lamp construction
- Healthy warmth for piglets and chicks
- Longer life (5.000 hours)

2.7 Animal rearing

Philips InfraRed heat lamps





2.7 Philips InfraRed Heat lamps for profitable animal rearing

- Energy savings of up to 30%
- Instant heat
- Improved feed conversion
- Lower mortality rates
- High growth rates
- Better, more even heat distribution over a larger area, even spread
- Low maintenance

Philips PAR InfraRed heat lamps are designed for profitable animal rearing, such as in pig and poultry farms. Every pig breeder and poultry farmer is familiar with the beneficial effects of warmth on newly born and growing piglets and chicks. A very good method of generating warmth is by using heat lamps. The Philips InfraRed incandescent reflector lamps provide direct, draught-free warmth to the animals. These benefits have made pig and poultry farmers around the world choose Philips InfraRed lamps, because they are the sturdiest, most energy-efficient lamps available for this application.




The Philips PAR lamps combine energy savings and strong construction. The design incorporates a completely sealed reflector. That means these PAR lamps have a considerably higher heating efficiency than the usual blown bulb

lamps: the same heating effect with 30% less electrical power!

Applications

- Breeding and rearing of pigs, calves, foals, dogs, poultry and other animals
- Veterinary clinics, zoos, pet shops and beauty parlors



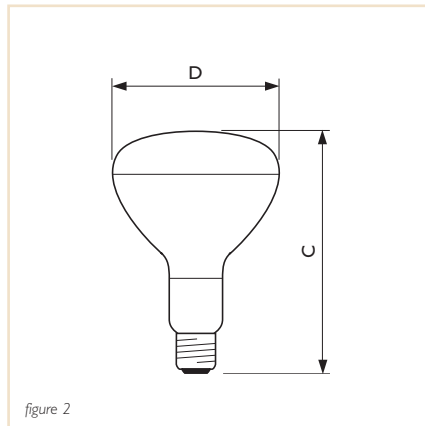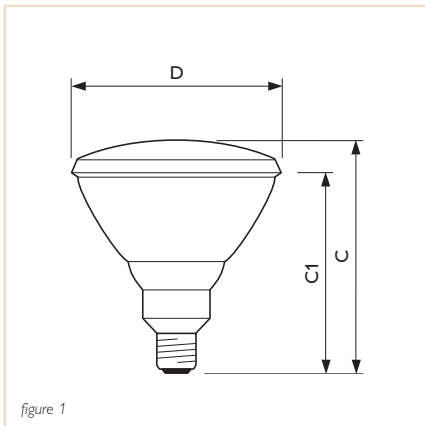


Switch on to fatter profits with Philips PAR InfraRed heat lamps


Lamp specifications Animal rearing

| Type | Lamp wattage (in W) | Voltage (in V) | Fig. | Cap/ Base | Total Lamp length (mm) C | Lamp length (mm) C1 | Diameter (mm) D | Bulb material | Finish | Burning position | Average Lamp life (in h) | 12 nc | EOC |
|--------------|---------------------|----------------|------|-----------|--------------------------|---------------------|-----------------|---------------|--------|------------------|--------------------------|--------------|-----------------|
| IR100R PAR38 | 100 | 230 | 1 | E27 | 136,0 | 123,0 | 121,0 | Hard Glass | Red | Horizontal H45 | 5.000 | 923801144207 | 871150060052320 |
| IR100R PAR38 | 100 | 240 | 1 | E27 | 136,0 | 123,0 | 121,0 | Hard Glass | Red | Horizontal H45 | 5.000 | 923801145502 | 871150012891120 |
| IR100C PAR38 | 100 | 230 | 1 | E27 | 136,0 | 123,0 | 121,0 | Hard Glass | Clear | Universal | 5.000 | 923801244207 | 871150011578220 |
| IR100C PAR38 | 100 | 240 | 1 | E27 | 136,0 | 123,0 | 121,0 | Hard Glass | Clear | Universal | 5.000 | 923801245501 | 871150012893520 |
| IR175C PAR38 | 175 | 230 | 1 | E27 | 136,0 | 123,0 | 121,0 | Hard Glass | Clear | Universal | 5.000 | 923801344207 | 871150011579920 |
| IR175C PAR38 | 175 | 240 | 1 | E27 | 136,0 | 123,0 | 121,0 | Hard Glass | Clear | Universal | 5.000 | 923801345501 | 871150012895920 |
| IR175R PAR38 | 175 | 230 | 1 | E27 | 136,0 | 123,0 | 121,0 | Hard Glass | Red | Horizontal H45 | 5.000 | 923801444204 | 871150060053020 |
| IR175R PAR38 | 175 | 230 | 1 | E27 | 136,0 | 123,0 | 121,0 | Hard Glass | Red | Horizontal H45 | 5.000 | 923801444207 | 871150060053020 |
| IR175R PAR38 | 175 | 240 | 1 | E27 | 136,0 | 123,0 | 121,0 | Hard Glass | Red | Horizontal H45 | 5.000 | 923801445501 | 871150012898020 |
| IR175R PAR38 | 175 | 240 | 1 | E27 | 136,0 | 123,0 | 121,0 | Hard Glass | Red | Horizontal H45 | 5.000 | 923801445502 | 871150012898020 |
| IR150C R125 | 150 | 230 | 2 | E27 | 181,0 | - | 125,0 | Soft Glass | Clear | Universal | 5.000 | 923211044202 | 871150034830225 |
| IR150C R125 | 150 | 240 | 2 | E27 | 181,0 | - | 125,0 | Soft Glass | Clear | Universal | 5.000 | 923211045502 | 871150034828925 |
| IR150C R125 | 150 | 240 | 2 | E27 | 181,0 | - | 125,0 | Soft Glass | Clear | Universal | 5.000 | 923211045503 | 871150034828925 |
| IR250C R125 | 250 | 230 | 2 | E27 | 181,0 | - | 125,0 | Soft Glass | Clear | Universal | 5.000 | 923211144202 | 871150034834025 |
| IR250C R125 | 250 | 240 | 2 | E27 | 181,0 | - | 125,0 | Soft Glass | Clear | Universal | 5.000 | 923211145502 | 871150034832625 |
| IR250C R125 | 250 | 240 | 2 | E27 | 181,0 | - | 125,0 | Soft Glass | Clear | Universal | 5.000 | 923211145503 | 871150034832625 |
| IR150R R125 | 150 | 230-250 | 2 | E27 | 181,0 | - | 125,0 | Soft Glass | Red | Universal | 5.000 | 923244343801 | 871150012639925 |
| IR150R R125 | 150 | 230 | 2 | E27 | 181,0 | - | 125,0 | Soft Glass | Red | Universal | 5.000 | 923244344201 | 871150012638225 |
| IR250R R125 | 250 | 230-250 | 2 | E27 | 181,0 | - | 125,0 | Soft Glass | Red | Universal | 5.000 | 923244443801 | - |
| IR250R R125 | 250 | 230 | 2 | E27 | 181,0 | - | 125,0 | Soft Glass | Red | Universal | 5.000 | 923244444201 | 871150012653525 |



Please check out our e-catalogue
www.philips.com/animalrearing








- High-power, high-efficiency heat source
- Instant heat
- Easy control
- Economical
- Low maintenance

2.8 Various industrial applications

Philips InfraRed heat lamps



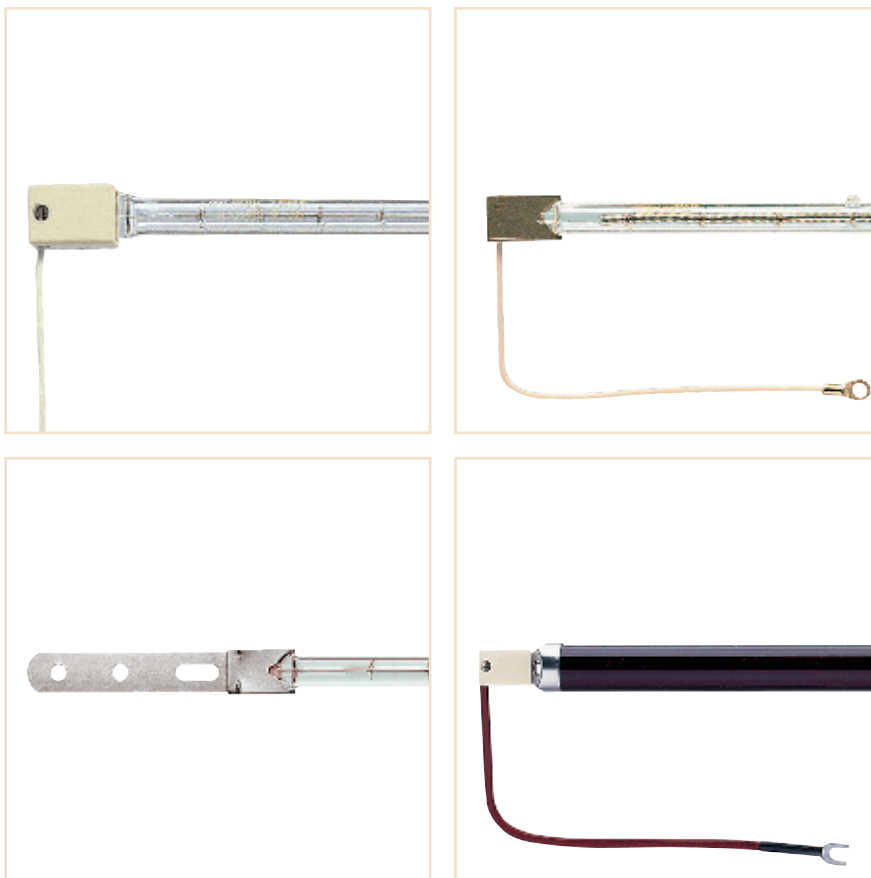

2.8 Philips InfraRed

Efficient, economical heating for a wide range of industrial applications


- Economical heat source (90% of energy is transmitted as InfraRed heat)
- Heat can be focused by using reflectors
- Fully dimmable: output accurately controllable from 0 to 100%
- Clean, safe heating
- Compact heat source

Philips InfraRed heat lamps are the ideal, high-power heat source for a wide range of industrial heating applications such as paint and paper drying, curing, sterilization and many more. These are halogen lamps, which means that tube blackening and resulting reduction in InfraRed output are negligible, ensuring very high process stability throughout the lamp lifetime. Full power is reached within a few hundred milliseconds of switch-on. Lamp power is fully controllable, with instant adjustment of the required heat level between 0 and 100%. Philips InfraRed lamps are compact heat sources.












Philips InfraRed lamps are the optimal solution for all heating, drying and curing applications.

Applications


- Paint drying in tunnels and body shops
- Paper drying in paper mills
- Powder coating
- Drying of lacquers and printing inks
- Heat sterilization

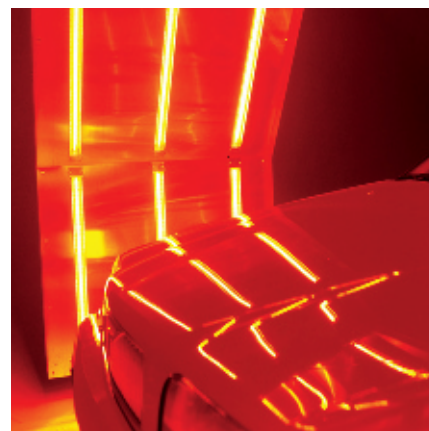


Picture by PSA

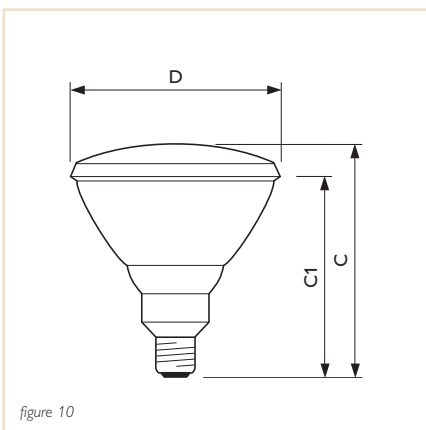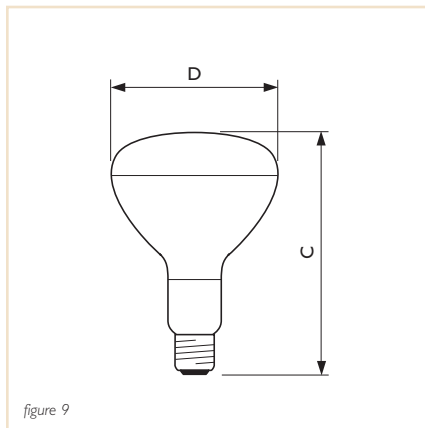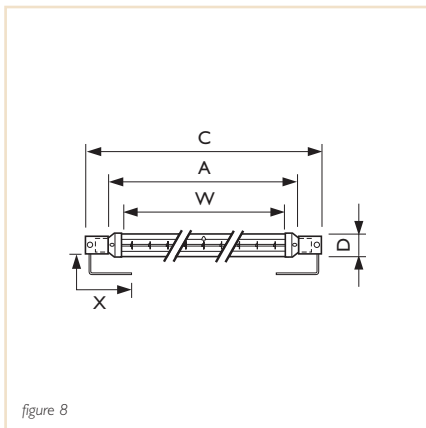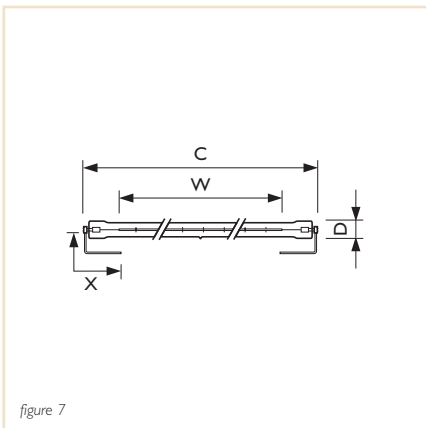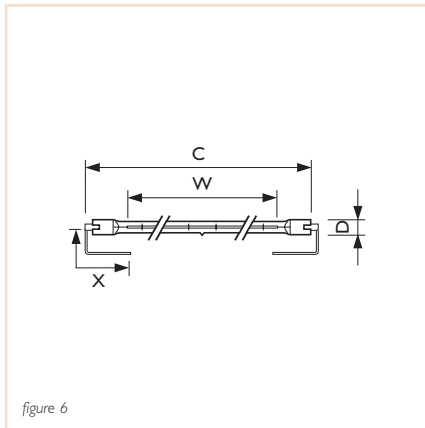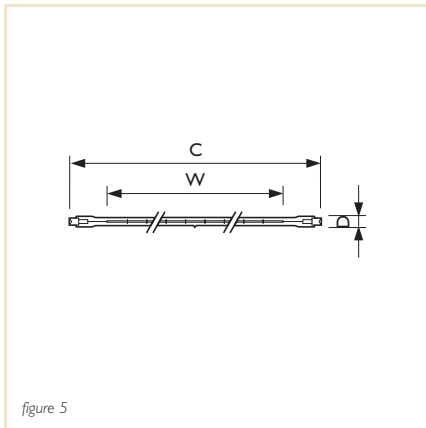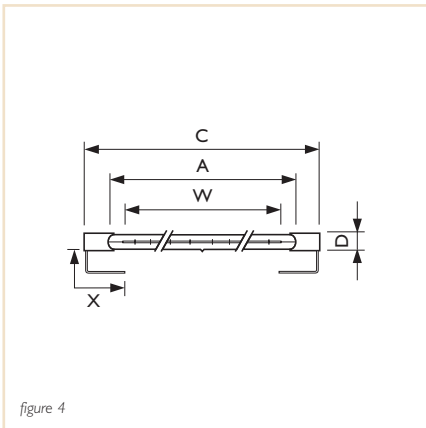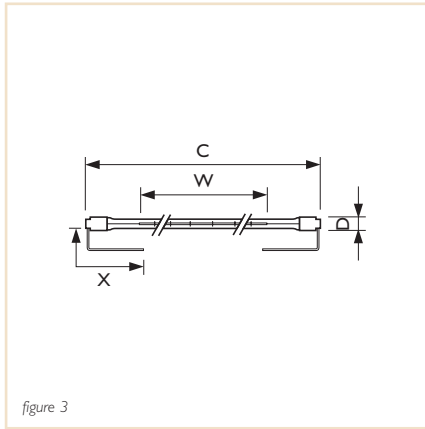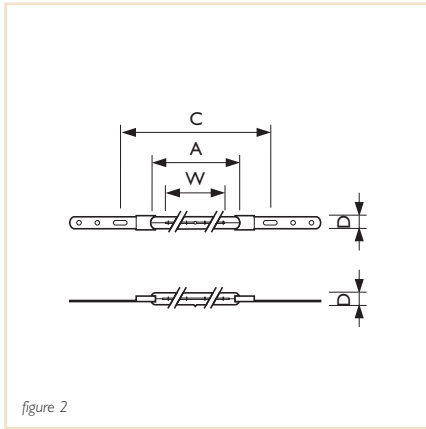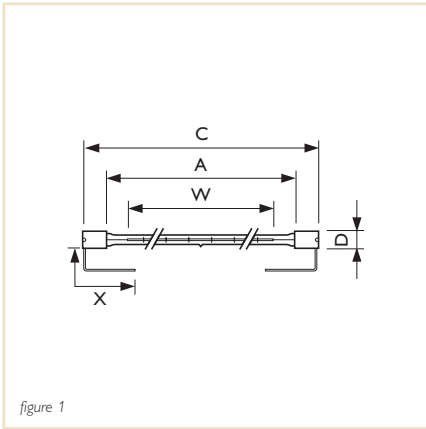


Instant heat for process optimisation






Lamp specifications Various industrial

| Type | Lamp wattage (in W) | Voltage (in V) | Fig. | Cap/ Base | Total Lamp length (mm) C | Heating length (mm) W | Diameter (mm) D | Finish | Burning position | Average Lamp life (in h) | Colour temp. (K) | Cable (mm) X | Cable connection | 12 nc | EOC | US Product Number |
|----------------|---------------------|----------------|------|------------|--------------------------|-----------------------|-----------------|-------------|------------------|--------------------------|------------------|--------------|------------------|----------------|-----------------|-------------------|
| 13908R | 300 | 230 | 5 | R7S | 117,5 | 60,0 | 11,0 | Clear | Horizontal | 1.000 | 2500 | - | - | 9238.503.43301 | 871150049155825 | - |
| 13908Z | 300 | 230 | 1 | SK15 | 122,0 | 60,0 | 11,0 | Clear | Horizontal | 1.000 | 2500 | 140 | Splice | 9245.271.44216 | 871150049609625 | - |
| 13169X | 500 | 120 | 2 | X | 242,0 | 142,0 | 11,0 | Clear | Horizontal | 5.000 | 2500 | - | - | 9238.500.32316 | 871150021679325 | 312033 |
| 13169X/98 | 500 | 120 | 2 | X | 242,0 | 142,0 | 11,0 | Reflector | Horizontal | 5.000 | 2500 | - | - | 9238.502.32316 | 871150021740025 | 312058 |
| 500T3 | 500 | 120 | 3 | U | 224,0 | 127,0 | 11,0 | Translucent | Horizontal | 5.000 | 2500 | 146 | Splice | 9245.176.36316 | 871150051763025 | 216515 |
| 13169Z/98 | 500 | 235 | 1 | SK15 | 227,0 | 159,0 | 11,0 | Reflector | Horizontal | 5.000 | 2400 | 200 | Fork | 9238.527.44516 | 871150021741725 | - |
| 13169R | 500 | 235 | 5 | R7S | 220,6 | 165,0 | 11,0 | Clear | Horizontal | 5.000 | 2400 | - | - | 9239.468.44516 | 871150005535425 | - |
| 13790R | 650 | 220 | 5 | R7S | 550,4 | 501,0 | 9,0 | Clear | Horizontal | 5.000 | 2200 | - | - | 9239.473.42916 | 871150049821225 | - |
| 1384ZZ/98 | 700 | 235 | 1 | SK15 | 216,0 | 150,0 | 11,0 | Reflector | Horizontal | 5.000 | 2600 | 140 | Splice | 9245.459.45516 | 871150051940525 | - |
| 1384ZZ | 700 | 240 | 1 | SK15 | 216,0 | 150,0 | 11,0 | Clear | Horizontal | 5.000 | 2600 | 140 | Splice | 9245.270.45516 | 871150049608925 | - |
| 800T3 | 800 | 120 | 3 | U | 303,0 | 203,0 | 11,0 | Translucent | Horizontal | 5.000 | 2500 | 146 | Splice | 9245.189.34616 | 871150051775325 | 216804 |
| 13195X | 1.000 | 235 | 2 | X | 370,0 | 280,0 | 11,0 | Clear | Horizontal | 5.000 | 2450 | - | - | 9238.510.43916 | 871150021742425 | 312132 |
| 13713X | 1.000 | 235 | 2 | X | 370,0 | 280,0 | 11,0 | Clear | Universal | 5.000 | 2450 | - | - | 9238.515.43916 | 871150021472025 | 312603 |
| 13713Z/98 | 1.000 | 235 | 1 | SK15 | 355,0 | 280,0 | 11,0 | Reflector | Universal | 5.000 | 2400 | 200 | Fork | 9238.535.44516 | 871150021474425 | 312678 |
| 13195Z/98 | 1.000 | 235 | 1 | SK15 | 355,0 | 280,0 | 11,0 | Reflector | Horizontal | 5.000 | 2400 | 200 | Fork | 9238.543.44516 | 871150021745525 | - |
| 13713X/98 | 1.000 | 235 | 2 | X | 370,0 | 280,0 | 11,0 | Reflector | Universal | 5.000 | 2450 | - | - | 9238.960.44516 | 871150021473725 | - |
| 1340ZZ | 1.000 | 235 | 1 | SK15 | 355,0 | 280,0 | 11,0 | Clear | Universal | 5.000 | 2500 | 200 | Fork | 9245.335.44916 | 871150049811325 | - |
| 1000T3 | 1.000 | 240 | 3 | U | 351,0 | 254,0 | 11,0 | Translucent | Horizontal | 5.000 | 2500 | 146 | Splice | 9245.178.43816 | 871150051765425 | 209957 |
| 1000T3/CL | 1.000 | 240 | 3 | U | 303,0 | 254,0 | 11,0 | Clear | Horizontal | 5.000 | 2500 | 146 | Splice | 9245.179.43816 | 871150051766125 | 210005 |
| 13561Y/98 | 1.200 | 144 | 4 | Y | 221,5 | 150,0 | 11,0 | Reflector | Horizontal | 5.000 | 2400 | 150 | Fork | 9245.033.57716 | 871150005569928 | 270637 |
| 14134Z/98 | 1.200 | 235 | 1 | SK15 | 228,0 | 155,0 | 11,0 | Reflector | Horizontal | 5.000 | 2700 | 150 | Fork | 9245.371.44916 | 871150005842325 | - |
| 13935R | 1.530 | 230 | 5 | R7S | 447,9 | 385,0 | 11,0 | Clear | Horizontal | 5.000 | 2400 | - | - | 9239.472.44224 | 871150021476825 | - |
| 13568Y/98 | 1.600 | 144 | 4 | Y | 221,5 | 155,0 | 11,0 | Reflector | Horizontal | 5.000 | 2500 | 150 | Fork | 9245.032.57716 | 871150005568228 | 270629 |
| 13568Z/98 | 1.600 | 144 | 1 | SK15 | 22980 | 155,0 | 11,0 | Reflector | Horizontal | 5.000 | 2500 | 150 | Fork | 9245.483.57716 | 871150051489925 | - |
| 1600T3 | 1.600 | 208 | 3 | U | 503,0 | 406,0 | 11,0 | Translucent | Horizontal | 5.000 | 2500 | 146 | Splice | 9245.180.41416 | 871150051767825 | 216762 |
| 14135Z/98 | 1.600 | 235 | 1 | SK15 | 228,0 | 155,0 | 11,0 | Reflector | Horizontal | 5.000 | 2600 | 150 | Fork | 9245.372.44916 | 871150018450425 | - |
| 1600T3 | 1.600 | 240 | 3 | U | 503,0 | 406,0 | 11,0 | Translucent | Horizontal | 5.000 | 2500 | 146 | Splice | 9245.182.45516 | 871150051769225 | 209965 |
| 1600T3/7 | 1.600 | 240 | 5 | R7S | 498,5 | 406,0 | 11,0 | Translucent | Horizontal | 5.000 | 2550 | - | - | 9245.190.43816 | 871150051767025 | 210039 |
| 13938R | 2.000 | 230 | 5 | R7S | 550,4 | 497,0 | 11,0 | Clear | Horizontal | 5.000 | 2500 | - | - | 9245.085.44216 | 871150005588025 | - |
| 13214Z/98 | 2.000 | 230 | 1 | SK15 | 657,0 | 500,0 | 11,0 | Reflector | Horizontal | 5.000 | 2500 | 500 | Splice | 9245.323.44216 | 871150049823625 | - |
| 13168V | 2.000 | 235 | 7 | V | 350,0 | 286,0 | 11,0 | Clear | Universal | 5.000 | 2500 | 138 | Ring | 9238.504.44516 | 871150049632425 | 357038 |
| 13168X | 2.000 | 235 | 2 | X | 370,0 | 288,0 | 11,0 | Clear | Universal | 5.000 | 2500 | - | - | 9238.525.43916 | 871150021677925 | 311985 |
| 13168Z/98 | 2.000 | 235 | 1 | SK15 | 355,0 | 280,0 | 11,0 | Reflector | Universal | 5.000 | 2500 | 200 | Fork | 9238.536.44516 | 871150021678625 | 312009 |
| 13213Z/98F | 2.000 | 235 | 1 | Z | 355,0 | 280,0 | 11,0 | Reflector | Horizontal | 5.000 | 2500 | 200 | Fork | 9245.003.44516 | 871150021747925 | 378117 |
| 14103Z/98 | 2.000 | 235 | 1 | SK15 | 355,0 | 280,0 | 11,0 | Reflector | Horizontal | 5.000 | 2500 | 230 | Splice | 9245.347.44916 | 871150049834225 | - |
| 2MT3/CL/HT/UB0 | 2.000 | 240 | 3 | U | 303,0 | 254,0 | 11,0 | Clear | Universal | 5.000 | 2500 | 146 | Splice | 9245.185.45516 | 871150051772225 | 216481 |
| 13245X/98 | 2.000 | 400 | 2 | X | 512,0 | 416,0 | 11,0 | Reflector | Horizontal | 5.000 | 2500 | - | - | 9238.529.57916 | 871150021470625 | 312520 |
| 13245X | 2.000 | 400 | 2 | X | 512,0 | 416,0 | 11,0 | Clear | Horizontal | 5.000 | 2500 | - | - | 9238.530.57916 | 871150049633125 | - |
| 13765X | 2.000 | 400 | 2 | X | 512,0 | 410,0 | 11,0 | Clear | Universal | 5.000 | 2500 | - | - | 9238.531.57916 | 871150021475125 | 312694 |
| 13765X/98 | 2.000 | 400 | 2 | X | 512,0 | 410,0 | 11,0 | Reflector | Universal | 5.000 | 2500 | - | - | 9245.054.57916 | 871150005575025 | 368555 |
| 2500T3 | 2.500 | 480 | 3 | U | 731,0 | 638,0 | 11,0 | Translucent | Horizontal | 5.000 | 2550 | 146 | Splice | 9245.183.51616 | 871150051770825 | 209981 |
| 2500T3/CL | 2.500 | 480 | 3 | U | 731,0 | 638,0 | 11,0 | Clear | Horizontal | 5.000 | 2550 | 146 | Splice | 9245.264.51616 | 871150051780725 | 238741 |
| 14107Z/98 | 3.000 | 230 | 1 | SK15 | 787,0 | 700,0 | 11,0 | Reflector | Horizontal | 5.000 | 2400 | 500 | Splice | 9245.363.44216 | 871150049852625 | - |
| 14107Z | 3.000 | 230 | 1 | SK15 | 787,0 | 700,0 | 11,0 | Clear | Horizontal | 5.000 | 2400 | 500 | Splice | 9245.574.44216 | - | - |
| 13565X | 3.000 | 235 | 2 | X | 370,0 | 277,0 | 13,5 | Clear | Universal | 5.000 | 2500 | - | - | 9239.456.44516 | 871150005533025 | - |
| 13565V | 3.000 | 235 | 7 | V | 350,0 | 277,0 | 13,5 | Clear | Universal | 5.000 | 2500 | 138 | Ring | 9245.143.44516 | 871150005594125 | 138867 |
| 14121Z/98 | 3.000 | 235 | 1 | Z | 355,0 | 280,0 | 11,0 | Reflector | Horizontal | 5.000 | 2650 | 230 | Splice | 9245.449.44916 | 871150051919125 | - |
| 13230X | 3.000 | 400 | 2 | X | 802,0 | 700,0 | 11,0 | Clear | Universal | 5.000 | 2500 | - | - | 9238.540.57916 | 871150021748625 | 312447 |
| 13230X/98 | 3.000 | 400 | 2 | X | 802,0 | 700,0 | 11,0 | Reflector | Universal | 5.000 | 2500 | - | - | 9238.541.57916 | 871150021749325 | 236489 |
| 3200T3/CL | 3.200 | 240 | 3 | U | 1062,0 | 815,0 | 11,0 | Clear | Horizontal | 5.000 | 2450 | 146 | Splice | 9245.326.45516 | 200833000168910 | 254359 |
| 3200T3/CL | 3.200 | 277 | 3 | U | 1062,0 | 813,0 | 11,0 | Clear | Horizontal | 5.000 | 2300 | 146 | Splice | 9245.326.46916 | - | 254789 |
| 14158/99 | 3.650 | 480 | 6 | R7S + LEAD | 1061,0 | 962,0 | 11,0 | Clear | Horizontal | 5.000 | 2500 | 146 | Splice | 9245.631.51716 | 871150018675110 | - |
| 3800T3/CL/UB | 3.800 | 575 | 3 | U | 1062,0 | 963,0 | 11,0 | Clear | Universal | 5.000 | 2500 | 146 | Splice | 9245.173.51116 | 871150051761610 | 221291 |
| 3800T3 | 3.800 | 575 | 3 | U | 1062,0 | 963,0 | 11,0 | Translucent | Horizontal | 5.000 | 2500 | 146 | Splice | 9245.184.51116 | 871150051771510 | 221283 |





Lamp specifications Ruby


| Type | Lamp wattage (in W) | Voltage (in V) | Fig. | Cap/ Base | Total Lamp length (mm) C | Heating length (mm) W | Diameter (mm) D | Finish | Burning position | Average Lamp life (in h) | Cable (mm) X | Cable connection | 12 nc | EOC |
|-------------|---------------------|----------------|------|-----------|--------------------------|-----------------------|-----------------|--------|------------------|--------------------------|--------------|------------------|----------------|-----------------|
| 13833Z/876 | 850 | 120 | 8 | SK15 | 198,0 | 119,0 | 20,0 | Ruby | Horizontal | 5.000 | 85 | Tab | 9245.226.36324 | 871150049575425 |
| 13833Z/876 | 850 | 240 | 8 | SK15 | 198,0 | 113,0 | 20,0 | Ruby | Horizontal | 5.000 | 85 | Tab | 9245.226.45524 | 871150049576125 |
| 13834Z/876 | 1.000 | 240 | 8 | SK15 | 355,0 | 280,0 | 20,0 | Ruby | Universal | 5.000 | 85 | Tab | 9245.232.45524 | 871150049569325 |
| 13836Z/876 | 1.000 | 240 | 8 | SK15 | 531,0 | 440,0 | 20,0 | Ruby | Universal | 5.000 | 85 | Tab | 9245.234.45524 | 871150049571625 |
| 13837Z/876 | 1.100 | 230 | 8 | SK15 | 531,0 | 446,0 | 20,0 | Ruby | Universal | 5.000 | 85 | Tab | 9245.235.44224 | 871150049572325 |
| 13835Z/876 | 1.150 | 230 | 8 | SK15 | 355,0 | 280,0 | 20,0 | Ruby | Universal | 5.000 | 85 | Tab | 9245.233.44224 | 871150049570925 |
| 13123Z/876L | 1.500 | 120 | 8 | SK15 | 355,0 | 280,0 | 20,0 | Ruby | Horizontal | 5.000 | 340 | Faston | 9238.551.34624 | 871150049142825 |
| 13846Z/876 | 1.500 | 200 | 8 | SK15 | 787,0 | 700,0 | 20,0 | Ruby | Universal | 5.000 | 85 | Tab | 9245.278.39524 | 871150049622525 |
| 13123Z/876 | 1.500 | 240 | 8 | SK15 | 355,0 | 280,0 | 20,0 | Ruby | Horizontal | 5.000 | 200 | Fork | 9238.550.45524 | 871150049141125 |
| 13123Z/876L | 1.500 | 240 | 8 | SK15 | 355,0 | 280,0 | 20,0 | Ruby | Horizontal | 5.000 | 340 | Faston | 9238.551.45524 | 871150049143525 |
| 13250Z/876 | 1.500 | 240 | 8 | SK15 | 787,0 | 700,0 | 20,0 | Ruby | Universal | 5.000 | 85 | Tab | 9245.280.45524 | 871150049623225 |
| 13934Z/876L | 2.000 | 240 | 8 | SK15 | 355,0 | 280,0 | 20,0 | Ruby | Horizontal | 5.000 | 340 | Faston | 9239.462.45524 | 871150049147325 |

Lamp specifications Speedium

| Type | Lamp wattage (in W) | Voltage (in V) | Fig. | Cap/ Base | Total Lamp length (mm) C | Heating length (mm) W | Diameter (mm) D | Finish | Burning position | Average Lamp life (in h) | Cable (mm) X | Cable connection | 12 nc | EOC |
|--------|---------------------|----------------|------|-----------|--------------------------|-----------------------|-----------------|--------|------------------|--------------------------|--------------|------------------|----------------|-----------------|
| 17012X | 1.500 | 235 | 2 | X | 370,0 | 280,0 | 11,0 | Clear | Universal | 5.000 | - | - | 9245/621.44946 | 871150018645425 |

Lamp specifications Incandescent Industrial

| Type | Lamp wattage (in W) | Voltage (in V) | Fig. | Cap/ Base | Total Lamp length (mm) C | Lamp length (mm) C1 | Diameter (mm) D | Bulb material | Finish | Burning position | Average Lamp life (in h) | 12 nc | EOC |
|--------------|---------------------|----------------|------|-----------|--------------------------|---------------------|-----------------|---------------|--------|------------------|--------------------------|--------------|-----------------|
| IR100R PAR38 | 100 | 230 | 10 | E27 | 136,0 | 123,0 | 121,0 | Hard Glass | Red | Horizontal H45 | 5.000 | 923801144207 | 871150060052320 |
| IR100R PAR38 | 100 | 240 | 10 | E27 | 136,0 | 123,0 | 121,0 | Hard Glass | Red | Horizontal H45 | 5.000 | 923801145502 | 871150012891120 |
| IR100C PAR38 | 100 | 230 | 10 | E27 | 136,0 | 123,0 | 121,0 | Hard Glass | Clear | Universal | 5.000 | 923801244207 | 871150011578220 |
| IR100C PAR38 | 100 | 240 | 10 | E27 | 136,0 | 123,0 | 121,0 | Hard Glass | Clear | Universal | 5.000 | 923801245501 | 871150012893520 |
| IR175C PAR38 | 175 | 230 | 10 | E27 | 136,0 | 123,0 | 121,0 | Hard Glass | Clear | Universal | 5.000 | 923801344207 | 871150011579920 |
| IR175C PAR38 | 175 | 240 | 10 | E27 | 136,0 | 123,0 | 121,0 | Hard Glass | Clear | Universal | 5.000 | 923801345501 | 871150012895920 |
| IR175R PAR38 | 175 | 230 | 10 | E27 | 136,0 | 123,0 | 121,0 | Hard Glass | Red | Horizontal H45 | 5.000 | 923801444204 | 871150060053020 |
| IR175R PAR38 | 175 | 230 | 10 | E27 | 136,0 | 123,0 | 121,0 | Hard Glass | Red | Horizontal H45 | 5.000 | 923801444207 | 871150060053020 |
| IR175R PAR38 | 175 | 240 | 10 | E27 | 136,0 | 123,0 | 121,0 | Hard Glass | Red | Horizontal H45 | 5.000 | 923801445501 | 871150012898020 |
| IR175R PAR38 | 175 | 240 | 10 | E27 | 136,0 | 123,0 | 121,0 | Hard Glass | Red | Horizontal H45 | 5.000 | 923801445502 | 871150012898020 |
| IR150C R125 | 150 | 230 | 9 | E27 | 181,0 | - | 125,0 | Soft Glass | Clear | Universal | 5.000 | 923211044202 | 871150034830225 |
| IR150C R125 | 150 | 240 | 9 | E27 | 181,0 | - | 125,0 | Soft Glass | Clear | Universal | 5.000 | 923211045502 | 871150034828925 |
| IR150C R125 | 150 | 240 | 9 | E27 | 181,0 | - | 125,0 | Soft Glass | Clear | Universal | 5.000 | 923211045503 | 871150034828925 |
| IR250C R125 | 250 | 230 | 9 | E27 | 181,0 | - | 125,0 | Soft Glass | Clear | Universal | 5.000 | 923211144202 | 871150034834025 |
| IR250C R125 | 250 | 240 | 9 | E27 | 181,0 | - | 125,0 | Soft Glass | Clear | Universal | 5.000 | 923211145502 | 871150034832625 |
| IR250C R125 | 250 | 240 | 9 | E27 | 181,0 | - | 125,0 | Soft Glass | Clear | Universal | 5.000 | 923211145503 | 871150034832625 |
| IR150R R125 | 150 | 230-250 | 9 | E27 | 181,0 | - | 125,0 | Soft Glass | Red | Universal | 5.000 | 923244343801 | 871150012639925 |
| IR150R R125 | 150 | 230 | 9 | E27 | 181,0 | - | 125,0 | Soft Glass | Red | Universal | 5.000 | 923244344201 | 871150012638225 |
| IR250R R125 | 250 | 230-250 | 9 | E27 | 181,0 | - | 125,0 | Soft Glass | Red | Universal | 5.000 | 923244443801 | - |
| IR250R R125 | 250 | 230 | 9 | E27 | 181,0 | - | 125,0 | Soft Glass | Red | Universal | 5.000 | 923244444201 | 871150012653525 |
| IR275CH R125 | 275 | 240 | 9 | E27 | 179,0 | - | 125,0 | Hard Glass | Clear | Universal | 5.000 | 923203145501 | - |
| IR250CH R125 | 250 | 230-250 | 9 | E27 | 179,0 | - | 125,0 | Hard Glass | Clear | Universal | 5.000 | 923221943805 | 871150012649825 |
| IR300CH R125 | 300 | 230-250 | 9 | E27 | 179,0 | - | 125,0 | Hard Glass | Clear | Universal | 5.000 | 923223043805 | 871150012656625 |
| IR375CH R125 | 375 | 230-250 | 9 | E27 | 183,0 | - | 125,0 | Hard Glass | Clear | Universal | 5.000 | 923223543805 | 871150012659725 |
| IR375SH R125 | 375 | 230 | 9 | E27 | 183,0 | - | 125,0 | Hard Glass | Sat | Universal | 5.000 | 923223644206 | 871150012661025 |



Logos description



Preferably do not touch quartz with bare hands. If grease or chemical compound have been deposited on quartz, simply clean before lighting with cloth moistened with alcohol.



Disconnect installation from power supply before removing or installing a lamp.



Prolonged looking at the lamp during operation may result in damage to the eye.



Keep dry.

Temperature limits on infrared halogen lamps

Standard permissible temperatures **HeLeN permissible temperatures**

