

INFRA LIGHT

HALOGEN INFRARED EMITTERS FOR HEATING AND DRYING PROCESSES

Properties of Infrared Heating

Heating by means of infrared radiation is natural and simple. Infrared heat means heating without contact with the heat source and rapid heat-up, as large amounts of energy can be transferred in a short time. It means gentle heating, as the radiation penetrates into the object being heated and doesn't just act on the surface. The temperature of the object being heated can be controlled quickly and precisely by controlling the infrared emitter. Heating is targeted, can be localised and is switched on and off by the push of a button.

Heraeus InfraLight is the New Standard in Halogen Infrared Emitters

They produce heat in the same way that a light bulb produces light. They have Standard emitter configuration designs, so that they can be easily interchanged. Because of the original Heraeus gold reflector, the emitters operate at a significantly higher efficiency than conventional lamps. Standard emitters are listed overleaf. Batches up to 100 pieces can be delivered within 72 hours on working days. For InfraLight emitters with non-standard sockets and ratings, please contact Heraeus.

InfraLight Emitters for all Infrared Processes

for heating, drying, evaporation, gelling, softening, hardening, tempering, forming, gluing, activating, brazing, laminating, disinfecting, baking.

of materials latex, foils, paper, carpets, rugs, textiles, plastics, glass, wood, chipboard, insulation board, furniture, fibres, printed circuit boards, car bodies, metals, castings, cores, membranes and shells, leather, foodstuffs.

and coatings lacquers, powder coatings, water coatings, primers, finish coats, paints and dyes, printing inks, thin films, glazing, pastes, glues, adhesives.


Heraeus offers Total Infrared Technology

- Standard emitters
- Twin tube infrared emitters in all commonly used wavelengths, cut to size for the particular process.
- IR modules and systems for industrial applications
- Individual consultation, advice and the technical capability to develop IR systems for particular finishing processes. With our long experience in infrared technologies, we are known worldwide as the market leader in this field.

InfraLight - The new standard from the specialist. Talk to us.



I
N
F
R
A
L
I
G
H
T
S
O
L
U
T
I
O
N
S
F
O
R
I
N
D
U
S
T
R
I
A
L
A
P
P
L
I
C
A
T
I
O
N
S

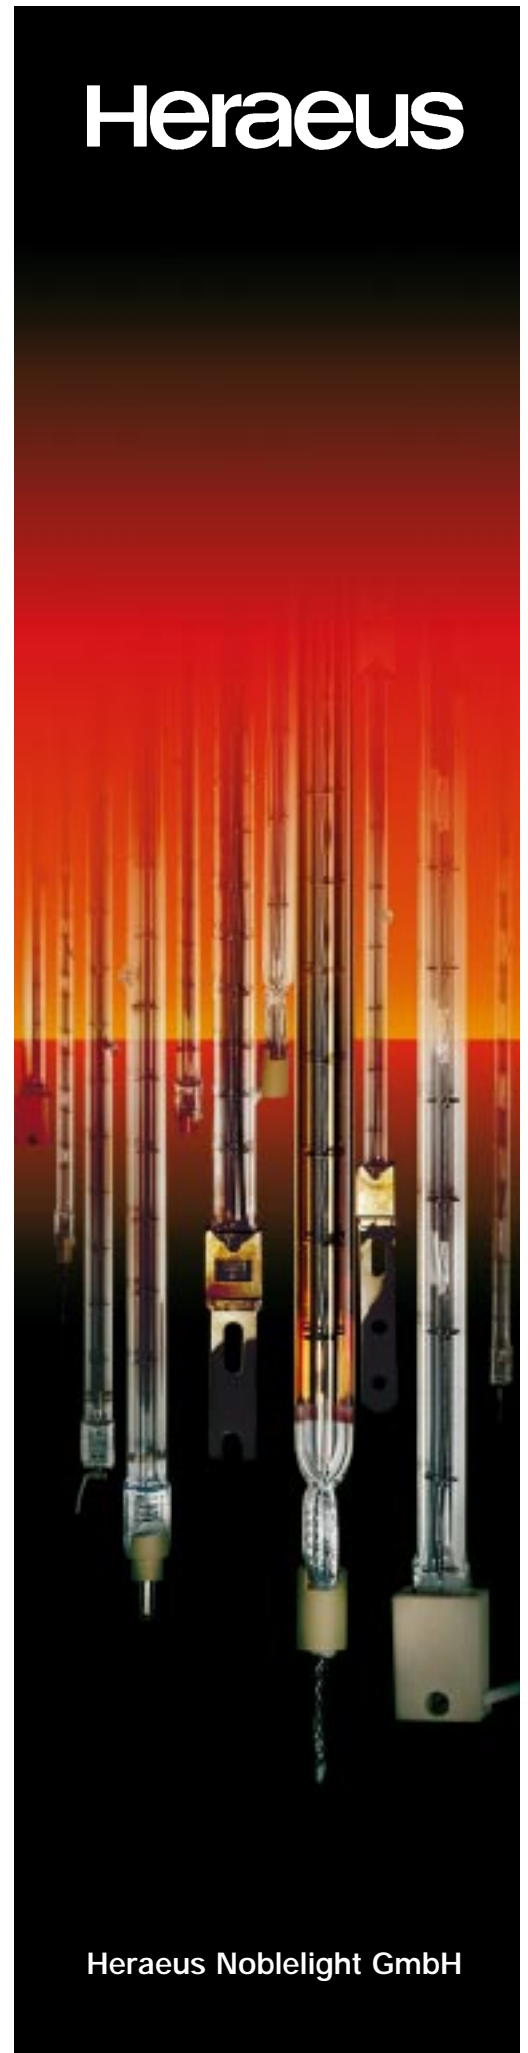


HERAEUS INFRALIGHT – HALOGEN INFRARED EMITTERS

InfraLight emitters can be supplied with a choice of different emitter configurations. With any inquiry or order, please include the socket designation (e.g. 4513 1740Y).

Emitters can be fitted with different reflectors, as required. When ordering, please specify the reflector designation (e.g. 4513 1740 YG).

The total length of the emitter, for emitter configurations L, R7s, U and Y, is the length between the ends of the complete emitter. For emitter configuration X, the length is the fitting length from the centre of the fitting hole in the metal plate (see diagram). For further information, please ask for our data sheets.

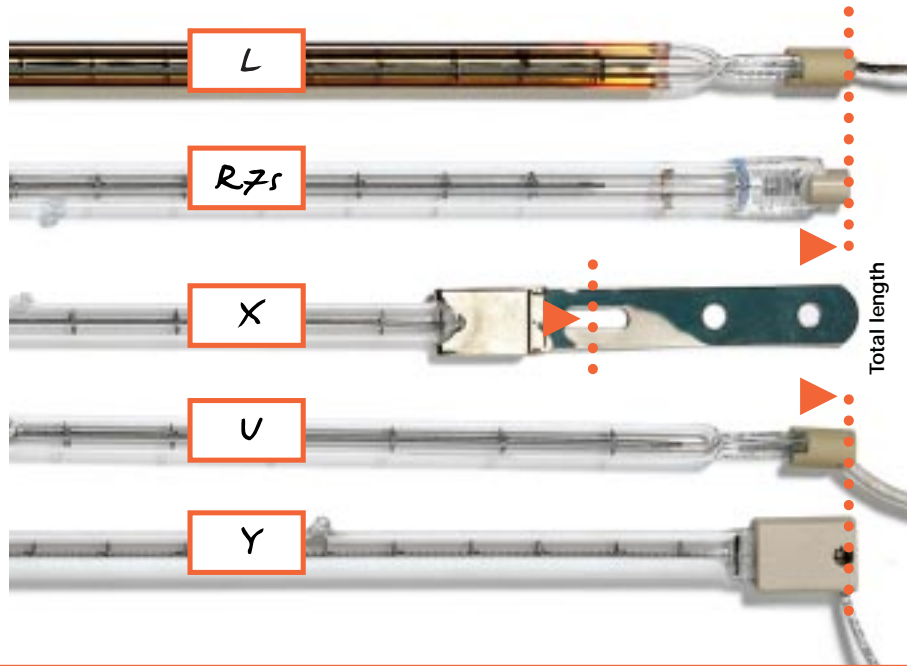


THE STANDARD RANGE

| Power [Watt] | Rating [Voltage] | Heated Length [mm] | Emitter Configuration | | | | | Total Length [mm] | Reflector | | | Type No. |
|--------------|------------------|--------------------|-----------------------|------|------|------|------|-------------------|-----------|---------|-----------|----------|
| | | | L | R7s | X | U | Y | | Without O | White W | Gold G | |
| 500 | 235 | 165 | 227 | 216 | 236 | 227 | 222 | ● | ● | ● | 4513 1481 | |
| 1000 | 235 | 272 | 355 | 344 | 365 | 355 | 348 | ● | ● | ● | 4513 1731 | |
| 1000 | 240 | 254 | 350 | 340 | 360 | 350 | 346 | ● | ● | ● | 4513 1732 | |
| 1600 | 240 | 406 | 503 | 493 | 513 | 503 | 499 | ● | ● | ● | 4513 1738 | |
| 2000 | 235 | 280 | 355 | 344 | 370 | 355 | 348 | ● | ● | ● | 4513 1740 | |
| 2000 | 235 | 410 | 498 | 488 | 508 | 498 | 494 | ● | ● | ● | 4513 1742 | |
| 2500 | 480 | 635 | 731 | 721 | 741 | 731 | 727 | ● | ● | ● | 4513 1745 | |
| 3000 | 400 | 700 | 788 | 778 | 798 | 788 | 784 | ● | ● | ● | 4513 1746 | |
| 3650 | 480 | 965 | 1062 | 1052 | 1072 | 1062 | 1058 | ● | ● | ● | 4513 1749 | |

InfraLight Emitters with Gold Reflector

Without reflector emitters radiate 50% of the infrared radiation to the rear and 50% forwards. Consequently, only 50% of the potential radiation is available to heat a surface. With white reflectors about 72% is available and with the Heraeus Gold reflector 95% of the available radiation is directed at the workpiece surface.

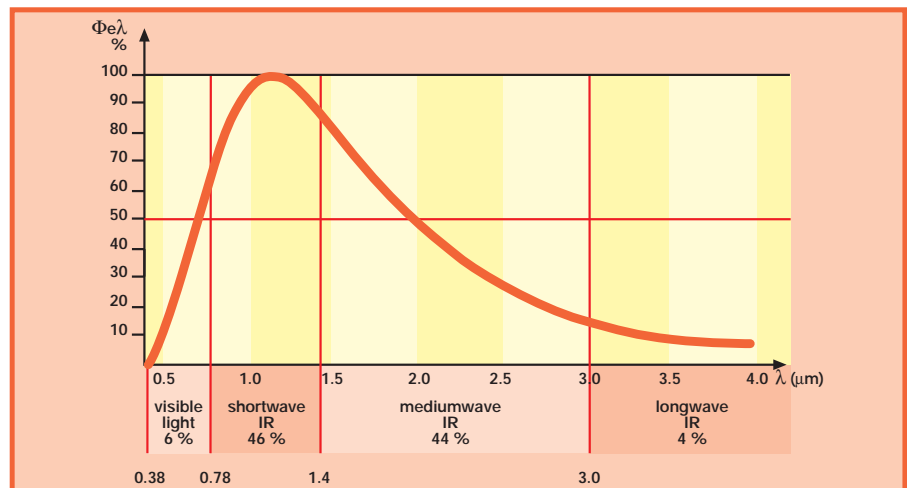

Spectral radiation distribution of an IR emitter at 2400 K (2450 K colour temperature).

We reserve the right to change the pictures and technical data of this leaflet. Printed in Germany. HNG - B 54 E D 3C 12/98/M+T

Heraeus

Heraeus Noblelight GmbH
Reinhard-Heraeus-Ring 7
D-63801 Kleinostheim
Germany
Phone +49 (6027) 507-403
Telefax +49 (6027) 507-410
E-Mail:

hng-infralight@europe.heraeus.com
Internet: www.heraeus-noblelight.com

Heraeus Noblelight Ltd.
8, Caldbeck Road
Bromborough, Wirral
Merseyside L62 3PL/England
Phone +44 (151) 343 0545
Telefax +44 (151) 343 9883
E-Mail:

hnl-bromborough@europe.heraeus.com
Internet: www.heraeus-noblelight.com

Heraeus Amersil Inc.
Noblelight Division
3473 Satellite Blvd.
Duluth, GA 30136-5821/USA
Phone +1 (770) 623 6000
Telefax +1 (770) 418 0688
E-Mail:

noblelight@heraeus-amersil.com
Internet: www.heraeus-amersil.com



REG. NO. 39254



InfraLight® is a registered trademark of Heraeus Noblelight GmbH.