



0770 LAME CIRCOLARI SILENZIATE PER TRONCATRICE

SILENCED CIRCULAR SAW BLADES FOR CUTTING OFF MACHINE

Hc - denti alternati - *alternated teeth*
 uso esclusivo per tagli di cornici - *exclusively for mouldings cut*

Cod.	D	B	Z	d
001	250	3	80	20 - 30
002	300	3	96	20 - 30
003	330	3,2	100	20 - 30
004	350	3,2	108	20 - 30

B = spessore in mm. - *thickness in mm.* d = foro in mm. - *bore in mm.*
 Z = numero dei taglienti - *number of cutting edges* D = diametro in mm. - *diameter in mm.*

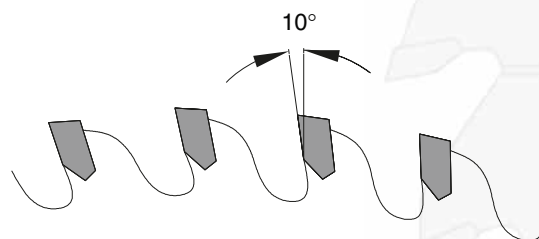

CARATTERISTICHE TECNICHE

Lame circolari in Hc (HM riportato) per taglio di cornici in legno ricoperto con vernici o gesso. La riduzione della rumorosità si ottiene grazie ai tagli effettuati nel corpo della lama, riempiti con materiale fonoassorbente che attenua la propagazione delle onde sonore.

IMPIEGO
 TRONCATRICE

TECHNICAL SPECIFICATIONS

Circular saw blades in Hc (braced tungsten carbide) to cut wooden mouldings covered with paint or plaster, and other delicate materials. The remarkable noise reduction is obtained thanks to the cuts effected in the body of the saw blade, which are filled with sound-proofing material that attenuates the sound waves propagation.

APPLICATION
 CUTTING OFF MACHINE