SPLIT WITH CABINET EVAPORATOR SYSTEM

- · Discreet device
- · Constant temperature maintenance
- · Preservation of humidity by heating or cooling
- ·Adjustable temperature from 4 to 15 °C
- · Low noise level
- ·Automatic defrost

A NEW GENERATION OF AIR CONDITIONERS FOR WINE CELLAR

SPLIT SP40 CA PRO /4/8





WINE MASTER®


Le temps d'être différent

EQUIPMENT



- Inside unit
- 2 Outside unit
- Thermostat
- Wiring box
- 5 Preloaded connecting ducts for the 4m & 8m version

FILTER VIEW



THERMOSTAT





EXPLODED VIEW



- \cdot Regulator
- · Fan speed controller
- · Wall brackets supplied with anti vibration pads
- · Automatic low & high pressure switch
- · Filter
- · Safety valve

INSTALLATION PRINCIPLE WITH/OR WITHOUT DIVIDING WALLS

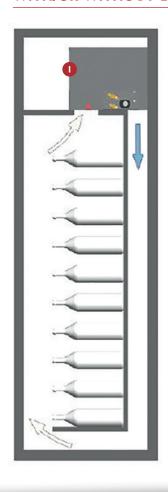

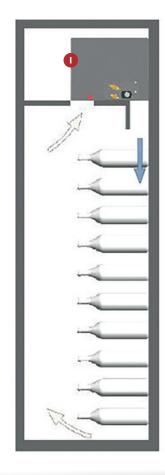

The WineMaster SP40 CA is available in 3 versions: the classic Split model for connections with a maximum distance of 30 m and 15 m in elevation and two preloaded models with insulated flexible connection length of 4 or 8m for an easy installation between the inside and outside.


TECHNICAL DRAWINGS

TECHNICAL DATA


Front view outside unit:




Side view outside unit:




Front view evaporator unit:



Side view evaporator unit:




Thermostat front view:



Thermostat side view:



Wiring box front view:



Wiring box side view:



Reference	SP40 CA PRO	SP40 CA 4	SP40 CA 8
Volume (m³)	Up to 40 m³ depending of insulation		
Cooling power (watt)	900		
Heating power (watt)	500		
Condenser unit			
Air flow (m³/h)	980 (without filter)		
Noise level (db)	59 (Im) / 49 (5m)		
Noise level with sound insulation option (db)	49 (Im) / 39 (5m)		
Weight (kg)	35		
Dimensions H x W x D (mm)	408 × 633 × 415		
Color finish	RAL 7012		
Refrigerant	R404		
Automatic high pressure switch			
Automatic low pressure switch			
Regulator and fan speed controller	•		
Oil separator			
Safety valve	•		
Sealed wiring box	•		
Preloaded duct length	1	4	8
Preloaded refrigerated connection lenght	1/4 and 3/8	1	1
Washable air filter	•		
Heating belt	•		
Evaporator			
Weight (kg)	17		
Dimensions H x W x D (mm)	262 x 517 x 327		
Color finish	RAL 7012		
Speed rate	2		
Drier	•		
Regulator	•		
Heating resistance			
Regulation		wire control	

Trust in FONDIS know-how and experience for the realisation of the wine cellar you ever dreamed of.

THE KEYS OF OUR SUCCESS:

- ·Constant temperature maintenance,
- ·Controlled humidity,
- ·Temperature setting between 4 & 15°C,
- ·Serial heating,
- ·Reduced noise level,
- · Automatic defrost.

To take care about your wine capital, we have taken the following technical precautions:

- · Regulator and fan speed controller,
- · Automatic low & high pressure switch,
- ·Safety valve,
- ·Heating belt,
- · Metallic dust filter.

THE WINE CELLAR IN THE CENTRE OF ALL ATTENTIONS

Real wine cabinet either for wine lovers or professionals, the wine cellar can now be installed directly into the living spaces.

Wine Master offers a complete range, more than 20 years of experience and thousands of realizations, an advanced design while ensuring a great discretion.

SPLIT SP 40 THE NEW GENERATION OF AIR CONDITIONER FOR WINE CELLAR

In order to answer to the requirements of glazed wine cabinets, Wine Master is launching a new range of air conditioner for wine cellars: SPLIT SP40.

Passionate wine lovers or professionals, your wine collection needs the most beautiful display for everyone to enjoy.

The Winemaster range has been built to provide most favorable cooling solution in the cellar of your dreams. Through constant temperature and controlled humidity, your wines grow up throughout the year in a wine cellar with preserved conditions even under extreme temperatures (minus 30°C to + 40°C).

CONTACT US:

WINEMASTER

Z.I. de Vieux-Thann - 18 rue Guy de Place BP 60010 - F 68801 THANN Cedex

Tél. : + 33 (0)3 89 377 500 Fax : + 33 (0)3 89 377 589 E-mail : contact@winemaster.fr

www.winemaster.fr

