





The gap between the upper edge of the door and the passage as shown in the figure is achieved by using the installation package for extra payment.

JAP 702 - AKTIVE STANDARD


The model of the pocket door frame without lining for sliding single-leaf doors completely without door lining.

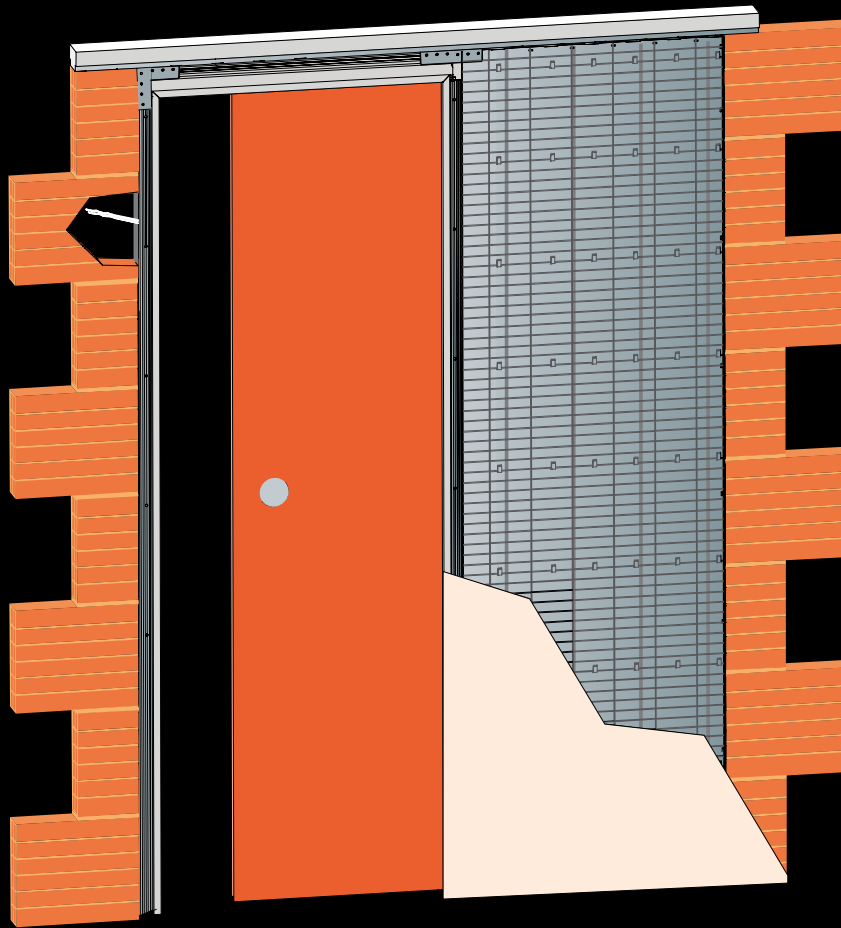

Wall version

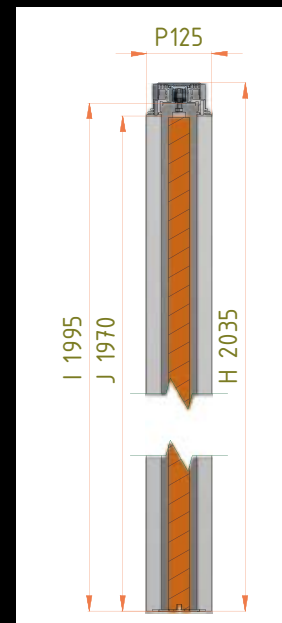

Vertical cross-section of the AKTIVE STANDARD pocket door frame

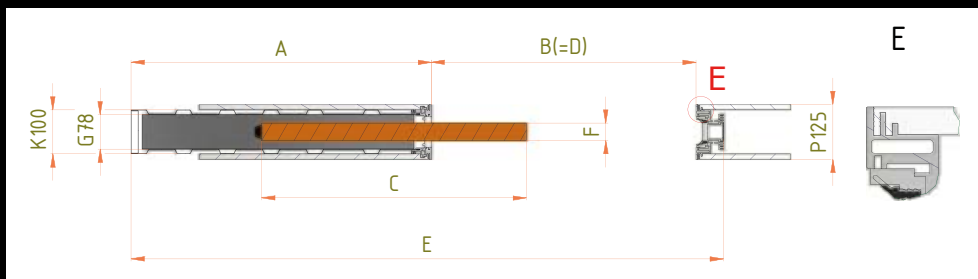

Horizontal cross-section of the AKTIVE STANDARD pocket door frame

JAP 702 AKTIVE STANDARD			
Clear passage D x J	Total dimensions of the pocket door frame E x H*	Width of sheet-metal pocket A	Width of passage after installation of pocket door frame B=D
600 x 1970	1343 x 2035	681	600
700 x 1970	1543 x 2035	781	700
800 x 1970	1743 x 2035	881	800
900 x 1970	1943 x 2035	981	900
1000 x 1970	2143 x 2035	1081	1000
1100 x 1970	2343 x 2035	1181	1100
1200 x 1970	2543 x 2035	1281	1200

Recommended door wing dimensions		
Standard dimensions of wooden door leaf C x L	Thickness of door leaf F** for K 100	Standard dimensions of glass door leaf C x L
650 x 1962	40 - 50	650 x 1950
750 x 1962		750 x 1950
850 x 1962		850 x 1950
950 x 1962		950 x 1950
1050 x 1962		1050 x 1950
1150 x 1962		1150 x 1950
1250 x 1962		1250 x 1950

* 10 mm high rivet nuts are on the top edge of the pocket door frame


** the stop track and brush seals around the perimeter of the passage are supplied at extra charge in the package for the wooden doors for a door thickness of 40 mm

The recommended rough opening dimensions for brick wall construction case system are E + 40 mm x H + 20 mm. The recommended rough opening dimensions for the dry wall system correspond to the dimensions of the construction case system, i.e. E x H.

The outer thickness (K) of the AKTIVE, EMOTIVE 100 mm case = finished partition wall (P) 125 mm.

The opening must be fitted with a lintel - the onstruction case cannot carry any load.

The standard clearance heights are 1970 mm, 1985 mm, 2100 mm and 2115 mm. Atypical dimensions from 1975 to 2700 mm.

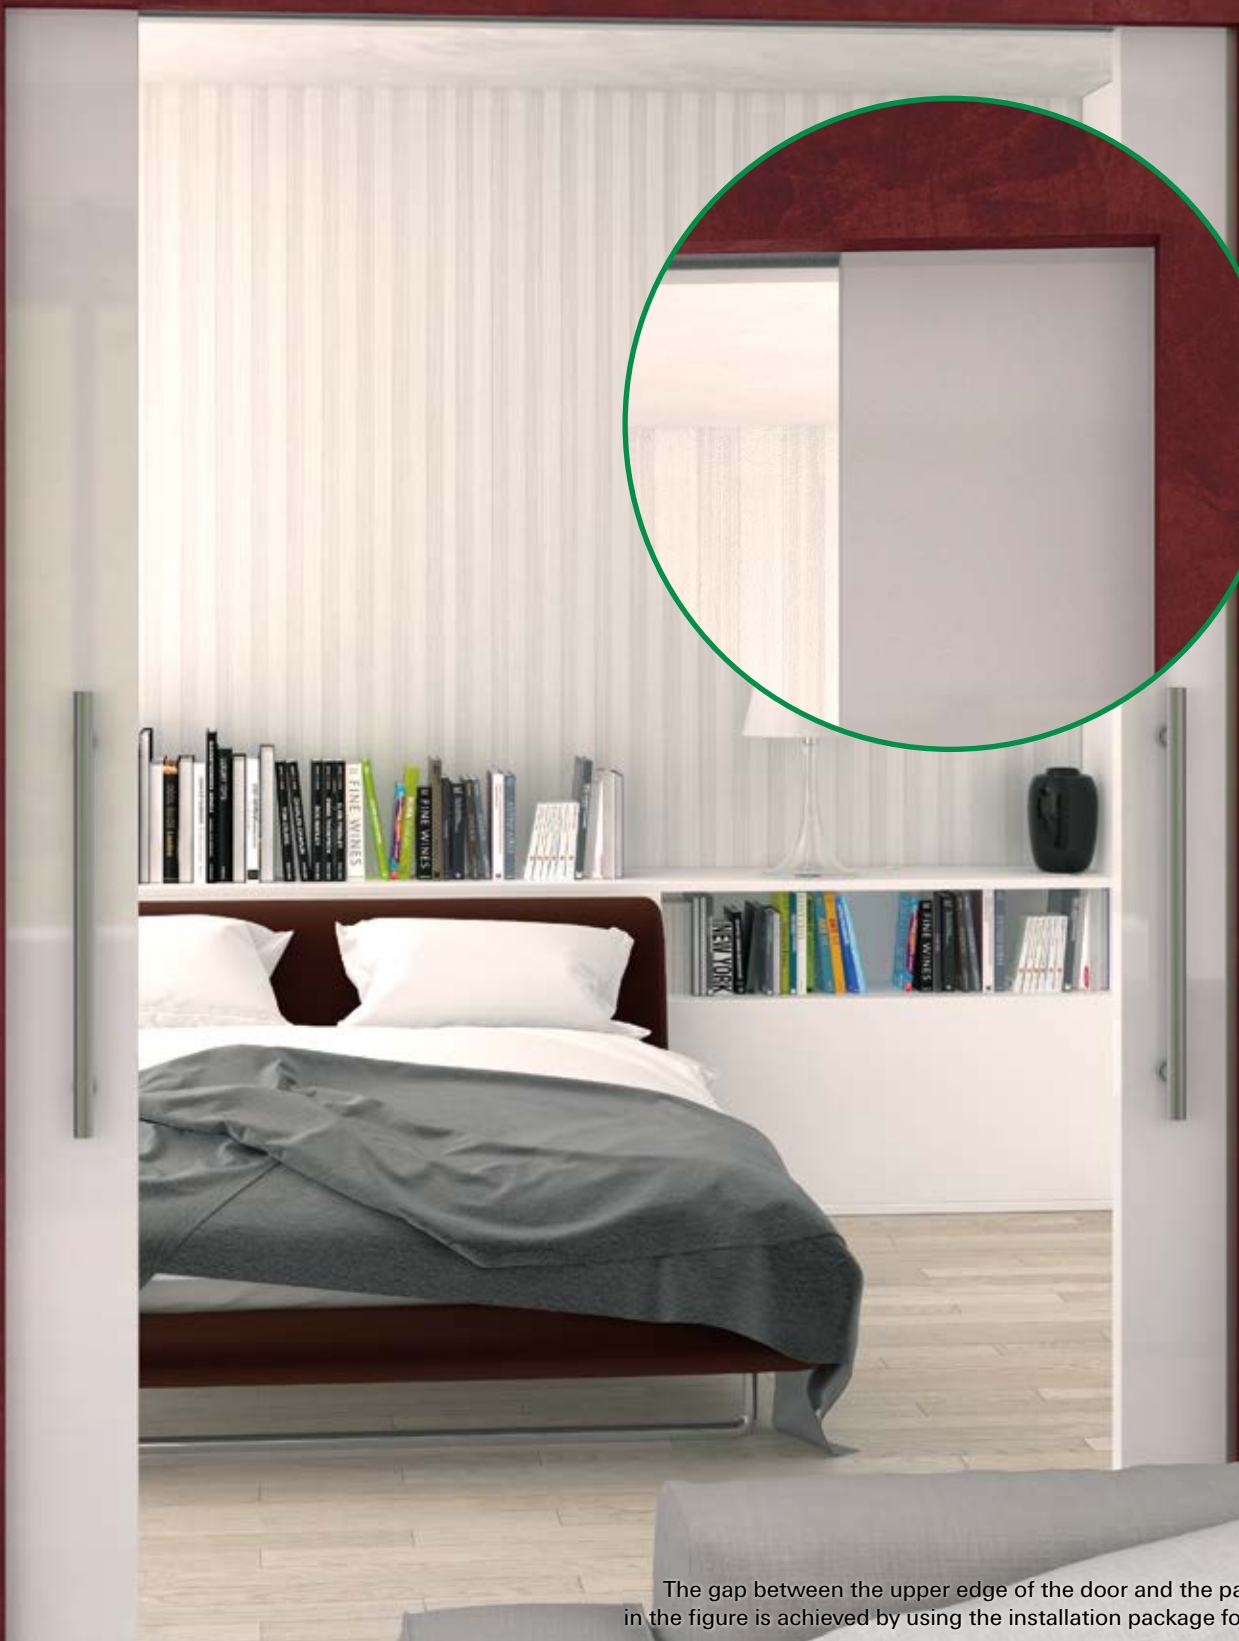

The gap between the upper edge of the door and the passage as shown in the figure is achieved by using the installation package for extra payment.

JAP 712 - AKTIVE KOMFORT

This model comprises two pocket door frames without linings mutually connected by a track. Each pocket door frame is for one door, and the two doors move toward each other; the motion of the doors can also be synchronised.

The model is completely without a door lining.