


TF36 Fest

UHF RFID Inlays

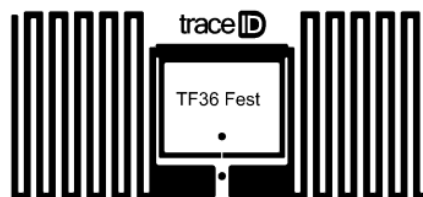

GENERAL CHARACTERISTICS:

Operating Frequency: Global (860 - 960MHz)

RF Protocol: ISO-18000-6C, EPC Class 1, Gen 2

Chip: IMPINJ Monza R6 / R6-P

EPC Memory: 96 / 128 bits auto serialized

USER Memory: NA / 32 bits

TID Memory: 64 bit with 48 bit unique serial number

COMMON APPLICATIONS:

- Apparel and other item-level retail
- Supply chain, inventory and logistics
- Pharmaceutical and healthcare

FORMAT	DRY INLAY	WET / WHITE WET INLAY
Antenna dimensions (Width x Length)	32 x 14mm [1.26 x 0.55 in] /	N/A
Die- cut dimensions	N/A	34 x 16mm [1.34 x 0.63 in]
Inlay substrate material	PET	PET
Inlay- to- liner adhesive	N/A	RC15 (UPM)
Liner material	N/A	Honey Glassine 65 (UPM)
Face sheet	N/A	White or clear Polypropylene / Vellum paper
Standard pitch	21,6mm [0.85 in]	21,6mm [0.85 in]
Standard web width	110mm [4.33 in]	52mm [2.047 in] / 40mm [1.574 in]
Total thickness over chip	177.8 - 203.2 microns	254 - 330.2 microns
Operating temperature	-40 to 85° C [-40 to 185°F]	-40 to 85° C [-40 to 185°F]
RoHS	EU Directive 2011/65 EU Compliant	EU Directive 2011/65 EU Compliant
Quality assurance	100% read tested with out- of- tolerance inlay marked	100% read tested with out- of- tolerance inlay marked
Un- wind direction	Inlay- side Out	Label side out
Core size with adaptor insert	152.4mm [6 in]	76.2 mm [3 in]
Maximum roll outer diameter (not to exceed)	431.8mm [17 in]	304.8mm [12 in]
Average # of units per roll	TBD	TBD

Minimum order quantity for customized labels, tickets, care labels (textile labels): 10.000 pcs

CARE AND HANDLING RFID inlays are sensitive to ESD. Observe standard practices to keep environmental static charge to a minimum.

APPLICATIONS This product should be tested by the customer/ user thoroughly under end use conditions to ensure the product meets the particular requirements. Trace-ID does not represent that this product is fit for any particular purpose or use.

PRODUCT CHANGES Trace-ID reserves the right to modify, change, supplement or discontinue product offerings at any time without notice.

© 2016 Trace-tech Id Solutions S.L. All rights reserved.