



Electronic Tool



Product Introduction

Steady, safety and reliable function
Use LSI double integral A/D converter as heart
Circuit overload protection for whole process
Unique design
Available for DC voltage, AC voltage, Resistance
Diode and circuit continuity



Digital voltage tester
portable and easy to
use



Aluminum alloy
LED bulb, much more
brighter

Multimeter

Multimeter Warranty Terms

- We'll provide the free maintenance and replacement of spare parts service if there are material or technical defects for the products within one year from the purchase date (Based on the purchase order document date)
- The products broken by the accident, negligence, misusage or using at the improper situation are not in the range of free maintenance and replacement of spare parts service.
- The products which are repaired by the other maintenance companies but not which appointed by JETECH are not in the range of free maintenance and replacement of spare parts service.

Analogue Multimeter



- Standard: GB/T 13978-2008
- Stable, safety and durable
- Use the large scale integrated circuit A/D adapter as the core
- Overall overload protection circuit
- Special appearance design
- Testing range: DC voltage, AC voltage, AC, resistance, diode and circuit connecting or cutting
- Note: Please be clear with the grades when using, otherwise the circuit will be broken.



Code	Model No.	Amm	Lmm	PCS	Kg	mm
160904	AM-A	80	160	20(1x20box)	10.50	407x347x303
160905	AM-B	111	173	20(1x20box)	12.00	407x277x293

Digital Multimeter



- Standard: GB/T 13978-2008
- Stable, safety and durable
- Use the large scale integrated circuit A/D adapter as the core
- Overall overload protection circuit
- Special appearance design
- Testing range: DC voltage, AC voltage, AC, resistance, diode and circuit connecting or cutting
- Note: Please be clear with the grades when using, otherwise the circuit will be broken.



DC voltage: 200mV+/- (0.5%+2字);
2V/20V/200V/600V+/- (0.8%+2字)

AC voltage: 200V/600V+/- (1.2%+10字)

DC voltage: 200μA+/- (1.2%+2字);
20μA/200μA/2000μA+/- (1.0%+2字);
2000mA+/- (1.0%+2字); 10A+/- (2.0%+2字);


Resistance: 200Ω+/- (1.0%+2字);
2KΩ/20KΩ/200KΩ+/- (0.8%+2字);
2000KΩ+/- (1.2%+2字);

Code	Model No.	Amm	Lmm	PCS	Kg	mm
160901	DM-A	70	140	60(10x6box)	15.00	607x237x370
160902	DM-B	80	160	40(10x4box)	13.50	518x287x386
160903	DM-C	83	165	30(5x6box)	22.50	652x357x358

Clamp Multimeter




- Standard: GB/T 13978-2008
- Stable, safety and durable
- Use the large scale integrated circuit A/D adapter as the core
- Overall overload protection circuit
- Special appearance design
- Testing range: DC voltage, AC voltage, AC, resistance, diode and circuit connecting or cutting
- Note: Please be clear with the grades when using, otherwise the circuit will be broken.



Code	Model No.	Amm	Lmm	PCS	Kg	mm
160906	DCM-A	65	151	60(1x60box)	14.00	517x292x278

Clamp Multimeter

- Standard: GB/T 13978-2008
- Stable, safety and durable
- Use the large scale integrated circuit A/D adapter as the core
- Overall overload protection circuit
- Special appearance design
- Testing range: DC voltage, AC voltage, AC, resistance, diode and circuit connecting or cutting
- Note: Please be clear with the grades when using, otherwise the circuit will be broken.



Code	Model No.	Amm	Lmm	PCS	Kg	mm
160907	DCM-B	79	230	20(1x20box)	10.60	517x292x278

Electronic Cutter

Electronic Cutter Straight Jaw

- Standard: QB/T 2208-1996



Code	Model No.	Tmm	Amm	Bmm	Lmm	PCS	Kg	mm
160401	EK-8A	3	30	110	121	60(10x6box)	10.00	352x202x247

Electronic Cutter Curved Jaw


- Standard: QB/T 2208-1996



Code	Model No.	Tmm	Amm	Bmm	Lmm	PCS	Kg	mm
160402	EK-8B	3	28	120	198	60(10x6box)	10.00	352x202x247

Soldering Iron

- Standard: GB/T 7157-2008

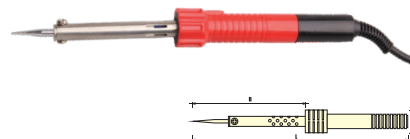


Code	Model No.	Amm	Bmm	Lmm	PCS	Kg	mm
160130	LSI-30	19	95	216	96(8x12box)	16.00	590x320x390
160140	LSI-40	19	107	230	96(8x12box)	17.00	590x320x395
160150	LSI-50	19	112	235	96(8x12box)	17.00	590x320x395
160160	LSI-60	30	115	240	96(8x12box)	17.00	590x320x395



Voltage Tester

Voltage Tester


○Standard: GB 8218-1987

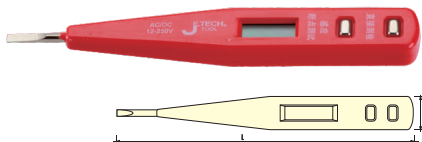

Code	Model No.	Amm	Lmm	PCS	Kg	mm
140101	VTD-130	18	133	240(12x20box)	6.00	436x396x265

Voltage Tester

○Standard: GB 8218-1987

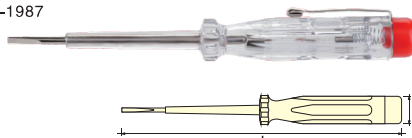

Code	Model No.	Amm	Lmm	PCS	Kg	mm
140201	VT-140	15	146	240(12x20box)	10.00	430x396x215

Digital Voltage Tester

○Digital display test pencil, carry conveniently, read more clearly.



Code	Model No.	Amm	Lmm	PCS	Kg	mm
140102	VTD-140			240(12x20box)		

Tweezers

110mm Needle Tip Tweezers

○Stainless steel
○Standard:Q/TKGS 14-2008



Code	Model No.	Amm	Lmm	PCS	Kg	mm
171000	TT-1			120(12x10box)		

125mm Needle Tip Tweezers

○Stainless steel
○Standard:Q/TKGS 14-2008



Code	Model No.	Amm	Lmm	PCS	Kg	mm
171002	TT-2	26.5	125	72(6x12box)	6.50	568x396x142

135mm Needle Tip Tweezers

○Stainless steel
○Standard:Q/TKGS 14-2008



Code	Model No.	Amm	Lmm	PCS	Kg	mm
171003	TT-3	9	135	100(10x10box)	4.00	212x204x193

120mm Curved Tip Tweezers

○Stainless steel
○Standard:Q/TKGS 14-2008



Code	Model No.	Amm	Lmm	PCS	Kg	mm
171004	TT-4	9	112	100(10x10box)	3.60	212x204x193

120mm Wide Tip Tweezers

○Stainless steel
○Standard:Q/TKGS 14-2008



Code	Model No.	Amm	Lmm	PCS	Kg	mm
171005	TT-5			120(12x10box)		

110mm Micro Tip Tweezers

○Stainless steel
○Standard:Q/TKGS 14-2008




Code	Model No.	Amm	Lmm	PCS	Kg	mm
171006	TT-6			120(12x10box)		

Antistatic Tweezers

130mm Needle Tip

○Stainless steel
○Standard:Q/TKGS 14-2008



Code	Model No.	Amm	Lmm	PCS	Kg	mm
171401	ETT-1			120(12x10box)		

Antistatic Tweezers

130mm Wide Tip

- Stainless steel
- Standard: Q/TKGS 14-2008



Code	Model No.	Amm	Lmm	PCS	Kg	mm
171402	ETT-2			120(12x10box)		

130mm Curved Tip


- Stainless steel
- Standard: Q/TKGS 14-2008



Code	Model No.	Amm	Lmm	PCS	Kg	mm
171403	ETT-3			120(12x10box)		

LED Flash Light

- Aluminum alloy LED bulb, much more brighter
- Standard: QB/T 2198-1996

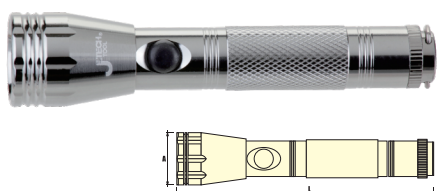

Code	Model No.	Amm	Lmm	PCS	Kg	mm
161302	AF-L	26.5	125	72(6x12box)	6.50	360x245x200

Hot Glue Gun

- Standard: Q/TKGS 31-2011



Code	Model No.	Amm	Lmm	PCS	Kg	mm
100302	HMG40-80	195	175	20(1x20box)	16.60	450x430x520
100303	HMG60-100	195	175	20(1x20box)	16.60	450x430x520

Hard Riveter



Code	Model No.	PCS	Kg	mm
100103	HR301	10(1 x 10box)		

Antistatic Bush

Straight Handle

- Standard: Q/TKGS 14-2008



Code	Model No.	Amm	Lmm	PCS	Kg	mm
160802	ASB-S			120(12x10box)		

U Type Handle

- Standard: Q/TKGS 14-2008



Code	Model No.	Amm	Lmm	PCS	Kg	mm
160803	ASB-U			60(6x10box)		

Plastic Tin Absorber



Code	Model No.	Amm	Lmm	PCS	Kg	mm
160204	ASA-B			120(12x10box)		

Automatic Wire Stripper

- Precisely strip wire function, don't break the wire
- The cutting edge open and close freely, comfortable grip feeling.
- Material: Zinc Alloy Casting
- Capacity:


EWS-A: ϕ 0.5mm— ϕ 1.2mm— ϕ 1.6mm— ϕ 2.0mm

EWS-B: ϕ 1.0mm— ϕ 1.6mm— ϕ 2.0mm— ϕ 2.6mm— ϕ 3.2mm

EWS-C: ϕ 1.25mm— ϕ 2.0mm— ϕ 3.5mm— ϕ 5.5mm— ϕ 8.0mm



Code	Model No.	Amm	Bmm	Lmm	PCS	Kg	mm
160501	EWS-A				48(6x8box)		
160502	EWS-B				48(6x8box)		
160503	EWS-C				48(6x8box)		




INDEX

Wire Stripper

Wire Stripper 6"


- Material: Whole body cold rolled steel sheet.
- Precision wire stripping hole, ensure stripping easily and no damage to inner line.
- Comfortable plastic handle, easy for use.
- Standard:QB/T 2207-1996



Code	Model No.	Amm	Lmm	PCS	Kg	mm
160301	WS-6	30	165	60(10x6box)	10.00	335x255x259

Multifunction Wire Stripper


- Available for: single branch line and flat cable diameter 0.5-6.0mm
- Standard: QB/T 2207-1996



Code	Model No.	Amm	Lmm	PCS	Kg	mm
160201	FWS-7	85	170	60(10x6box)	15.50	458x266x522

Wire Stripper 8"

- Material: Whole body cold rolled steel sheet.
- Precision wire stripping hole, ensure stripping easily and no damage to inner line.
- Comfortable plastic handle, easy for use.
- Standard:QB/T 2207-1996



Code	Model No.	Amm	Lmm	PCS	Kg	mm
160302	WS-8	36	215	60(10x6box)	14.60	405x300x310