



PRODUCT CATALOG



www.sgstool.com



Overview	
Tool Wizard	3
Common Legend	4
Coatings	
6	
Milling	
8	
High Performance End Mills	14
General Purpose End Mills	98
Hole Making	
158	
High Performance Drills	163
General Purpose Drills	197
Countersinks	221
Reamers	235
Routing	
242	
High Performance Routers	246
General Purpose Routers	249
Technical Information	
EDP Index	257
SGS Reference Information	273
Decimal Equivalent Chart	274
Hardness Conversion Chart	275



Tool Wizard

CALCULATE APPLICATION PARAMETERS

The SGS Tool Wizard is designed to assist in the selection and application of products manufactured by SGS Tool Company and is now available to download on the App Store for Apple and Android Devices.

Use the Tool Wizard to calculate application parameters and select the right tool for the job.

- High Performance End Mills and Drills
- General Purpose Tooling
- Search by Application or EDP number
- Calculate Speeds and Feeds

To the best of our knowledge, the information contained in the Tool Wizard database is accurate. Due to differences in machining conditions (coolant, rigidity, spindle condition, etc.), and the subsequent effects, these recommendations must be considered a starting point, with possible variations to achieve the desired result. Refer to the SGS Tool Wizard for complete technical information.

Available for Android and Apple devices on the App store or visit www.sgstool.com to sign up.



Common Legend



Leyenda habitual



Légende commune

TO ORDER: Please specify quantity and EDP number.

PARA SU PEDIDO: Por favor especifique cantidad y número de EDP.

POUR COMMANDER: Veuillez préciser la quantité et le code article EDP.

RETURN POLICY: An RMA number must accompany all product returns. Contact your Customer Service Representative for an RMA number.

DEVOLUCIONES: Todo material devuelto debe ir acompañado de un número de RMA correspondiente. Para solicitarlo, póngase en contacto con su Representante de Servicio.

POLITIQUE DE RETOUR: Tous les produits retournés doivent être accompagnés d'un numéro RMA. Contacter votre interlocuteur commercial pour obtenir un numéro RMA.

REGULATION SAFETY GLASSES SHOULD ALWAYS BE WORN WHEN USING HIGH-SPEED CUTTING EQUIPMENT

DEBEN USARSE GAFAS PROTECTORAS CUANDO SE UTILIZA UN EQUIPO DE ALTA VELOCIDAD

DES LUNETTES DE SÉCURITÉ DOIVENT ÊTRE IMPÉRATIVEMENT PORTÉES LORS D'UTILISATION D'OUTILS À GRANDE VITESSE



Z1PLB

FRACTIONAL SERIES

TECH INFO 57

Refers to exact page where Speed and Feed Information can be found.

Hace referencia a la página exacta en la que puede encontrarse la información de velocidades y avances.

Indique la page exacte des informations de vitesse et avance.

INDUSTRY

INDUSTRIAS INDUSTRIES

These icons indicate for which industry applications SGS High Performance Products are best suited.

Estos íconos indican las aplicaciones industriales más adecuadas para los productos SGS de alto rendimiento.

Ces icônes indiquent les applications industrielles pour lesquelles les produits haute performance SGS sont les mieux adaptés.



Aerospace | Aeroespacial | Aérospatiale



Medical | Médica | Médical



Power Generation | Energética | Production d'énergie



Automotive | Automotriz | Automobile



Mold & Die | Moldes y matrices | Moules et coquilles



Castings & Foundries | Fundición | Moulages et fonderies



General Engineering | Ingeniería | Ingénierie générale

Common Legend

Leyenda habitual

Légende commune

MATERIALS MATERIALES MATÉRIAUX

	Steels Aceros Aciers
	Stainless Steels Aceros Inoxidables Inox
	Cast Iron Hierro Fundido Fonte
	High Temp Alloys Aleaciones a Altas Temperaturas Alliages Haute Temp
	Titanium Titanio Titane
	Non-Ferrous No Férrico Non Ferreux
	Plastics/Composites Plásticos/Resinas Plastiques/Composites
	Hardened Steels Aceros Endurecidos Aciers Trempés

TOOL LENGTH LONGITUD FRESA LONGUEUR DE L'OUTIL


	Stub Corta Court
	Medium Media Moyen
	Long Larga Long
	Long Reach Neck Larga con cuello Gorge de dégagement longue portée
	Extra Long Extra-larga Extra-long

FLUTES FILOS GOIJURES

	Flutes - 2 2 filos Goujures - 2
	Flutes - 3 3 filos Goujures - 3
	Flutes - 4 4 filos Goujures - 4
	Flutes - 5 5 filos Goujures - 5
	Flutes - 6 6 filos Goujures - 6
	Multi-Flute Filo múltiple Multi-goujure



COATINGS



Coating	Titanium (TiN)	Aluminum Titanium Nitride (AlTiN)	Titanium DiBoride (TiB2)
Identifying Color	gold	violet-grey	light grey-silver
Layer Structure	monolayer	nano structure	monolayer
Thickness	1–4 microns	1–4 microns	1–2 microns
Hardness (HV)	2200	3300	4000
Coefficient of Friction (Fetting)	0.4–0.65	0.45	0.45
Thermal Stability	600°C / 1112°F	800°C / 1472°F	850°C / 1562°F
General Information	A general purpose coating with good adhesion and abrasion resistant properties. Suitable for a wide variety of materials.	Excellent thermal and chemical resistance allows for dry cutting and improvements in performance of carbide. The coating has a high hardness giving great protection against abrasive wear and erosion.	This coating offers a very smooth surface and a low affinity to cold welding or built up edge, which makes it optimal for Titanium, Aluminum (>10%) and copper applications. It has high toughness and high hardness.



Titanium Carbonitride
(TiCN)

Proprietary
(TX)

Crystalline Diamond
(Diamond)

pink-red

violet-grey

light grey-silver

gradient

nano structure

monolayer

1–4 microns

1–4 microns

6–20 microns

3000

3000

>8000

0.3–0.45

0.50

0.15–0.2

400°C / 752°F

900°C / 1562°F

800°C / 1470°F

A very wear resistant coating with high toughness and shock resistance. Good in interrupted cuts found in applications like milling.

Applied utilizing a patented process, this coating offers unsurpassed adhesion aiding in long tool life. The coating deposition is consistent and dense giving strength advantages to the coating.

This is the hardest coating available with the best abrasion resistance. It is carbon based so it is limited in application capabilities. It is also the most expensive with the longest processing time.



ENDMILLS



Milling

HIGH PERFORMANCE END MILLS	SERIES	PAGE
Z-Carb-AP Variable Rake End Mills	Z1PCR, Z1MPCR, Z1PLC, Z1MPLC, Z1PLB	14
Z-Carb End Mills	Z1, Z1M, Z1B, Z1MB, Z16CR	19
Z-Carb-HTA End Mills	ZH1CR, ZH1MCR	24
Z-Carb-MD End Mills	ZD1CR, ZD1MCR	25
Series 7 End Mills	7, 7M, 7B, 7MB	26
V-Carb Finishing & Semi-Finishing End Mills	55, 55M, 55CR	30
T-Carb End Mills	51, 51M, 51L, 51ML, 51CR, 51MCR, 51LC, 51MLC	34
Multi-Carb Finishing End Mills	66, 66M, 66CR, 66MCR	38
Turbo-Carb End Mills	56B, 56MB	40
Power-Carb End Mills	57, 57M	41
Series 33 End Mills	33CR, 33MCR	42
Ski-Carb End Mills	45, 44, 44M	43
S-Carb 3 Flute End Mills	43CR, 43MCR, 43LC, 43, 43M, 43L	46
S-Carb Roughing End Mills	43CB, 43MCB	53
S-Carb 2 Flute End Mills	47, 47M, 47B, 47MB, 47ES, 47MES, 47EB, 47MEB	54
CFRP Slow Helix End Mills	27, 27M	58
TECHNICAL INFORMATION		
Speed & Feed Recommendations		60

(continued)

GENERAL PURPOSE END MILLS	SERIES	PAGE
4 Flute Square End Stub	16, 16M	98
4 Flute Square End	1, 1L, 1EL, 1M, 1XLM	99
4 Flute Double End Mills	14, 14M	102
4 Flute Ball End	1B, 1LB, 1ELB, 1MB, 1XLMB	104
4 Flute Double End Ball End	14B, 14MB	107
4 Flute Corner Radius	1CR, 1MCR	109
4 Flute High Shear End Mills	54, 54M	112
2 Flute Square End Stub	17, 17M	113
2 Flute Square End	3, 3L, 3EL, 3M, 3XLM	114
2 Flute Square End Long Reach	59, 59M	117
2 Flute Double End Mills	15, 15M	118
2 Flute Ball End	3B, 3LB, 3ELB, 3MB, 3XLMB	120
2 Flute Ball End Long Reach	59B, 59MB	123
2 Flute Double End Ball End	15B, 15MB	124
2 Flute Corner Radius	3CR	126
2 Flute High Shear End Mills	52, 52M	127
3 Flute Square End	5, 5M, 5XLM	128
3 Flute Ball End	5B, 5MB, 5XLMB	130
Single End Roughers	61, 61M, 62, 62M	132
Micro End Mills	MK2, MK2M	134
Tapered Square End	23	136
Tapered Radius End	24	137
End Mills Sets		138
TECHNICAL INFORMATION		
Speed & Feed Recommendations		139
Application Tips		154

FRESAS DE ALTO RENDIMIENTO	SERIE	PÁGINA
Fresas de inclinación variable Z-Carb-AP	Z1PCR, Z1MPCR, Z1PLC, Z1MPLC, Z1PLB	14
Fresas Z-Carb	Z1, Z1M, Z1B, Z1MB, Z16CR	19
Fresas Z-Carb-HTA	ZH1CR, ZH1MCR	24
Fresas Z-Carb-MD	ZD1CR, ZD1MCR	25
Fresas Serie 7	7, 7M, 7B, 7MB	26
Fresas de acabado y semiacabado V-Carb	55, 55M, 55CR	30
Fresas T-Carb	51, 51M, 51L, 51ML, 51CR, 51MCR, 51LC, 51MLC	34
Fresas de acabado Multi-Carb	66, 66M, 66CR, 66MCR	38
Fresas Turbo-Carb	56B, 56MB	40
Fresas Power-Carb	57, 57M	41
Fresas Serie 33	33CR, 33MCR	42
Fresas Ski-Carb	45, 44, 44M	43
Fresas de 3 filos S-Carb	43CR, 43MCR, 43LC, 43, 43M, 43L	46
Fresas desbastadoras S-Carb	43CB, 43MCB	53
Fresas de 2 filos S-Carb	47, 47M, 47B, 47MB, 47ES, 47MES, 47EB, 47MEB	54
Fresas helicoidales de avance lento CFRP	27, 27M	58

INFORMACIÓN TÉCNICA

Velocidades y avances recomendados	60
------------------------------------	----

FRESAS DE USO GENERAL	SERIE	PÁGINA
4 filos, pieza de punta cuadrada	16, 16M	98
4 filos, punta cuadrada	1, 1L, 1EL, 1M, 1XLM	99
4 filos, fresas dobles	14, 14M	102
4 filos, punta esférica	1B, 1LB, 1ELB, 1MB, 1XLMB	104
4 filos, punta doble, punta esférica	14B, 14MB	107
4 filos, radio angulado	1CR, 1MCR	109
4 filos, fresas de corte de alto rendimiento	54, 54M	112
2 filos, pieza de punta cuadrada	17, 17M	113
2 filos, punta cuadrada	3, 3L, 3EL, 3M, 3XLM	114
2 filos, punta cuadrada, largo alcance	59, 59M	117
2 filos, fresas dobles	15, 15M	118
2 filos, punta esférica	3B, 3LB, 3ELB, 3MB, 3XLMB	120
2 filos, punta esférica, largo alcance	59B, 59MB	123
2 filos, punta doble, punta esférica	15B, 15MB	124
2 filos, radio angulado	3CR	126
2 filos, fresas de corte de alto rendimiento	52, 52M	127
3 filos, punta cuadrada	5, 5M, 5XLM	128
3 filos, punta esférica	5B, 5MB, 5XLMB	130
Desbastadores sencillos Microfresas	61, 61M, 62, 62M	132
Microfresas	MK2, MK2M	134
Punta cuadrada cónica	23	136
Punta redonda cónica	24	137
Juegos de fresas		138

INFORMACIÓN TÉCNICA

Velocidades y avances recomendados	139
Puntas para aplicaciones	154



Fraisage

FRAISES A DETOURER UNIVERSELLES	SERIES	PAGE
Fraises Z-Carb-AP à vague de coupe variable	Z1PCR, Z1MPCR, Z1PLC, Z1MPLC, Z1PLB	14
Fraises en bout Z-Carb	Z1, Z1M, Z1B, Z1MB, Z16CR	19
Fraises en bout Z-Carb HTA	ZH1CR, ZH1MCR	24
Fraises en bout Z-Carb MD	ZD1CR, ZD1MCR	25
Fraises en bout série 7	7, 7M, 7B, 7MB	26
Fraises en bout de finition et semi-finition V-Carb	55, 55M, 55CR	30
Fraises en bout T-Carb	51, 51M, 51L, 51ML, 51CR, 51MCR, 51LC, 51MLC	34
Fraises en bout de finition Multi-Carb	66, 66M, 66CR, 66MCR	38
Fraises en bout Turbo-Carb	56B, 56MB	40
Fraises en bout Power-Carb	57, 57M	41
Fraises en bout série 33	33CR, 33MCR	42
Fraises en bout Ski-Carb	45, 44, 44M	43
Fraise 3 dents S-Carb	43CR, 43MCR, 43LC, 43, 43M, 43L	46
Fraise d'ébauche S-Carb	43CB, 43MCB	53
Fraise 2 dents S-Carb	47, 47M, 47B, 47MB, 47ES, 47MES, 47EB, 47MEB	54
Fraises hélice lente CFRP	27, 27M	58

INFORMATIONS TECHNIQUES

Recommandations de vitesse et avance	60
--------------------------------------	----

FRAISES A USAGE GENERAL	SERIES	PAGE
Moignon 4 dents bout plat.	16, 16M	98
4 dents bout plat	1, 1L, 1EL, 1M, 1XLM	99
Fraises 4 dents double bouts	14, 14M	102
Fraise 4 dents en bout hémisphérique	1B, 1LB, 1ELB, 1MB, 1XLMB	104
Fraise 4 dents en bout double bouts hémisphérique	14B, 14MB	107
4 dents, rayon en coin	1CR, 1MCR	109
Fraises 4 dents en bout cisaillement élevé	54, 54M	112
Moignon 2 dents bout plat	17, 17M	113
2 dents en bout plat	3, 3L, 3EL, 3M, 3XLM	114
2 dents en bout plat longue portée	59, 59M	117
Fraises 2 dents en double bouts	15, 15M	118
2 dents en bout hémisphérique	3B, 3LB, 3ELB, 3MB, 3XLMB	120
2 dents en bout hémisphérique longue portée	59B, 59MB	123
2 dents en double bouts hémisphériques	15B, 15MB	124
2 dents, rayon en coin	3CR	126
Fraises 2 dents en bout cisaillement élevé	52, 52M	127
3 dents en bout plat	5, 5M, 5XLM	128
3 dents bout en hémisphérique	5B, 5MB, 5XLMB	130
Fraises en bout d'ébauche à bout unique	61, 61M, 62, 62M	132
Micro fraises	MK2, MK2M	134
Bout plat conique	23	136
Bout arrondi conique	24	137
Jeux de fraises		138

INFORMATIONS TECHNIQUES

Recommandations de vitesse et avance	139
Conseils d'utilisation	154

End Mill Icon Legend

Leyenda del icono de las fresas

Légende d'icone de fraise

END CONFIGURATIONS CONFIGURACIONES DE LA PUNTA CONFIGURATIONS TERMINALES



Ball
Esférica
Boule



Corner
Plana con borde romo
Coin



Square
Plana
Carrée

SHANK TYPE TIPO DE VÁSTAGO TYPE DE TIGE



Weldon Flat
Weldon plano
Méplat Weldon



Common
Normal
Commune



Straight
Recto
Droite

HELIX ANGLES ÁNGULOS HELICOIDALES ANGLES DE L'HÉLICE



Right Spiral
Espiral sentido derecho
Spirale droite



Left Spiral
Espiral sentido izquierdo
Spirale gauche



Variable Right Spiral
Espiral sentido derecha con ángulo variable
Spirale droite variable

RAKE ANGLE ÁNGULO DE ATAQUE ANGLE DE PENTE



Positive
Positivo
Positif



Neutral
Neutro
Neutre



Negative
Negativo
Négatif



Variable
Variable
Variable

COOLANT OPTIONS OPCIONES DE REFRIGERACIÓN OPTIONS DE REFOIDISSEMENT



JetStream Coolant Slots
Ranuras del refrigerante
JetStream
Fentes de refroidissement
JetStream



Internal Coolant
Refrigerante interno
Refrroidissement interne



External Coolant
Recommended
Refrigerante externo
recomendado
Agent de refroidissement
recommandé

ADDITIONAL GEOMETRY CARACTERÍSTICAS GEOMÉTRICAS ADICIONALES GÉOMÉTRIE SUPPLÉMENTAIRE



Left Cut Direction
Fresado sentido izquierda
Coupe vers la gauche



Right Cut Direction
Fresado sentido derecha
Coupe vers la droite



Flute Spacing Unequal
Espaciado filos desigual
Espacement inégal entre les
goujures



Chip Breaker
Rompevirutas
Brise-copeaux



High Speed Machining
Mecanizado de
alta velocidad
Usinage à grande vitesse

COATINGS REVESTIMIENTOS REVÊTEMENTS



Uncoated



Ti-NAMITE
(TiN)



Ti-NAMITE-A
(AlTiN)



Ti-NAMITE-B
(TiB2)



Ti-NAMITE-C
(TiCN)



Ti-NAMITE-X
(TX)




Di-NAMITE
(Diamond)



Z1PCR FRACTIONAL SERIES

TECH INFO 60

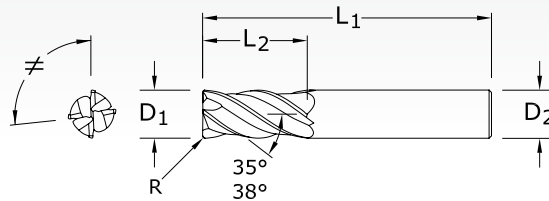

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS
TITANIUM

inch					EDP NO.		
CUTTING DIAMETER D ₁	LENGTH OF CUT L ₂	OVERALL LENGTH L ₁	SHANK DIAMETER D ₂	CORNER RADIUS R	Ti-NAMITE-X	Ti-NAMITE-X W/FLAT	JetStream*
1/16	3/16	1-1/2	1/8	.005	36872	—	—
3/32	9/32	1-1/2	1/8	.010	36873	—	—
1/8	3/8	1-1/2	1/8	.010	36370	—	—
1/8	3/8	1-1/2	1/8	.015	36851	—	—
3/16	7/16	2	3/16	.010	36371	—	—
3/16	7/16	2	3/16	.015	36852	—	—
3/16	7/16	2	3/16	.030	36722	—	—
1/4	1/2	2-1/2	1/4	.010	36372	—	—
1/4	1/2	2-1/2	1/4	.015	36723	—	—
1/4	1/2	2-1/2	1/4	.020	36853	—	—
1/4	1/2	2-1/2	1/4	.030	36373	—	—
1/4	3/4	2-1/2	1/4	.010	36599	—	—
1/4	3/4	2-1/2	1/4	.015	36600	—	—
1/4	3/4	2-1/2	1/4	.020	36854	—	—
1/4	3/4	2-1/2	1/4	.030	36601	—	—
5/16	13/16	2-1/2	5/16	.015	36724	—	—
5/16	13/16	2-1/2	5/16	.020	36855	—	—
5/16	13/16	2-1/2	5/16	.030	36374	—	—
3/8	7/8	2-1/2	3/8	.010	36375	36701	—
3/8	7/8	2-1/2	3/8	.015	36725	36736	—
3/8	7/8	2-1/2	3/8	.020	36856	36864	—
3/8	7/8	2-1/2	3/8	.030	36376	36702	—
3/8	7/8	2-1/2	3/8	.060	36727	36738	—
7/16	1	2-3/4	7/16	.020	36857	36865	—

*JetStream Patented Coolant Technology

continued on next page

TOLERANCES (inch)

<1/8 DIAMETER

D₁ = +0.0005/-0.0005

D₂ = h₆

R = +0.000/-0.0010

1/8-1/4 DIAMETER

D₁ = +0.000/-0.0012

D₂ = h₆

R = +0.000/-0.0020

>1/4-3/8 DIAMETER

D₁ = +0.000/-0.0016

D₂ = h₆

R = +0.000/-0.0020

>3/8-1 DIAMETER

D₁ = +0.000/-0.0020

D₂ = h₆

R = +0.000/-0.0020





Z1PCR

FRACTIONAL SERIES

CONTINUED

CUTTING DIAMETER D ₁	LENGTH OF CUT L ₂	inch			EDP NO.		
		OVERALL LENGTH L ₁	SHANK DIAMETER D ₂	CORNER RADIUS R	Ti-NAMITE-X	Ti-NAMITE-X W/FLAT	JetStream*
1/2	1	3	1/2	.010	36378	36704	36804
1/2	1	3	1/2	.015	36729	36740	36810
1/2	1	3	1/2	.030	36858	36866	36805
1/2	1	3	1/2	.060	36380	36706	36811
1/2	1	3	1/2	.090	36381	36707	36812
1/2	1	3	1/2	.125	36731	36742	36813
1/2	1-1/4	3-1/4	1/2	.010	36602	36603	—
1/2	1-1/4	3-1/4	1/2	.015	36604	36605	—
1/2	1-1/4	3-1/4	1/2	.030	36859	36867	—
1/2	1-1/4	3-1/4	1/2	.060	36610	36611	—
1/2	1-1/4	3-1/4	1/2	.090	36612	36613	—
1/2	1-1/4	3-1/4	1/2	.125	36614	36615	—
9/16	1-1/8	3-1/2	9/16	.030	36860	36868	36806
5/8	1-1/4	3-1/2	5/8	.030	36383	36709	36814
5/8	1-1/4	3-1/2	5/8	.040	36861	36869	36807
5/8	1-1/4	3-1/2	5/8	.060	36384	36710	36815
5/8	1-1/4	3-1/2	5/8	.090	36385	36711	36816
5/8	1-1/4	3-1/2	5/8	.125	36733	36744	36817
3/4	1-1/2	4	3/4	.030	36386	36712	36818
3/4	1-1/2	4	3/4	.040	36862	36870	36808
3/4	1-1/2	4	3/4	.060	36387	36713	36819
3/4	1-1/2	4	3/4	.090	36388	36714	36820
3/4	1-1/2	4	3/4	.125	36389	36715	36821
1	1-1/2	4	1	.030	36390	36716	36822
1	1-1/2	4	1	.040	36863	36871	36809
1	1-1/2	4	1	.060	36391	36717	36823
1	1-1/2	4	1	.090	36392	36718	36824
1	1-1/2	4	1	.125	36393	36719	36825



*JetStream Patented Coolant Technology



Z1MPCR

METRIC SERIES

TECH INFO 62

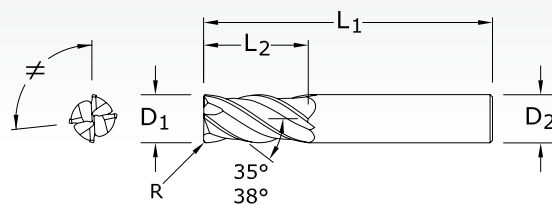

CUTTING DIAMETER D ₁	LENGTH OF CUT L ₂	mm			CORNER RADIUS R	EDP NO.		
		OVERALL LENGTH L ₁	SHANK DIAMETER D ₂			Ti-NAMITE-X	Ti-NAMITE-X W/FLAT	JetStream*
1,5	4,5	57,0	6,0	0,1		46849	—	—
2,0	6,0	57,0	6,0	0,2		46850	—	—
3,0	8,0	57,0	6,0	0,3		46851	—	—
3,0	8,0	57,0	6,0	0,5		46880	—	—
4,0	11,0	57,0	6,0	0,3		46852	—	—
4,0	11,0	57,0	6,0	0,5		46881	—	—
5,0	13,0	57,0	6,0	0,3		46853	—	—
6,0	13,0	57,0	6,0	0,25		46882	—	—
6,0	13,0	57,0	6,0	0,5		46854	—	—
6,0	13,0	57,0	6,0	1,0		46855	—	—
6,0	13,0	57,0	6,0	1,5		46884	—	—
8,0	19,0	63,0	8,0	0,5		46856	—	—
8,0	19,0	63,0	8,0	1,0		46857	—	—
8,0	19,0	63,0	8,0	1,5		46886	—	—
8,0	19,0	63,0	8,0	2,0		46887	—	—
10,0	22,0	72,0	10,0	0,5		46858	—	—
10,0	22,0	72,0	10,0	1,0		46859	—	—
10,0	22,0	72,0	10,0	1,5		46889	—	—
10,0	22,0	72,0	10,0	2,0		46890	—	—
10,0	22,0	72,0	10,0	2,5		46891	—	—
12,0	26,0	83,0	12,0	0,5		46860	46909	—
12,0	26,0	83,0	12,0	0,75		46861	46910	—
12,0	26,0	83,0	12,0	1,0		46893	46911	—
12,0	26,0	83,0	12,0	1,5		46894	46912	—
12,0	26,0	83,0	12,0	2,0		46895	46913	—
12,0	26,0	83,0	12,0	2,5		46896	46914	—
12,0	26,0	83,0	12,0	3,0		42718	46915	—
14,0	26,0	83,0	14,0	1,0		46862	46916	46494
16,0	32,0	92,0	16,0	1,0		46863	46917	46495
16,0	32,0	92,0	16,0	1,5		46898	46918	—
16,0	32,0	92,0	16,0	2,0		46899	46919	—
16,0	32,0	92,0	16,0	2,5		46900	46920	—
16,0	32,0	92,0	16,0	3,0		46864	46921	—
20,0	38,0	104,0	20,0	1,0		46865	46922	46497
20,0	38,0	104,0	20,0	1,5		46903	46923	—
20,0	38,0	104,0	20,0	2,0		46904	46924	—
20,0	38,0	104,0	20,0	2,5		46905	46925	—
20,0	38,0	104,0	20,0	3,0		42722	46926	—
25,0	38,0	104,0	25,0	1,0		46866	46927	46498

TOLERANCES (mm)

<3 DIAMETER

D₁ = +0,012/-0,012

D₂ = h₆

R = +0,000/-0,025

3-6 DIAMETER

D₁ = +0,000/-0,030

D₂ = h₆

R = +0,000/-0,050

>6-10 DIAMETER

D₁ = +0,000/-0,040

D₂ = h₆

R = +0,000/-0,050


>10-25 DIAMETER

D₁ = +0,000/-0,050

D₂ = h₆

R = +0,000/-0,050



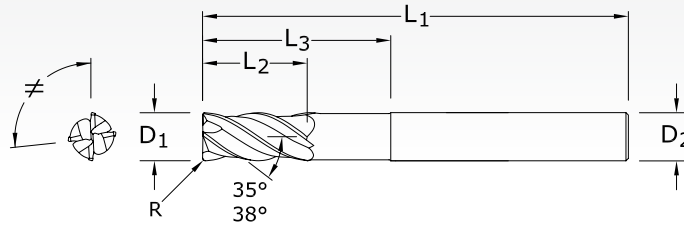

TOLERANCES (inch)

1/4 DIAMETER

$D_1 = +0.0000/-0.0012$

$D_2 = h_6$

$R = +0.0000/-0.0020$

>1/4-3/8 DIAMETER

$D_1 = +0.0000/-0.0016$

$D_2 = h_6$

$R = +0.0000/-0.0020$

>3/8-1 DIAMETER

$D_1 = +0.0000/-0.0020$

$D_2 = h_6$

$R = +0.0000/-0.0020$

TOLERANCES (mm)

6 DIAMETER

$D_1 = +0,000/-0,030$

$D_2 = h_6$

$R = +0,000/-0,050$

>6-10 DIAMETER

$D_1 = +0,000/-0,040$

$D_2 = h_6$

$R = +0,000/-0,050$

>10-25 DIAMETER

$D_1 = +0,000/-0,050$


$D_2 = h_6$

$R = +0,000/-0,050$

Z1PLC
FRACTIONAL SERIES

TECH INFO 60

inch						EDP NO.
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	REACH L_3	CORNER RADIUS R	Ti-NAMITE-X
1/4	1/2	4	1/4	1-1/4	.020	36450
5/16	13/16	4	5/16	1-5/8	.020	36452
3/8	7/8	5	3/8	1-7/8	.020	36456
7/16	1	6	7/16	2	.020	36460
1/2	1	6	1/2	2-1/4	.030	36462
9/16	1-1/8	6	9/16	2-1/2	.030	36466
5/8	1-1/4	6	5/8	3	.040	36470
3/4	1-1/2	6	3/4	3-1/2	.040	36472
1	1-1/2	6	1	4	.040	36474



Z1MPLC
METRIC SERIES

TECH INFO 62



mm						EDP NO.
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	REACH L_3	CORNER RADIUS R	Ti-NAMITE-X
6,0	8,0	75,0	6,0	24,0	0,5	46821
8,0	10,0	75,0	8,0	32,0	1,0	46822
8,0	10,0	75,0	8,0	32,0	2,0	46823
10,0	12,0	100,0	10,0	40,0	1,0	46824
10,0	12,0	100,0	10,0	40,0	2,0	46825
12,0	15,0	100,0	12,0	48,0	1,0	46826
12,0	15,0	100,0	12,0	48,0	1,5	46827
12,0	15,0	100,0	12,0	48,0	2,0	46828
12,0	15,0	100,0	12,0	48,0	3,0	46829
16,0	20,0	115,0	16,0	65,0	1,0	46830
16,0	20,0	115,0	16,0	65,0	1,5	46831
16,0	20,0	115,0	16,0	65,0	2,0	46832
16,0	20,0	115,0	16,0	65,0	3,0	46833
16,0	20,0	115,0	16,0	65,0	4,0	46834
16,0	20,0	115,0	16,0	65,0	5,0	46835
20,0	24,0	140,0	20,0	80,0	1,0	46836
20,0	24,0	140,0	20,0	80,0	1,5	46737
20,0	24,0	140,0	20,0	80,0	2,0	46838
20,0	24,0	140,0	20,0	80,0	3,0	46839
20,0	24,0	140,0	20,0	80,0	4,0	46840
20,0	24,0	140,0	20,0	80,0	5,0	46841

U.S. Patents 7,306,408 and 7,789,597



Z1PLB FRACTIONAL SERIES

TECH INFO 60

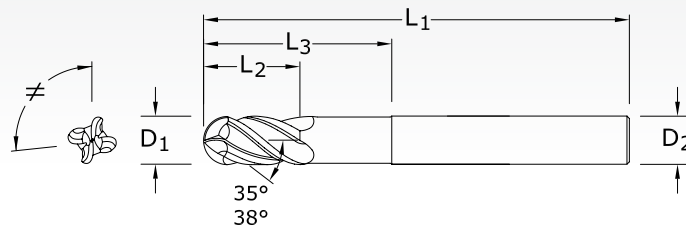

CUTTING DIAMETER D ₁	LENGTH OF CUT L ₂	inch			EDP NO. Ti-NAMITE-X
		OVERALL LENGTH L ₁	SHANK DIAMETER D ₂	REACH L ₃	
1/4	1/2	4	1/4	1-1/4	36480
5/16	13/16	4	5/16	1-5/8	36482
3/8	7/8	5	3/8	1-7/8	36486
7/16	1	6	7/16	2	38490
1/2	1	6	1/2	2-1/4	38492
9/16	1-1/8	6	9/16	2-1/2	38496
5/8	1-1/4	6	5/8	3	36500
3/4	1-1/2	6	3/4	3-1/2	36502
1	1-1/2	6	1	4	36504

TOLERANCES (inch)

1/4 DIAMETER

D₁ = +0.0000/-0.0012

D₂ = h₆

>1/4-3/8 DIAMETER

D₁ = +0.0000/-0.0016


D₂ = h₆

>3/8-1 DIAMETER

D₁ = +0.0000/-0.0020

D₂ = h₆



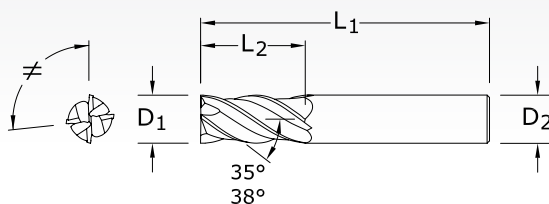

TOLERANCES (inch)

1/8-1/4 DIAMETER

$D_1 = +0.0000/-0.0012$

$D_2 = h_6$

>1/4-3/8 DIAMETER

$D_1 = +0.0000/-0.0016$

$D_2 = h_6$

>3/8-1 DIAMETER

$D_1 = +0.0000/-0.0020$

$D_2 = h_6$

Z1
FRACTIONAL SERIES

TECH INFO 64

inch				EDP NO.		
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	Ti-NAMITE-A (AlTiN)	Ti-NAMITE-A (AlTiN) W/FLAT	JetStream*
1/8	3/8	1-1/2	1/8	36404	—	—
5/32	7/16	2	3/16	36406	—	—
3/16	7/16	2	3/16	36408	—	—
7/32	7/16	2-1/2	1/4	36410	—	—
1/4	1/2	2-1/2	1/4	36416	—	—
1/4	3/4	2-1/2	1/4	36596	—	—
9/32	5/8	2-1/2	5/16	36418	—	—
5/16	13/16	2-1/2	5/16	36420	—	—
11/32	13/16	2-1/2	3/8	36422	—	—
3/8	7/8	2-1/2	3/8	36424	36530	—
13/32	15/16	2-3/4	7/16	36426	36531	—
7/16	1	2-3/4	7/16	36428	36532	—
1/2	1	3	1/2	36430	36533	—
1/2	1	3	1/2	36432	36534	36826
1/2	1-1/4	3-1/4	1/2	36597	36598	—
9/16	1-1/8	3-1/2	9/16	36436	36535	36827
5/8	1-1/4	3-1/2	5/8	36440	36536	36828
3/4	1-1/2	4	3/4	36442	36537	36829
1	1-1/2	4	1	36444	36538	36830

*JetStream Patented Coolant Technology


STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS
TITANIUM



Z1M

METRIC SERIES

TECH INFO 66

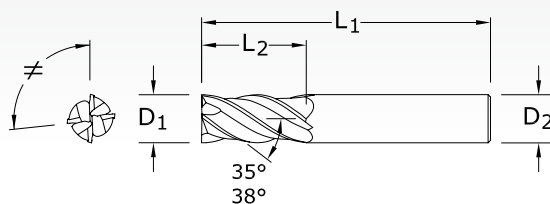

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS
TITANIUM

mm				EDP NO.	
CUTTING DIAMETER D ₁	LENGTH OF CUT L ₂	OVERALL LENGTH L ₁	SHANK DIAMETER D ₂	Ti-NAMITE-A (AlTiN)	JetStream*
3,0	8,0	57,0	6,0	46357	—
4,0	11,0	57,0	6,0	46358	—
5,0	13,0	57,0	6,0	46359	—
6,0	13,0	57,0	6,0	46360	—
8,0	19,0	63,0	8,0	46362	—
10,0	22,0	72,0	10,0	46364	—
12,0	26,0	83,0	12,0	46366	—
14,0	26,0	83,0	14,0	46368	46506
16,0	32,0	92,0	16,0	46370	46507
18,0	32,0	92,0	18,0	46372	46508
20,0	38,0	104,0	20,0	46374	46509
25,0	38,0	104,0	25,0	46376	46510

*JetStream Patented Coolant Technology

TOLERANCES (mm)

3–6 DIAMETER

D₁ = +0,000/–0,030

D₂ = h₆

>6–10 DIAMETER

D₁ = +0,000/–0,040


D₂ = h₆

>10–25 DIAMETER

D₁ = +0,000/–0,050

D₂ = h₆



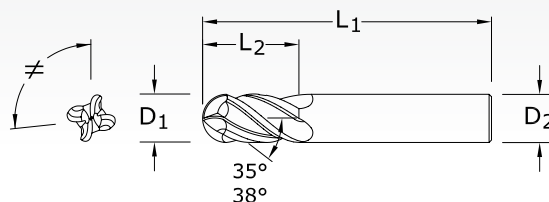

TOLERANCES (inch)

1/8-1/4 DIAMETER

$D_1 = +0.0000/-0.0012$

$D_2 = h_6$

>1/4-3/8 DIAMETER

$D_1 = +0.0000/-0.0016$

$D_2 = h_6$

>3/8-1 DIAMETER

$D_1 = +0.0000/-0.0020$

$D_2 = h_6$

Z1B

FRACTIONAL SERIES

TECH INFO 64

inch				EDP NO.		
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	Ti-NAMITE-A (AlTiN)	Ti-NAMITE-A (AlTiN) W/FLAT	JetStream*
1/8	3/8	1-1/2	1/8	36358	—	—
5/32	7/16	2	3/16	36357	—	—
3/16	7/16	2	3/16	36359	—	—
7/32	7/16	2-1/2	1/4	36361	—	—
1/4	1/2	2-1/2	1/4	36344	—	—
1/4	3/4	2-1/2	1/4	36590	—	—
9/32	5/8	2-1/2	5/16	36353	—	—
5/16	13/16	2-1/2	5/16	36345	—	—
11/32	13/16	2-1/2	3/8	36354	—	—
3/8	7/8	2-1/2	3/8	36346	36539	—
13/32	15/16	2-3/4	7/16	36355	36540	—
7/16	1	2-3/4	7/16	36347	36541	—
15/32	1	3	1/2	36356	36542	—
1/2	1	3	1/2	36348	36543	36846
1/2	1-1/4	3-1/4	1/2	36591	36592	—
9/16	1-1/8	3-1/2	9/16	36349	36544	36847
5/8	1-1/4	3-1/2	5/8	36350	36545	36848
3/4	1-1/2	4	3/4	36351	36546	36849
1	1-1/2	4	1	36352	36547	36850

*JetStream Patented Coolant Technology



STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS
TITANIUM



Z1MB

METRIC SERIES

TECH INFO 66

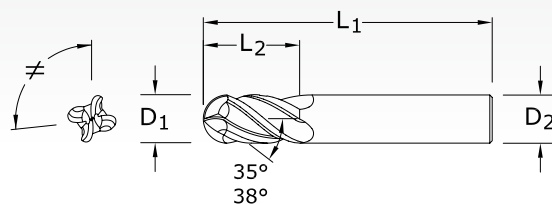

mm				EDP NO.	
CUTTING DIAMETER D ₁	LENGTH OF CUT L ₂	OVERALL LENGTH L ₁	SHANK DIAMETER D ₂	Ti-NAMITE-A (AlTiN)	JetStream*
3,0	8,0	57,0	6,0	46354	—
4,0	11,0	57,0	6,0	46355	—
5,0	13,0	57,0	6,0	46356	—
6,0	13,0	57,0	6,0	46343	—
8,0	19,0	63,0	8,0	46344	—
10,0	22,0	72,0	10,0	46345	—
12,0	26,0	83,0	12,0	46346	—
14,0	26,0	83,0	14,0	46347	46518
16,0	32,0	92,0	16,0	46348	46519
18,0	32,0	92,0	18,0	46349	46520
20,0	38,0	104,0	20,0	46350	46521
25,0	38,0	104,0	25,0	46351	46522

*JetStream Patented Coolant Technology

TOLERANCES (mm)

3–6 DIAMETER


D₁ = +0,000/–0,030D₂ = h₆

>6–10 DIAMETER

D₁ = +0,000/–0,040D₂ = h₆

>10–25 DIAMETER

D₁ = +0,000/–0,050D₂ = h₆

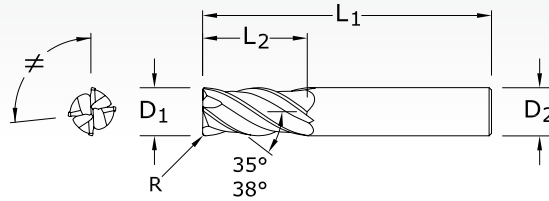

TOLERANCES (inch)

1/8-1/4 DIAMETER

$D_1 = +0.0000/-0.0012$

$D_2 = h_6$

>1/4-3/8 DIAMETER

$D_1 = +0.0000/-0.0016$

$D_2 = h_6$

>3/8-1 DIAMETER


$D_1 = +0.0000/-0.0020$

$D_2 = h_6$

Z16CR
FRACTIONAL SERIES

TECH INFO 64

CUTTING DIAMETER D_1	LENGTH OF CUT L_2	inch		CORNER RADIUS R	EDP NO. Ti-NAMITE-A (AlTiN)
		OVERALL LENGTH L_1	SHANK DIAMETER D_2		
1/8	1/4	1-1/2	1/8	.010-.015	36505
5/32	5/16	2	3/16	.010-.015	36506
3/16	3/8	2	3/16	.010-.015	36507
7/32	3/8	2	1/4	.015-.020	36508
1/4	7/16	2	1/4	.015-.020	36509
5/16	1/2	2	5/16	.015-.020	36511
3/8	5/8	2	3/8	.015-.020	36513
7/16	5/8	2-1/2	7/16	.015-.020	36515
1/2	5/8	2-1/2	1/2	.025-.030	36517
5/8	3/4	3	5/8	.035-.040	36519
3/4	1	3	3/4	.035-.040	36520






ZH1CR

FRACTIONAL SERIES

TECH INFO 68

HIGH TEMP ALLOYS

TITANIUM

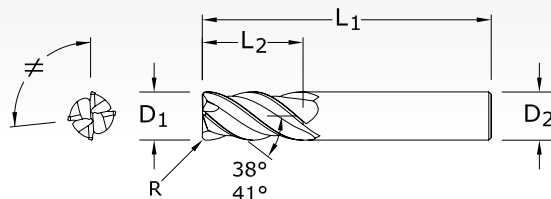

CUTTING DIAMETER D ₁	LENGTH OF CUT L ₂	OVERALL LENGTH L ₁	SHANK DIAMETER D ₂	CORNER RADIUS R	EDP NO.	
					Ti-NAMITE-A (AlTiN)	Ti-NAMITE-A (AlTiN) W/FLAT
1/4	1/2	2-1/2	1/4	.015-.020	36570	—
1/4	3/4	2-1/2	1/4	.015-.020	36616	—
5/16	13/16	2-1/2	5/16	.015-.020	36571	—
3/8	7/8	2-1/2	3/8	.015-.020	36572	36555
7/16	1	2-3/4	7/16	.015-.020	36573	36556
1/2	1	3	1/2	.025-.030	36574	36557
1/2	1-1/4	3-1/4	1/2	.025-.030	36618	36617
9/16	1-1/8	3-1/2	9/16	.025-.030	36575	36558
5/8	1-1/4	3-1/2	5/8	.035-.040	36576	36559
3/4	1-1/2	4	3/4	.035-.040	36577	36560
1	1-1/2	4	1	.035-.040	36578	36561

TOLERANCES (inch)

1/4 DIAMETER

D₁ = +0.0000/-0.0012D₂ = h₆

>1/4-3/8 DIAMETER

D₁ = +0.0000/-0.0016D₂ = h₆

>3/8-1 DIAMETER

D₁ = +0.0000/-0.0020D₂ = h₆

ZH1MCR

METRIC SERIES

TECH INFO 68

CUTTING DIAMETER D ₁	LENGTH OF CUT L ₂	OVERALL LENGTH L ₁	SHANK DIAMETER D ₂	CORNER RADIUS R	EDP NO.	
					Ti-NAMITE-A (AlTiN)	Ti-NAMITE-A (AlTiN) W/FLAT
6,0	13,0	57,0	6,0	0,5	46450	—
6,0	13,0	57,0	6,0	1,0	46451	—
6,0	13,0	57,0	6,0	1,5	46452	—
8,0	19,0	63,0	8,0	0,5	46453	—
8,0	19,0	63,0	8,0	1,0	46454	—
8,0	19,0	63,0	8,0	1,5	46455	—
10,0	22,0	72,0	10,0	0,5	46456	—
10,0	22,0	72,0	10,0	1,0	46457	—
10,0	22,0	72,0	10,0	1,5	46458	—
10,0	22,0	72,0	10,0	2,0	46459	—
12,0	26,0	83,0	12,0	0,5	46460	46471
12,0	26,0	83,0	12,0	1,0	46461	46472
12,0	26,0	83,0	12,0	1,5	46462	46473
12,0	26,0	83,0	12,0	2,0	46463	46474
12,0	26,0	83,0	12,0	3,0	46464	46475
16,0	32,0	92,0	16,0	1,5	46465	46476
16,0	32,0	92,0	16,0	2,0	46466	46477
16,0	32,0	92,0	16,0	3,0	46467	46478
20,0	38,0	104,0	20,0	3,0	46468	46479
20,0	38,0	104,0	20,0	4,0	46469	46480
20,0	38,0	104,0	20,0	5,0	46470	46481

TOLERANCES (mm)

6 DIAMETER

D₁ = +0,000/-0,030D₂ = h₆

R = +0,000/-0,050

>6-10 DIAMETER


D₁ = +0,000/-0,040D₂ = h₆

R = +0,000/-0,050

>10-20 DIAMETER

D₁ = +0,000/-0,050D₂ = h₆

R = +0,000/-0,050

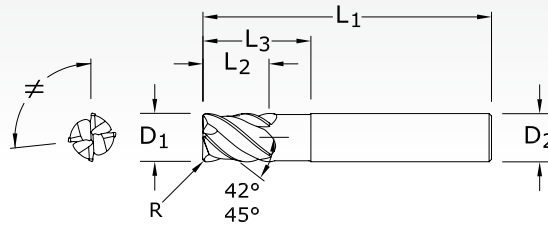

TOLERANCES (inch)

1/8–1/4 DIAMETER

 $D_1 = +0.0000/-0.0012$
 $D_2 = h_6$
 $R = +0.0000/-0.0020$

>1/4–3/8 DIAMETER

 $D_1 = +0.0000/-0.0016$
 $D_2 = h_6$
 $R = +0.0000/-0.0020$

>3/8–1 DIAMETER

 $D_1 = +0.0000/-0.002$
 $D_2 = h_6$
 $R = +0.0000/-0.0020$

ZD1CR

FRACTIONAL SERIES

TECH INFO 69

inch						EDP NO.
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	REACH L_3	CORNER RADIUS R	Ti-NAMITE-A (AlTiN)
1/8	5/32	2-1/2	1/4	1/2	.010	36780
3/16	7/32	2-1/2	1/4	3/4	.020	36781
1/4	9/32	2-1/2	1/4	3/4	.020	36782
5/16	13/32	2-1/2	5/16	1	.040	36783
3/8	15/32	2-1/2	3/8	1	.040	36784
7/16	9/16	2-3/4	7/16	1	.040	36785
1/2	5/8	3	1/2	1-1/4	.040	36786
1/2	5/8	4-1/2	1/2	2-1/4	.040	36787
5/8	3/4	3-1/2	5/8	1-1/2	.040	36788
5/8	3/4	4-1/2	5/8	2-1/4	.040	36789
5/8	3/4	5-1/2	5/8	3-1/4	.040	36790
3/4	15/16	4	3/4	1-3/4	.060	36791
3/4	15/16	4-1/2	3/4	2-1/4	.060	36792
3/4	15/16	5-1/2	3/4	3-1/4	.060	36793

STEELS

HARDENED STEELS

TOLERANCES (mm)

3–6 DIAMETER

 $D_1 = +0,000/-0,030$
 $D_2 = h_6$
 $R = +0,000/-0,050$

>6–10 DIAMETER

 $D_1 = +0,000/-0,040$
 $D_2 = h_6$
 $R = +0,000/-0,050$

>10–20 DIAMETER

 $D_1 = +0,000/-0,050$
 $D_2 = h_6$
 $R = +0,000/-0,050$

ZD1MCR

METRIC SERIES

TECH INFO 69


mm						EDP NO.
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	REACH L_3	CORNER RADIUS R	Ti-NAMITE-A (AlTiN)
3,0	4,0	57,0	6,0	15,0	0,2	46560
4,0	5,0	57,0	6,0	15,0	0,3	46561
5,0	6,0	57,0	6,0	15,0	0,5	46562
6,0	7,0	57,0	6,0	15,0	1,0	46563
8,0	10,0	63,0	8,0	25,0	1,0	46564
10,0	12,0	72,0	10,0	30,0	1,0	46565
12,0	15,0	83,0	12,0	35,0	1,0	46566
16,0	20,0	92,0	16,0	45,0	1,5	46567
20,0	24,0	104,0	20,0	55,0	2,0	46568




7

FRACTIONAL SERIES

TECH INFO 70

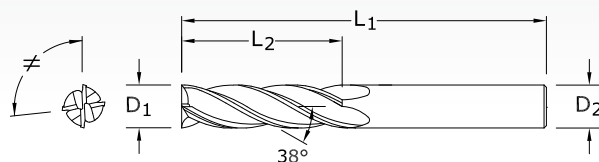

TOLERANCES (inch)

 $D_1 = +0.0000/-0.0020$ $D_2 = h_6$ 

inch				EDP NO.
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	Ti-NAMITE-A (AlTiN)
1/8	3/4	2-1/4	1/8	70470
1/8	1	3	1/8	70471
3/16	3/4	2-1/2	3/16	70472
3/16	1-1/8	3	3/16	70473
1/4	1-1/8	3	1/4	70474
1/4	1-1/2	4	1/4	70475
5/16	1-1/8	3	5/16	70476
5/16	1-5/8	4	5/16	70477
3/8	1-1/8	3	3/8	70478
3/8	1-3/4	4	3/8	70479
7/16	2	4-1/2	7/16	70480
7/16	3	6	7/16	70481
1/2	2	4-1/2	1/2	70482
1/2	3	6	1/2	70483
5/8	2-1/4	5	5/8	70484
5/8	3	6	5/8	70485
3/4	2-1/4	5	3/4	70486
3/4	3	6	3/4	70487
1	2-1/4	5	1	70488
1	3	6	1	70489






TOLERANCES (mm)

$D_1 = +0,000/-0,050$

$D_2 = h_6$

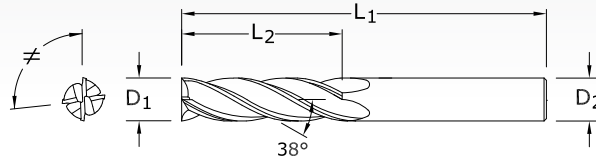

7M
METRIC SERIES

TECH INFO 71

mm				EDP NO.
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	Ti-NAMITE-A (AlTiN)
3,0	25,0	75,0	3,0	70551
4,0	25,0	75,0	4,0	70552
5,0	25,0	75,0	5,0	70553
6,0	25,0	75,0	6,0	70554
8,0	25,0	75,0	8,0	70555
10,0	38,0	100,0	10,0	70556
12,0	50,0	100,0	12,0	70557
12,0	75,0	150,0	12,0	70558
14,0	75,0	150,0	14,0	70559
16,0	75,0	150,0	16,0	70560
18,0	75,0	150,0	18,0	70561
20,0	75,0	150,0	20,0	70562
25,0	75,0	150,0	25,0	70563


STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS
TITANIUM



7B

FRACTIONAL SERIES


TECH INFO 70

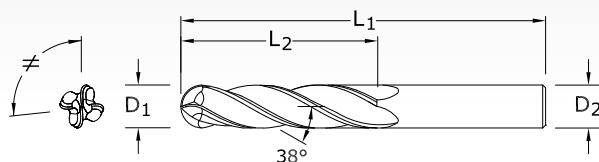

TOLERANCES (inch)

$D_1 = +0.0000/-0.0020$

$D_2 = h_6$



inch				EDP NO.
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	Ti-NAMITE-A (AlTiN)
1/8	3/4	2-1/4	1/8	70441
1/8	1	3	1/8	70442
3/16	3/4	2-1/2	3/16	70444
3/16	1-1/8	3	3/16	70445
1/4	1-1/8	3	1/4	70447
1/4	1-1/2	4	1/4	70448
5/16	1-1/8	3	5/16	70450
5/16	1-5/8	4	5/16	70451
3/8	1-1/8	3	3/8	70453
3/8	1-3/4	4	3/8	70454
7/16	2	4-1/2	7/16	70456
7/16	3	6	7/16	70457
1/2	2	4-1/2	1/2	70459
1/2	3	6	1/2	70460
5/8	2-1/4	5	5/8	70462
5/8	3	6	5/8	70463
3/4	2-1/4	5	3/4	70465
3/4	3	6	3/4	70466
1	2-1/4	5	1	70468
1	3	6	1	70469






TOLERANCES (mm)

$D_1 = +0,000/+0,050$


$D_2 = h_6$

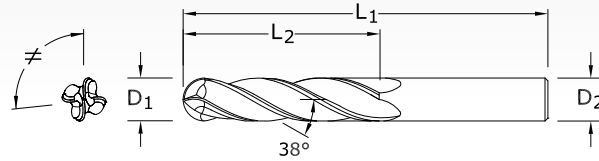

7MB
METRIC SERIES

TECH INFO 71

mm				EDP NO.
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	Ti-NAMITE-A (AlTiN)
3,0	25,0	75,0	3,0	70527
4,0	25,0	75,0	4,0	70529
5,0	25,0	75,0	5,0	70531
6,0	25,0	75,0	6,0	70533
8,0	25,0	75,0	8,0	70535
10,0	38,0	100,0	10,0	70537
12,0	50,0	100,0	12,0	70539
12,0	75,0	150,0	12,0	70540
14,0	75,0	150,0	14,0	70542
16,0	75,0	150,0	16,0	70544
18,0	75,0	150,0	18,0	70546
20,0	75,0	150,0	20,0	70548
25,0	75,0	150,0	25,0	70550







55

FRACTIONAL SERIES

TECH INFO 72

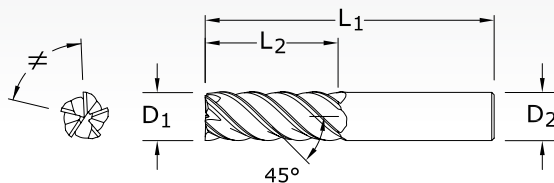

TOLERANCES (inch)

 $D_1 = +0.0000/-0.0020$
 $D_2 = h_6$


inch				EDP NO.	
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	Ti-NAMITE-A (AlTiN)	Ti-NAMITE-A (AlTiN) W/FLAT
1/8	1/4	1-1/2	1/8	32672	—
1/8	1/2	1-1/2	1/8	32655	—
5/32	9/16	2	3/8	32656	—
3/16	5/16	2	3/8	32673	—
3/16	5/8	2	3/8	32657	—
7/32	3/4	2-1/2	1/4	32658	—
1/4	3/8	2	1/4	32674	—
1/4	3/4	2-1/2	1/4	32659	—
5/16	7/16	2	5/16	32675	—
5/16	13/16	2-1/2	5/16	32660	—
3/8	1/2	2	3/8	32676	32677
3/8	1	2-1/2	3/8	32661	32662
7/16	1	2-3/4	7/16	32663	—
1/2	5/8	2-1/2	1/2	32678	32679
1/2	1-1/4	3	1/2	32664	32665
5/8	3/4	3	5/8	32680	32681
5/8	1-5/8	3-1/2	5/8	32666	32667
3/4	1	3	3/4	32682	32683
3/4	1-5/8	4	3/4	32668	32669
1	1-1/2	4	1	32670	32671






TOLERANCES (mm)

$D_1 = +0,000/-0,050$

$D_2 = h_6$

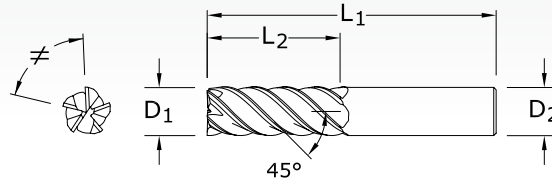

55M
METRIC SERIES

TECH INFO 74



mm				EDP NO.	
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	Ti-NAMITE-A (AlTiN)	Ti-NAMITE-A (AlTiN) W/FLAT
6,0	12,0	50,0	6,0	42606	—
6,0	19,0	63,0	6,0	42607	—
6,0	25,0	75,0	6,0	42608	—
8,0	12,0	50,0	8,0	42609	—
8,0	20,0	63,0	8,0	42610	—
8,0	25,0	75,0	8,0	42611	—
10,0	16,0	50,0	10,0	42612	—
10,0	22,0	75,0	10,0	42622	42613
10,0	38,0	100,0	10,0	42614	—
12,0	19,0	63,0	12,0	42615	—
12,0	25,0	75,0	12,0	42616	42623
12,0	50,0	100,0	12,0	42617	—
16,0	32,0	89,0	16,0	42618	42624
16,0	75,0	150,0	16,0	42619	—
20,0	38,0	100,0	20,0	42620	42625
20,0	75,0	150,0	20,0	42621	—

- STEELS
- STAINLESS STEELS
- CAST IRON
- HIGH TEMP ALLOYS
- TITANIUM

**55CR**

FRACTIONAL SERIES

TECH INFO 72

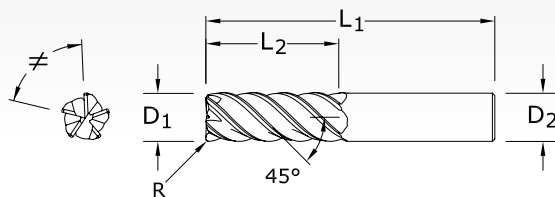**TOLERANCES (inch)** $D_1 = +0.0000/-0.0020$ $D_2 = h_6$ $R = +0.0000/-0.0020$ 

CUTTING DIAMETER D_1	LENGTH OF CUT L_2	inch			EDP NO.	
		OVERALL LENGTH L_1	SHANK DIAMETER D_2	CORNER RADIUS R	Ti-NAMITE-A (AlTiN)	Ti-NAMITE-A (AlTiN) W/FLAT
1/8	1/4	1-1/2	1/8	.010	32606	—
1/8	1/2	1-1/2	1/8	.010	32607	—
5/32	5/16	2	3/16	.010	32608	—
5/32	9/16	2	3/16	.010	32609	—
3/16	5/16	2	3/16	.010	32610	—
3/16	5/8	2	3/16	.010	32611	—
7/32	3/8	2	1/4	.015	32612	—
7/32	3/4	2-1/2	1/4	.015	32613	—
1/4	3/8	2	1/4	.015	32614	—
1/4	3/4	2-1/2	1/4	.015	32615	—
1/4	1-1/4	4	1/4	.015	32616	—
5/16	7/16	2	5/16	.015	32619	—
5/16	13/16	2-1/2	5/16	.015	32620	—
5/16	1-1/4	4	5/16	.015	32621	—
3/8	1/2	2	3/8	.015	32625	32591
3/8	1/2	2	3/8	.030	32592	32593
3/8	1	2-1/2	3/8	.015	32626	32628
3/8	1	2-1/2	3/8	.030	32573	32574
3/8	1-1/2	4	3/8	.015	32627	—
3/8	1-1/2	4	3/8	.030	32569	—

continued on next page





55CR

FRACTIONAL SERIES

CONTINUED


CUTTING DIAMETER D ₁	LENGTH OF CUT L ₂	inch			EDP NO.	
		OVERALL LENGTH L ₁	SHANK DIAMETER D ₂	CORNER RADIUS R	Ti-NAMITE-A (AlTiN)	Ti-NAMITE-A (AlTiN) W/FLAT
7/16	1	2-3/4	7/16	.015	32632	—
7/16	2	4	7/16	.015	32633	—
1/2	5/8	2-1/2	1/2	.030	32594	32595
1/2	5/8	2-1/2	1/2	.060	32596	32597
1/2	1-1/4	3	1/2	.030	32575	32576
1/2	1-1/4	3	1/2	.060	32577	32578
1/2	2	4	1/2	.030	32685	—
1/2	2	4	1/2	.060	32686	—
5/8	3/4	3	5/8	.030	32598	32599
5/8	3/4	3	5/8	.060	32600	32601
5/8	1-5/8	3-1/2	5/8	.030	32579	32580
5/8	1-5/8	3-1/2	5/8	.060	32581	32582
5/8	2-1/2	5	5/8	.030	32570	—
5/8	2-1/2	5	5/8	.060	32687	—
3/4	1	3	3/4	.030	32602	32603
3/4	1	3	3/4	.060	32604	32605
3/4	1-5/8	4	3/4	.030	32583	32584
3/4	1-5/8	4	3/4	.060	32585	32586
3/4	3-1/4	6	3/4	.030	32571	—
3/4	3-1/4	6	3/4	.060	32688	—
1	1-1/2	4	1	.030	32587	32588
1	1-1/2	4	1	.060	32589	32590
1	2-5/8	6	1	.030	32572	—
1	2-5/8	6	1	.060	32689	—



51

FRACTIONAL SERIES


TECH INFO 76

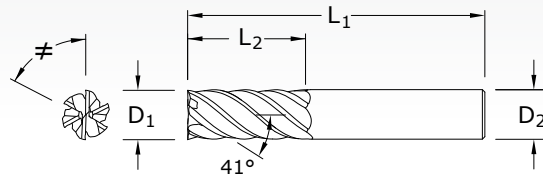

TOLERANCES (inch)

D1 = +0.0000/-0.0020

D2 = h6



inch				EDP NO.
CUTTING DIAMETER D ₁	LENGTH OF CUT L ₂	OVERALL LENGTH L ₁	SHANK DIAMETER D ₂	Ti-NAMITE-X
1/4	3/4	2-1/2	1/4	35100
3/8	1	2-1/2	3/8	35101
1/2	1-1/4	3	1/2	35102
5/8	1-5/8	3-1/2	5/8	35103
3/4	1-5/8	4	3/4	35104
1	2-5/8	6	1	35105

51M

METRIC SERIES

TECH INFO 78


mm				EDP NO.
CUTTING DIAMETER D ₁	LENGTH OF CUT L ₂	OVERALL LENGTH L ₁	SHANK DIAMETER D ₂	Ti-NAMITE-X
6,0	19,0	63,0	6,0	45100
8,0	20,0	63,0	8,0	45101
10,0	22,0	75,0	10,0	45102
12,0	26,0	83,0	12,0	45103
16,0	32,0	92,0	16,0	45104
20,0	38,0	104,0	20,0	45105

TOLERANCES (mm)

D1 = +0,000/-0,050


D2 = h6

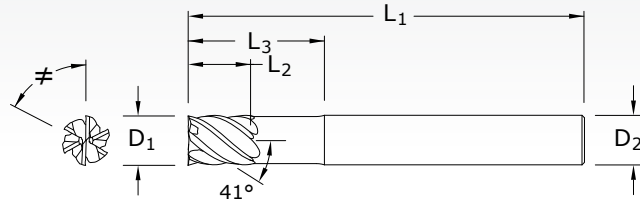


TOLERANCES (inch)
 $D1 = +0.0000/-0.0020$
 $D2 = h6$
51L
 FRACTIONAL SERIES



TECH INFO 76

inch					EDP NO.
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	REACH L_2	Ti-NAMITE-X
1/4	3/8	4	1/4	1-1/8	35106
3/8	1/2	4	3/8	2-1/8	35107
1/2	5/8	4	1/2	2-1/4	35108
5/8	3/4	5	5/8	2-1/2	35109
3/4	1	6	3/4	3-3/8	35110
1	1-1/4	6	1	3-3/8	35111


TOLERANCES (mm)
 $D1 = +0,000/-0,050$
 $D2 = h6$
51ML
 METRIC SERIES

TECH INFO 78

mm					EDP NO.
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	REACH L_2	Ti-NAMITE-X
6,0	8,0	75,0	6,0	32,0	45106
8,0	10,0	75,0	8,0	32,0	45107
10,0	12,0	100,0	10,0	40,0	45108
12,0	15,0	100,0	12,0	48,0	45109
16,0	20,0	115,0	16,0	65,0	45110
20,0	24,0	150,0	20,0	80,0	45111

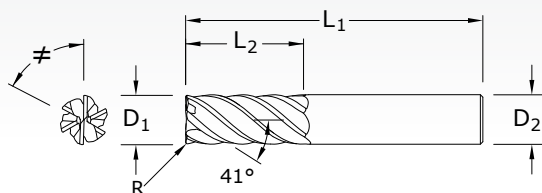

FRACTIONAL SERIES

TECH INFO 76

TOLERANCES (inch)

D1 = +0.0000/-0.0020

$$D2 = h6$$

R = +0.000/-0.002

inch					EDP NO.
CUTTING DIAMETER D ₁	LENGTH OF CUT L ₂	OVERALL LENGTH L ₁	SHANK DIAMETER D ₂	CORNER RADIUS R	Ti-NAMITE-X
1/4	3/4	2-1/2	1/4	.015	35112
3/8	1	2-1/2	3/8	.015	35113
3/8	1	2-1/2	3/8	.030	35114
1/2	1-1/4	3	1/2	.030	35115
1/2	1-1/4	3	1/2	.090	35116
1/2	1-1/4	3	1/2	.120	35117
5/8	1-5/8	3-1/2	5/8	.030	35118
5/8	1-5/8	3-1/2	5/8	.090	35119
5/8	1-5/8	3-1/2	5/8	.120	35120
3/4	1-5/8	4	3/4	.030	35121
3/4	1-5/8	4	3/4	.090	35122
3/4	1-5/8	4	3/4	.120	35123
1	2-5/8	6	1	.030	35124
1	2-5/8	6	1	.090	35125
1	2-5/8	6	1	.120	35126

METRIC SERIES

TECH INFO 78

TOLERANCES (mm)



D1 = +0,000/-0,050

D2 = h6

R = +0,000/-0,050

mm					EDP NO.
CUTTING DIAMETER D ₁	LENGTH OF CUT L ₂	OVERALL LENGTH L ₁	SHANK DIAMETER D ₂	CORNER RADIUS R	Ti-NAMITE-X
6,0	19,0	63,0	6,0	0,5	45112
8,0	20,0	63,0	8,0	0,5	45113
8,0	20,0	63,0	8,0	1,0	45114
10,0	22,0	75,0	10,0	1,0	45115
10,0	22,0	75,0	10,0	1,5	45116
10,0	22,0	75,0	10,0	2,0	45117
12,0	26,0	83,0	12,0	1,0	45118
12,0	26,0	83,0	12,0	1,5	45119
12,0	26,0	83,0	12,0	2,0	45120
16,0	32,0	92,0	16,0	1,0	45121
16,0	32,0	92,0	16,0	1,5	45122
16,0	32,0	92,0	16,0	2,0	45123
20,0	38,0	104,0	20,0	1,0	45124
20,0	38,0	104,0	20,0	1,5	45125
20,0	38,0	104,0	20,0	2,0	45126

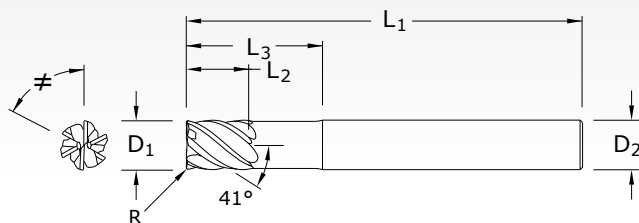


TOLERANCES (inch)
 $D1 = +0.0000/-0.0020$
 $D2 = h6$
 $R = +0.000/-0.002$

51LC

 FRACTIONAL SERIES

TECH INFO 76

inch						EDP NO.
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	REACH L_3	CORNER RADIUS R	TI-NAMITE-X
1/4	3/8	4	1/4	1-1/8	.015	35127
3/8	1/2	4	3/8	2-1/8	.015	35128
3/8	1/2	4	3/8	2-1/8	.030	35129
1/2	5/8	4	1/2	2-1/4	.030	35130
1/2	5/8	4	1/2	2-1/4	.090	35131
1/2	5/8	4	1/2	2-1/4	.120	35132
5/8	3/4	5	5/8	2-1/2	.030	35133
5/8	3/4	5	5/8	2-1/2	.090	35134
5/8	3/4	5	5/8	2-1/2	.120	35135
3/4	1	6	3/4	3-3/8	.030	35136
3/4	1	6	3/4	3-3/8	.090	35137
3/4	1	6	3/4	3-3/8	.120	35138
1	1-1/4	6	1	3-3/8	.030	35139
1	1-1/4	6	1	3-3/8	.090	35140
1	1-1/4	6	1	3-3/8	.120	35141

STEELS

STAINLESS STEELS

HIGH TEMP ALLOYS

TITANIUM

TOLERANCES (mm)
 $D1 = +0,000/-0,050$
 $D2 = h6$
 $R = +0,000/-0,050$

51MLC

 METRIC SERIES

TECH INFO 78


mm						EDP NO.
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	REACH L_3	CORNER RADIUS R	TI-NAMITE-X
6,0	8,0	75,0	6,0	32,0	0,5	45127
8,0	10,0	75,0	8,0	32,0	0,5	45128
8,0	10,0	75,0	8,0	32,0	1,0	45129
10,0	12,0	100,0	10,0	40,0	1,0	45130
10,0	12,0	100,0	10,0	40,0	1,5	45131
10,0	12,0	100,0	10,0	40,0	2,0	45132
12,0	15,0	100,0	12,0	48,0	1,0	45133
12,0	15,0	100,0	12,0	48,0	1,5	45134
12,0	15,0	100,0	12,0	48,0	2,0	45135
16,0	20,0	115,0	16,0	65,0	1,0	45136
16,0	20,0	115,0	16,0	65,0	1,5	45137
16,0	20,0	115,0	16,0	65,0	2,0	45138
20,0	24,0	150,0	20,0	80,0	1,0	45139
20,0	24,0	150,0	20,0	80,0	1,5	45140
20,0	24,0	150,0	20,0	80,0	2,0	45141



66

FRACTIONAL SERIES

TECH INFO 80

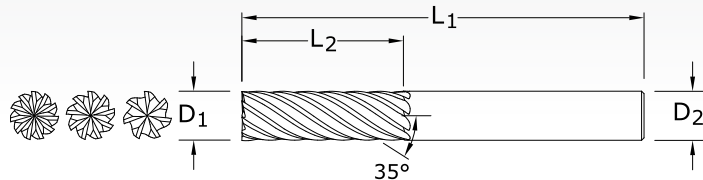

TOLERANCES (inch)

 $D_1 = +0.0000/-0.0020$
 $D_2 = h_6$

inch

CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	NO. OF FLUTES	EDP NO. Ti-NAMITE-A (AlTiN)
3/16	5/8	2	3/16	7	36620
1/4	3/4	2-1/2	1/4	7	36621
3/8	1	3	3/8	7	36622
1/2	1-1/4	3	1/2	9	36623
5/8	1-5/8	3-1/2	5/8	9	36624
3/4	1-5/8	4	3/4	11	36625
1	2	6	1	11	36626

Neck Option Available

STEELS

STAINLESS STEELS

HIGH TEMP ALLOYS

TITANIUM

66M

METRIC SERIES

TECH INFO 82

CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	NO. OF FLUTES	EDP NO. Ti-NAMITE-A (AlTiN)
6,0	19,0	63,0	6,0	7	46620
8,0	20,0	63,0	8,0	7	46621
10,0	22,0	75,0	10,0	7	46622
12,0	26,0	83,0	12,0	9	46623
16,0	32,0	92,0	16,0	9	46624
20,0	38,0	104,0	20,0	11	46625
25,0	38,0	104,0	25,0	11	46626


Neck Option Available

TOLERANCES (mm)

 $D_1 = +0,000/-0,050$
 $D_2 = h_6$

mm



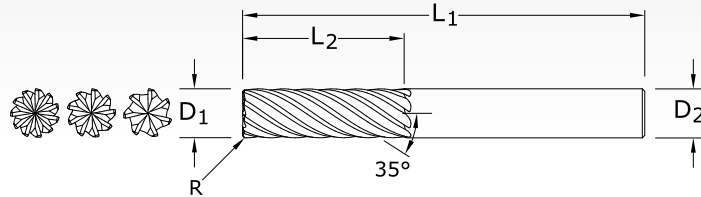

TOLERANCES (inch)

$D_1 = +0.0000/-0.0020$

$D_2 = h_6$


$R = +0.0000/-0.0020$

66CR
FRACTIONAL SERIES

TECH INFO 82

CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	CORNER RADIUS R	NO. OF FLUTES	EDP NO. Ti-NAMITE-A (AITIN)
3/16	5/8	2	3/16	.010	7	36627
1/4	3/4	2-1/2	1/4	.015	7	36628
3/8	1	3	3/8	.015	7	36629
1/2	1-1/4	3	1/2	.030	9	36630
1/2	1-1/4	3	1/2	.090	9	36631
1/2	1-1/4	3	1/2	.120	9	36632
5/8	1-5/8	3-1/2	5/8	.030	9	36633
5/8	1-5/8	3-1/2	5/8	.090	9	36634
5/8	1-5/8	3-1/2	5/8	.120	9	36635
3/4	1-5/8	4	3/4	.030	11	36636
3/4	1-5/8	4	3/4	.090	11	36637
3/4	1-5/8	4	3/4	.120	11	36638
1	2	6	1	.030	11	36639
1	2	6	1	.090	11	36640
1	2	6	1	.120	11	36641

Neck Option Available



TOLERANCES (mm)

$D_1 = +0,000/-0,050$

$D_2 = h_6$

$R = +0,000/-0,050$

66MCR
METRIC SERIES

TECH INFO 82

CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	CORNER RADIUS R	NO. OF FLUTES	EDP NO. Ti-NAMITE-A (AITIN)
6,0	19,0	63,0	6,0	0,5	7	46627
8,0	20,0	63,0	8,0	0,5	7	46629
10,0	22,0	75,0	10,0	0,5	7	46632
12,0	26,0	83,0	12,0	1,0	9	46636
12,0	26,0	83,0	12,0	2,0	9	46638
12,0	26,0	83,0	12,0	3,0	9	46640
16,0	32,0	92,0	16,0	1,0	9	46641
16,0	32,0	92,0	16,0	2,0	9	46643
16,0	32,0	92,0	16,0	3,0	9	46645
20,0	38,0	104,0	20,0	1,0	11	46647
20,0	38,0	104,0	20,0	2,0	11	46649
20,0	38,0	104,0	20,0	3,0	11	46651
25,0	38,0	104,0	25,0	1,0	11	46654
25,0	38,0	104,0	25,0	2,0	11	46656
25,0	38,0	104,0	25,0	3,0	11	46658


Neck Option Available



56B

FRACTIONAL SERIES

TECH INFO 84

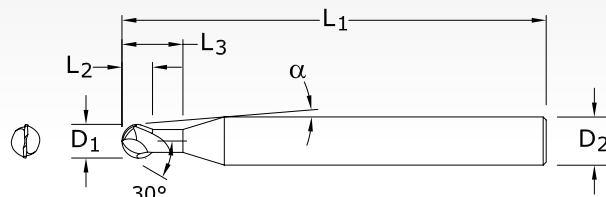

inch						EDP NO.
CUTTING DIAMETER D ₁	LENGTH OF CUT L ₂	OVERALL LENGTH L ₁	SHANK DIAMETER D ₂	α	REACH L ₃	Ti-NAMITE-A (AlTiN)
1/32	1/32	3	1/4	8°20'	1/16	93272
1/16	1/16	3	1/4	7°40'	1/8	93273
3/32	3/32	3	1/4	6°50'	3/16	93274
1/8	1/8	3	1/4	6°	1/4	93275
3/16	3/16	3	1/4	3°35'	3/8	93276
1/4	1/4	3-1/2	1/4	—	1/2	93277
5/16	5/16	4	5/16	—	5/8	93278
3/8	3/8	4	3/8	—	3/4	93279
1/2	1/2	4-1/2	1/2	—	1	93280
5/8	5/8	5-1/2	5/8	—	1-1/4	93281
3/4	3/4	6-1/2	3/4	—	1-1/2	93282

Neck Option Available

TOLERANCES (inch)

1/32–3/32 DIAMETER

D₁ = +0.0000/–0.0010

D₂ = h₆

>3/32–1/4 DIAMETER

D₁ = +0.0000/–0.0012

D₂ = h₆

>1/4–3/8 DIAMETER

D₁ = +0.0000/–0.0016

D₂ = h₆

>3/8–3/4 DIAMETER

D₁ = +0.0000/–0.0020

D₂ = h₆

56MB

METRIC SERIES

TECH INFO 85

mm						EDP NO.
CUTTING DIAMETER D ₁	LENGTH OF CUT L ₂	OVERALL LENGTH L ₁	SHANK DIAMETER D ₂	α	REACH L ₃	Ti-NAMITE-A (AlTiN)
1,0	1,0	76,0	6,0	8°10'	2,0	91349
1,5	1,5	76,0	6,0	7°45'	3,0	91350
2,0	2,0	76,0	6,0	7°10'	4,0	91351
2,5	2,5	76,0	6,0	6°35'	5,0	91352
3,0	3,0	76,0	6,0	6°	6,0	91353
4,0	4,0	76,0	6,0	4°30'	8,0	91354
5,0	5,0	89,0	6,0	2°30'	10,0	91355
6,0	6,0	89,0	6,0	—	12,0	91356
8,0	8,0	102,0	8,0	—	16,0	91357
10,0	10,0	102,0	10,0	—	20,0	91358
12,0	12,0	114,0	12,0	—	24,0	91359
16,0	16,0	140,0	16,0	—	32,0	91360
20,0	20,0	165,0	20,0	—	40,0	91361

TOLERANCES (mm)

1–2,5 DIAMETER

D₁ = +0,000/–0,025

D₂ = h₆

>2,5–6 DIAMETER

D₁ = +0,000/–0,030

D₂ = h₆

>6–10 DIAMETER


D₁ = +0,000/–0,040

D₂ = h₆

>10–20 DIAMETER

D₁ = +0,000/–0,050

D₂ = h₆

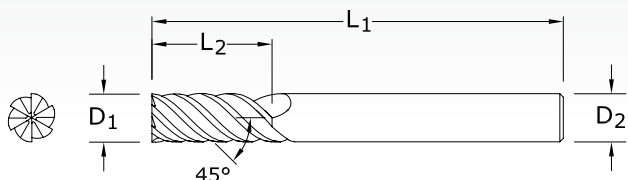TOLERANCES (inch)

1/4 DIAMETER

$D_1 = +0.0000/-0.0012$

$D_2 = h_6$

5/16 DIAMETER

$D_1 = +0.0000/-0.0016$

$D_2 = h_6$

3/8 DIAMETER

$D_1 = +0.0000/-0.0016$

$D_2 = h_6$

1/2 DIAMETER

$D_1 = +0.0000/-0.0020$

$D_2 = h_6$

inch				EDP NO.
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	Ti-NAMITE-A (AlTiN)
1/4	17/32	3-1/2	1/4	36140
5/16	11/16	4	5/16	36141
3/8	13/16	4	3/8	36142
1/2	1-3/32	4-1/2	1/2	36143

Neck Option Available
Ideal for Trochoidal Milling

57
FRACTIONAL SERIES

TECH INFO 86

HARDENED STEELS

TOLERANCES (mm)

6 DIAMETER

$D_1 = +0,000/-0,030$

$D_2 = h_6$

8 DIAMETER

$D_1 = +0,000/-0,040$

$D_2 = h_6$

10 DIAMETER

$D_1 = +0,000/-0,040$

$D_2 = h_6$

12 DIAMETER

$D_1 = +0,000/-0,050$

$D_2 = h_6$

mm				EDP NO.
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	Ti-NAMITE-A (AlTiN)
6,0	13,0	89,0	6,0	46140
8,0	18,0	102,0	8,0	46141
10,0	22,0	102,0	10,0	46142
12,0	26,0	114,0	12,0	46143

Neck Option Available
Ideal for Trochoidal Milling

57M
METRIC SERIES


TECH INFO 87



33CR

FRACTIONAL SERIES

TECH INFO 88

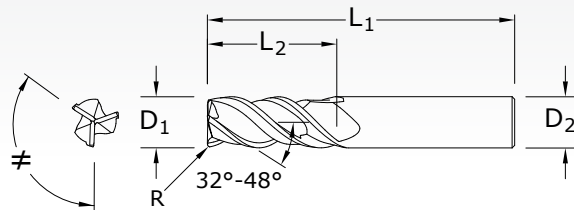

inch					
CUTTING DIAMETER D ₁	LENGTH OF CUT L ₂	OVERALL LENGTH L ₁	SHANK DIAMETER D ₂	CORNER RADIUS R	TI-NAMITE-A (AlTiN) EDP NO.
1/8	3/8	2-1/2	1/4	.015	33345
3/16	9/16	2-1/2	1/4	.015	33346
1/4	3/4	2-1/2	1/4	.020	33347
5/16	13/16	2-1/2	5/16	.020	33348
3/8	1	2-1/2	3/8	.020	33349
7/16	1-1/8	2-3/4	7/16	.020	33350
1/2	1-1/4	3-1/4	1/2	.030	33351
5/8	1-1/2	3-1/2	5/8	.040	33352
3/4	1-3/4	4	3/4	.040	33353
1	2-1/4	5	1	.040	33354

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS
TITANIUM

TOLERANCES (inch)

1/8-1/4 DIAMETER

D₁ = +0.0000/-0.0012D₂ = h₆

R = +0.0000/-0.0020

>1/4-3/8 DIAMETER

D₁ = +0.0000/-0.0016D₂ = h₆

R = +0.0000/-0.0020

>3/8-1 DIAMETER

D₁ = +0.0000/-0.0020D₂ = h₆

R = +0.0000/-0.0020

33MCR

METRIC SERIES

TECH INFO 90

mm					
CUTTING DIAMETER D ₁	LENGTH OF CUT L ₂	OVERALL LENGTH L ₁	SHANK DIAMETER D ₂	CORNER RADIUS R	TI-NAMITE-A (AlTiN) EDP NO.
3,0	9,0	57,0	6,0	0,3	43445
4,0	12,0	57,0	6,0	0,3	43446
5,0	15,0	57,0	6,0	0,3	43447
6,0	18,0	57,0	6,0	0,5	43448
8,0	20,0	63,0	8,0	0,5	43449
10,0	27,0	72,0	10,0	0,5	43450
12,0	30,0	83,0	12,0	0,5	43451
16,0	38,0	92,0	16,0	1,0	43452
20,0	46,0	104,0	20,0	1,0	43453

TOLERANCES (mm)

3-6 DIAMETER

D₁ = +0,000/-0,030D₂ = h₆

R = +0,00/-0,05

>6-10 DIAMETER

D₁ = +0,000/-0,040D₂ = h₆


R = +0,00/-0,05

>10-25 DIAMETER

D₁ = +0,000/-0,050D₂ = h₆

R = +0,00/-0,05

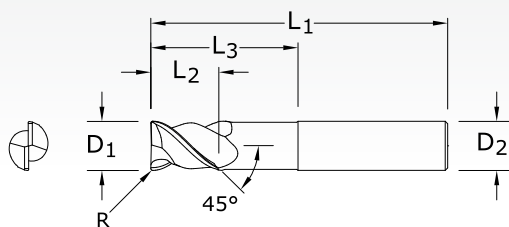


TOLERANCES (inch)
1/4–3/8 DIAMETER
 $D_1 = +0.0000/-0.00035$
 $D_2 = h_6$
 $R = +0.0000/-0.0020$
1/2–5/8 DIAMETER
 $D_1 = +0.0000/-0.00043$
 $D_2 = h_6$
 $R = +0.0000/-0.002$
3/4–1 DIAMETER
 $D_1 = +0.0000/-0.00051$
 $D_2 = h_6$
 $R = +0.0000/-0.0020$
45
FRACTIONAL SERIES

TECH INFO 92

inch						EDP NO.			
CUTTING DIA. D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIA. D_2	REACH* L_3	CORNER RADIUS R	UNCOATED W/FLAT	UNCOATED W/O FLAT	TI-NAMITE-B (TiB ₂) W/FLAT	TI-NAMITE-B (TiB ₂) W/O FLAT
1/4	3/8	2-1/2	3/8	1	.010	91257	91250	91235	91242
5/16	7/16	2-1/2	3/8	1-1/8	.012	91258	91251	91236	91243
3/8	9/16	2-1/2	3/8	1-1/8	.015	91259	91252	91237	91244
1/2	3/4	3	1/2	1-1/2	.020	91260	91253	91238	91245
5/8	7/8	3-1/2	5/8	1-3/4	.025	91261	91254	91239	91246
3/4	1	4	3/4	2	.030	91262	91255	91240	91247
1	1-1/4	4	1	2-1/8	.040	91263	91256	91241	91248

*Reach (Optional)


NON-FERROUS

PLASTICS/COMPOSITES

**44**

FRACTIONAL SERIES

TECH INFO 92

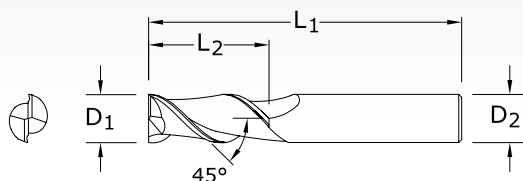

inch					EDP NO.			
CUTTING DIA. D ₁	LENGTH OF CUT L ₂	OVERALL LENGTH L ₁	SHANK DIA. D ₂	CORNER RADIUS* R	UNCOATED W/FLAT	UNCOATED W/O FLAT	Ti-NAMITE-B (TiB ₂) W/FLAT	Ti-NAMITE-B (TiB ₂) W/O FLAT
1/4	3/4	2-7/16	3/8	.015-.060	34501	32033	34502	32053
1/4	1-1/4	3-1/16	3/8	.015-.060	34503	32034	34504	32054
1/4	1-3/4	3-9/16	3/8	.015-.060	34505	32035	34506	32055
5/16	1-3/8	3-1/8	3/8	.015-.060	34507	32036	34508	32056
3/8	3/4	2-1/2	3/8	.015-.060	34509	32037	34510	32057
3/8	1-1/2	3-1/4	3/8	.015-.060	34511	32038	34512	32058
3/8	2-1/2	4-1/4	3/8	.015-.060	34513	32039	34514	32059
1/2	1-1/4	3-1/4	1/2	.015-.125	34515	32040	34516	32060
1/2	2	4	1/2	.015-.125	34517	32041	34518	32061
1/2	3	5	1/2	.015-.125	34519	32042	34520	32062
5/8	1-5/8	3-3/4	5/8	.015-.125	34521	32043	34522	32063
5/8	2-1/2	4-5/8	5/8	.015-.125	34523	32044	34524	32064
3/4	1-5/8	3-7/8	3/4	.015-.125	34525	32045	34526	32065
3/4	3	5-1/4	3/4	.015-.125	34527	32046	34528	32066
3/4	4	6-1/4	3/4	.015-.125	34529	32047	34530	32067
1	2	4-1/2	1	.015-.125	34531	32048	34532	32068
1	4	6-1/2	1	.015-.125	34533	32049	34534	32069

*Contact your SGS Sales Representative for more information on Corner Radius options.

TOLERANCES (inch)

1/4-3/8 DIAMETERD₁ = +0.0000/-0.00035D₂ = h₆

R = +0.0000/-0.0020

1/2-5/8 DIAMETERD₁ = +0.0000/-0.00043D₂ = h₆

R = +0.0000/-0.0020


3/4-1 DIAMETERD₁ = +0.0000/-0.00051D₂ = h₆

R = +0.0000/-0.0020

NON-FERROUS

PLASTICS/COMPOSITES

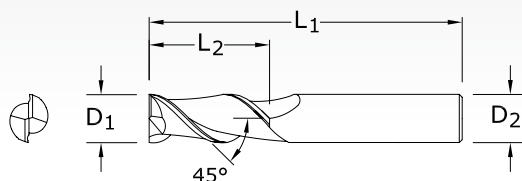


TOLERANCES (mm)
≤3 DIAMETER

$$D_1 = +0,000/-0,006$$

$$D_2 = h_6$$

$$R = +0,000/-0,050$$

>3–6 DIAMETER

$$D_1 = +0,000/-0,008$$

$$D_2 = h_6$$

$$R = +0,000/-0,050$$

>6–10 DIAMETER

$$D_1 = +0,000/-0,009$$

$$D_2 = h_6$$

$$R = +0,000/-0,050$$

>10–18 DIAMETER

$$D_1 = +0,000/-0,011$$

$$D_2 = h_6$$

$$R = +0,000/-0,050$$

>18–20 DIAMETER

$$D_1 = +0,000/-0,013$$

$$D_2 = h_6$$

$$R = +0,000/-0,050$$

44M
METRIC SERIES

TECH INFO 94

mm					EDP NO.			
CUTTING DIA. D ₁	LENGTH OF CUT L ₂	OVERALL LENGTH L ₁	SHANK DIA. D ₂	CORNER RADIUS* R	UNCOATED W/FLAT	UNCOATED W/O FLAT	Ti-NAMITE-B (TiB ₂) W/FLAT	Ti-NAMITE-B (TiB ₂) W/O FLAT
3,0	8,0	52,0	6,0	0,36–0,76	44505	49663	44506	49674
4,0	11,0	55,0	6,0	0,36–0,76	44509	49664	44510	49675
5,0	13,0	57,0	6,0	0,36–0,76	44513	49665	44514	49676
6,0	13,0	57,0	6,0	0,36–0,76	44517	49666	44518	49677
8,0	19,0	69,0	10,0	0,38–1,52	44521	49667	44522	49678
10,0	22,0	72,0	10,0	0,38–1,52	44525	49668	44526	49679
12,0	26,0	83,0	12,0	0,38–3,17	44529	49669	44530	49680
14,0	26,0	83,0	14,0	0,38–3,17	44533	49670	44534	49681
16,0	32,0	92,0	16,0	0,38–3,17	44537	49671	44538	49682
18,0	32,0	92,0	18,0	0,38–3,17	44541	49672	44542	49683
20,0	38,0	104,0	20,0	0,38–3,17	44545	49673	44546	49684

*Contact your SGS Sales Representative for more information on Corner Radius options.

NON-FERROUS


PLASTICS/COMPOSITES



43CR

FRACTIONAL SERIES

TECH INFO 92

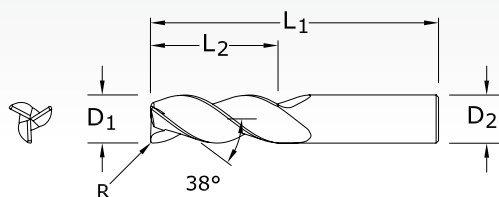

NON-FERROUS

PLASTICS/COMPOSITES

CUTTING DIAMETER D ₁	LENGTH OF CUT L ₂	OVERALL LENGTH L ₁	SHANK DIAMETER D ₂	CORNER RADIUS R	EDP NO.	
					UNCOATED	TI-NAMITE-B (TiB ₂)
1/8	3/8	1-1/2	1/8	.010	34771	34793
3/16	9/16	2	3/16	.010	34772	34794
1/4	3/4	2-1/2	1/4	.010	34773	34795
1/4	3/4	2-1/2	1/4	.030	34774	34796
5/16	5/8	2-1/2	5/16	.030	34775	34797
3/8	1	2-1/2	3/8	.010	34776	34798
3/8	1	2-1/2	3/8	.030	34777	34799
3/8	1	2-1/2	3/8	.060	32761	32825
1/2	1-1/4	3-1/4	1/2	.010	34778	34800
1/2	1-1/4	3-1/4	1/2	.030	34779	34801
1/2	1-1/4	3-1/4	1/2	.060	34780	34802
1/2	1-1/4	3-1/4	1/2	.090	34781	34803
1/2	1-1/4	3-1/4	1/2	.120	32766	32830
5/8	1-5/8	3-3/4	5/8	.030	34782	34804
5/8	1-5/8	3-3/4	5/8	.060	34783	34805
5/8	1-5/8	3-3/4	5/8	.090	34784	34806
3/4	1-5/8	4	3/4	.030	34785	34807
3/4	1-5/8	4	3/4	.060	34786	34808
3/4	1-5/8	4	3/4	.090	34787	34809
3/4	1-5/8	4	3/4	.120	34815	34817
1	2	4-1/2	1	.030	34789	34811
1	2	4-1/2	1	.060	34790	34812
1	2	4-1/2	1	.090	34791	34813
1	2	4-1/2	1	.120	34816	34818

TOLERANCES (inch)

1/8-3/16 DIAMETERD₁ = +0.0000/-0.00032D₂ = h₆

R = +0.0000/-0.0020

1/4-3/8 DIAMETERD₁ = +0.0000/-0.00035D₂ = h₆

R = +0.0000/-0.0020


1/2-5/8 DIAMETERD₁ = +0.0000/-0.00043D₂ = h₆

R = +0.0000/-0.0020

3/4-1 DIAMETERD₁ = +0.0000/-0.00051D₂ = h₆

R = +0.0000/-0.0020



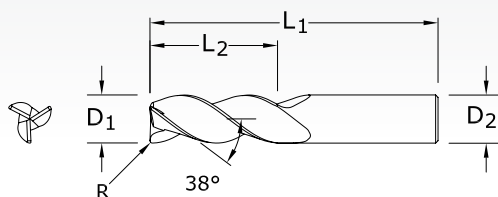

43MCR

METRIC SERIES

TECH INFO 94

TOLERANCES (mm)

6 DIAMETER

$D_1 = +0,000/-0,008$

$D_2 = h_6$

$R = +0,000/-0,050$

>6-10 DIAMETER

$D_1 = +0,000/-0,009$

$D_2 = h_6$

$R = +0,000/-0,050$

>10-18 DIAMETER

$D_1 = +0,000/-0,011$

$D_2 = h_6$

$R = +0,000/-0,050$

>18-20 DIAMETER

$D_1 = +0,000/-0,013$

$D_2 = h_6$

$R = +0,000/-0,050$

mm						EDP NO.	
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	REACH L_3	CORNER RADIUS R	UNCOATED	Ti-NAMITE-B (TiB ₂)
6,0	10,0	63,0	6,0	20,0	0,5	44769	44789
6,0	10,0	63,0	6,0	20,0	1,0	44770	44790
6,0	13,0	72,0	6,0	30,0	0,5	44771	44791
6,0	13,0	72,0	6,0	30,0	1,0	44772	44792
8,0	12,0	75,0	8,0	25,0	0,3	44773	44793
8,0	12,0	75,0	8,0	25,0	0,5	44774	44794
8,0	12,0	75,0	8,0	25,0	1,0	44775	44795
8,0	12,0	75,0	8,0	25,0	1,5	44776	44796
10,0	14,0	100,0	10,0	35,0	0,3	44777	44797
10,0	14,0	100,0	10,0	35,0	0,5	44778	44798
10,0	14,0	100,0	10,0	35,0	1,0	44779	44799
10,0	14,0	100,0	10,0	35,0	1,5	44780	44800
12,0	16,0	100,0	12,0	40,0	0,5	44781	44801
12,0	16,0	100,0	12,0	40,0	1,0	44782	44802
12,0	16,0	100,0	12,0	40,0	1,5	44783	44803
12,0	16,0	100,0	12,0	40,0	2,0	44784	44804
16,0	20,0	125,0	16,0	50,0	2,0	44785	44805
16,0	20,0	125,0	16,0	50,0	4,0	44786	44806
20,0	25,0	150,0	20,0	65,0	2,0	44787	44807
20,0	25,0	150,0	20,0	65,0	4,0	44788	44808

NON-FERROUS


PLASTICS/COMPOSITES



43LC

FRACTIONAL SERIES

TECH INFO 92

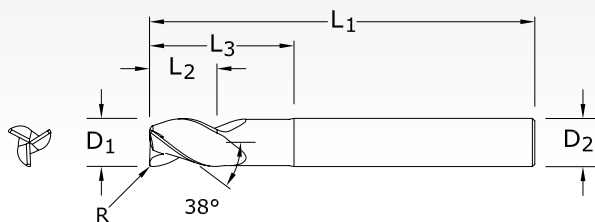

inch						EDP NO.	
CUTTING DIAMETER D ₁	LENGTH OF CUT L ₂	OVERALL LENGTH L ₁	SHANK DIAMETER D ₂	REACH L ₃	CORNER RADIUS R	UNCOATED	Ti-NAMITE-B (TiB ₂)
1/8	5/32	3	1/8	1/2	.010	32751	32815
3/16	7/32	3	3/16	1/2	.010	32752	32816
1/4	3/8	4	1/4	3/4	.010	32753	32817
1/4	3/8	4	1/4	3/4	.030	32754	32818
1/4	3/8	4	1/4	1-1/2	.010	32755	32819
1/4	3/8	4	1/4	1-1/2	.030	32756	32820
1/4	3/8	4	1/4	2-1/8	.010	32757	32821
1/4	3/8	4	1/4	2-1/8	.030	32758	32822
5/16	7/16	4	5/16	1-1/8	.030	32759	32823
5/16	7/16	4	5/16	2-1/8	.030	32760	32824
3/8	1/2	4	3/8	1-1/8	.030	32762	32826
3/8	1/2	4	3/8	1-1/8	.060	32763	32827
3/8	1/2	4	3/8	2-1/8	.030	32764	32828
3/8	1/2	4	3/8	2-1/8	.060	32765	32829
1/2	5/8	4	1/2	1-3/8	.030	32767	32831
1/2	5/8	4	1/2	1-3/8	.060	32768	32832
1/2	5/8	4	1/2	1-3/8	.090	32769	32833
1/2	5/8	4	1/2	1-3/8	.120	32770	32834
1/2	5/8	6	1/2	2-1/8	.030	32771	32835
1/2	5/8	6	1/2	2-1/8	.060	32772	32836
1/2	5/8	6	1/2	2-1/8	.090	32773	32837
1/2	5/8	6	1/2	2-1/8	.120	32774	32838
1/2	5/8	6	1/2	3-3/8	.030	32775	32839
1/2	5/8	6	1/2	3-3/8	.060	32776	32840
1/2	5/8	6	1/2	3-3/8	.090	32777	32841
1/2	5/8	6	1/2	3-3/8	.120	32778	32842

continued on next page

TOLERANCES (inch)

1/8-3/16 DIAMETER

D₁ = +0.0000/-0.00032D₂ = h₆

R = +0.0000/-0.0020

1/4-3/8 DIAMETER

D₁ = +0.0000/-0.00035D₂ = h₆

R = +0.0000/-0.0020

1/2-5/8 DIAMETER

D₁ = +0.0000/-0.00043D₂ = h₆

R = +0.0000/-0.0020

3/4-1 DIAMETER

D₁ = +0.0000/-0.00051D₂ = h₆

R = +0.0000/-0.0020



43LC

FRACTIONAL SERIES

CONTINUED

CUTTING DIAMETER D ₁	LENGTH OF CUT L ₂	inch		REACH L ₃	CORNER RADIUS R	EDP NO.	
		OVERALL LENGTH L ₁	SHANK DIAMETER D ₂			UNCOATED	TI-NAMITE-B (TiB ₂)
5/8	3/4	4	5/8	1-3/4	.030	32779	32843
5/8	3/4	4	5/8	1-3/4	.060	32780	32844
5/8	3/4	4	5/8	1-3/4	.090	32781	32845
5/8	3/4	4	5/8	1-3/4	.120	32782	32846
5/8	3/4	4	5/8	2-3/8	.030	32783	32847
5/8	3/4	4	5/8	2-3/8	.060	32784	32848
5/8	3/4	4	5/8	2-3/8	.090	32785	32849
5/8	3/4	4	5/8	2-3/8	.120	32786	32850
5/8	3/4	6	5/8	3-3/8	.030	32787	32851
5/8	3/4	6	5/8	3-3/8	.060	32788	32852
5/8	3/4	6	5/8	3-3/8	.090	32789	32853
5/8	3/4	6	5/8	3-3/8	.120	32790	32854
3/4	1	4	3/4	1-3/4	.030	32791	32855
3/4	1	4	3/4	1-3/4	.060	32792	32856
3/4	1	4	3/4	1-3/4	.090	32793	32857
3/4	1	4	3/4	1-3/4	.120	32794	32858
3/4	1	6	3/4	2-3/8	.030	32795	32859
3/4	1	6	3/4	2-3/8	.060	32796	32860
3/4	1	6	3/4	2-3/8	.090	32797	32861
3/4	1	6	3/4	2-3/8	.120	32798	32862
3/4	1	6	3/4	3-3/8	.030	32799	32863
3/4	1	6	3/4	3-3/8	.060	32800	32864
3/4	1	6	3/4	3-3/8	.090	32801	32865
3/4	1	6	3/4	3-3/8	.120	32802	32866
1	1-1/4	6	1	2-3/8	.030	32803	32867
1	1-1/4	6	1	2-3/8	.060	32804	32868
1	1-1/4	6	1	2-3/8	.090	32805	32869
1	1-1/4	6	1	2-3/8	.120	32806	32870
1	1-1/4	6	1	3-3/8	.030	32807	32871
1	1-1/4	6	1	3-3/8	.060	32808	32872
1	1-1/4	6	1	3-3/8	.090	32809	32873
1	1-1/4	6	1	3-3/8	.120	32810	32874

NON-FERROUS


PLASTICS/COMPOSITES



43

FRACTIONAL SERIES

TECH INFO 92

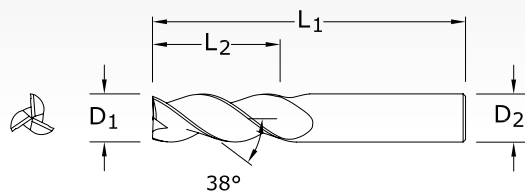

NON-FERROUS

PLASTICS/COMPOSITES

inch				EDP NO.	
CUTTING DIAMETER D ₁	LENGTH OF CUT L ₂	OVERALL LENGTH L ₁	SHANK DIAMETER D ₂	UNCOATED	Ti-NAMITE-B (TiB ₂)
1/8	3/8	1-1/2	1/8	34701	34728
3/16	9/16	2	3/16	34702	34729
1/4	3/8	2	1/4	34703	34730
1/4	3/4	2-1/2	1/4	34704	34731
1/4	1-1/4	3-1/2	1/4	34705	34732
5/16	7/16	2	5/16	34706	34733
5/16	5/8	2-1/2	5/16	34707	34734
5/16	1-1/4	4	5/16	34708	34735
3/8	1/2	2	3/8	34709	34736
3/8	1	2-1/2	3/8	34710	34737
3/8	1-1/2	3-1/2	3/8	34711	34738
1/2	5/8	2-1/2	1/2	34712	34739
1/2	1-1/4	3-1/4	1/2	34713	34740
1/2	2	4	1/2	34714	34741
1/2	3-1/8	6	1/2	34715	34742
5/8	3/4	3	5/8	34716	34743
5/8	1-5/8	3-3/4	5/8	34717	34744
5/8	2-1/2	5	5/8	34718	34745
5/8	3-3/4	6	5/8	34719	34746
3/4	1	3	3/4	34720	34747
3/4	1-5/8	4	3/4	34721	34748
3/4	2-1/4	5	3/4	34722	34749
3/4	3-1/4	6	3/4	34723	34750
1	1-1/4	4	1	34724	34751
1	2	4-1/2	1	34725	34752
1	2-5/8	6	1	34726	34753
1	3-1/4	6	1	34727	34754

TOLERANCES (inch)

1/8–3/16 DIAMETER

D₁ = +0.0000/–0.00032D₂ = h₆

1/4–3/8 DIAMETER


D₁ = +0.0000/–0.00035D₂ = h₆

1/2–5/8 DIAMETER

D₁ = +0.0000/–0.00043D₂ = h₆

3/4–1 DIAMETER

D₁ = +0.0000/–0.00051D₂ = h₆

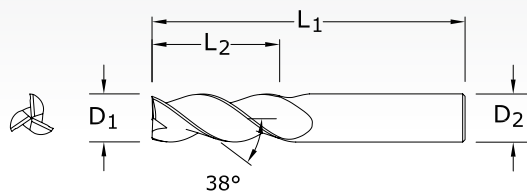

TOLERANCES (mm)

6 DIAMETER

$D_1 = +0,000/-0,008$

$D_2 = h_6$

>6-10 DIAMETER

$D_1 = +0,000/-0,009$

$D_2 = h_6$

>10-18 DIAMETER

$D_1 = +0,000/-0,011$

$D_2 = h_6$

>18-20 DIAMETER

$D_1 = +0,000/-0,013$

$D_2 = h_6$

mm				EDP NO.	
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	UNCOATED	Ti-NAMITE-B (TiB ₂)
6,0	13,0	57,0	6,0	44701	44715
6,0	13,0	72,0	6,0	44702	44716
8,0	19,0	63,0	8,0	44703	44717
10,0	22,0	72,0	10,0	44705	44719
12,0	26,0	83,0	12,0	44708	44722
16,0	32,0	92,0	16,0	44711	44725
20,0	38,0	104,0	20,0	44714	44728

43M

METRIC SERIES

TECH INFO 94

NON-FERROUS


PLASTICS/COMPOSITES



43L

FRACTIONAL SERIES

TECH INFO 92

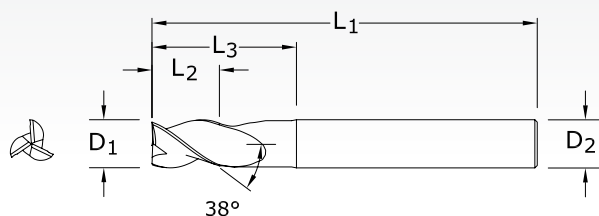

CUTTING DIAMETER D ₁	LENGTH OF CUT L ₂	inch			EDP NO.	
		OVERALL LENGTH L ₁	SHANK DIAMETER D ₂	REACH L ₃	UNCOATED	TI-NAMITE-B (TiB ₂)
1/8	5/32	3	1/8	1/2	32700	32725
3/16	7/32	3	3/16	1/2	32701	32726
1/4	3/8	4	1/4	3/4	32702	32727
1/4	3/8	4	1/4	1-1/2	32703	32728
1/4	3/8	4	1/4	2-1/8	32704	32729
5/16	7/16	4	5/16	1-1/8	32705	32730
5/16	7/16	4	5/16	2-1/8	32706	32731
3/8	1/2	4	3/8	1-1/8	32707	32732
3/8	1/2	4	3/8	2-1/8	32708	32733
1/2	5/8	4	1/2	1-3/8	32709	32734
1/2	5/8	6	1/2	2-1/8	32710	32735
1/2	5/8	6	1/2	3-3/8	32711	32736
5/8	3/4	4	5/8	1-3/4	32712	32737
5/8	3/4	4	5/8	2-3/8	32713	32738
5/8	3/4	6	5/8	3-3/8	32714	32739
3/4	1	4	3/4	1-3/4	32715	32740
3/4	1	6	3/4	2-3/8	32716	32741
3/4	1	6	3/4	3-3/8	32717	32742
1	1-1/4	6	1	2-3/8	32718	32743
1	1-1/4	6	1	3-3/8	32719	32744
1	1-1/4	7	1	4-3/8	32720	32745

TOLERANCES (inch)

1/8–3/16 DIAMETER

D₁ = +0.0000/–0.00032D₂ = h₆

1/4–3/8 DIAMETER


D₁ = +0.0000/–0.00035D₂ = h₆

1/2–5/8 DIAMETER

D₁ = +0.0000/–0.00043D₂ = h₆

3/4–1 DIAMETER

D₁ = +0.0000/–0.00051D₂ = h₆

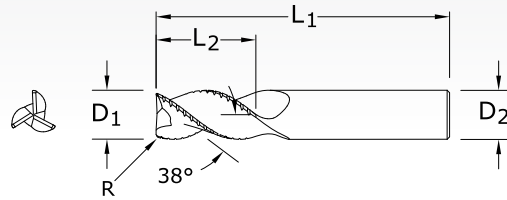

TOLERANCES (inch)

3/8 DIAMETER

$D_1 = +0.0000/-0.00035$

$D_2 = h_6$

$R = +0.0000/-0.0020$

1/2-5/8 DIAMETER

$D_1 = +0.0000/-0.00043$

$D_2 = h_6$

$R = +0.0000/-0.0020$

3/4-1 DIAMETER

$D_1 = +0.0000/-0.00051$

$D_2 = h_6$

$R = +0.0000/-0.0020$

43CB

FRACTIONAL SERIES

TECH INFO 92

inch					EDP NO.	
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	CORNER RADIUS R	UNCOATED	Ti-NAMITE-B (TiB ₂)
3/8	1	2-1/2	3/8	.020	34300	34305
1/2	1-1/4	3-1/4	1/2	.030	34301	34306
5/8	1-5/8	3-3/4	5/8	.030	34302	34307
3/4	1-5/8	4	3/4	.030	34303	34308
1	2	4-1/2	1	.030	34304	34309



TOLERANCES (mm)

8-10 DIAMETER

$D_1 = +0.000/-0.009$

$D_2 = h_6$

$R = +0.000/-0.050$

>10-18 DIAMETER

$D_1 = +0.000/-0.011$

$D_2 = h_6$

$R = +0.000/-0.050$

>18-20 DIAMETER

$D_1 = +0.000/-0.013$

$D_2 = h_6$

$R = +0.000/-0.050$

43MCB

METRIC SERIES

TECH INFO 94


mm					EDP NO.	
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	CORNER RADIUS R	UNCOATED	Ti-NAMITE-B (TiB ₂)
8,0	19,0	63,0	8,0	0,3	44300	44305
10,0	22,0	72,0	10,0	0,3	44301	44306
12,0	26,0	83,0	12,0	1,0	44302	44307
16,0	32,0	92,0	16,0	1,0	44303	44308
20,0	38,0	104,0	20,0	1,0	44304	44309



47

FRACTIONAL SERIES

TECH INFO 92

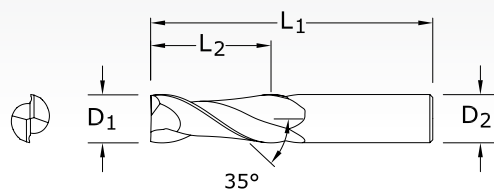

NON-FERROUS

PLASTICS/COMPOSITES

inch				EDP NO.	
CUTTING DIAMETER D ₁	LENGTH OF CUT L ₂	OVERALL LENGTH L ₁	SHANK DIAMETER D ₂	UNCOATED	Ti-NAMITE-B (TiB ₂)
1/8	3/8	1-1/2	1/8	34620	34660
3/16	9/16	2	3/16	34621	34661
1/4	3/4	2-1/2	1/4	34622	34662
5/16	13/16	2-1/2	5/16	34623	34663
3/8	1	2-1/2	3/8	34624	34664
1/2	1-1/4	3-1/4	1/2	34625	34665
5/8	1-5/8	3-3/4	5/8	34626	34666
3/4	1-5/8	4	3/4	34627	34667
1	2	4-1/2	1	34628	34668

TOLERANCES (inch)

1/8–3/16 DIAMETER

D₁ = +0.0000/–0.00032D₂ = h₆

1/4–3/8 DIAMETER

D₁ = +0.0000/–0.00035D₂ = h₆

1/2–5/8 DIAMETER

D₁ = +0.0000/–0.00043D₂ = h₆

3/4–1 DIAMETER

D₁ = +0.0000/–0.00051D₂ = h₆

47M

METRIC SERIES

TECH INFO 94

mm				EDP NO.	
CUTTING DIAMETER D ₁	LENGTH OF CUT L ₂	OVERALL LENGTH L ₁	SHANK DIAMETER D ₂	UNCOATED	Ti-NAMITE-B (TiB ₂)
3,0	8,0	38,0	3,0	44550	44587
4,0	11,0	50,0	4,0	44551	44588
5,0	13,0	50,0	5,0	44552	44589
6,0	13,0	57,0	6,0	44553	44590
8,0	19,0	63,0	8,0	44554	44591
10,0	22,0	72,0	10,0	44555	44592
12,0	26,0	83,0	12,0	44556	44593
14,0	26,0	83,0	14,0	44557	44594
16,0	32,0	92,0	16,0	44558	44595
20,0	38,0	104,0	20,0	44559	44596
25,0	44,0	104,0	25,0	44560	44597

TOLERANCES (mm)

3+ DIAMETER

D₁ = +0,000/–0,006D₂ = h₆

>3–6 DIAMETER

D₁ = +0,000/–0,008D₂ = h₆

>6–10 DIAMETER


D₁ = +0,000/–0,009D₂ = h₆

>10–18 DIAMETER

D₁ = +0,000/–0,012D₂ = h₆

>18–25 DIAMETER

D₁ = +0,000/–0,013D₂ = h₆

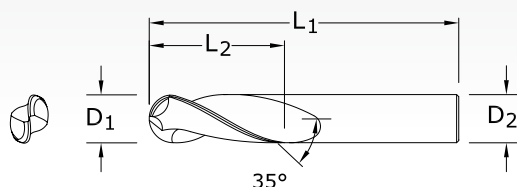

TOLERANCES (inch)

1/8-3/16 DIAMETER

$$D_1 = +0.0000/-0.00032$$
$$D_2 = h_6$$

1/4-3/8 DIAMETER

$$D_1 = +0.0000/-0.00035$$
$$D_2 = h_6$$

1/2-5/8 DIAMETER

$$D_1 = +0.0000/-0.00043$$
$$D_2 = h_6$$

3/4-1 DIAMETER

$$D_1 = +0.0000/-0.00051$$
$$D_2 = h_6$$

47B
FRACTIONAL SERIES

TECH INFO 92

inch				EDP NO.	
CUTTING DIAMETER D ₁	LENGTH OF CUT L ₂	OVERALL LENGTH L ₁	SHANK DIAMETER D ₂	UNCOATED	Ti-NAMITE-B (TiB ₂)
1/8	3/8	1-1/2	1/8	34630	34669
3/16	9/16	2	3/16	34631	34670
1/4	3/4	2-1/2	1/4	34632	34671
5/16	13/16	2-1/2	5/16	34633	34672
3/8	1	2-1/2	3/8	34634	34673
1/2	1-1/4	3-1/4	1/2	34635	34674
5/8	1-5/8	3-3/4	5/8	34636	34675
3/4	1-5/8	4	3/4	34637	34676
1	2	4-1/2	1	34638	34677

NON-FERROUS

PLASTICS/COMPOSITES

47MB
METRIC SERIES

TECH INFO 94

TOLERANCES (mm)

3+ DIAMETER

$$D_1 = +0,000/-0,006$$
$$D_2 = h_6$$

>3-6 DIAMETER

D₁ = +0,000/-0,008

$$D_2 = h_6$$

>6-10 DIAMETER

$$D_1 = +0,000/-0,009$$
$$D_2 = h_6$$

>10-18 DIAMETER

$$D_1 = +0,000/-0,012$$
$$D_2 = h_6$$

>18-25 DIAMETER


$$D_1 = +0,000/-0,013$$
$$D_2 = h_6$$

mm				EDP NO.	
CUTTING DIAMETER D ₁	LENGTH OF CUT L ₂	OVERALL LENGTH L ₁	SHANK DIAMETER D ₂	UNCOATED	Ti-NAMITE-B (TiB ₂)
3,0	8,0	38,0	3,0	44570	44598
4,0	11,0	50,0	4,0	44571	44599
5,0	13,0	50,0	5,0	44572	44600
6,0	13,0	57,0	6,0	44573	44601
8,0	19,0	63,0	8,0	44574	44602
10,0	22,0	72,0	10,0	44575	44603
12,0	26,0	83,0	12,0	44576	44604
14,0	26,0	83,0	14,0	44577	44605
16,0	32,0	92,0	16,0	44578	44606
20,0	38,0	104,0	20,0	44579	44607
25,0	44,0	104,0	25,0	44580	44608

**47ES**

FRACTIONAL SERIES

TECH INFO 92

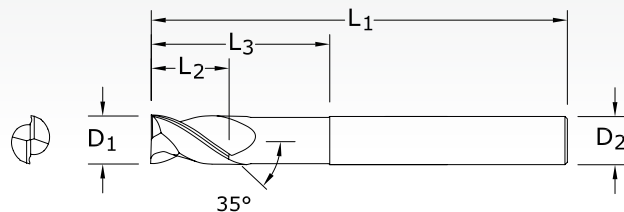

NON-FERROUS

PLASTICS/COMPOSITES

inch					EDP NO.	
CUTTING DIAMETER D ₁	LENGTH OF CUT L ₂	OVERALL LENGTH L ₁	SHANK DIAMETER D ₂	REACH L ₃	UNCOATED	TI-NAMITE-B (TiB ₂)
1/4	3/8	4	1/4	2-1/8	34640	34678
3/8	1/2	4	3/8	2-1/8	34641	34679
1/2	5/8	6	1/2	2-1/8	34642	34680
1/2	5/8	6	1/2	3-3/8	34643	34681
5/8	3/4	6	5/8	2-3/8	34644	34682
5/8	3/4	6	5/8	3-3/8	34645	34683
3/4	1	6	3/4	2-1/2	34646	34684
3/4	1	6	3/4	3-3/8	34647	34685


TOLERANCES (inch)**1/4–3/8 DIAMETER**D₁ = +0.0000/–0.00035D₂ = h₆**1/2–5/8 DIAMETER**D₁ = +0.0000/–0.00043D₂ = h₆**3/4–1 DIAMETER**D₁ = +0.0000/–0.00051D₂ = h₆**47MES**

METRIC SERIES

TECH INFO 94

mm					EDP NO.	
CUTTING DIAMETER D ₁	LENGTH OF CUT L ₂	OVERALL LENGTH L ₁	SHANK DIAMETER D ₂	REACH L ₃	UNCOATED	TI-NAMITE-B (TiB ₂)
6,0	10,0	100,0	6,0	54,0	44561	44609
8,0	12,0	100,0	8,0	54,0	44562	44610
10,0	12,0	100,0	10,0	54,0	44563	44611
12,0	16,0	150,0	12,0	80,0	44564	44612
16,0	20,0	150,0	16,0	80,0	44565	44613
20,0	25,0	150,0	20,0	80,0	44566	44614

TOLERANCES (mm)**6 DIAMETER**D₁ = +0,000/–0,008D₂ = h₆**>6–10 DIAMETER**D₁ = +0,000/–0,009D₂ = h₆**>10–18 DIAMETER**D₁ = +0,000/–0,011D₂ = h₆**>18–20 DIAMETER**D₁ = +0,000/–0,013D₂ = h₆

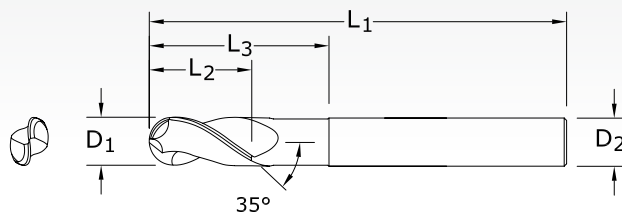

TOLERANCES (inch)

1/4–3/8 DIAMETER

$D_1 = +0.0000/-0.00035$

$D_2 = h_6$

1/2–5/8 DIAMETER

$D_1 = +0.0000/-0.00043$

$D_2 = h_6$

3/4–1 DIAMETER

$D_1 = +0.0000/-0.00051$

$D_2 = h_6$

47EB

FRACTIONAL SERIES

TECH INFO 92

inch					EDP NO.	
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	REACH L_3	UNCOATED	Ti-NAMITE-B (TiB ₂)
1/4	3/8	4	1/4	2-1/8	34650	34686
3/8	1/2	4	3/8	2-1/8	34651	34687
1/2	5/8	6	1/2	2-1/8	34652	34688
1/2	5/8	6	1/2	3-3/8	34653	34689
5/8	3/4	6	5/8	3-3/8	34654	34691
5/8	3/4	6	5/8	2-3/8	34655	34690
3/4	1	6	3/4	2-1/2	34656	34693
3/4	1	6	3/4	3-3/8	34657	34692

NON-FERROUS

PLASTICS/COMPOSITES

TOLERANCES (mm)

6 DIAMETER

$D_1 = +0,000/-0,008$

$D_2 = h_6$

>6–10 DIAMETER

$D_1 = +0,000/-0,009$

$D_2 = h_6$

>10–18 DIAMETER

$D_1 = +0,000/-0,011$

$D_2 = h_6$

>18–20 DIAMETER

$D_1 = +0,000/-0,013$


$D_2 = h_6$

47MEB

METRIC SERIES

TECH INFO 94

mm					EDP NO.	
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	REACH L_3	UNCOATED	Ti-NAMITE-B (TiB ₂)
6,0	10,0	100,0	6,0	54,0	44581	44615
8,0	12,0	100,0	8,0	54,0	44582	44616
10,0	12,0	100,0	10,0	54,0	44583	44617
12,0	16,0	150,0	12,0	80,0	44584	44618
16,0	20,0	150,0	16,0	80,0	44585	44619
20,0	25,0	150,0	20,0	80,0	44586	44620

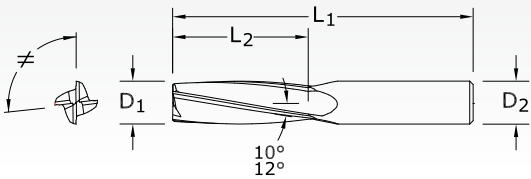

27
FRACTIONAL SERIES


TECH INFO 96

PLASTICS/COMPOSITES

TOLERANCES (inch)
D₁ = +0.0000/-0.0030
D₂ = h₆

inch				EDP NO.	
CUTTING DIAMETER D ₁	LENGTH OF CUT L ₂	OVERALL LENGTH L ₁	SHANK DIAMETER D ₂	UNCOATED	Di-NAMITE (Diamond)
1/4	1	2-1/2	1/4	72978	72979
3/8	1-1/8	2-1/2	3/8	72980	72981
1/2	1-1/2	3-1/2	1/2	72982	72983
3/4	1-3/8	4	3/4	72984	72985



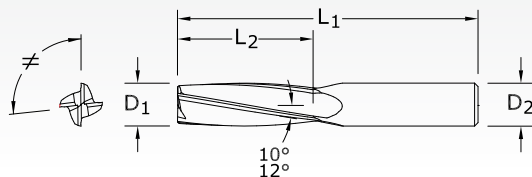

TOLERANCES (mm)

$D_1 = +0,000/-0,080$


$D_2 = h_6$

27M
METRIC SERIES

TECH INFO 97


mm				EDP NO.	
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	UNCOATED	Di-NAMITE (Diamond)
6,0	25,0	63,0	6,0	83056	83057
8,0	25,0	63,0	8,0	83058	83059
10,0	28,0	63,0	10,0	83060	83061
12,0	38,0	89,0	12,0	83062	83063
16,0	48,0	115,0	16,0	83064	83065

PLASTICS/COMPOSITES



Series Z1PCR, Z1PLC, Z1PLB Fractional		Hardness BRINELL			Vc (SFM)	Diameter (D ₁) (inch)								
			Ae x D ₁	Ap x D ₁		1/8	1/4	3/8	1/2	5/8	3/4	1		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275	 Profile	≤ 0.5	≤ 1.5	555	RPM	16961	8480	5654	4240	3392	2827	2120
						(444-666)	Fz	0.0004	0.0010	0.0019	0.0025	0.0031	0.0032	0.0035
						Feed (IPM)	27.1	33.9	43.0	42.4	42.1	36.2	29.7	
			 Slot	1	≤ 1	440	RPM	13446	6723	4482	3362	2689	2241	1681
						(352-528)	Fz	0.0004	0.0010	0.0019	0.0025	0.0031	0.0032	0.0035
						Feed (IPM)	21.5	26.9	34.1	33.6	33.3	28.7	23.5	
P	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375	 Profile	≤ 0.5	≤ 1.5	315	RPM	9626	4813	3209	2407	1925	1604	1203
						(252-378)	Fz	0.0003	0.0008	0.0014	0.0019	0.0024	0.0025	0.0027
						Feed (IPM)	13.1	15.4	18.0	18.3	18.5	16.0	13.0	
			 Slot	1	≤ 1	250	RPM	7640	3820	2547	1910	1528	1273	955
						(200-300)	Fz	0.0003	0.0008	0.0014	0.0019	0.0024	0.0025	0.0027
						Feed (IPM)	10.4	12.2	14.3	14.5	14.7	12.7	10.3	
P	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375	 Profile	≤ 0.5	≤ 1.5	185	RPM	5654	2827	1885	1413	1131	942	707
						(148-222)	Fz	0.0002	0.0005	0.0010	0.0013	0.0016	0.0017	0.0018
						Feed (IPM)	4.5	5.7	7.5	7.3	7.2	6.4	5.1	
			 Slot	1	≤ 1	145	RPM	4431	2216	1477	1108	886	739	554
						(116-174)	Fz	0.0002	0.0005	0.0010	0.0013	0.0016	0.0017	0.0018
						Feed (IPM)	3.5	4.4	5.9	5.8	5.7	5.0	4.0	
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220	 Profile	≤ 0.5	≤ 1.5	355	RPM	10849	5424	3616	2712	2170	1808	1356
						(284-426)	Fz	0.0004	0.0010	0.0018	0.0024	0.0030	0.0031	0.0034
						Feed (IPM)	18.2	21.7	26.0	26.0	26.0	22.4	18.4	
			 Slot	1	≤ 1	445	RPM	13599	6800	4533	3400	2720	2267	1700
						(356-534)	Fz	0.0004	0.0010	0.0018	0.0024	0.0030	0.0031	0.0034
						Feed (IPM)	22.8	27.2	32.6	32.6	32.6	28.1	23.1	
K	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	> 220 ≤ 260	 Profile	≤ 0.5	≤ 1.5	340	RPM	10390	5195	3463	2598	2078	1732	1299
						(272-408)	Fz	0.0003	0.0007	0.0014	0.0018	0.0023	0.0024	0.0025
						Feed (IPM)	12.5	14.5	19.4	18.7	19.1	16.6	13.0	
			 Slot	1	≤ 1	270	RPM	8251	4126	2750	2063	1650	1375	1031
						(216-324)	Fz	0.0003	0.0007	0.0014	0.0018	0.0023	0.0024	0.0025
						Feed (IPM)	9.9	11.6	15.4	14.9	15.2	13.2	10.3	
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	≤ 275	 Profile	≤ 0.5	≤ 1.5	490	RPM	14974	7487	4991	3744	2995	2496	1872
						(392-588)	Fz	0.0003	0.0007	0.0014	0.0018	0.0023	0.0024	0.0025
						Feed (IPM)	18.0	21.0	28.0	27.0	27.6	24.0	18.7	
			 Slot	1	≤ 1	390	RPM	11918	5959	3973	2980	2384	1986	1490
						(312-468)	Fz	0.0003	0.0007	0.0014	0.0018	0.0023	0.0024	0.0025
						Feed (IPM)	14.3	16.7	22.2	21.5	21.9	19.1	14.9	

continued on next page



Series Z1PCR, Z1PLC, Z1PLB Fractional	Hardness BRINELL	Ae x D ₁	Ap x D ₁	Vc (SFM)		Diameter (D ₁) (inch)						
						1/8	1/4	3/8	1/2	5/8	3/4	1
M	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275	 Profile ≤ 0.5 ≤ 1.5	340	RPM	10390	5195	3463	2598	2078	1732	1299
				(272-408)	Fz	0.0002	0.0006	0.0011	0.0014	0.0018	0.0019	0.0020
					Feed (IPM)	8.3	12.5	15.2	14.5	15.0	13.2	10.4
			 Slot 1 ≤ 1	270	RPM	8251	4126	2750	2063	1650	1375	1031
				(216-324)	Fz	0.0002	0.0006	0.0011	0.0014	0.0018	0.0019	0.0020
					Feed (IPM)	6.6	9.9	12.1	11.6	11.9	10.5	8.3
M	STAINLESS STEELS (PH) 13-8 PH, 15-5PH, 17-4 PH, Custom 450	< 325	 Profile ≤ 0.5 ≤ 1.5	310	RPM	9474	4737	3158	2368	1895	1579	1184
				(248-372)	Fz	0.0002	0.0006	0.0011	0.0014	0.0018	0.0019	0.0020
					Feed (IPM)	7.6	11.4	13.9	13.3	13.6	12.0	9.5
			 Slot 1 ≤ 1	250	RPM	7640	3820	2547	1910	1528	1273	955
				(200-300)	Fz	0.0002	0.0006	0.0011	0.0014	0.0018	0.0019	0.0020
					Feed (IPM)	6.1	9.2	11.2	10.7	11.0	9.7	7.6
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoly 800, Monel 400	≤ 300	 Profile ≤ 0.5 ≤ 1.5	80	RPM	2445	1222	815	611	489	407	306
				(64-96)	Fz	0.0002	0.0004	0.0008	0.0010	0.0013	0.0014	0.0015
					Feed (IPM)	1.5	2.0	2.6	2.4	2.5	2.3	1.8
			 Slot 1 ≤ 1	65	RPM	1986	993	662	497	397	331	248
				(52-78)	Fz	0.0002	0.0004	0.0008	0.0010	0.0013	0.0014	0.0015
					Feed (IPM)	1.2	1.6	2.1	2.0	2.1	1.9	1.5
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, 750X, Incoly 925, Waspaloy, Hastelloy, Rene	> 300	 Profile ≤ 0.5 ≤ 1.5	62	RPM	1895	947	632	474	379	316	237
				(50-74)	Fz	0.0001	0.0003	0.0005	0.0007	0.0009	0.0010	0.0011
					Feed (IPM)	0.8	1.1	1.3	1.3	1.4	1.3	1.0
			 Slot 1 ≤ 1	50	RPM	1528	764	509	382	306	255	191
				(40-60)	Fz	0.0001	0.0003	0.0005	0.0007	0.0009	0.0010	0.0011
					Feed (IPM)	0.6	0.9	1.0	1.1	1.1	1.0	0.8
S	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350	 Profile ≤ 0.5 ≤ 1.5	215	RPM	6570	3285	2190	1643	1314	1095	821
				(172-258)	Fz	0.0002	0.0005	0.0010	0.0013	0.0016	0.0017	0.0018
					Feed (IPM)	5.3	6.6	8.8	8.5	8.4	7.4	5.9
			 Slot 1 ≤ 1	170	RPM	5195	2598	1732	1299	1039	866	649
				(136-204)	Fz	0.0002	0.0005	0.0010	0.0013	0.0016	0.0017	0.0018
					Feed (IPM)	4.2	5.2	6.9	6.8	6.6	5.9	4.7
S	TITANIUM ALLOYS (DIFFICULT) Ti10Al2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	> 350 ≤ 440	 Profile ≤ 0.5 ≤ 1.5	75	RPM	2292	1146	764	573	458	382	287
				(60-90)	Fz	0.0002	0.0005	0.0010	0.0013	0.0016	0.0017	0.0018
					Feed (IPM)	1.8	2.3	3.1	3.0	2.9	2.6	2.1
			 Slot 1 ≤ 1	60	RPM	1834	917	611	458	367	306	229
				(48-72)	Fz	0.0002	0.0005	0.0010	0.0013	0.0016	0.0017	0.0018
					Feed (IPM)	1.5	1.8	2.4	2.4	2.3	2.1	1.7

rpm = sfm x 3.82 / D₁

ipm = (inch / flute) x 4 x rpm


maximum Slotting Ap for Z1PLC / Z1PLB is .25 x D₁

maximum Profile Ae for Z1PLC / Z1PLB is .2 x D₁

reduce speed and feed for materials harder than listed


reduce feed and Ae when finish milling (.02 x D₁ maximum)

refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)



Series Z1MPCR, Z1MPLC Metric	Hardness BRINELL			Vc (m/min)	Diameter (D ₁) (mm)									
		Ae x D ₁	Ap x D ₁		3	6	8	10	12	16	20	25		
P CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275		≤ 0.5	≤ 1.5	169	RPM	17934	8967	6725	5380	4484	3363	2690	2152
					(135-203)	Fz	0.010	0.024	0.041	0.051	0.060	0.079	0.085	0.088
						Feed (mm/min)	689	861	1091	1090	1076	1067	918	753
			1	≤ 1	134	RPM	14218	7109	5332	4265	3555	2666	2133	1706
					(107-161)	Fz	0.010	0.024	0.041	0.051	0.060	0.079	0.085	0.088
						Feed (mm/min)	546	682	865	864	853	846	728	597
P ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375		≤ 0.5	≤ 1.5	96	RPM	10179	5089	3817	3054	2545	1909	1527	1221
					(77-115)	Fz	0.008	0.019	0.030	0.037	0.046	0.061	0.067	0.068
						Feed (mm/min)	332	391	456	456	464	469	407	330
			1	≤ 1	76	RPM	8078	4039	3029	2424	2020	1515	1212	969
					(61-91)	Fz	0.008	0.019	0.030	0.037	0.046	0.061	0.067	0.068
						Feed (mm/min)	264	310	362	362	368	372	323	262
P TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375		≤ 0.5	≤ 1.5	56	RPM	5978	2989	2242	1793	1495	1121	897	717
					(45-68)	Fz	0.005	0.012	0.021	0.027	0.031	0.041	0.045	0.045
						Feed (mm/min)	115	143	191	191	186	184	163	129
			1	≤ 1	44	RPM	4686	2343	1757	1406	1171	879	703	562
					(35-53)	Fz	0.005	0.012	0.021	0.027	0.031	0.041	0.045	0.045
						Feed (mm/min)	90	112	150	150	146	144	127	101
K CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220		≤ 0.5	≤ 1.5	108	RPM	11471	5736	4302	3441	2868	2151	1721	1377
					(87-130)	Fz	0.010	0.024	0.038	0.048	0.058	0.077	0.083	0.085
						Feed (mm/min)	462	551	661	661	661	661	569	468
			1	≤ 1	136	RPM	14380	7190	5392	4314	3595	2696	2157	1726
					(109-163)	Fz	0.010	0.024	0.038	0.048	0.058	0.077	0.083	0.085
						Feed (mm/min)	580	690	828	828	828	828	713	587
K CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	> 220 ≤ 260		≤ 0.5	≤ 1.5	104	RPM	10987	5493	4120	3296	2747	2060	1648	1318
					(83-124)	Fz	0.007	0.017	0.030	0.037	0.043	0.059	0.064	0.063
						Feed (mm/min)	316	369	492	492	475	485	422	330
			1	≤ 1	82	RPM	8725	4362	3272	2617	2181	1636	1309	1047
					(66-99)	Fz	0.007	0.017	0.030	0.037	0.043	0.059	0.064	0.063
						Feed (mm/min)	251	293	391	391	377	385	385	262
M STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	≤ 275		≤ 0.5	≤ 1.5	149	RPM	15834	7917	5938	4750	3958	2969	2375	1900
					(119-179)	Fz	0.007	0.017	0.030	0.037	0.043	0.059	0.064	0.063
						Feed (mm/min)	456	532	709	709	684	699	608	475
			1	≤ 1	119	RPM	12602	6301	4726	3781	3151	2363	1890	1512
					(95-143)	Fz	0.007	0.017	0.030	0.037	0.043	0.059	0.064	0.063
						Feed (mm/min)	363	423	565	565	544	557	484	378

continued on next page

Series Z1MPCR, Z1MPLC Metric		Hardness BRINELL			Vc (m/min)	Diameter (D ₁) (mm)									
			Ae x D ₁	Ap x D ₁		3	6	8	10	12	16	20	25		
M	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275		≤ 0.5	≤ 1.5	104	RPM	10987	5493	4120	3296	2747	2060	1648	1318
						(83-124)	Fz	0.005	0.014	0.023	0.029	0.034	0.046	0.051	0.050
							Feed (mm/min)	211	316	387	387	369	380	334	264
				1	≤ 1	82	RPM	8725	4362	3272	2617	2181	1636	1309	1047
						(66-99)	Fz	0.005	0.014	0.023	0.029	0.034	0.046	0.051	0.050
							Feed (mm/min)	168	251	307	307	293	302	265	209
M	STAINLESS STEELS (PH) 13-8 PH, 15-5PH, 17-4 PH, Custom 450	< 325		≤ 0.5	≤ 1.5	94	RPM	10017	5009	3756	3005	2504	1878	1503	1202
						(76-113)	Fz	0.005	0.014	0.023	0.029	0.034	0.046	0.051	0.050
							Feed (mm/min)	192	288	353	353	337	346	305	240
				1	≤ 1	76	RPM	8078	4039	3029	2424	2020	1515	1212	969
						(61-91)	Fz	0.005	0.014	0.023	0.029	0.034	0.046	0.051	0.050
							Feed (mm/min)	155	233	284	284	271	279	246	194
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoly 800, Monel 400	≤ 300		≤ 0.5	≤ 1.5	24	RPM	2585	1293	969	776	646	485	388	310
						(20-29)	Fz	0.004	0.010	0.017	0.021	0.024	0.033	0.037	0.038
							Feed (mm/min)	37	50	66	66	62	65	58	47
				1	≤ 1	20	RPM	2100	1050	788	630	525	394	315	252
						(16-24)	Fz	0.004	0.010	0.017	0.021	0.024	0.033	0.037	0.038
							Feed (mm/min)	30	40	54	54	50	52	47	38
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, 750X, Incoly 925, Waspaloy, Hastelloy, Rene	> 300		≤ 0.5	≤ 1.5	19	RPM	2003	1002	751	601	501	376	301	240
						(15-23)	Fz	0.002	0.007	0.011	0.013	0.017	0.023	0.027	0.028
							Feed (mm/min)	19	29	32	32	34	35	32	26
				1	≤ 1	15	RPM	1616	808	606	485	404	303	242	194
						(12-18)	Fz	0.002	0.007	0.011	0.013	0.017	0.023	0.027	0.028
							Feed (mm/min)	16	23	26	26	27	28	26	21
S	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350		≤ 0.5	≤ 1.5	66	RPM	6947	3474	2605	2084	1737	1303	1042	834
						(52-79)	Fz	0.005	0.012	0.021	0.027	0.031	0.041	0.045	0.045
							Feed (mm/min)	133	167	222	222	217	213	189	150
				1	≤ 1	52	RPM	5493	2747	2060	1648	1373	1030	824	659
						(41-62)	Fz	0.005	0.012	0.021	0.027	0.031	0.041	0.045	0.045
							Feed (mm/min)	105	132	176	176	171	169	149	119
S	TITANIUM ALLOYS (DIFFICULT) Ti10Al2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	> 350 ≤ 440		≤ 0.5	≤ 1.5	23	RPM	2424	1212	909	727	606	454	364	291
						(18-27)	Fz	0.005	0.012	0.021	0.027	0.031	0.041	0.045	0.045
							Feed (mm/min)	47	58	78	78	76	74	66	52
				1	≤ 1	18	RPM	1939	969	727	582	485	364	291	233
						(15-22)	Fz	0.005	0.012	0.021	0.027	0.031	0.041	0.045	0.045
							Feed (mm/min)	37	47	62	62	60	60	53	42

rpm = (1000 x m/min) / (3.14 x D₁)

mm / min = (mm / flute) x 4 x rpm


maximum Slotting Ap for Z1PLC / Z1PLB is .25 x D₁

maximum Profile Ae for Z1PLC / Z1PLB is .2 x D₁

reduce speed and feed for materials harder than listed


reduce feed and Ae when finish milling (.02 x D₁ maximum)

refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)



Series Z1, Z1B, Z16CR Fractional		Hardness BRINELL			Vc (SFM)	Diameter (D1) (inch)								
			Ae x D1	Ap x D1		1/8	1/4	3/8	1/2	5/8	3/4	1		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275	 Profile	≤ 0.5	≤ 1.5	555	RPM	16961	8480	5654	4240	3392	2827	2120
						(444-666)	Fz	0.0004	0.0010	0.0019	0.0025	0.0031	0.0032	0.0035
							Feed (IPM)	25.8	33.9	43.0	42.4	42.1	36.5	29.7
			 Slot	1	≤ 1	440	RPM	13446	6723	4482	3362	2689	2241	1681
						(352-528)	Fz	0.0004	0.0010	0.0019	0.0025	0.0031	0.0032	0.0035
							Feed (IPM)	20.4	26.9	34.1	33.6	33.3	29.0	23.5
P	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375	 Profile	≤ 0.5	≤ 1.5	315	RPM	9626	4813	3209	2407	1925	1604	1203
						(252-378)	Fz	0.0003	0.0008	0.0014	0.0019	0.0024	0.0025	0.0027
							Feed (IPM)	10.8	15.4	18.0	18.3	18.5	16.0	13.0
			 Slot	1	≤ 1	250	RPM	7640	3820	2547	1910	1528	1273	955
						(200-300)	Fz	0.0003	0.0008	0.0014	0.0019	0.0024	0.0025	0.0027
							Feed (IPM)	8.6	12.2	14.3	14.5	14.7	12.7	10.3
P	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375	 Profile	≤ 0.5	≤ 1.5	185	RPM	5654	2827	1885	1413	1131	942	707
						(148-222)	Fz	0.0002	0.0005	0.0010	0.0013	0.0016	0.0017	0.0018
							Feed (IPM)	4.5	5.7	7.5	7.3	7.2	6.4	5.1
			 Slot	1	≤ 1	145	RPM	4431	2216	1477	1108	886	739	554
						(116-174)	Fz	0.0002	0.0005	0.0010	0.0013	0.0016	0.0017	0.0018
							Feed (IPM)	3.5	4.4	5.9	5.8	5.7	5.0	4.0
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220	 Profile	≤ 0.5	≤ 1.5	445	RPM	13599	6800	4533	3400	2720	2267	1700
						(356-534)	Fz	0.0004	0.0010	0.0018	0.0024	0.0030	0.0031	0.0034
							Feed (IPM)	19.0	27.2	32.6	32.6	32.6	28.1	23.1
			 Slot	1	≤ 1	355	RPM	10849	5424	3616	2712	2170	1808	1356
						(284-426)	Fz	0.0004	0.0010	0.0018	0.0024	0.0030	0.0031	0.0034
							Feed (IPM)	15.2	21.7	26.0	26.0	26.0	22.4	18.4
K	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	> 220 ≤ 260	 Profile	≤ 0.5	≤ 1.5	340	RPM	10390	5195	3463	2598	2078	1732	1299
						(272-408)	Fz	0.0003	0.0007	0.0014	0.0018	0.0023	0.0024	0.0025
							Feed (IPM)	12.5	14.5	19.4	18.7	19.1	16.6	13.0
			 Slot	1	≤ 1	270	RPM	8251	4126	2750	2063	1650	1375	1031
						(216-324)	Fz	0.0003	0.0007	0.0014	0.0018	0.0023	0.0024	0.0025
							Feed (IPM)	9.9	11.6	15.4	14.9	15.2	13.2	10.3
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	≤ 275	 Profile	≤ 0.5	≤ 1.5	490	RPM	14974	7487	4991	3744	2995	2496	1872
						(392-588)	Fz	0.0003	0.0007	0.0014	0.0018	0.0023	0.0024	0.0025
							Feed (IPM)	18.0	21.0	28.0	27.0	27.6	24.0	18.7
			 Slot	1	≤ 1	390	RPM	11918	5959	3973	2980	2384	1986	1490
						(312-468)	Fz	0.0003	0.0007	0.0014	0.0018	0.0023	0.0024	0.0025
							Feed (IPM)	14.3	16.7	22.2	21.5	21.9	19.1	14.9

continued on next page

Series Z1, Z1B, Z16CR Fractional		Hardness BRINELL			Vc (SFM)	Diameter (D ₁) (inch)								
			Ae x D ₁	Ap x D ₁		1/8	1/4	3/8	1/2	5/8	3/4	1		
M	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275		≤ 0.5	≤ 1.5	340	RPM	10390	5195	3463	2598	2078	1732	1299
						(272-408)	Fz	0.0002	0.0006	0.0011	0.0014	0.0018	0.0019	0.0020
							Feed (IPM)	8.3	12.5	15.2	14.5	15.0	13.2	10.4
				1	≤ 1	270	RPM	8251	4126	2750	2063	1650	1375	1031
						(216-324)	Fz	0.0002	0.0006	0.0011	0.0014	0.0018	0.0019	0.0020
							Feed (IPM)	6.6	9.9	12.1	11.6	11.9	10.5	8.3
M	STAINLESS STEELS (PH) 13-8 PH, 15-5PH, 17-4 PH, Custom 450	< 325		≤ 0.5	≤ 1.5	310	RPM	9474	4737	3158	2368	1895	1579	1184
						(248-372)	Fz	0.0002	0.0006	0.0011	0.0014	0.0018	0.0019	0.0020
							Feed (IPM)	7.6	11.4	13.9	13.3	13.6	12.0	9.5
				1	≤ 1	250	RPM	7640	3820	2547	1910	1528	1273	955
						(200-300)	Fz	0.0002	0.0006	0.0011	0.0014	0.0018	0.0019	0.0020
							Feed (IPM)	6.1	9.2	11.2	10.7	11.0	9.7	7.6
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoly 800, Monel 400	≤ 300		≤ 0.5	≤ 1.5	80	RPM	2445	1222	815	611	489	407	306
						(64-96)	Fz	0.0002	0.0004	0.0008	0.0010	0.0013	0.0014	0.0015
							Feed (IPM)	2.2	2.0	2.6	2.4	2.5	2.3	1.8
				1	≤ 1	65	RPM	1986	993	662	497	397	331	248
						(52-78)	Fz	0.0002	0.0004	0.0008	0.0010	0.0013	0.0014	0.0015
							Feed (IPM)	1.6	1.6	2.1	2.0	2.1	1.9	1.5
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, 750X, Incoly 925, Waspaloy, Hastelloy, Rene	> 300		≤ 0.5	≤ 1.5	62	RPM	1895	947	632	474	379	316	237
						(50-74)	Fz	0.0001	0.0003	0.0005	0.0007	0.0008	0.0009	0.0010
							Feed (IPM)	0.8	1.1	1.3	1.3	1.2	1.1	0.9
				1	≤ 1	50	RPM	1497	749	499	374	299	250	187
						(40-60)	Fz	0.0001	0.0003	0.0005	0.0007	0.0008	0.0009	0.0010
							Feed (IPM)	0.6	0.9	1.0	1.0	1.0	0.9	0.7
S	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350		≤ 0.5	≤ 1.5	215	RPM	6570	3285	2190	1643	1314	1095	821
						(172-258)	Fz	0.0002	0.0005	0.0010	0.0013	0.0016	0.0017	0.0018
							Feed (IPM)	5.3	6.6	8.8	8.5	8.4	7.4	5.9
				1	≤ 1	170	RPM	5195	2598	1732	1299	1039	866	649
						(136-204)	Fz	0.0002	0.0005	0.0010	0.0013	0.0016	0.0017	0.0018
							Feed (IPM)	4.2	5.2	6.9	6.8	6.6	5.9	4.7
S	TITANIUM ALLOYS (DIFFICULT) Ti10Al2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	> 350 ≤ 440		≤ 0.5	≤ 1.5	75	RPM	2292	1146	764	573	458	382	287
						(60-90)	Fz	0.0002	0.0005	0.0010	0.0013	0.0016	0.0017	0.0018
							Feed (IPM)	1.8	2.3	3.1	3.0	2.9	2.6	2.1
				1	≤ 1	60	RPM	1834	917	611	458	367	306	229
						(48-72)	Fz	0.0002	0.0005	0.0010	0.0013	0.0016	0.0017	0.0018
							Feed (IPM)	1.5	1.8	2.4	2.4	2.3	2.1	1.7


rpm = sfm x 3.82 / D₁

ipm = (inch / flute) x 4 x rpm

reduce speed and feed for materials harder than listed


reduce feed and Ae when finish milling (.02 x D₁ maximum)

refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)



Series Z1M, Z1MB Metric		Hardness BRINELL			Vc (m/min)	Diameter (D ₁) (mm)									
			Ae x D ₁	Ap x D ₁		3	6	8	10	12	16	20	25		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275	 Profile	≤ 0.5	≤ 1.5	169	RPM	17934	8967	6725	5380	4484	3363	2690	2152
						(135-203)	Fz	0.009	0.024	0.041	0.051	0.060	0.079	0.086	0.088
						Feed (mm/min)	654	861	1091	1090	1076	1067	927	753	
			 Slot	1	≤ 1	134	RPM	14218	7109	5332	4265	3555	2666	2133	1706
						(107-161)	Fz	0.009	0.024	0.041	0.051	0.060	0.079	0.086	0.088
						Feed (mm/min)	519	682	865	864	853	846	735	597	
P	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375	 Profile	≤ 0.5	≤ 1.5	96	RPM	10179	5089	3817	3054	2545	1909	1527	1221
						(77-115)	Fz	0.007	0.019	0.030	0.037	0.046	0.061	0.067	0.068
						Feed (mm/min)	274	391	456	456	464	469	407	330	
			 Slot	1	≤ 1	76	RPM	8078	4039	3029	2424	2020	1515	1212	969
						(61-91)	Fz	0.007	0.019	0.030	0.037	0.046	0.061	0.067	0.068
						Feed (mm/min)	217	310	362	362	368	372	323	262	
P	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375	 Profile	≤ 0.5	≤ 1.5	56	RPM	5978	2989	2242	1793	1495	1121	897	717
						(45-68)	Fz	0.005	0.012	0.021	0.027	0.031	0.041	0.045	0.045
						Feed (mm/min)	115	143	191	191	186	184	163	129	
			 Slot	1	≤ 1	44	RPM	4686	2343	1757	1406	1171	879	703	562
						(35-53)	Fz	0.005	0.012	0.021	0.027	0.031	0.041	0.045	0.045
						Feed (mm/min)	90	112	150	150	146	144	127	101	
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220	 Profile	≤ 0.5	≤ 1.5	136	RPM	14380	7190	5392	4314	3595	2696	2157	1726
						(109-163)	Fz	0.008	0.024	0.038	0.048	0.058	0.077	0.083	0.085
						Feed (mm/min)	483	690	828	828	828	828	713	587	
			 Slot	1	≤ 1	108	RPM	11471	5736	4302	3441	2868	2151	1721	1377
						(87-130)	Fz	0.008	0.024	0.038	0.048	0.058	0.077	0.083	0.085
						Feed (mm/min)	385	551	661	661	661	661	569	468	
K	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	> 220 ≤ 260	 Profile	≤ 0.5	≤ 1.5	104	RPM	10987	5493	4120	3296	2747	2060	1648	1318
						(83-124)	Fz	0.007	0.017	0.030	0.037	0.043	0.059	0.064	0.063
						Feed (mm/min)	316	369	492	492	475	485	422	330	
			 Slot	1	≤ 1	82	RPM	8725	4362	3272	2617	2181	1636	1309	1047
						(66-99)	Fz	0.007	0.017	0.030	0.037	0.043	0.059	0.064	0.063
						Feed (mm/min)	251	293	391	391	377	385	335	262	
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	≤ 275	 Profile	≤ 0.5	≤ 1.5	149	RPM	15834	7917	5938	4750	3958	2969	2375	1900
						(119-179)	Fz	0.007	0.017	0.030	0.037	0.043	0.059	0.064	0.063
						Feed (mm/min)	456	532	709	709	684	699	608	475	
			 Slot	1	≤ 1	119	RPM	12602	6301	4726	3781	3151	2363	1890	1512
						(95-143)	Fz	0.007	0.017	0.030	0.037	0.043	0.059	0.064	0.063
						Feed (mm/min)	363	423	565	565	544	557	484	378	

continued on next page

Series Z1M, Z1MB Metric		Hardness BRINELL			Vc (m/min)	Diameter (D ₁) (mm)									
			Ae x D ₁	Ap x D ₁		3	6	8	10	12	16	20	25		
M	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275		≤ 0.5	≤ 1.5	104	RPM	10987	5493	4120	3296	2747	2060	1648	1318
						(83-124)	Fz	0.005	0.014	0.023	0.029	0.034	0.046	0.051	0.050
							Feed (mm/min)	211	316	387	387	369	380	334	264
				1	≤ 1	82	RPM	8725	4362	3272	2617	2181	1636	1309	1047
						(66-99)	Fz	0.005	0.014	0.023	0.029	0.034	0.046	0.051	0.050
							Feed (mm/min)	168	251	307	307	293	302	265	209
M	STAINLESS STEELS (PH) 13-8 PH, 15-5PH, 17-4 PH, Custom 450	< 325		≤ 0.5	≤ 1.5	94	RPM	10017	5009	3756	3005	2504	1878	1503	1202
						(76-113)	Fz	0.005	0.014	0.023	0.029	0.034	0.046	0.051	0.050
							Feed (mm/min)	192	288	353	353	337	346	305	240
				1	≤ 1	76	RPM	8078	4039	3029	2424	2020	1515	1212	969
						(61-91)	Fz	0.005	0.014	0.023	0.029	0.034	0.046	0.051	0.050
							Feed (mm/min)	155	233	284	284	271	279	246	194
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoly 800, Monel 400	≤ 300		≤ 0.5	≤ 1.5	24	RPM	2585	1293	969	776	646	485	388	310
						(20-29)	Fz	0.005	0.010	0.017	0.021	0.024	0.033	0.037	0.038
							Feed (mm/min)	55	50	66	53	62	65	58	47
				1	≤ 1	20	RPM	2100	1050	788	630	525	394	315	252
						(16-24)	Fz	0.005	0.010	0.017	0.021	0.024	0.033	0.037	0.038
							Feed (mm/min)	40	40	54	54	50	52	47	38
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, 750X, Incoly 925, Waspaloy, Hastelloy, Rene	> 300		≤ 0.5	≤ 1.5	19	RPM	2003	1002	751	601	501	376	301	240
						(15-23)	Fz	0.002	0.007	0.011	0.013	0.017	0.020	0.024	0.025
							Feed (mm/min)	19	29	32	32	34	31	29	24
				1	≤ 1	15	RPM	1583	792	594	475	396	297	238	190
						(12-18)	Fz	0.002	0.007	0.011	0.013	0.017	0.020	0.024	0.025
							Feed (mm/min)	15	23	25	25	27	24	23	19
S	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350		≤ 0.5	≤ 1.5	66	RPM	6947	3474	2605	2084	1737	1303	1042	834
						(52-79)	Fz	0.005	0.012	0.021	0.027	0.031	0.041	0.045	0.045
							Feed (mm/min)	133	167	222	222	217	213	189	150
				1	≤ 1	52	RPM	5493	2747	2060	1648	1373	1030	824	659
						(41-62)	Fz	0.005	0.012	0.021	0.027	0.031	0.041	0.045	0.045
							Feed (mm/min)	105	132	176	176	171	169	149	119
S	TITANIUM ALLOYS (DIFFICULT) Ti10Al2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	> 350 ≤ 440		≤ 0.5	≤ 1.5	23	RPM	2424	1212	909	727	606	454	364	291
						(18-27)	Fz	0.005	0.012	0.021	0.027	0.031	0.041	0.045	0.045
							Feed (mm/min)	47	58	78	78	76	74	66	52
				1	≤ 1	18	RPM	1939	969	727	582	485	364	291	233
						(15-22)	Fz	0.005	0.012	0.021	0.027	0.031	0.041	0.045	0.045
							Feed (mm/min)	37	47	62	62	60	60	53	42


rpm = (1000 x m/min) / (3.14 x D₁)

mm / min = (mm / flute) x 4 x rpm

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x D₁ maximum)

refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)

Series ZH1CR Fractional		Hardness BRINELL			Vc (SFM)	Diameter (D ₁) (inch)						
			Ae x D ₁	Ap x D ₁		1/4	3/8	1/2	3/4	1		
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoly 800, Monel 400	≤ 300	 Profile	≤ 0.5	≤ 1.5	85	RPM	1299	866	649	433	325
						(68-102)	Fz	0.0007	0.0012	0.0017	0.0020	0.0023
							Feed (IPM)	3.6	4.2	4.4	3.5	3.0
		 Slot	1	≤ 1	70	RPM	1070	713	535	357	267	
					(56-84)	Fz	0.0007	0.0012	0.0017	0.0020	0.0023	
						Feed (IPM)	3.0	3.4	3.6	2.9	2.5	
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, 750X, Incoly 925, Waspaloy, Hastelloy, Rene	> 300	 Profile	≤ 0.5	≤ 1.5	70	RPM	1070	713	535	357	267
						(56-84)	Fz	0.0005	0.0009	0.0012	0.0014	0.0016
							Feed (IPM)	2.1	2.6	2.6	2.0	1.7
		 Slot	1	≤ 1	55	RPM	840	560	420	280	210	
					(44-66)	Fz	0.0005	0.0009	0.0012	0.0014	0.0016	
						Feed (IPM)	1.7	2.0	2.0	1.6	1.3	


rpm = sfm x 3.82 / D₁

ipm = (inch / flute) x 4 x rpm

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x D₁ maximum)

refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)

Series ZH1MCR Metric		Hardness BRINELL			Vc (m/min)	Diameter (D ₁) (mm)						
			Ae x D ₁	Ap x D ₁		6	10	12	20	25		
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoly 800, Monel 400	≤ 300	 Profile	≤ 0.5	≤ 1.5	26	RPM	1373	824	687	412	330
						(21-31)	Fz	0.017	0.032	0.041	0.053	0.058
						Feed (mm/min)	93	105	113	87	76	
			 Slot	1	≤ 1	21	RPM	1131	679	565	339	271
						(17-26)	Fz	0.017	0.032	0.041	0.053	0.058
						Feed (mm/min)	77	87	93	72	63	
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, 750X, Incoly 925, Waspaloy, Hastelloy, Rene	> 300	 Profile	≤ 0.5	≤ 1.5	21	RPM	1131	679	565	339	271
						(17-26)	Fz	0.012	0.024	0.029	0.037	0.040
						Feed (mm/min)	54	65	66	50	43	
			 Slot	1	≤ 1	17	RPM	889	533	444	267	213
						(13-20)	Fz	0.012	0.024	0.029	0.037	0.040
						Feed (mm/min)	43	51	52	39	34	


rpm = (1000 x m/min) / (3.14 x D₁)

mm / min = (mm / flute) x 4 x rpm


reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x D₁ maximum)


refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)

Series ZD1CR Fractional		Hardness BRINELL			Vc (SFM)	Diameter (D ₁) (inch)							
			Ae x D ₁	Ap x D ₁		1/8	1/4	3/8	1/2	5/8	3/4		
P	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375	Profile		405	RPM	12377	6188	4126	3094	2475	2063	
				≤ 0.4	≤ 1	(324-486)	Fz	0.0005	0.0012	0.0023	0.0030	0.0039	0.0042
							Feed (IPM)	24.8	29.7	38.0	37.1	38.6	34.7
			Slot			320	RPM	9779	4890	3260	2445	1956	1630
				1	≤ 0.4	(256-384)	Fz	0.0005	0.0012	0.0023	0.0030	0.0039	0.0042
							Feed (IPM)	19.6	23.5	30.0	29.3	30.5	27.4
P	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	> 375 ≤ 475	Profile		210	RPM	6418	3209	2139	1604	1284	1070	
				≤ 0.4	≤ 1	(168-252)	Fz	0.0004	0.0010	0.0019	0.0025	0.0032	0.0035
							Feed (IPM)	10.3	12.8	16.3	16.0	16.4	15.0
			Slot			170	RPM	5195	2598	1732	1299	1039	866
				1	≤ 0.4	(136-204)	Fz	0.0004	0.0010	0.0019	0.0025	0.0032	0.0035
							Feed (IPM)	8.3	10.4	13.2	13.0	13.3	12.1
P	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	> 475 ≤ 655	Profile		90	RPM	2750	1375	917	688	550	458	
				≤ 0.4	≤ 1	(72-108)	Fz	0.0002	0.0005	0.0010	0.0013	0.0017	0.0018
							Feed (IPM)	2.2	2.8	3.7	3.6	3.7	3.3
			Slot			70	RPM	2139	1070	713	535	428	357
				1	≤ 0.4	(56-84)	Fz	0.0002	0.0005	0.0010	0.0013	0.0017	0.0018
							Feed (IPM)	1.7	2.1	2.9	2.8	2.9	2.6

rpm = sfm x 3.82 / D₁
 ipm = (inch / flute) x 4 x rpm
 reduce speed and feed for materials harder than listed
 reduce feed and Ae when finish milling (.02 x D₁ maximum)
 refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)

Series ZD1MCR Metric	Hardness BRINELL			Vc (m/min)	Diameter (D ₁) (mm)								
		Ae x D ₁	Ap x D ₁		3	6	8	10	12	16	20		
P	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2		≤ 0.4	≤ 1	123	RPM	13087	6544	4908	3926	3272	2454	1963
					(99-148)	Fz	0.012	0.029	0.049	0.061	0.072	0.083	0.112
					Feed (mm/min)	628	754	963	963	942	817	879	
			1	≤ 0.4	98	RPM	10340	5170	3878	3102	2585	1939	1551
					(78-117)	Fz	0.012	0.029	0.049	0.061	0.072	0.083	0.112
					Feed (mm/min)	496	596	761	761	744	645	695	
P	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2		≤ 0.4	≤ 1	64	RPM	6786	3393	2545	2036	1696	1272	1018
					(51-77)	Fz	0.010	0.024	0.041	0.051	0.060	0.068	0.093
					Feed (mm/min)	261	326	413	413	407	347	380	
			1	≤ 0.4	52	RPM	5493	2747	2060	1648	1373	1030	824
					(41-62)	Fz	0.010	0.024	0.041	0.051	0.060	0.068	0.093
					Feed (mm/min)	211	264	334	334	330	281	308	
P	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2		≤ 0.4	≤ 1	27	RPM	2908	1454	1091	872	727	545	436
					(22-33)	Fz	0.005	0.012	0.021	0.027	0.031	0.036	0.048
					Feed (mm/min)	56	70	93	93	91	79	84	
			1	≤ 0.4	21	RPM	2262	1131	848	679	565	424	339
					(17-26)	Fz	0.005	0.012	0.021	0.027	0.031	0.036	0.048
					Feed (mm/min)	43	54	72	72	71	62	65	

rpm = (1000 x m/min) / (3.14 x D₁)
 mm / min = (mm / flute) x 4 x rpm
 maximum Slotting Ap for Z1PLC / Z1PLB is .25 x D₁
 maximum Profile Ae for Z1PLC / Z1PLB is .2 x D₁
 reduce speed and feed for materials harder than listed
 reduce feed and Ae when finish milling (.02 x D₁ maximum)
 refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)




Series 7, 7B Fractional		Hardness BRINELL		Vc (SFM)		Diameter (D ₁) (inch)								
						1/8	1/4	3/8	1/2	5/8	3/4	1		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275		≤ 0.02	≤ 2	480	RPM	14669	7334	4890	3667	2934	2445	1834
						(384-576)	Fz	0.0004	0.0010	0.0019	0.0025	0.0032	0.0033	0.0035
						Feed (IPM)	23.5	29.3	37.2	36.7	37.6	32.3	25.7	
P	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375		≤ 0.02	≤ 2	275	RPM	8404	4202	2801	2101	1681	1401	1051
						(220-330)	Fz	0.0003	0.0007	0.0014	0.0018	0.0023	0.0024	0.0026
						Feed (IPM)	10.1	11.8	15.7	15.1	15.5	13.4	10.9	
P	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375		≤ 0.02	≤ 2	230	RPM	7029	3514	2343	1757	1406	1171	879
						(184-276)	Fz	0.0002	0.0006	0.0012	0.0016	0.0020	0.0021	0.0022
						Feed (IPM)	5.6	8.4	11.2	11.2	11.2	9.8	7.7	
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220		≤ 0.02	≤ 2	605	RPM	18489	9244	6163	4622	3698	3081	2311
						(484-726)	Fz	0.0006	0.0015	0.0028	0.0037	0.0046	0.0047	0.0051
						Feed (IPM)	44.4	55.5	69.0	68.4	68.0	57.9	47.1	
K	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	> 220 ≤ 260		≤ 0.02	≤ 2	465	RPM	14210	7105	4737	3553	2842	2368	1776
						(372-558)	Fz	0.0004	0.0011	0.0021	0.0028	0.0034	0.0036	0.0039
						Feed (IPM)	22.7	31.3	39.8	39.8	38.7	34.1	27.7	
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	≤ 275		≤ 0.02	≤ 2	420	RPM	12835	6418	4278	3209	2567	2139	1604
						(336-504)	Fz	0.0004	0.0010	0.0019	0.0025	0.0032	0.0033	0.0035
						Feed (IPM)	20.5	25.7	32.5	32.1	32.9	28.2	22.5	
M	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275		≤ 0.02	≤ 2	290	RPM	8862	4431	2954	2216	1772	1477	1108
						(232-348)	Fz	0.0003	0.0007	0.0014	0.0018	0.0023	0.0024	0.0026
						Feed (IPM)	10.6	12.4	16.5	16.0	16.3	14.2	11.5	
M	STAINLESS STEELS (PH) 13-8 PH, 15-5PH, 17-4 PH, Custom 450	< 325		≤ 0.02	≤ 2	265	RPM	8098	4049	2699	2025	1620	1350	1012
						(212-318)	Fz	0.0003	0.0007	0.0014	0.0018	0.0023	0.0024	0.0026
						Feed (IPM)	9.7	11.3	15.1	14.6	14.9	13.0	10.5	
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoly 800, Monel 400	≤ 300		≤ 0.02	≤ 2	80	RPM	2445	1222	815	611	489	407	306
						(64-96)	Fz	0.0003	0.0007	0.0014	0.0018	0.0023	0.0024	0.0026
						Feed (IPM)	2.9	3.4	4.6	4.4	4.5	3.9	3.2	
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, 750X, Incoly 925, Waspaloy, Hastelloy, Rene	> 300		≤ 0.02	≤ 2	65	RPM	1986	993	662	497	397	331	248
						(52-78)	Fz	0.0002	0.0006	0.0010	0.0014	0.0017	0.0018	0.0019
						Feed (IPM)	1.6	2.4	2.6	2.8	2.7	2.4	1.9	
S	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350		≤ 0.02	≤ 2	300	RPM	9168	4584	3056	2292	1834	1528	1146
						(240-360)	Fz	0.0004	0.0011	0.0021	0.0028	0.0034	0.0036	0.0039
						Feed (IPM)	14.7	20.2	25.7	25.7	24.9	22.0	17.9	
S	TITANIUM ALLOYS (DIFFICULT) Ti10Al2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	> 350 ≤ 440		≤ 0.02	≤ 2	105	RPM	3209	1604	1070	802	642	535	401
						(84-126)	Fz	0.0004	0.0011	0.0021	0.0028	0.0034	0.0036	0.0039
						Feed (IPM)	5.1	7.1	9.0	9.0	8.7	7.7	6.3	

rpm = sfm x 3.82 / D₁

ipm = (inch / flute) x 4 x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)




	Series 7M, 7MB Metric	Hardness BRINELL				Vc (m/min)	Diameter (D ₁) (mm)								
				Ae x D ₁	Ap x D ₁		3	6	8	10	12	16	20	25	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275		≤ 0.02	≤ 2	146	RPM	15511	7755	5816	4653	3878	2908	2327	1861
						(117-176)	Fz	0.0166	0.043	0.075	0.093	0.110	0.125	0.147	0.160
						Feed (mm/min)	1030	1334	1745	1731	1706	1454	1368	1191	
P	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375		≤ 0.02	≤ 2	84	RPM	8886	4443	3332	2666	2222	1666	1333	1066
						(67-101)	Fz	0.0122	0.034	0.051	0.069	0.082	0.091	0.109	0.120
						Feed (mm/min)	434	604	680	736	729	606	581	512	
P	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375		≤ 0.02	≤ 2	70	RPM	7432	3716	2787	2230	1858	1394	1115	892
						(56-84)	Fz	0.0070	0.019	0.040	0.043	0.048	0.057	0.064	0.070
						Feed (mm/min)	208	282	446	384	357	318	285	250	
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220		≤ 0.02	≤ 2	184	RPM	19550	9775	7331	5865	4887	3666	2932	2346
						(148-221)	Fz	0.0132	0.036	0.052	0.075	0.089	0.099	0.117	0.130
						Feed (mm/min)	10322	1408	1525	1759	1740	1452	1372	1220	
K	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	> 220 ≤ 260		≤ 0.02	≤ 2	142	RPM	15026	7513	5635	4508	3756	2817	2254	1803
						(113-170)	Fz	0.0132	0.036	0.052	0.075	0.089	0.099	0.117	0.130
						Feed (mm/min)	793	1082	1172	1352	1337	1116	1055	938	
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	≤ 275		≤ 0.02	≤ 2	128	RPM	13572	6786	5089	4072	3393	2545	2036	1629
						(102-154)	Fz	0.0086	0.024	0.040	0.048	0.058	0.065	0.077	0.087
						Feed (mm/min)	467	651	814	782	787	662	627	567	
M	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275		≤ 0.02	≤ 2	88	RPM	9371	4686	3514	2811	2343	1757	1406	1125
						(71-106)	Fz	0.0082	0.022	0.037	0.045	0.048	0.060	0.072	0.078
						Feed (mm/min)	307	412	520	506	450	422	405	351	
M	STAINLESS STEELS (PH) 13-8 PH, 15-5PH, 17-4 PH, Custom 450	< 325		≤ 0.02	≤ 2	81	RPM	8563	4282	3211	2569	2141	1606	1284	1028
						(65-97)	Fz	0.0070	0.019	0.029	0.040	0.048	0.055	0.064	0.070
						Feed (mm/min)	240	325	372	411	411	353	329	288	
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoly 800, Monel 400	≤ 300		≤ 0.02	≤ 2	24	RPM	2585	1293	969	776	646	485	388	310
						(20-29)	Fz	0.0072	0.019	0.029	0.037	0.046	0.053	0.061	0.085
						Feed (mm/min)	74	98	112	90	119	103	95	105	
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, 750X, Incoly 925, Waspaloy, Hastelloy, Rene	> 300		≤ 0.02	≤ 2	20	RPM	2100	1050	788	630	525	394	315	252
						(16-24)	Fz	0.0075	0.016	0.021	0.030	0.038	0.044	0.051	0.070
						Feed (mm/min)	63	67	66	76	80	69	64	71	
S	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350		≤ 0.02	≤ 2	91	RPM	9694	4847	3635	2908	2424	1818	1454	1163
						(73-110)	Fz	0.0091	0.024	0.004	0.005	0.060	0.070	0.080	0.088
						Feed (mm/min)	353	465	51	59	582	509	465	409	
S	TITANIUM ALLOYS (DIFFICULT) Ti10Al2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	> 350 ≤ 440		≤ 0.02	≤ 2	32	RPM	3393	1696	1272	1018	848	636	509	407
						(26-38)	Fz	0.0082	0.019	0.029	0.037	0.046	0.053	0.061	0.085
						Feed (mm/min)	111	129	148	151	156	135	124	138	

rpm = (1000 x m/min) / (3.14 x D₁)


mm / min = (mm / flute) x 4 x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)

Series 55, 55CR Fractional	Hardness BRINELL				Vc (SFM)	Diameter (D ₁) (inch)							
		Ae x D ₁	Ap x D ₁	1/8		1/4	3/8	1/2	5/8	3/4	1		
P CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275		≤ 0.25	≤ 1.5	385	RPM	11766	5883	3922	2941	2353	1961	1471
					(308-462)	Fz	0.0004	0.0009	0.0017	0.0023	0.0029	0.0028	0.0032
					Feed (IPM)	20.6	26.5	33.3	33.8	34.1	27.5	23.5	
			≤ 0.05	≤ 2	630	RPM	19253	9626	6418	4813	3851	3209	2407
					(504-756)	Fz	0.0007	0.0018	0.0034	0.0046	0.0057	0.0055	0.0064
					Feed (IPM)	67.4	86.6	109.1	110.7	109.7	88.2	77.0	
P ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375		≤ 0.25	≤ 1.5	325	RPM	9932	4966	3311	2483	1986	1655	1242
					(260-390)	Fz	0.0003	0.0007	0.0013	0.0017	0.0022	0.0021	0.0024
					Feed (IPM)	12.9	17.4	21.5	21.1	21.9	17.4	14.9	
			≤ 0.05	≤ 2	530	RPM	16197	8098	5399	4049	3239	2699	2025
					(424-636)	Fz	0.0005	0.0014	0.0026	0.0034	0.0043	0.0041	0.0048
					Feed (IPM)	42.1	56.7	70.2	68.8	69.6	55.3	48.6	
P TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375		≤ 0.25	≤ 1.5	175	RPM	5348	2674	1783	1337	1070	891	669
					(140-210)	Fz	0.0002	0.0005	0.0010	0.0013	0.0016	0.0017	0.0018
					Feed (IPM)	5.3	6.7	8.9	8.7	8.6	7.6	6.0	
			≤ 0.05	≤ 2	290	RPM	8862	4431	2954	2216	1772	1477	1108
					(232-348)	Fz	0.0004	0.0010	0.0019	0.0025	0.0032	0.0033	0.0035
					Feed (IPM)	17.7	22.2	28.1	27.7	28.4	24.4	19.4	
K CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220		≤ 0.25	≤ 1.5	470	RPM	14363	7182	4788	3591	2873	2394	1795
					(376-564)	Fz	0.0004	0.0009	0.0017	0.0023	0.0029	0.0030	0.0032
					Feed (IPM)	25.1	32.3	40.7	41.3	41.7	35.9	28.7	
			≤ 0.05	≤ 2	705	RPM	21545	10772	7182	5386	4309	3591	2693
					(564-846)	Fz	0.0007	0.0018	0.0034	0.0046	0.0057	0.0059	0.0064
					Feed (IPM)	75.4	97.0	122.1	123.9	122.8	105.9	86.2	
K CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	> 220 ≤ 260		≤ 0.25	≤ 1.5	360	RPM	11002	5501	3667	2750	2200	1834	1375
					(288-432)	Fz	0.0003	0.0007	0.0013	0.0017	0.0022	0.0023	0.0024
					Feed (IPM)	14.3	19.3	23.8	23.4	24.2	21.1	16.5	
			≤ 0.05	≤ 2	540	RPM	16502	8251	5501	4126	3300	2750	2063
					(432-648)	Fz	0.0005	0.0014	0.0026	0.0034	0.0043	0.0044	0.0048
					Feed (IPM)	42.9	57.8	71.5	70.1	71.0	60.5	49.5	
M STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	≤ 275		≤ 0.25	≤ 1.5	370	RPM	11307	5654	3769	2827	2261	1885	1413
					(296-444)	Fz	0.0003	0.0007	0.0013	0.0017	0.0022	0.0023	0.0024
					Feed (IPM)	14.7	19.8	24.5	24.0	24.9	21.7	17.0	
			≤ 0.05	≤ 2	560	RPM	17114	8557	5705	4278	3423	2852	2139
					(448-672)	Fz	0.0005	0.0014	0.0026	0.0034	0.0043	0.0044	0.0048
					Feed (IPM)	44.5	59.9	74.2	72.7	73.6	62.7	51.3	

continued on next page

Series 55, 55CR Fractional	Hardness BRINELL				Vc (SFM)	Diameter (D ₁) (inch)							
		Ae x D ₁	Ap x D ₁			1/8	1/4	3/8	1/2	5/8	3/4	1	
M	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L		≤ 0.25	≤ 1.5	255	RPM	7793	3896	2598	1948	1559	1299	974
					(204-306)	Fz	0.0002	0.0006	0.0012	0.0016	0.0020	0.0021	0.0023
						Feed (IPM)	9.4	11.7	15.6	15.6	15.6	13.6	11.2
			≤ 0.05	≤ 2	385	RPM	11766	5883	3922	2941	2353	1961	1471
					(308-462)	Fz	0.0005	0.0013	0.0024	0.0032	0.0040	0.0041	0.0045
						Feed (IPM)	28.2	38.2	47.1	47.1	47.1	40.2	33.1
M	STAINLESS STEELS (PH) 13-8 PH, 15-5PH, 17-4 PH, Custom 450		≤ 0.25	≤ 1.5	235	RPM	7182	3591	2394	1795	1436	1197	898
					(188-282)	Fz	0.0002	0.0006	0.0010	0.0014	0.0017	0.0018	0.0019
						Feed (IPM)	7.5	10.8	12.0	12.6	12.2	10.8	8.5
			≤ 0.05	≤ 2	355	RPM	10849	5424	3616	2712	2170	1808	1356
					(284-426)	Fz	0.0004	0.0011	0.0021	0.0028	0.0034	0.0036	0.0039
						Feed (IPM)	22.2	29.8	38.0	38.0	36.9	32.5	26.4
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoly 800, Monel 400		≤ 0.25	≤ 1.5	70	RPM	2139	1070	713	535	428	357	267
					(56-84)	Fz	0.0002	0.0006	0.0010	0.0014	0.0017	0.0018	0.0019
						Feed (IPM)	2.2	3.2	3.6	3.7	3.6	3.2	2.5
			≤ 0.05	≤ 2	107	RPM	3270	1635	1090	817	654	545	409
					(86-128)	Fz	0.0004	0.0011	0.0021	0.0028	0.0034	0.0036	0.0039
						Feed (IPM)	6.7	9.0	11.4	11.4	11.1	9.8	8.0
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, 750X, Incoly 925, Waspaloy, Hastelloy, Rene		≤ 0.25	≤ 1.5	55	RPM	1681	840	560	420	336	280	210
					(44-66)	Fz	0.0002	0.0004	0.0008	0.0010	0.0013	0.0014	0.0015
						Feed (IPM)	1.3	1.7	2.2	2.1	2.2	2.0	1.6
			≤ 0.05	≤ 2	85	RPM	2598	1299	866	649	520	433	325
					(68-102)	Fz	0.0003	0.0008	0.0015	0.0021	0.0026	0.0027	0.0029
						Feed (IPM)	4.0	5.2	6.5	6.8	6.8	5.8	4.7
S	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si		≤ 0.25	≤ 1.5	235	RPM	7182	3591	2394	1795	1436	1197	898
					(188-282)	Fz	0.0002	0.0006	0.0012	0.0016	0.0020	0.0021	0.0023
						Feed (IPM)	7.2	10.8	14.4	14.4	14.4	12.6	10.3
			≤ 0.05	≤ 2	390	RPM	11918	5959	3973	2980	2384	1986	1490
					(312-468)	Fz	0.0005	0.0013	0.0024	0.0032	0.0040	0.0041	0.0045
						Feed (IPM)	29.8	38.7	47.7	47.7	47.7	40.7	33.5
S	TITANIUM ALLOYS (DIFFICULT) Ti10Al2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al		≤ 0.25	≤ 1.5	85	RPM	2598	1299	866	649	520	433	325
					(68-102)	Fz	0.0002	0.0006	0.0012	0.0016	0.0020	0.0021	0.0023
						Feed (IPM)	2.6	3.9	5.2	5.2	5.2	4.5	3.7
			≤ 0.05	≤ 2	140	RPM	4278	2139	1426	1070	856	713	535
					(112-168)	Fz	0.0005	0.0013	0.0024	0.0032	0.0040	0.0042	0.0045
						Feed (IPM)	10.7	13.9	17.1	17.1	17.1	15.0	12.0

rpm = sfm x 3.82 / D₁

ipm = (inch / flute) x 5 x rpm


HSM (high speed machining)

reduce speed and feed for materials harder than listed


reduce feed and Ae when finish milling (.02 x D₁ maximum)

reduce Ap to 1 x D₁ (maximum) when profile milling with long or extra long flute length tools

refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)

Series 55M Metric	Hardness BRINELL			Vc (m/min)	Diameter (D ₁) (mm)							
		Ae x D ₁	Ap x D ₁		6	8	10	12	16	20		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536		≤ 0.25	≤ 1.5	117	RPM	6220	4665	3732	3110	2333	1866
					(94-141)	Fz	0.022	0.036	0.061	0.070	0.072	0.085
						Feed (mm/min)	672	846	1145	1082	836	796
			≤ 0.05	≤ 2	192	RPM	10179	7634	6107	5089	3817	3054
					(154-230)	Fz	0.043	0.073	0.123	0.137	0.141	0.154
						Feed (mm/min)	2198	2769	3746	3481	2687	2345
P	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100		≤ 0.25	≤ 1.5	99	RPM	5251	3938	3151	2626	1969	1575
					(79-119)	Fz	0.017	0.028	0.045	0.053	0.054	0.064
						Feed (mm/min)	441	546	571	693	529	504
			≤ 0.05	≤ 2	162	RPM	8563	6422	5138	4282	3211	2569
					(129-194)	Fz	0.034	0.055	0.091	0.103	0.105	0.128
						Feed (mm/min)	1438	1781	2329	2209	1685	1644
P	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2		≤ 0.25	≤ 1.5	53	RPM	2827	2121	1696	1414	1060	848
					(43-64)	Fz	0.012	0.021	0.035	0.038	0.044	0.048
						Feed (mm/min)	170	226	294	271	231	204
			≤ 0.05	≤ 2	88	RPM	4686	3514	2811	2343	1757	1406
					(71-106)	Fz	0.024	0.041	0.067	0.077	0.084	0.093
						Feed (mm/min)	562	712	937	900	742	656
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile		≤ 0.25	≤ 1.5	143	RPM	7594	5695	4556	3797	2848	2278
					(115-172)	Fz	0.022	0.036	0.061	0.070	0.077	0.085
						Feed (mm/min)	820	1033	1397	1321	1093	972
			≤ 0.05	≤ 2	215	RPM	11391	8543	6834	5695	4271	3417
					(172-258)	Fz	0.043	0.073	0.123	0.137	0.151	0.171
						Feed (mm/min)	2460	3099	4192	3895	3226	2916
K	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile		≤ 0.25	≤ 1.5	110	RPM	5816	4362	3490	2908	2181	1745
					(88-132)	Fz	0.017	0.028	0.045	0.053	0.059	0.064
						Feed (mm/min)	489	605	791	768	642	558
			≤ 0.05	≤ 2	165	RPM	8725	6544	5235	4362	3272	2617
					(132-198)	Fz	0.034	0.055	0.091	0.103	0.113	0.128
						Feed (mm/min)	1466	1815	2373	2251	1843	1675
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F		≤ 0.25	≤ 1.5	113	RPM	5978	4484	3587	2989	2242	1793
					(90-135)	Fz	0.017	0.028	0.045	0.053	0.059	0.064
						Feed (mm/min)	502	622	813	789	660	574
			≤ 0.05	≤ 2	171	RPM	9048	6786	5429	4524	3393	2714
					(137-205)	Fz	0.034	0.055	0.091	0.103	0.113	0.128
						Feed (mm/min)	1520	1882	2461	2334	1911	1737

continued on next page

Series 55M Metric	Hardness BRINELL			Vc (m/min)	Diameter (D ₁) (mm)							
		Ae x D ₁	Ap x D ₁		6	8	10	12	16	20		
M	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	 Profile	≤ 0.25	≤ 1.5	78	RPM	4120	3090	2472	2060	1545	1236
					(62-93)	Fz	0.014	0.026	0.043	0.048	0.054	0.061
					Feed (mm/min)	297	396	527	494	415	379	
		 HSM	≤ 0.05	≤ 2	117	RPM	6220	4665	3732	3110	2333	1866
					(94-141)	Fz	0.031	0.051	0.085	0.096	0.105	0.120
					Feed (mm/min)	970	1194	1592	1493	1224	1120	
M	STAINLESS STEELS (PH) 13-8 PH, 15-5PH, 17-4 PH, Custom 450	 Profile	≤ 0.25	≤ 1.5	72	RPM	3797	2848	2278	1898	1424	1139
					(57-86)	Fz	0.014	0.021	0.037	0.041	0.046	0.051
					Feed (mm/min)	273	13260	425	387	328	289	
		 HSM	≤ 0.05	≤ 2	108	RPM	5736	4302	3441	2868	2151	1721
					(87-130)	Fz	0.026	0.045	0.075	0.082	0.092	0.104
					Feed (mm/min)	757	14850	1285	1170	991	895	
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoly 800, Monel 400	 Profile	≤ 0.25	≤ 1.5	21	RPM	1131	848	679	565	424	339
					(17-26)	Fz	0.014	0.021	0.037	0.041	0.046	0.051
					Feed (mm/min)	81	16530	196792	115	98	86	
		 HSM	≤ 0.05	≤ 2	33	RPM	1729	1297	1037	864	648	519
					(26-39)	Fz	0.026	0.045	0.075	0.082	0.092	0.104
					Feed (mm/min)	228	290	387	353	299	270	
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, 750X, Incoly 925, Waspaloy, Hastelloy, Rene	 Profile	≤ 0.25	≤ 1.5	17	RPM	889	666	533	444	333	267
					(13-20)	Fz	0.010	0.017	0.027	0.031	0.036	0.040
					Feed (mm/min)	43	57	71	69	60	53	
		 HSM	≤ 0.05	≤ 2	26	RPM	1373	1030	824	687	515	412
					(21-31)	Fz	0.019	0.032	0.056	0.062	0.069	0.077
					Feed (mm/min)	132	165	231	214	178	159	
S	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	 Profile	≤ 0.25	≤ 1.5	72	RPM	3797	2848	2278	1898	1424	1139
					(57-86)	Fz	0.014	0.026	0.043	0.048	0.054	0.061
					Feed (mm/min)	273	365	486	456	383	349	
		 HSM	≤ 0.05	≤ 2	119	RPM	6301	4726	3781	3151	2363	1890
					(95-143)	Fz	0.031	0.051	0.085	0.096	0.105	0.120
					Feed (mm/min)	983	1210	1613	1512	1240	1134	
S	TITANIUM ALLOYS (DIFFICULT) Ti10Al2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	 Profile	≤ 0.25	≤ 1.5	26	RPM	1373	1030	824	687	515	412
					(21-31)	Fz	0.014	0.026	0.043	0.048	0.054	0.061
					Feed (mm/min)	99	132	176	165	138	126	
		 HSM	≤ 0.05	≤ 2	43	RPM	2262	1696	1357	1131	848	679
					(34-51)	Fz	0.031	0.051	0.085	0.096	0.108	0.120
					Feed (mm/min)	353	434	579	543	456	407	

rpm = (1000 x m/min) / (3.14 x D₁)

mm / min = (mm / flute) x 5 x rpm


HSM (high speed machining)

reduce speed and feed for materials harder than listed


reduce feed and Ae when finish milling (.02 x D₁ maximum)

reduce Ap to 1 x D₁ (maximum) when profile milling with long or extra long flute length tools

refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)

Series 51, 51CR Fractional	Hardness BRINELL			Vc (SFM)	Diameter (D ₁) (inch)						
		Ae x D ₁	Ap x D ₁		1/4	3/8	1/2	5/8	3/4	1	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275	 Profile ≤ 0.1 ≤ 1	720	RPM	11002	7334	5501	4401	3667	2750
				(576-864)	Fz	0.0020	0.0035	0.0050	0.0055	0.0061	0.0071
					Feed (IPM)	132	154	165	145	134	117
		 HSM ≤ 0.05 ≤ 2	915	RPM	13981	9321	6991	5592	4660	3495	
			(732-1098)	Fz	0.0028	0.0053	0.0070	0.0077	0.0085	.0100	
				Feed (IPM)	235	296	294	258	238	21	
P	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375	 Profile ≤ 0.1 ≤ 1	490	RPM	7487	4991	3744	2995	2496	1872
				(392-588)	Fz	0.0015	0.0029	0.0038	0.0042	0.0046	0.0054
					Feed (IPM)	67	87	85	75	69	61
		 HSM ≤ 0.05 ≤ 2	620	RPM	9474	6316	4737	3789	3158	2368	
			(496-744)	Fz	0.0021	0.0039	0.0052	0.0057	0.0062	0.0073	
				Feed (IPM)	119	148	148	130	117	104	
P	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375	 Profile ≤ 0.1 ≤ 1	240	RPM	3667	2445	1834	1467	1222	917
				(192-288)	Fz	0.0012	0.0023	0.0030	0.0034	0.0037	0.0043
					Feed (IPM)	26	34	33	30	27	24
		 HSM ≤ 0.05 ≤ 2	305	RPM	4660	3107	2330	1864	1553	1165	
			(244-366)	Fz	0.0017	0.0032	0.0042	0.0046	0.0050	0.0059	
				Feed (IPM)	48	60	59	51	47	41	
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	≤ 275	 Profile ≤ 0.1 ≤ 1	510	RPM	7793	5195	3896	3117	2598	1948
				(459-561)	Fz	0.0015	0.0028	0.0038	0.0041	0.0045	0.0053
					Feed (IPM)	70	87	89	77	70	62
		 HSM ≤ 0.05 ≤ 2	650	RPM	9932	6621	4966	3973	3311	2483	
			(585-715)	Fz	0.0021	0.0038	0.0051	0.0056	0.0061	0.0072	
				Feed (IPM)	125	151	152	133	121	107	
M	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275	 Profile ≤ 0.1 ≤ 1	350	RPM	5348	3565	2674	2139	1783	1337
				(315-385)	Fz	0.0012	0.0023	0.0030	0.0033	0.0036	0.0042
					Feed (IPM)	39	49	48	42	39	34
		 HSM ≤ 0.05 ≤ 2	450	RPM	6876	4584	3438	2750	2292	1719	
			(405-495)	Fz	0.0017	0.0032	0.0042	0.0046	0.0050	0.0059	
				Feed (IPM)	70	88	87	76	69	61	
M	STAINLESS STEELS (PH) 13-8 PH, 15-5PH, 17-4 PH, Custom 450	< 325	 Profile ≤ 0.1 ≤ 1	325	RPM	4966	3311	2483	1986	1655	1242
				(293-358)	Fz	0.0012	0.0023	0.0030	0.0033	0.0036	0.0042
					Feed (IPM)	36	46	45	39	36	31
		 HSM ≤ 0.05 ≤ 2	410	RPM	6265	4177	3132	2506	2088	1566	
			(369-451)	Fz	0.0017	0.0032	0.0042	0.0046	0.0050	0.0059	
				Feed (IPM)	64	80	79	69	63	55	

continued on next page

Series 51, 51CR Fractional	Hardness BRINELL			Vc (SFM)	Diameter (D ₁) (inch)								
		Ae x D ₁	Ap x D ₁		1/4	3/8	1/2	5/8	3/4	1			
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoly 800, Monel 400	≤ 300		≤ 0.1	≤ 1	105	RPM	1604	1070	802	642	535	401
						(84-126)	Fz	0.0014	0.0027	0.0036	0.0039	0.0043	0.0050
						Feed (IPM)	13	17	17	15	14	12	
		HSM		≤ 0.05	≤ 2	130	RPM	1986	1324	993	795	662	497
						(104-156)	Fz	0.0016	0.0036	0.0048	0.0053	0.0058	0.0067
						Feed (IPM)	19	29	29	25	23	20	
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, 750X, Incoly 925, Waspaloy, Hastelloy, Rene	> 300		≤ 0.1	≤ 1	80	RPM	1222	815	611	489	407	306
						(64-96)	Fz	0.0010	0.0018	0.0025	0.0027	0.0029	0.0034
						Feed (IPM)	7	9	9	8	7	6	
		HSM		≤ 0.05	≤ 2	100	RPM	1528	1019	764	611	509	382
						(80-120)	Fz	0.0013	0.0025	0.0034	0.0037	0.0041	0.0047
						Feed (IPM)	12	15	16	14	13	11	
S	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350		≤ 0.1	≤ 1	280	RPM	4278	2852	2139	1711	1426	1070
						(224-336)	Fz	0.0010	0.0018	0.0025	0.0027	0.0029	0.0034
						Feed (IPM)	26	31	32	28	25	22	
		HSM		≤ 0.05	≤ 2	355	RPM	5424	3616	2712	2170	1808	1356
						(284-426)	Fz	0.0013	0.0025	0.0034	0.0037	0.0041	0.0047
						Feed (IPM)	42	54	55	48	44	38	
S	TITANIUM ALLOYS (DIFFICULT) Ti10Al2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	> 350 ≤ 440		≤ 0.1	≤ 1	155	RPM	2368	1579	1184	947	789	592
						(124-186)	Fz	0.0010	0.0018	0.0025	0.0027	0.0029	0.0034
						Feed (IPM)	14	17	18	15	14	12	
		HSM		≤ 0.05	≤ 2	200	RPM	3056	2037	1528	1222	1019	764
						(160-240)	Fz	0.0013	0.0025	0.0034	0.0037	0.0041	0.0047
						Feed (IPM)	24	31	31	27	25	22	

rpm = sfm x 3.82 / D₁


ipm = (inch / flute) x 6 x rpm

HSM (high speed machining)


reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x D₁ maximum)

refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)

Series 51M, 51MCR Metric	Hardness BRINELL			Vc (m/min)	Diameter (D1) (mm)						
		Ae x D1	Ap x D1		6	8	10	12	16	20	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275	 Profile ≤ 0.1 ≤ 1	219	RPM	11633	8725	6980	5816	4362	3490
				(176-263)	Fz	0.048	0.081	0.101	0.121	0.142	0.158
				Feed (mm/min)	3350	4240	4230	4223	3717	3308	
		 HSM ≤ 0.05 ≤ 2	279	RPM	14784	11088	8870	7392	5544	4435	
			(223-335)	Fz	0.066	0.113	0.141	0.169	0.197	0.220	
			Feed (mm/min)	5854	7517	7504	7495	6553	5854		
P	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375	 Profile ≤ 0.1 ≤ 1	149	RPM	7917	5938	4750	3958	2969	2375
				(119-179)	Fz	0.036	0.061	0.077	0.092	0.107	0.119
				Feed (mm/min)	1710	2173	2195	2185	1906	1696	
		 HSM ≤ 0.05 ≤ 2	189	RPM	10017	7513	6010	5009	3756	3005	
			(151-227)	Fz	0.049	0.083	0.104	0.125	0.146	0.163	
			Feed (mm/min)	2945	3741	3750	3756	3291	2939		
P	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375	 Profile ≤ 0.1 ≤ 1	73	RPM	3878	2908	2327	1939	1454	1163
				(59-88)	Fz	0.029	0.049	0.061	0.073	0.086	0.096
				Feed (mm/min)	675	855	852	849	750	670	
		 HSM ≤ 0.05 ≤ 2	93	RPM	4928	3696	2957	2464	1848	1478	
			(74-112)	Fz	0.040	0.069	0.086	0.103	0.120	0.134	
			Feed (mm/min)	1183	1530	1526	1523	1331	1189		
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	≤ 275	 Profile ≤ 0.1 ≤ 1	155	RPM	8240	6180	4944	4120	3090	2472
				(140-171)	Fz	0.035	0.060	0.075	0.090	0.105	0.117
				Feed (mm/min)	1730	2225	2225	2225	1947	1735	
		 HSM ≤ 0.05 ≤ 2	198	RPM	10502	7877	6301	5251	3938	3151	
			(178-218)	Fz	0.048	0.082	0.102	0.122	0.143	0.159	
			Feed (mm/min)	3025	3875	3856	3844	3379	3006		
M	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275	 Profile ≤ 0.1 ≤ 1	107	RPM	5655	4241	3393	2827	2121	1696
				(96-117)	Fz	0.029	0.049	0.061	0.073	0.086	0.096
				Feed (mm/min)	984	1247	1242	1238	1094	977	
		 HSM ≤ 0.05 ≤ 2	137	RPM	7271	5453	4362	3635	2726	2181	
			(123-151)	Fz	0.040	0.069	0.086	0.103	0.120	0.134	
			Feed (mm/min)	1745	2258	2251	2247	1963	1754		
M	STAINLESS STEELS (PH) 13-8 PH, 15-5PH, 17-4 PH, Custom 450	< 325	 Profile ≤ 0.1 ≤ 1	99	RPM	5251	3938	3151	2626	1969	1575
				(89-109)	Fz	0.029	0.049	0.061	0.073	0.086	0.096
				Feed (mm/min)	914	1158	1153	1150	1016	907	
		 HSM ≤ 0.05 ≤ 2	125	RPM	6624	4968	3975	3312	2484	1987	
			(112-137)	Fz	0.040	0.069	0.086	0.103	0.120	0.134	
			Feed (mm/min)	1590	2057	2051	2047	1789	1598		

continued on next page



Series 51M, 51MCR Metric	Hardness BRINELL		Ae x D ₁	Ap x D ₁	Vc (m/min)	Diameter (D ₁) (mm)						
						6	8	10	12	16	20	
S	≤ 300	Profile 	≤ 0.1	≤ 1	32	RPM	1696	1272	1018	848	636	509
					(26-38)	Fz	0.034	0.057	0.071	0.085	0.100	0.110
						Feed (mm/min)	346	435	434	433	382	336
		HSM 	≤ 0.05	≤ 2	40	RPM	2100	1575	1260	1050	788	630
					(32-48)	Fz	0.046	0.077	0.097	0.120	0.140	0.150
						Feed (mm/min)	580	728	733	756	662	567
S	> 300	Profile 	≤ 0.1	≤ 1	24	RPM	1293	969	776	646	485	388
					(20-29)	Fz	0.023	0.039	0.049	0.059	0.068	0.077
						Feed (mm/min)	178	227	228	229	198	179
		HSM 	≤ 0.05	≤ 2	30	RPM	1616	1212	969	808	606	485
					(24-37)	Fz	0.032	0.054	0.068	0.081	0.095	0.110
						Feed (mm/min)	310	393	396	393	345	320
S	≤ 350	Profile 	≤ 0.1	≤ 1	85	RPM	4524	3393	2714	2262	1696	1357
					(68-102)	Fz	0.023	0.039	0.049	0.059	0.068	0.077
						Feed (mm/min)	624	794	798	801	692	627
		HSM 	≤ 0.05	≤ 2	108	RPM	5736	4302	3441	2868	2151	1721
					(87-130)	Fz	0.032	0.054	0.068	0.081	0.095	0.110
						Feed (mm/min)	1101	1394	1404	1394	1226	1136
S	> 350 ≤ 440	Profile 	≤ 0.1	≤ 1	47	RPM	2504	1878	1503	1252	939	751
					(38-57)	Fz	0.023	0.039	0.049	0.059	0.068	0.077
						Feed (mm/min)	346	440	442	443	383	347
		HSM 	≤ 0.05	≤ 2	61	RPM	3231	2424	1939	1616	1212	969
					(49-73)	Fz	0.032	0.054	0.068	0.081	0.095	0.110
						Feed (mm/min)	620	785	791	785	691	640

rpm = (1000 x m/min) / (3.14 x D₁)

mm / min = (mm / flute) x 6 x rpm


HSM (high speed machining)


reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x D₁ maximum)


refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)





Series 66, 66CR Fractional		Hardness BRINELL			Vc (SFM)	Diameter (D ₁) (inch)								
			Ae x D ₁	Ap x D ₁		3/16	1/4	3/8	1/2	5/8	3/4	1		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275	 Profile	≤ 0.05	≤ 1	635	RPM	12937	9703	6469	4851	3881	3234	2426
						(508-762)	Fz	0.0008	0.0012	0.0022	0.0030	0.0037	0.0038	0.0042
							Feed (IPM)	72.4	81.5	99.6	131.0	129.2	135.2	112.1
			 Finish	≤ 0.02	≤ 2	762	RPM	15524	11643	7762	5822	4657	3881	2911
						(610-914)	Fz	0.0006	0.0010	0.0018	0.0024	0.0030	0.0030	0.0034
							Feed (IPM)	69.5	78.2	95.6	125.7	124.1	129.8	107.6
P	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375	 Profile	≤ 0.05	≤ 1	360	RPM	7334	5501	3667	2750	2200	1834	1375
						(288-432)	Fz	0.0006	0.0009	0.0017	0.0023	0.0029	0.0030	0.0032
							Feed (IPM)	30.8	34.7	43.6	56.9	57.4	60.5	48.4
			 Finish	≤ 0.02	≤ 2	432	RPM	8801	6601	4401	3300	2640	2200	1650
						(346-518)	Fz	0.0005	0.0007	0.0014	0.0018	0.0023	0.0024	0.0026
							Feed (IPM)	29.6	33.3	41.9	54.7	55.1	58.1	46.5
P	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375	 Profile	≤ 0.05	≤ 1	290	RPM	5908	4431	2954	2216	1772	1477	1108
						(232-348)	Fz	0.0004	0.0006	0.0012	0.0016	0.0020	0.0021	0.0022
							Feed (IPM)	16.5	18.6	24.8	31.9	31.9	34.1	26.8
			 Finish	≤ 0.02	≤ 2	348	RPM	7090	5317	3545	2659	2127	1772	1329
						(278-418)	Fz	0.0003	0.0005	0.0010	0.0013	0.0016	0.0017	0.0018
							Feed (IPM)	15.9	17.9	23.8	30.6	30.6	32.8	25.7
K	CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220	 Profile	≤ 0.05	≤ 1	705	RPM	14363	10772	7182	5386	4309	3591	2693
						(564-846)	Fz	0.0008	0.0012	0.0022	0.0030	0.0037	0.0038	0.0042
							Feed (IPM)	80.4	90.5	110.6	145.4	143.5	150.1	124.4
			 Finish	≤ 0.02	≤ 2	846	RPM	17236	12927	8618	6463	5171	4309	3232
						(677-1015)	Fz	0.0006	0.0010	0.0018	0.0024	0.0030	0.0030	0.0034
							Feed (IPM)	77.2	86.9	106.2	139.6	137.7	144.1	119.4
K	CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	> 220 ≤ 260	 Profile	≤ 0.05	≤ 1	540	RPM	11002	8251	5501	4126	3300	2750	2063
						(432-648)	Fz	0.0006	0.0009	0.0017	0.0023	0.0029	0.0030	0.0032
							Feed (IPM)	46.2	52.0	65.5	85.4	86.1	90.8	72.6
			 Finish	≤ 0.02	≤ 2	648	RPM	13202	9901	6601	4951	3961	3300	2475
						(518-778)	Fz	0.0005	0.0007	0.0014	0.0018	0.0023	0.0024	0.0026
							Feed (IPM)	44.4	49.9	62.8	82.0	82.7	87.1	69.7
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	≤ 275	 Profile	≤ 0.05	≤ 1	560	RPM	11409	8557	5705	4278	3423	2852	2139
						(448-672)	Fz	0.0006	0.0009	0.0017	0.0023	0.0029	0.0030	0.0032
							Feed (IPM)	47.9	53.9	67.9	88.6	89.3	94.1	75.3
			 Finish	≤ 0.02	≤ 2	448	RPM	9127	6845	4564	3423	2738	2282	1711
						(358-538)	Fz	0.0005	0.0007	0.0014	0.0018	0.0023	0.0024	0.0026
							Feed (IPM)	30.7	34.5	43.4	56.7	57.2	60.2	48.2

continued on next page


Series 66, 66CR Fractional	Hardness BRINELL				Vc (SFM)	Diameter (D1) (inch)							
		Ae x D1	Ap x D1	3/16		1/4	3/8	1/2	5/8	3/4	1		
M	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L		≤ 0.05	≤ 1	385	RPM	7844	5883	3922	2941	2353	1961	1471
					(308-462)	Fz	0.0005	0.0007	0.0014	0.0018	0.0023	0.0024	0.0026
					Feed (IPM)	27.5	28.8	38.4	47.7	48.7	51.8	42.1	
			≤ 0.02	≤ 2	462	RPM	9412	7059	4706	3530	2824	2353	1765
					(370-554)	Fz	0.0004	0.0006	0.0011	0.0014	0.0018	0.0019	0.0021
					Feed (IPM)	26.4	27.7	36.9	45.7	46.8	49.7	40.4	
M	STAINLESS STEELS (PH) 13-8 PH, 15-5PH, 17-4 PH, Custom 450		≤ 0.05	≤ 1	355	RPM	7233	5424	3616	2712	2170	1808	1356
					(284-426)	Fz	0.0005	0.0007	0.0014	0.0018	0.0023	0.0024	0.0026
					Feed (IPM)	25.3	26.6	35.4	43.9	44.9	47.7	38.8	
			≤ 0.02	≤ 2	426	RPM	8679	6509	4340	3255	2604	2170	1627
					(341-511)	Fz	0.0004	0.0006	0.0011	0.0014	0.0018	0.0019	0.0021
					Feed (IPM)	24.3	25.5	34.0	42.2	43.1	45.8	37.2	
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoly 800, Monel 400		≤ 0.05	≤ 1	105	RPM	2139	1604	1070	802	642	535	401
					(84-126)	Fz	0.0005	0.0007	0.0014	0.0018	0.0023	0.0024	0.0026
					Feed (IPM)	7.5	7.9	10.5	13.0	13.3	14.1	11.5	
			≤ 0.02	≤ 2	126	RPM	2567	1925	1284	963	770	642	481
					(101-151)	Fz	0.0004	0.0006	0.0011	0.0014	0.0018	0.0019	0.0021
					Feed (IPM)	7.2	7.5	10.1	12.5	12.8	13.6	11.0	
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, 750X, Incoly 925, Waspaloy, Hastelloy, Rene		≤ 0.05	≤ 1	85	RPM	1732	1299	866	649	520	433	325
					(68-102)	Fz	0.0003	0.0005	0.0009	0.0011	0.0014	0.0015	0.0016
					Feed (IPM)	3.6	4.5	5.5	6.4	6.5	7.1	5.7	
			≤ 0.02	≤ 2	102	RPM	2078	1559	1039	779	623	520	390
					(82-122)	Fz	0.0002	0.0004	0.0007	0.0009	0.0011	0.0012	0.0013
					Feed (IPM)	3.5	4.4	5.2	6.2	6.3	6.9	5.5	
S	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si		≤ 0.05	≤ 1	390	RPM	7946	5959	3973	2980	2384	1986	1490
					(312-468)	Fz	0.0005	0.0008	0.0015	0.0021	0.0026	0.0027	0.0029
					Feed (IPM)	27.8	33.4	41.7	56.3	55.8	59.0	47.5	
			≤ 0.02	≤ 2	468	RPM	9535	7151	4767	3576	2860	2384	1788
					(374-562)	Fz	0.0004	0.0006	0.0012	0.0017	0.0021	0.0022	0.0023
					Feed (IPM)	26.7	32.0	40.0	54.1	53.5	56.6	45.6	
S	TITANIUM ALLOYS (DIFFICULT) Ti10Al2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al		≤ 0.05	≤ 1	140	RPM	2852	2139	1426	1070	856	713	535
					(112-168)	Fz	0.0005	0.0008	0.0015	0.0021	0.0026	0.0027	0.0029
					Feed (IPM)	10.0	12.0	15.0	20.2	20.0	21.2	17.1	
			≤ 0.02	≤ 2	168	RPM	3423	2567	1711	1284	1027	856	642
					(134-202)	Fz	0.0004	0.0006	0.0012	0.0017	0.0021	0.0022	0.0023
					Feed (IPM)	9.6	11.5	14.4	19.4	19.2	20.3	16.4	

rpm = sfm x 3.82 / D₁

ipm = (inch / flute) x number of flutes x rpm


reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)



Series 66M, 66MCR Metric	Hardness BRINELL		Vc (m/min)	Diameter (D ₁) (mm)								
				6	8	10	12	16	20	25		
P CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275	 Profile ≤ 0.05 ≤ 1	194	RPM	10260	7695	6156	5130	3847	3078	2462	
			(155-232)	Fz	0.029	0.047	0.059	0.072	0.095	0.101	0.105	
				Feed (mm/min)	2068	2528	2528	3324	3280	3431	2844	
		 Finish ≤ 0.02 ≤ 2	232	RPM	12312	9234	7387	6156	4617	3693	2955	
			(186-279)	Fz	0.023	0.038	0.047	0.058	0.076	0.081	0.084	
				Feed (mm/min)	1985	2427	2427	3191	3149	3294	2730	
P ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 375	 Profile ≤ 0.05 ≤ 1	110	RPM	5816	4362	3490	2908	2181	1745	1396	
			(88-132)	Fz	0.022	0.036	0.045	0.055	0.074	0.080	0.080	
				Feed (mm/min)	879	1108	1107	1445	1457	1536	1229	
		 Finish ≤ 0.02 ≤ 2	132	RPM	6980	5235	4188	3490	2617	2094	1675	
			(105-158)	Fz	0.017	0.029	0.036	0.044	0.059	0.064	0.064	
				Feed (mm/min)	844	1063	1063	1387	1399	1474	1179	
P TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 375	 Profile ≤ 0.05 ≤ 1	88	RPM	4686	3514	2811	2343	1757	1406	1125	
			(71-106)	Fz	0.014	0.026	0.032	0.038	0.051	0.056	0.055	
				Feed (mm/min)	472	630	630	810	810	866	680	
		 Finish ≤ 0.02 ≤ 2	106	RPM	5622.615 12	4217	3374	2811	2108	1687	1349	
			(85-127)	Fz	0.012	0.020	0.026	0.031	0.041	0.045	0.044	
				Feed (mm/min)	453	605	605	777	777	831	653	
K CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220	 Profile ≤ 0.05 ≤ 1	215	RPM	11391	8543	6834	5695	4271	3417	2734	
			(172-258)	Fz	0.029	0.047	0.059	0.072	0.095	0.101	0.105	
				Feed (mm/min)	2296	2807	2807	3690	3641	3809	3158	
		 Finish ≤ 0.02 ≤ 2	258	RPM	13669	10252	8201	6834	5126	4101	3281	
			(206-309)	Fz	0.023	0.038	0.047	0.058	0.076	0.081	0.084	
				Feed (mm/min)	2204	2695	2694	3543	3496	3657	3031	
K CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	> 220 ≤ 260	 Profile ≤ 0.05 ≤ 1	165	RPM	8725	6544	5235	4362	3272	2617	2094	
			(132-198)	Fz	0.022	0.036	0.045	0.055	0.074	0.080	0.080	
				Feed (mm/min)	1319	1661	1661	2167	2186	2303	1843	
		 Finish ≤ 0.02 ≤ 2	198	RPM	10470	7852	6282	5235	3926	3141	2513	
			(158-237)	Fz	0.017	0.029	0.036	0.044	0.059	0.064	0.064	
				Feed (mm/min)	1266	1595	1595	2080	2099	2211	1769	
M STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	≤ 275	 Profile ≤ 0.05 ≤ 1	171	RPM	9048	6786	5429	4524	3393	2714	2171	
			(137-205)	Fz	0.022	0.036	0.045	0.055	0.074	0.080	0.080	
				Feed (mm/min)	1368	1723	1723	2247	2267	2389	1911	
		 Finish ≤ 0.02 ≤ 2	137	RPM	7238	5429	4343	3619	2714	2171	1737	
			(109-164)	Fz	0.017	0.029	0.036	0.044	0.059	0.064	0.064	
				Feed (mm/min)	875	1103	1103	1438	1451	1529	1223	

continued on next page


Series 66M, 66MCR Metric	Hardness BRINELL			Vc (m/min)	Diameter (D ₁) (mm)								
		Ae x D ₁	Ap x D ₁		6	8	10	12	16	20	25		
M	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L		≤ 0.05	≤ 1	117	RPM	6220	4665	3732	3110	2333	1866	1493
					(94-141)	Fz	0.017	0.030	0.037	0.043	0.059	0.064	0.065
						Feed (mm/min)	731	975	975	1209	1236	1314	1067
			≤ 0.02	≤ 2	141	RPM	7465	5598	4479	3732	2799	2239	1791
					(113-169)	Fz	0.013	0.024	0.030	0.035	0.047	0.051	0.052
						Feed (mm/min)	702	17	936	1161	1187	1261	1025
M	STAINLESS STEELS (PH) 13-8 PH, 15-5PH, 17-4 PH, Custom 450		≤ 0.05	≤ 1	108	RPM	5736	4302	3441	2868	2151	1721	1377
					(87-130)	Fz	0.017	0.030	0.037	0.043	0.059	0.064	0.065
						Feed (mm/min)	674	899	899	1115	1140	1211	984
			≤ 0.02	≤ 2	130	RPM	6883	5162	4130	3441	2581	2065	1652
					(104-156)	Fz	0.013	0.024	0.030	0.035	0.047	0.051	0.052
						Feed (mm/min)	647	863	863	1070	1094	1163	945
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoly 800, Monel 400		≤ 0.05	≤ 1	32	RPM	1696	1272	1018	848	636	509	407
					(26-38)	Fz	0.017	0.030	0.037	0.043	0.059	0.064	0.065
						Feed (mm/min)	199	266	213	330	337	358	291
			≤ 0.02	≤ 2	38	RPM	2036	1527	1221	1018	763	611	489
					(31-46)	Fz	0.013	0.024	0.030	0.035	0.047	0.051	0.052
						Feed (mm/min)	192	255	255	317	324	344	279
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, 750X, Incoly 925, Waspaloy, Hastelloy, Rene		≤ 0.05	≤ 1	26	RPM	1373	1030	824	687	515	412	330
					(21-31)	Fz	0.012	0.019	0.024	0.026	0.036	0.040	0.040
						Feed (mm/min)	115	138	138	163	166	181	145
			≤ 0.02	≤ 2	31	RPM	1648	1236	989	824	618	494	396
					(25-37)	Fz	0.010	0.015	0.019	0.021	0.029	0.032	0.032
						Feed (mm/min)	111	133	133	157	159	174	139
S	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si		≤ 0.05	≤ 1	119	RPM	6301	4726	3781	3151	2363	1890	1512
					(95-143)	Fz	0.019	0.032	0.040	0.050	0.067	0.072	0.073
						Feed (mm/min)	847	1059	1059	1429	1415	1497	1206
			≤ 0.02	≤ 2	143	RPM	7561	5671	4537	3781	2836	2268	1815
					(114-171)	Fz	0.015	0.026	0.032	0.040	0.053	0.058	0.058
						Feed (mm/min)	813	1016	1016	1372	1359	1437	1158
S	TITANIUM ALLOYS (DIFFICULT) Ti10Al2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al		≤ 0.05	≤ 1	43	RPM	2262	1696	1357	1131	848	679	543
					(34-51)	Fz	0.019	0.032	0.040	0.050	0.067	0.072	0.073
						Feed (mm/min)	304	380	380	513	508	537	433
			≤ 0.02	≤ 2	51	RPM	2714	2036	1629	1357	1018	814	651
					(41-61)	Fz	0.015	0.026	0.032	0.040	0.053	0.058	0.058
						Feed (mm/min)	292	365	365	492	488	516	416

rpm = (1000 x m/min) / (3.14 x D₁)

mm / min = (mm / flute) x number of flutes x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)



Series 56B Fractional		Hardness BRINELL			Vc (SFM)	Diameter (D ₁) (inch)									
			Ae x D ₁	Ap x D ₁		1/32	1/16	1/8	3/16	1/4	3/8	1/2	3/4		
P	TOOL STEELS MOLD AND DIE STEEL 300M, 4340, 52100, HP-9-4-20, M50, A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 370		≤ 0.4	≤ 0.1	625	RPM	76400	38200	19100	12733	9550	6367	4775	3183
						(500-750)	Fz	0.0006	0.0015	0.0030	0.0040	0.0050	0.0080	0.0100	0.0120
							Feed (IPM)	92	115	115	102	96	102	96	76
				≤ 0.4	≤ 0.03	950	RPM	116128	58064	29032	19355	14516	9677	7258	4839
						(760-1140)	Fz	0.0007	0.0017	0.0033	0.0044	0.0060	0.0088	0.0110	0.0013
							Feed (IPM)	163	197	192	170	174	170	160	126
P	TOOL STEELS MOLD AND DIE STEEL 300M, 4340, 52100, HP-9-4-20, M50, A2, D2, H13, L2, M2, P20, S7, T15, W2	> 370 ≤ 475		≤ 0.4	≤ 0.05	750	RPM	91680	45840	22920	15280	11460	7640	5730	3820
						(600-900)	Fz	0.0005	0.0011	0.0023	0.0030	0.0038	0.0060	0.0075	0.0085
							Feed (IPM)	92	101	105	92	87	92	86	65
				≤ 0.4	≤ 0.02	1150	RPM	140576	70288	35144	23429	17572	11715	8786	5857
						(920-1380)	Fz	0.0006	0.0012	0.0025	0.0033	0.0042	0.0066	0.0082	0.0100
							Feed (IPM)	169	169	176	155	148	155	144	117
H	TOOL STEELS MOLD AND DIE STEEL 300M, 4340, 52100, HP-9-4-20, M50, A2, D2, H13, L2, M2, P20, S7, T15, W2	> 475 ≤ 655		≤ 0.4	≤ 0.04	500	RPM	61120	30560	15280	10187	7640	5093	3820	2547
						(400-600)	Fz	0.0004	0.0008	0.0017	0.0023	0.0029	0.0045	0.0057	0.0063
							Feed (IPM)	49	49	52	47	44	46	44	32
				≤ 0.4	≤ 0.01	1000	RPM	122240	61120	30560	20373	15280	10187	7640	5093
						(800-1200)	Fz	0.0005	0.0009	0.0019	0.0025	0.0032	0.0050	0.0063	0.0071
							Feed (IPM)	122	110	116	102	98	102	96	72

rpm = sfm x 3.82 / D₁


ipm = (inch / flute) x 2 x rpm

HSM (high speed machining)

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x D₁ maximum)

refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)



Series 56MB Metric	Hardness BRINELL		Ae x D ₁	Ap x D ₁	Vc (m/min)	Diameter (D ₁) (mm)							
						1	1.5	3	5	6	10	12	20
P	TOOL STEELS MOLD AND DIE STEEL 300M, 4340, 52100, HP-9-4-20, M50, A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 370	 Rough ≤ 0.4 ≤ 0.1	191	RPM	60748	40498	20249	12150	10125	6075	5062	3037
				(153-229)	Fz	0.015	0.038	0.076	0.102	0.127	0.203	0.254	0.305
					Feed (mm/min)	1822	3078	3078	2479	2572	2466	2572	1853
			 HSM ≤ 0.4 ≤ 0.03	290	RPM	92235	61490	46117	18447	15372	9223	7686	4612
				(232-348)	Fz	0.018	0.043	0.084	0.112	0.117	0.224	0.279	0.330
					Feed (mm/min)	3320	5288	7748	4132	3597	4132	4289	3044
P	TOOL STEELS MOLD AND DIE STEEL 300M, 4340, 52100, HP-9-4-20, M50, A2, D2, H13, L2, M2, P20, S7, T15, W2	> 370 ≤ 475	 Rough ≤ 0.4 ≤ 0.05	229	RPM	72833	48556	24278	14567	12139	7283	6069	3642
				(183-275)	Fz	0.013	0.028	0.058	0.076	0.097	0.152	0.191	0.216
					Feed (mm/min)	1894	2719	2816	2214	2355	2214	2319	1573
			 HSM ≤ 0.4 ≤ 0.02	351	RPM	111636	74424	37212	22327	18606	11164	9303	5582
				(281-421)	Fz	0.015	0.030	0.064	0.084	0.107	0.168	0.208	0.254
					Feed (mm/min)	3349	4465	4763	3751	3982	3751	3870	2836
H	TOOL STEELS MOLD AND DIE STEEL 300M, 4340, 52100, HP-9-4-20, M50, A2, D2, H13, L2, M2, P20, S7, T15, W2	> 475 ≤ 655	 Rough ≤ 0.4 ≤ 0.04	152	RPM	48344	32229	16115	9669	8057	4834	4029	2417
				(122-182)	Fz	0.010	0.020	0.043	0.058	0.074	0.114	0.145	0.160
					Feed (mm/min)	967	1289	1386	1122	1192	1102	1168	773
			 HSM ≤ 0.4 ≤ 0.01	305	RPM	97005	64670	32335	19401	16168	9701	8084	4850
				(244-366)	Fz	0.013	0.023	0.048	0.064	0.081	0.127	0.160	0.180
					Feed (mm/min)	2522	2975	3104	2483	2619	2464	2587	1746

rpm = (1000 x m/min) / (3.14 x D₁)

mm / min = (mm / flute) x 2 x rpm


HSM (high speed machining)


reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x D₁ maximum)

refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)





Series 57 Fractional	Hardness BRINELL			Vc (SFM)	Diameter (D ₁) (inch)					
		Ae x D ₁	Ap x D ₁		1/4	5/16	3/8	1/2		
P	TOOL STEELS MOLD AND DIE STEEL 300M, 4340, 52100, HP-9-4-20, M50, A2, D2, H13, L2, M2, P20, S7, T15, W2		1	≤ 0.3	215	RPM	3285	2628	2190	1643
					(172-258)	Fz	0.0013	0.0019	0.0025	0.0031
						Feed (IPM)	26	30	33	31
			≤ 0.1	≤ 1.5	265	RPM	4049	3239	2699	2025
					(212-318)	Fz	0.0018	0.0026	0.0035	0.0440
						Feed (IPM)	44	51	57	53
			≤ 0.04	≤ 1.5	560	RPM	8557	6845	5705	4278
					(448-672)	Fz	0.0022	0.0033	0.0044	0.0055
						Feed (IPM)	113	136	151	141
P	TOOL STEELS MOLD AND DIE STEEL 300M, 4340, 52100, HP-9-4-20, M50, A2, D2, H13, L2, M2, P20, S7, T15, W2		1	≤ 0.3	120	RPM	1834	1467	1222	917
					(96-144)	Fz	0.0010	0.0015	0.0020	0.0025
						Feed (IPM)	11	13	15	14
			≤ 0.1	≤ 1.5	150	RPM	2292	1834	1528	1146
					(120-180)	Fz	0.0014	0.0021	0.0028	0.0035
						Feed (IPM)	19	23	26	24
			≤ 0.04	≤ 1.5	490	RPM	7487	5990	4991	3744
					(392-588)	Fz	0.0018	0.0026	0.0035	0.0044
						Feed (IPM)	81	93	105	99
H	TOOL STEELS MOLD AND DIE STEEL 300M, 4340, 52100, HP-9-4-20, M50, A2, D2, H13, L2, M2, P20, S7, T15, W2		1	≤ 0.3	65	RPM	993	795	662	497
					(52-78)	Fz	0.0008	0.0011	0.0015	0.0019
						Feed (IPM)	5	5	6	6
			≤ 0.1	≤ 1.5	80	RPM	1222	978	815	611
					(64-96)	Fz	0.0011	0.0016	0.0021	0.0026
						Feed (IPM)	8	9	10	10
			≤ 0.04	≤ 1.5	250	RPM	3820	3056	2547	1910
					(200-300)	Fz	0.0013	0.0019	0.0025	0.0031
						Feed (IPM)	30	35	38	36

rpm = sfm x 3.82 / D₁


ipm = (inch / flute) x 6 x rpm

HSM (high speed machining)

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x D₁ maximum)

refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)

Series 57M Metric	Hardness BRINELL			Vc (m/min)	Diameter (D ₁) (mm)					
		Ae x D ₁	Ap x D ₁		6	8	10	12		
P	> 280 ≤ 420		1	≤ 0.3	66	RPM	3499	2624	2099	1749
					(53-79)	Fz	0.032	0.048	0.064	0.079
						Feed (mm/min)	672	756	806	829
			≤ 0.1	≤ 1.5	81	RPM	4294	3220	2576	2147
					(65-97)	Fz	0.046	0.066	0.089	0.112
						Feed (mm/min)	1185	1275	1376	1443
			≤ 0.04	≤ 1.5	171	RPM	9064	6798	5439	4532
					(137-205)	Fz	0.056	0.084	0.112	0.140
						Feed (mm/min)	3046	3426	3655	3807
P	> 420 ≤ 560		1	≤ 0.3	37	RPM	1961	1471	1177	981
					(30-44)	Fz	0.025	0.038	0.051	0.064
						Feed (mm/min)	294	335	360	377
			≤ 0.1	≤ 1.5	46	RPM	2438	1829	1463	1219
					(37-55)	Fz	0.036	0.053	0.071	0.089
						Feed (mm/min)	527	582	623	651
			≤ 0.04	≤ 1.5	149	RPM	7898	5924	4739	3949
					(119-179)	Fz	0.046	0.066	0.089	0.112
						Feed (mm/min)	2180	2346	2531	2654
H	> 560 < 745		1	≤ 0.3	20	RPM	1060	795	636	530
					(16-24)	Fz	0.020	0.028	0.038	0.048
						Feed (mm/min)	127	134	145	153
			≤ 0.1	≤ 1.5	24	RPM	1272	954	763	636
					(19-29)	Fz	0.028	0.041	0.053	0.066
						Feed (mm/min)	214	235	243	252
			≤ 0.04	≤ 1.5	76	RPM	4029	3021	2417	2014
					(61-91)	Fz	0.033	0.048	0.064	0.079
						Feed (mm/min)	798	870	928	955

rpm = (1000 x m/min) / (3.14 x D₁)


mm / min = (mm / flute) x 6 x rpm

HSM (high speed machining)


reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x D₁ maximum)

refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)

Series 33CR Fractional	Hardness BRINELL			Vc (SFM)	Diameter (D1) (inch)								
		Ae x D1	Ap x D1		1/8	1/4	3/8	1/2	5/8	3/4	1		
P CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 275	 Profile	≤ 0.5	≤ 1.5	550	RPM	16808	8404	5603	4202	3362	2801	2101
					(440-660)	Fz	0.0005	0.0012	0.0023	0.0031	0.0039	0.0040	0.0043
						Feed (IPM)	25.2	30.3	38.7	39.1	39.3	33.6	27.1
		 Slot	1	≤ 1	440	RPM	13446	6723	4482	3362	2689	2241	1681
					(352-528)	Fz	0.0005	0.0012	0.0023	0.0031	0.0039	0.0040	0.0043
						Feed (IPM)	20.2	24.2	30.9	31.3	31.5	26.9	21.7
P ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	> 275 ≤ 375	 Profile	≤ 0.5	≤ 1.5	315	RPM	9626	4813	3209	2407	1925	1604	1203
					(252-378)	Fz	0.0004	0.0009	0.0017	0.0023	0.0029	0.0030	0.0032
						Feed (IPM)	11.6	13.0	16.4	16.6	16.7	14.4	11.6
		 Slot	1	≤ 1	250	RPM	7640	3820	2547	1910	1528	1273	955
					(200-300)	Fz	0.0004	0.0009	0.0017	0.0023	0.0029	0.0030	0.0032
						Feed (IPM)	9.2	10.3	13.0	13.2	13.3	11.5	9.2
P TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	> 250 ≤ 375	 Profile	≤ 0.5	≤ 1.5	185	RPM	5654	2827	1885	1413	1131	942	707
					(148-222)	Fz	0.0003	0.0007	0.0014	0.0018	0.0023	0.0024	0.0025
						Feed (IPM)	5.1	5.9	7.9	7.6	7.8	6.8	5.3
		 Slot	1	≤ 1	145	RPM	4431	2216	1477	1108	886	739	554
					(116-174)	Fz	0.0003	0.0007	0.0014	0.0018	0.0023	0.0024	0.0025
						Feed (IPM)	4.0	4.7	6.2	6.0	6.1	5.3	4.2
K CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220	 Profile	≤ 0.5	≤ 1.5	445	RPM	13599	6800	4533	3400	2720	2267	1700
					(356-534)	Fz	0.0004	0.0011	0.0021	0.0028	0.0035	0.0036	0.0039
						Feed (IPM)	14.3	22.4	28.6	28.6	28.6	24.5	19.9
		 Slot	1	≤ 1	355	RPM	10849	5424	3616	2712	2170	1808	1356
					(284-426)	Fz	0.0004	0.0011	0.0021	0.0028	0.0035	0.0036	0.0039
						Feed (IPM)	11.4	17.9	22.8	22.8	22.8	19.5	15.9
K CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	> 220 ≤ 260	 Profile	≤ 0.5	≤ 1.5	340	RPM	10390	5195	3463	2598	2078	1732	1299
					(272-408)	Fz	0.0003	0.0008	0.0016	0.0021	0.0026	0.0027	0.0029
						Feed (IPM)	9.4	12.5	16.6	16.4	16.2	14.0	11.3
		 Slot	1	≤ 1	270	RPM	8251	4126	2750	2063	1650	1375	1031
					(216-324)	Fz	0.0003	0.0008	0.0016	0.0021	0.0026	0.0027	0.0029
						Feed (IPM)	7.4	9.9	13.2	13.0	12.9	11.1	9.0
M STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	≤ 275	 Profile	≤ 0.5	≤ 1.5	490	RPM	14974	7487	4991	3744	2995	2496	1872
					(392-588)	Fz	0.0004	0.0010	0.0019	0.0025	0.0031	0.0032	0.0035
						Feed (IPM)	17.1	22.5	28.5	28.1	27.9	24.0	19.7
		 Slot	1	≤ 1	390	RPM	11918	5959	3973	2980	2384	1986	1490
					(312-468)	Fz	0.0004	0.0010	0.0019	0.0025	0.0031	0.0032	0.0035
						Feed (IPM)	13.6	17.9	22.6	22.3	22.2	19.1	15.6

continued on next page

Series 33CR Fractional	Hardness BRINELL			Vc (SFM)	Diameter (D ₁) (inch)								
		Ae x D ₁	Ap x D ₁		1/8	1/4	3/8	1/2	5/8	3/4	1		
M	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L		≤ 0.5	≤ 1.5	340	RPM	16808	8404	5603	4202	3362	2801	2101
					(272-408)	Fz	0.0005	0.0012	0.0023	0.0031	0.0039	0.0040	0.0043
						Feed (IPM)	25.2	30.3	38.7	39.1	39.3	33.6	27.1
			1	≤ 1	270	RPM	13446	6723	4482	3362	2689	2241	1681
					(216-324)	Fz	0.0005	0.0012	0.0023	0.0031	0.0039	0.0040	0.0043
						Feed (IPM)	20.2	24.2	30.9	31.3	31.5	26.9	21.7
M	STAINLESS STEELS (PH) 13-8 PH, 15-5PH, 17-4 PH, Custom 450		≤ 0.5	≤ 1.5	310	RPM	9626	4813	3209	2407	1925	1604	1203
					(248-372)	Fz	0.0004	0.0009	0.0017	0.0023	0.0029	0.0030	0.0032
						Feed (IPM)	11.6	13.0	16.4	16.6	16.7	14.4	11.6
			1	≤ 1	250	RPM	7640	3820	2547	1910	1528	1273	955
					(200-300)	Fz	0.0004	0.0009	0.0017	0.0023	0.0029	0.0030	0.0032
						Feed (IPM)	9.2	10.3	13.0	13.2	13.3	11.5	9.2
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoly 800, Monel 400		≤ 0.5	≤ 1.5	80	RPM	5654	2827	1885	1413	1131	942	707
					(64-96)	Fz	0.0003	0.0007	0.0014	0.0018	0.0023	0.0024	0.0025
						Feed (IPM)	5.1	5.9	7.9	7.6	7.8	6.8	5.3
			1	≤ 1	65	RPM	4431	2216	1477	1108	886	739	554
					(52-78)	Fz	0.0003	0.0007	0.0014	0.0018	0.0023	0.0024	0.0025
						Feed (IPM)	4.0	4.7	6.2	6.0	6.1	5.3	4.2
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, 750X, Incoly 925, Waspaloy, Hastelloy, Rene		≤ 0.5	≤ 1.5	62	RPM	13599	6800	4533	3400	2720	2267	1700
					(50-74)	Fz	0.0004	0.0011	0.0021	0.0028	0.0035	0.0036	0.0039
						Feed (IPM)	14.3	22.4	28.6	28.6	28.6	24.5	19.9
			1	≤ 1	49	RPM	10849	5424	3616	2712	2170	1808	1356
					(39-59)	Fz	0.0004	0.0011	0.0021	0.0028	0.0035	0.0036	0.0039
						Feed (IPM)	11.4	17.9	22.8	22.8	22.8	19.5	15.9
S	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si		≤ 0.5	≤ 1.5	215	RPM	10390	5195	3463	2598	2078	1732	1299
					(172-258)	Fz	0.0003	0.0008	0.0016	0.0021	0.0026	0.0027	0.0029
						Feed (IPM)	9.4	12.5	16.6	16.4	16.2	14.0	11.3
			1	≤ 1	170	RPM	8251	4126	2750	2063	1650	1375	1031
					(136-204)	Fz	0.0003	0.0008	0.0016	0.0021	0.0026	0.0027	0.0029
						Feed (IPM)	7.4	9.9	13.2	13.0	12.9	11.1	9.0
S	TITANIUM ALLOYS (DIFFICULT) Ti10Al2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al		≤ 0.5	≤ 1.5	75	RPM	14974	7487	4991	3744	2995	2496	1872
					(60-90)	Fz	0.0004	0.0010	0.0019	0.0025	0.0031	0.0032	0.0035
						Feed (IPM)	17.1	22.5	28.5	28.1	27.9	24.0	19.7
			1	≤ 1	60	RPM	11918	5959	3973	2980	2384	1986	1490
					(48-72)	Fz	0.0004	0.0010	0.0019	0.0025	0.0031	0.0032	0.0035
						Feed (IPM)	13.6	17.9	22.6	22.3	22.2	19.1	15.6


rpm = sfm x 3.82 / D₁

ipm = (inch / flute) x 3 x rpm

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x D₁ maximum)

refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)



Series 33MCR Metric	Hardness BRINELL			Vc (m/min)	Diameter (D ₁) (mm)									
		Ae x D ₁	Ap x D ₁		3	6	8	10	12	16	20	25		
P CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	> 175 ≤ 275	 Profile	≤ 0.5	≤ 1.5	168	RPM	17773	8886	6665	5332	4443	3332	2666	2133
					(134-201)	Fz	0.012	0.029	0.049	0.061	0.074	0.100	0.107	0.108
						Feed (mm/min)	640	768	981	981	992	998	853	688
		 Slot	1	≤ 1	134	RPM	14218	7109	5332	4265	3555	2666	2133	1706
					(107-161)	Fz	0.012	0.029	0.049	0.061	0.074	0.100	0.107	0.108
						Feed (mm/min)	512	614	785	785	793	798	682	550
P ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	> 275 ≤ 375	 Profile	≤ 0.5	≤ 1.5	96	RPM	10179	5089	3817	3054	2545	1909	1527	1221
					(77-115)	Fz	0.010	0.022	0.036	0.045	0.055	0.074	0.080	0.080
						Feed (mm/min)	293	330	415	415	421	425	366	293
		 Slot	1	≤ 1	76	RPM	8078	4039	3029	2424	2020	1515	1212	969
					(61-91)	Fz	0.010	0.022	0.036	0.045	0.055	0.074	0.080	0.080
						Feed (mm/min)	233	262	330	330	334	337	291	233
P TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	> 250 ≤ 375	 Profile	≤ 0.5	≤ 1.5	56	RPM	5978	2989	2242	1793	1495	1121	897	717
					(45-68)	Fz	0.007	0.017	0.030	0.037	0.043	0.059	0.064	0.063
						Feed (mm/min)	129	151	201	201	194	198	172	135
		 Slot	1	≤ 1	44	RPM	4686	2343	1757	1406	1171	879	703	562
					(35-53)	Fz	0.007	0.017	0.030	0.037	0.043	0.059	0.064	0.063
						Feed (mm/min)	101	118	157	157	152	155	135	105
K CAST IRONS (LOW & MEDIUM ALLOY) Gray, Malleable, Ductile	≤ 220	 Profile	≤ 0.5	≤ 1.5	136	RPM	14380	7190	5392	4314	3595	2696	2157	1726
					(109-163)	Fz	0.008	0.026	0.045	0.056	0.067	0.090	0.096	0.098
						Feed (mm/min)	362	569	725	725	725	725	621	505
		 Slot	1	≤ 1	108	RPM	11471	5736	4302	3441	2868	2151	1721	1377
					(87-130)	Fz	0.008	0.026	0.045	0.056	0.067	0.090	0.096	0.098
						Feed (mm/min)	289	454	578	578	578	578	496	403
K CAST IRONS (HIGH ALLOY) Gray, Malleable, Ductile	> 220 ≤ 260	 Profile	≤ 0.5	≤ 1.5	104	RPM	10987	5493	4120	3296	2747	2060	1648	1318
					(83-124)	Fz	0.007	0.019	0.034	0.043	0.050	0.067	0.072	0.073
						Feed (mm/min)	237	316	422	422	415	411	356	287
		 Slot	1	≤ 1	82	RPM	8725	4362	3272	2617	2181	1636	1309	1047
					(66-99)	Fz	0.007	0.019	0.034	0.043	0.050	0.067	0.072	0.073
						Feed (mm/min)	188	251	335	335	330	327	283	228
M STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	≤ 275	 Profile	≤ 0.5	≤ 1.5	149	RPM	15834	7917	5938	4750	3958	2969	2375	1900
					(119-179)	Fz	0.009	0.024	0.041	0.051	0.060	0.079	0.085	0.088
						Feed (mm/min)	433	570	722	722	712	707	608	499
		 Slot	1	≤ 1	119	RPM	12602	6301	4726	3781	3151	2363	1890	1512
					(95-143)	Fz	0.009	0.024	0.041	0.051	0.060	0.079	0.085	0.088
						Feed (mm/min)	345	454	575	575	567	563	484	397

continued on next page

Series 33MCR Metric	Hardness BRINELL			Vc (m/min)	Diameter (D ₁) (mm)										
		Ae x D ₁	Ap x D ₁		3	6	8	10	12	16	20	25			
M	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275		≤ 0.5	≤ 1.5	104	RPM	10987	5493	4120	3296	2747	2060	1648	1318
						(83-124)	Fz	0.007	0.019	0.032	0.040	0.048	0.064	0.069	0.070
							Feed (mm/min)	237	316	396	396	395	396	343	277
			1	≤ 1	82	RPM	8725	4362	3272	2617	2181	1636	1309	1047	
					(66-99)	Fz	0.007	0.019	0.032	0.040	0.048	0.064	0.069	0.070	
						Feed (mm/min)	188	251	314	314	314	314	272	220	
M	STAINLESS STEELS (PH) 13-8 PH, 15-5PH, 17-4 PH, Custom 450	< 325		≤ 0.5	≤ 1.5	94	RPM	10017	5009	3756	3005	2504	1878	1503	1202
						(76-113)	Fz	0.007	0.019	0.032	0.040	0.048	0.064	0.069	0.070
							Feed (mm/min)	216	288	361	361	361	361	313	252
			1	≤ 1	76	RPM	8078	4039	3029	2424	2020	1515	1212	969	
					(61-91)	Fz	0.007	0.019	0.032	0.040	0.048	0.064	0.069	0.070	
						Feed (mm/min)	174	233	291	291	291	291	252	204	
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoly 800, Monel 400	≤ 300		≤ 0.5	≤ 1.5	24	RPM	2585	1293	969	776	646	485	388	310
						(20-29)	Fz	0.006	0.017	0.028	0.035	0.041	0.054	0.059	0.060
							Feed (mm/min)	48	65	81	65	79	78	68	56
			1	≤ 1	20	RPM	2100	1050	788	630	525	394	315	252	
					(16-24)	Fz	0.006	0.017	0.028	0.035	0.041	0.054	0.059	0.060	
						Feed (mm/min)	39	53	66	66	64	64	55	45	
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 718, 750X, Incoly 925, Waspaloy, Hastelloy, Rene	> 300		≤ 0.5	≤ 1.5	19	RPM	2003	1002	751	601	501	376	301	240
						(15-23)	Fz	0.005	0.012	0.019	0.024	0.029	0.038	0.043	0.043
							Feed (mm/min)	29	36	43	43	43	43	38	31
			1	≤ 1	15	RPM	11471	5736	4302	3441	2868	2151	1721	1377	
					(12-18)	Fz	0.008	0.026	0.045	0.056	0.067	0.090	0.096	0.098	
						Feed (mm/min)	289	454	578	578	578	578	496	403	
S	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si	≤ 350		≤ 0.5	≤ 1.5	66	RPM	6947	3474	2605	2084	1737	1303	1042	834
						(52-79)	Fz	0.007	0.019	0.032	0.040	0.048	0.064	0.069	0.070
							Feed (mm/min)	150	200	250	250	250	250	217	175
			1	≤ 1	52	RPM	5493	2747	2060	1648	1373	1030	824	659	
					(41-62)	Fz	0.007	0.019	0.032	0.040	0.048	0.064	0.069	0.070	
						Feed (mm/min)	119	158	198	198	198	198	171	138	
S	TITANIUM ALLOYS (DIFFICULT) Ti10Al2Fe3Al, Ti5Al5V5Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti15V3 Cr3Sn3Al	> 350 ≤ 440		≤ 0.5	≤ 1.5	23	RPM	2424	1212	909	727	606	454	364	291
						(18-27)	Fz	0.007	0.019	0.032	0.040	0.048	0.064	0.069	0.070
							Feed (mm/min)	52	70	87	87	87	87	76	61
			1	≤ 1	18	RPM	1939	969	727	582	485	364	291	233	
					(15-22)	Fz	0.007	0.019	0.032	0.040	0.048	0.064	0.069	0.070	
						Feed (mm/min)	42	56	70	70	70	70	60	49	

rpm = (1000 x m/min) / (3.14 x D₁)

mm / min = (mm / flute) x 3 x rpm

reduce speed and feed for materials harder than listed


reduce feed and Ae when finish milling (.02 x D₁ maximum)

refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)






Series
44, 45, 43CR, 43CB,
43LC, 43, 43L, 47,
47B, 47ES, 47EB
Fractional



44, 45, 43CR, 43CB, 43LC, 43, 43L, 47, 47B, 47ES, 47EB Fractional							Vc (SFM)	Diameter (D ₁) (inch)					
					Ae x D ₁	Ap x D ₁		1/8	1/4	3/8	1/2	3/4	1
N	ALUMINUM ALLOYS 2024, 5052, 5086, 6061, 6073, 7975		1	≤ 1	1600 (1280-1920)	RPM	48896	24448	16299	12224	8149	6112	
						Fz	0.0009	0.0025	0.0045	0.0060	0.0070	0.0085	
						Feed 2 flutes (IPM)	88	122	147	147	114	104	
						Feed 3 flutes (IPM)	132	183	220	220	171	156	
			≤ 0.5	≤ 1.5	2000 (1600-2400)	RPM	61120	30560	20373	15280	10187	7640	
						Fz	0.0009	0.0025	0.0045	0.0060	0.0070	0.0085	
						Feed 2 flutes (IPM)	110	153	183	183	143	130	
						Feed 3 flutes (IPM)	165	229	275	275	214	195	
			≤ 0.5	≤ 2	3300 (2640-3960)	RPM	100848	50424	33616	25212	16808	12606	
						Fz	0.0021	0.0055	0.0105	0.0140	0.0165	0.0195	
						Feed 2 flutes (IPM)	424	555	706	706	555	492	
						Feed 3 flutes (IPM)	635	832	1059	1059	832	737	
N	ALUMINUM DIE CAST ALLOYS (HIGH SILICONE) A-390, A-392, B- 390		1	≤ 1	600 (480-720)	RPM	18336	9168	6112	4584	3056	2292	
						Fz	0.0009	0.0025	0.0045	0.0060	0.0070	0.0085	
						Feed 2 flutes (IPM)	33	46	55	55	43	39	
						Feed 3 flutes (IPM)	50	69	83	83	64	58	
			≤ 0.5	≤ 1.5	750 (600-900)	RPM	22920	11460	7640	5730	3820	2865	
						Fz	0.0009	0.0025	0.0045	0.0060	0.0070	0.0085	
						Feed 2 flutes (IPM)	41	57	69	69	53	49	
						Feed 3 flutes (IPM)	62	86	103	103	80	73	
			≤ 0.5	≤ 2	1240 (992-1488)	RPM	37894	18947	12631	9474	6316	4737	
						Fz	0.0021	0.0055	0.0105	0.0140	0.0165	0.0195	
						Feed 2 flutes (IPM)	159	208	265	265	208	185	
						Feed 3 flutes (IPM)	239	313	398	398	313	277	
N	COPPER ALLOYS Aluminum Bronze Brass Naval Brass Red Brass		1	≤ 1	865 (692-1038)	RPM	26434	13217	8811	6609	8149	6112	
						Fz	0.0008	0.0020	0.0040	0.0050	0.0060	0.0070	
						Feed 2 flutes (IPM)	42	53	70	66	98	86	
						Feed 3 flutes (IPM)	63	79	106	99	147	128	
			≤ 0.5	≤ 1.5	1080 (864-1296)	RPM	33005	16502	11002	8251	5501	4126	
						Fz	0.0008	0.0020	0.0040	0.0050	0.0060	0.0070	
						Feed 2 flutes (IPM)	53	66	88	83	66	58	
						Feed 3 flutes (IPM)	79	99	132	124	99	87	
			≤ 0.5	≤ 2	1780 (1424-2136)	RPM	54397	27198	18132	13599	9066	6800	
						Fz	0.0017	0.0045	0.0085	0.0115	0.0140	0.0160	
						Feed 2 flutes (IPM)	185	245	308	313	254	218	
						Feed 3 flutes (IPM)	277	367	462	469	381	326	

continued on next page

Series
44, 45, 43CR, 43CB,
43LC, 43, 43L, 47,
47B, 47ES, 47EB
Fractional



44, 45, 43CR, 43CB, 43LC, 43, 43L, 47, 47B, 47ES, 47EB Fractional							Vc (SFM)	Diameter (D ₁) (inch)					
Ae x D ₁		Ap x D ₁		1/8	1/4	3/8		1/2	3/4	1			
N	COPPER ALLOYS Beryllium Copper C110, Maganese Bronze, Tin Bronze		1	≤ 1	(276-414)	345	RPM	10543	5272	3514	2636	1757	1318
						Fz	0.0008	0.0020	0.0040	0.0050	0.0060	0.0070	
						Feed 2 flutes (IPM)	17	21	28	26	21	18	
						Feed 3 flutes (IPM)	25	32	42	40	32	28	
			≤ 0.5	≤ 1.5	(344-516)	430	RPM	13141	6570	4380	3285	2190	1643
						Fz	0.0008	0.0020	0.0040	0.0050	0.0060	0.0070	
						Feed 2 flutes (IPM)	21	26	35	33	26	23	
						Feed 3 flutes (IPM)	32	39	53	49	39	34	
			≤ 0.5	≤ 2	(568-852)	710	RPM	21698	10849	7233	5424	3616	2712
						Fz	0.0017	0.0045	0.0085	0.0115	0.0140	0.0160	
						Feed 2 flutes (IPM)	74	98	123	125	101	87	
						Feed 3 flutes (IPM)	111	146	184	187	152	130	
PLASTICS ABS, Polycarbonate, PVC, Polypropylene		1	≤ 1	(1280-1920)	1600	RPM	48896	24448	16299	12224	8149	6112	
					Fz	0.0015	0.0040	0.0075	0.0100	0.0120	0.0140		
					Feed 2 flutes (IPM)	147	196	244	244	196	171		
					Feed 3 flutes (IPM)	220	293	367	367	293	257		
		≤ 0.5	≤ 1.5	(1600-2400)	2000	RPM	61120	30560	20373	15280	10187	7640	
					Fz	0.0015	0.0040	0.0075	0.0100	0.0120	0.0140		
					Feed 2 flutes (IPM)	183	244	306	306	244	214		
					Feed 3 flutes (IPM)	275	367	458	458	367	321		
		≤ 0.5	≤ 2	(2640-3960)	3300	RPM	100848	50424	33616	25212	16808	12606	
					Fz	0.0034	0.0090	0.0170	0.0230	0.0275	0.0320		
					Feed 2 flutes (IPM)	686	908	1143	1160	924	807		
					Feed 3 flutes (IPM)	1029	1361	1714	1740	1387	1210		

rpm = sfm x 3.82 / D₁

ipm = (inch / flute) x number of flutes x rpm

HSM (high speed machining)


reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x D₁ maximum)

refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)




Series
44M, 43MCR, 43MCB,
43M, 47M, 47MB,
47MES, 47MEB
Metric



					Diameter (D ₁) (mm)							
					3	6	10	12	20	25	30	35
N	ALUMINUM ALLOYS 2024, 5052, 5086, 6061, 6073, 7975		1	≤ 1	490	RPM	52022	26011	15607	13005	7803	6243
					Fz	0.022	0.060	0.120	0.144	0.187	0.213	
					(392-588)	Feed 2 flutes (m/min)	2247	3121	3746	3745	2913	2653
					Feed 3 flutes (m/min)	3371	4682	5618	5618	4370	3980	
			≤ 0.5	≤ 1.5	610	RPM	64762	32381	19429	16190	9714	7771
					Fz	0.022	0.060	0.120	0.144	0.187	0.213	
					(488-732)	Feed 2 flutes (m/min)	2797	3885	4663	4662	3627	3303
					Feed 3 flutes (m/min)	4196	5828	6994	6994	5440	4955	
			≤ 0.5	≤ 2	1005	RPM	106698	53349	32009	26674	16005	12804
					Fz	0.050	0.132	0.280	0.336	0.440	0.488	
					(804-1206)	Feed 2 flutes (m/min)	10754	14083	17925	17924	14084	12484
					Feed 3 flutes (m/min)	16131	21124	26888	26885	21126	18726	
N	ALUMINUM DIE CAST ALLOYS (HIGH SILICONE) A-390, A-392, B- 390		1	≤ 1	185	RPM	19641	9820	15607	13005	7803	6243
					Fz	0.022	0.060	0.120	0.144	0.187	0.213	
					(148-222)	Feed 2 flutes (m/min)	848	1178	3746	3745	2913	2653
					Feed 3 flutes (m/min)	1273	1768	5618	5618	4370	3980	
			≤ 0.5	≤ 1.5	230	RPM	24418	12209	7326	6105	3663	2930
					Fz	0.022	0.060	0.120	0.144	0.187	0.213	
					(184-276)	Feed 2 flutes (m/min)	1055	1465	1758	1758	1367	1245
					Feed 3 flutes (m/min)	1582	2197	2637	2637	2051	1868	
			≤ 0.5	≤ 2	380	RPM	40343	20172	12103	10086	6052	4841
					Fz	0.050	0.132	0.280	0.336	0.440	0.488	
					(304-456)	Feed 2 flutes (m/min)	4066	5325	6778	6777	5325	4720
					Feed 3 flutes (m/min)	6099	7987	10166	10166	7988	7081	
N	COPPER ALLOYS Aluminum Bronze Brass Naval Brass Red Brass		1	≤ 1	265	RPM	28134	14067	8440	7034	7803	6243
					Fz	0.019	0.048	0.107	0.120	0.160	0.175	
					(212-318)	Feed 2 flutes (m/min)	1080	1350	1801	1688	2497	2185
					Feed 3 flutes (m/min)	1620	2025	2701	2532	3746	3278	
			≤ 0.5	≤ 1.5	330	RPM	35035	17518	10511	8759	5255	4204
					Fz	0.019	0.048	0.107	0.120	0.160	0.175	
					(264-396)	Feed 2 flutes (m/min)	1345	1682	2242	2102	1682	1472
					Feed 3 flutes (m/min)	2018	2522	3363	3153	2523	2207	
			≤ 0.5	≤ 2	545	RPM	57861	28930	17358	14465	8679	6943
					Fz	0.041	0.108	0.227	0.276	0.373	0.400	
					(436-654)	Feed 2 flutes (m/min)	4721	6248	7869	7984	6480	5555
					Feed 3 flutes (m/min)	7082	9373	11804	11976	9721	8332	

continued on next page

Series
44M, 43MCR, 43MCB,
43M, 47M, 47MB,
47MES, 47MEB
Metric



44M, 43MCR, 43MCB, 43M, 47M, 47MB, 47MES, 47MEB							Vc (m/min)	Diameter (D ₁) (mm)					
Metric	Ae x D ₁		Ap x D ₁		3	6		10	12	20	25		
N	COPPER ALLOYS Beryllium Copper C110, Manganese Bronze, Tin Bronze		1	≤ 1	105 (84-126)	RPM	11148	5574	3344	2787	1672	1338	
						Fz	0.019	0.048	0.107	0.120	0.160	0.175	
						Feed 2 flutes (m/min)	428	535	713	669	535	468	
						Feed 3 flutes (m/min)	642	803	1070	1003	803	702	
			≤ 0.5	≤ 1.5	130 (104-156)	RPM	13802	6901	4141	3450	2070	1656	
						Fz	0.019	0.048	0.107	0.120	0.160	0.175	
						Feed 2 flutes (m/min)	530	662	883	828	662	580	
						Feed 3 flutes (m/min)	795	994	1325	1242	994	870	
			≤ 0.5	≤ 2	215 (172-258)	RPM	22826	11413	6848	5706	3424	2739	
						Fz	0.041	0.108	0.227	0.276	0.373	0.400	
						Feed 2 flutes (m/min)	1862	2465	3104	3150	2556	2191	
						Feed 3 flutes (m/min)	2794	3697	4656	4725	3835	3287	
PLASTICS ABS, Polycarbonate, PVC, Polypropylene		1	≤ 1	490 (392-588)	RPM	52022	26011	15607	13005	7803	6243		
					Fz	0.036	0.096	0.200	0.240	0.320	0.350		
					Feed 2 flutes (m/min)	3745	4994	6243	6242	4994	4370		
					Feed 3 flutes (m/min)	5618	7490	9364	9363	7491	6555		
		≤ 0.5	≤ 1.5	610 (488-732)	RPM	64762	32381	19429	16190	9714	7771		
					Fz	0.036	0.096	0.200	0.240	0.320	0.350		
					Feed 2 flutes (m/min)	4662	6217	7771	7771	6217	5440		
					Feed 3 flutes (m/min)	6994	9325	11657	11656	9326	8160		
		≤ 0.5	≤ 2	1005 (804-1206)	RPM	106698	53349	32009	26674	16005	12804		
					Fz	0.082	0.216	0.453	0.552	0.733	0.800		
					Feed 2 flutes (m/min)	17412	23045	29022	29446	23473	20487		
					Feed 3 flutes (m/min)	26117	34567	43532	44169	35210	30730		

rpm = (1000 x m/min) / (3.14 x D₁)


mm / min = (mm / flute) x number of flutes x rpm

HSM (high speed machining)

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x D₁ maximum)


refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)



Series 27 Fractional				Vc (SFM)		Diameter (D ₁) (inch)				
						1/4	5/16	3/8	1/2	3/4
CFRP, AFRP (CARBON FIBER, ARAMID FIBER)		1	≤ 1	400	RPM	6112	4890	4075	3056	2037
				(320-480)	Fz	0.0016	0.0025	0.0030	0.0040	0.0048
					Feed (IPM)	39.1	48.9	48.9	48.9	39.1
		≤ 0.5	≤ 1.5	500	RPM	7640	6112	5093	3820	2547
				(400-600)	Fz	0.0016	0.0025	0.0030	0.0040	0.0048
					Feed (IPM)	48.9	61.1	61.1	61.1	48.9
		≤ 0.5	≤ 2	825	RPM	12606	10085	8404	6303	4202
				(660-990)	Fz	0.0037	0.0057	0.0069	0.0092	0.0110
					Feed (IPM)	186.6	229.9	232.0	232.0	184.9
GFRP (FIBERGLASS)		1	≤ 1	320	RPM	4890	3912	3260	2445	1630
				(256-384)	Fz	0.0016	0.0025	0.0030	0.0040	0.0048
					Feed (IPM)	31.3	39.1	39.1	39.1	31.3
		≤ 0.5	≤ 1.5	400	RPM	6112	4890	4075	3056	2037
				(320-480)	Fz	0.0016	0.0025	0.0030	0.0040	0.0048
					Feed (IPM)	39.1	48.9	48.9	48.9	39.1
		≤ 0.5	≤ 2	660	RPM	10085	8068	6723	5042	3362
				(528-792)	Fz	0.0037	0.0057	0.0069	0.0092	0.0110
					Feed (IPM)	149.3	183.9	185.6	185.6	147.9
CARBON, GRAPHITE		1	≤ 1	480	RPM	7334	5868	4890	3667	2445
				(384-576)	Fz	0.0020	0.0031	0.0038	0.0050	0.0060
					Feed (IPM)	58.7	72.8	74.3	73.3	58.7
		≤ 0.5	≤ 1.5	600	RPM	9168	7334	6112	4584	3056
				(480-720)	Fz	0.0020	0.0031	0.0038	0.0050	0.0060
					Feed (IPM)	73.3	90.9	92.9	91.7	73.3
		≤ 0.5	≤ 2	990	RPM	15127	12102	10085	7564	5042
				(792-1188)	Fz	0.0046	0.0072	0.0086	0.0115	0.0138
					Feed (IPM)	278.3	348.5	346.9	347.9	278.3
PLASTICS		1	≤ 1	800	RPM	12224	9779	8149	6112	4075
				(640-690)	Fz	0.0020	0.0031	0.0038	0.0050	0.0060
					Feed (IPM)	97.8	121.3	123.9	122.2	97.8
		≤ 0.5	≤ 1.5	1000	RPM	15280	12224	10187	7640	5093
				(800-1200)	Fz	0.0020	0.0031	0.0038	0.0050	0.0060
					Feed (IPM)	122.2	151.6	154.8	152.8	122.2
		≤ 0.5	≤ 2	1650	RPM	25212	20170	16808	12606	8404
				(1320-1980)	Fz	0.0046	0.0072	0.0086	0.0115	0.0138
					Feed (IPM)	463.9	580.9	578.2	579.9	463.9
MACHINABLE CERAMICS MACHINABLE GLASS		1	≤ 1	40	RPM	611	489	407	306	204
				(32-48)	Fz	0.0008	0.0013	0.0015	0.0020	0.0024
					Feed (IPM)	2.0	2.5	2.4	2.4	2.0
		≤ 0.5	≤ 1.5	50	RPM	764	611	509	382	255
				(40-60)	Fz	0.0008	0.0013	0.0015	0.0020	0.0024
					Feed (IPM)	2.4	3.2	3.1	3.1	2.4
		≤ 0.5	≤ 2	85	RPM	1299	1039	866	649	433
				(68-102)	Fz	0.0018	0.0029	0.0034	0.0046	0.0055
					Feed (IPM)	9.4	12.1	11.8	11.9	9.5

$rpm = sfm \times 3.82 / D_1$
 $ipm = (inch / flute) \times 4 \times rpm$
 HSM (high speed machining)
 adjust parameters based on resin type and fiber structure
 reduce speed when overheating causes melting or damage to resin
 reduce feed if delamination or fraying occur

finish cuts typically required reduced feed and cutting depths
 rates shown are for use without coolant; rates may be increased with coolant
 dust collection is vital when machining dry
 diamond coating will increase tool life in graphite and composite materials
 refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)



Series 27M Metric				Vc (m/min)	Diameter (D1) (mm)					
		Ae x D1	Ap x D1		6	8	10	12	16	
CFRP, AFRP (CARBON FIBER, ARAMID FIBER)		1	≤ 1	120	RPM	6361	4771	3817	3181	2385
				(96-164)	Fz	0.040	0.065	0.075	0.100	0.120
					Feed (mm/min)	1018	1240	1145	1272	1145
		≤ 0.5	≤ 1.5	150	RPM	7951	5963	4771	3976	2982
				(120-180)	Fz	0.040	0.065	0.075	0.100	0.120
					Feed (mm/min)	1272	1550	1431	1590	1431
		≤ 0.5	≤ 2	250	RPM	13252	9939	7951	6626	4970
				(200-300)	Fz	0.095	0.145	0.175	0.235	0.280
					Feed (mm/min)	5036	5765	5566	6228	5566
GFRP (FIBERGLASS)		1	≤ 1	100	RPM	5301	3976	3181	2650	1988
				(80-120)	Fz	0.040	0.065	0.075	0.100	0.120
					Feed (mm/min)	848	1034	954	1060	954
		≤ 0.5	≤ 1.5	120	RPM	6361	4771	3817	3181	2385
				(96-164)	Fz	0.040	0.065	0.075	0.100	0.120
					Feed (mm/min)	1018	1240	1145	1272	1145
		≤ 0.5	≤ 2	200	RPM	10602	7951	6361	5301	3976
				(160-240)	Fz	0.095	0.145	0.175	0.235	0.280
					Feed (mm/min)	4029	4612	4453	4983	4453
CARBON, GRAPHITE		1	≤ 1	145	RPM	7686	5765	4612	3843	2882
				(116-174)	Fz	0.050	0.080	0.095	0.125	0.150
					Feed (mm/min)	1537	1845	1752	1922	1729
		≤ 0.5	≤ 1.5	185	RPM	9807	7355	5884	4903	3677
				(148-222)	Fz	0.050	0.080	0.095	0.125	0.150
					Feed (mm/min)	1961	2354	2236	2452	2206
		≤ 0.5	≤ 2	300	RPM	15903	11927	9542	7951	5963
				(240-360)	Fz	0.115	0.185	0.220	0.290	0.350
					Feed (mm/min)	7315	8826	8397	9223	8349
PLASTICS		1	≤ 1	245	RPM	12987	9740	7792	6494	4870
				(196-294)	Fz	0.050	0.080	0.095	0.125	0.150
					Feed (mm/min)	2597	3117	2961	3247	2922
		≤ 0.5	≤ 1.5	305	RPM	16168	12126	9701	8084	6063
				(244-366)	Fz	0.050	0.080	0.095	0.125	0.150
					Feed (mm/min)	3234	3880	3686	4042	3638
		≤ 0.5	≤ 2	505	RPM	26769	20077	16062	13385	10038
				(404-606)	Fz	0.115	0.185	0.220	0.290	0.350
					Feed (mm/min)	12314	14857	14134	15526	14054
MACHINABLE CERAMICS MACHINABLE GLASS		1	≤ 1	10	RPM	530	398	318	265	199
				(8-12)	Fz	0.020	0.035	0.040	0.050	0.060
					Feed (mm/min)	42	56	51	53	48
		≤ 0.5	≤ 1.5	15	RPM	795	596	477	398	298
				(12-18)	Fz	0.020	0.035	0.040	0.050	0.060
					Feed (mm/min)	64	83	76	80	72
		≤ 0.5	≤ 2	25	RPM	1325	994	795	663	497
				(20-30)	Fz	0.045	0.075	0.085	0.115	0.140
					Feed (mm/min)	239	298	270	305	278

rpm = (1000 x m/min) / (3.14 x D₁)

mm / min = (mm / flute) x 4 x rpm

HSM (high speed machining)

adjust parameters based on resin type and fiber structure

reduce speed when overheating causes melting or damage to resin

reduce feed if delamination or fraying occur


finish cuts typically required reduced feed and cutting depths

rates shown are for use without coolant; rates may be increased with coolant

dust collection is vital when machining dry

diamond coating will increase tool life in graphite and composite materials


refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)



16

FRACTIONAL SERIES

TECH INFO 139

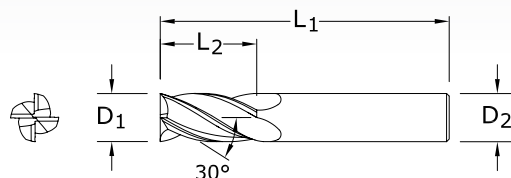

TOLERANCES (inch)

$D_1 = +0.0000/-0.0020$

$D_2 = h_6$

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS
TITANIUM
NON-FERROUS
PLASTICS/COMPOSITES

inch				EDP NO.			
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	UNCOATED	TI-NAMITE (TiN)	TI-NAMITE-C (TiCN)	TI-NAMITE-A (AlTiN)
1/16	1/8	1-1/2	1/8	31601	31650	31238	31251
3/32	3/16	1-1/2	1/8	31603	31651	31239	31252
1/8	1/4	1-1/2	1/8	31605	31652	31240	31253
5/32	5/16	2	3/16	31607	31653	31241	31254
3/16	3/8	2	3/16	31609	31654	31242	31255
7/32	7/16	2	1/4	31611	31655	31243	31256
1/4	1/2	2	1/4	31613	31656	31244	31257
5/16	1/2	2	5/16	31615	31657	31245	31258
3/8	5/8	2	3/8	31617	31658	31246	31259
7/16	5/8	2-1/2	7/16	31619	31659	31247	31260
1/2	5/8	2-1/2	1/2	31621	31660	31248	31261
5/8	3/4	3	5/8	31623	31661	31249	31262
3/4	1	3	3/4	31625	31662	31250	31263

16M

METRIC SERIES

TECH INFO 141


mm				EDP NO.			
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	UNCOATED EDP NO.	TI-NAMITE (TiN)	TI-NAMITE-C (TiCN)	TI-NAMITE-A (AlTiN)
1,0	2,0	38,0	3,0	41605	49136	49157	49178
1,5	3,0	38,0	3,0	41609	49137	49158	49179
2,0	4,0	38,0	3,0	41613	49138	49159	49180
2,5	5,0	38,0	3,0	41617	49139	49160	49181
3,0	6,0	38,0	3,0	41621	49140	49161	49182
3,5	7,0	50,0	4,0	41625	49141	49162	49183
4,0	8,0	50,0	4,0	41629	49142	49163	49184
4,5	9,5	50,0	4,5	41633	49143	49164	49185
5,0	10,0	50,0	5,0	41637	49144	49165	49186
6,0	12,0	50,0	6,0	41641	49145	49166	49187
7,0	12,0	50,0	8,0	41645	49146	49167	49188
8,0	12,0	50,0	8,0	41649	49147	49168	49189
9,0	14,0	50,0	9,0	41653	49148	49169	49190
10,0	16,0	50,0	10,0	41657	49149	49170	49191
11,0	19,0	63,0	12,0	41661	49150	49171	49192
12,0	19,0	63,0	12,0	40165	49151	49172	49193

TOLERANCES (mm)


$D_1 = +0,000/-0,050$

$D_2 = h_6$






TOLERANCES (inch)

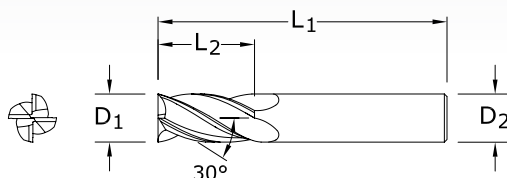
D₁ = +0.0000/-0.0020D₂ = h₆
1 • 1L • 1EL
 FRACTIONAL SERIES

inch				EDP NO.							SERIES
CUTTING DIAMETER D ₁	LENGTH OF CUT L ₂	OVERALL LENGTH L ₁	SHANK DIAMETER D ₂	UNCOATED	UNCOATED W/FLAT	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)	Ti-NAMITE-A (AlTiN) W/FLAT	Di-NAMITE (Diamond)	
1/64	1/32	1-1/2	1/8	30101	—	39101	39001	30191	—	—	1
1/32	5/64	1-1/2	1/8	30103	—	39103	39003	30192	—	—	1
3/64	7/64	1-1/2	1/8	30105	—	39105	39005	30193	—	—	1
1/16	3/16	1-1/2	1/8	30107	—	39107	39007	30194	—	91268	1
5/64	3/16	1-1/2	1/8	30109	—	39109	39009	30195	—	—	1
3/32	9/32	1-1/2	1/8	30111	—	39111	39011	30196	—	—	1
7/64	3/8	1-1/2	1/8	30113	—	39113	39013	30197	—	—	1
1/8	3/8	1-1/2	1/8	30177	—	39177	39077	30029	—	—	1
*1/8	1/2	1-1/2	1/8	30115	—	39115	39015	30198	—	91272	1
1/8	3/4	2-1/4	1/8	33141	—	31727	31737	31747	—	—	1L
1/8	1	3	1/8	33143	—	31860	31870	31880	—	—	1EL
9/64	1/2	2	3/16	30117	—	39117	39017	30199	—	—	1
5/32	1/2	2	3/16	30119	—	39119	39019	30000	—	—	1
11/64	5/8	2	3/16	30121	—	39121	39021	30001	—	—	1
*3/16	5/8	2	3/16	30123	—	39123	39023	30002	—	91276	1
3/16	3/4	2-1/2	3/16	33101	—	31728	31738	31748	—	—	1L
3/16	1-1/8	3	3/16	33121	—	31861	31871	31881	—	—	1EL
13/64	5/8	2-1/2	1/4	30125	—	39125	39025	30003	—	—	1
7/32	5/8	2-1/2	1/4	30127	—	39127	39027	30004	—	—	1
15/64	3/4	2-1/2	1/4	30129	—	39129	39029	30005	—	—	1
*1/4	3/4	2-1/2	1/4	30131	—	39131	39031	30006	—	91280	1
1/4	1-1/8	3	1/4	33103	—	31729	31739	31749	—	—	1L
1/4	1-1/2	4	1/4	33123	—	31862	31872	31882	—	—	1EL
17/64	3/4	2-1/2	5/16	30133	—	39133	39033	30007	—	—	1
9/32	3/4	2-1/2	5/16	30135	—	39135	39035	30008	—	—	1
19/64	13/16	2-1/2	5/16	30137	—	39137	39037	30009	—	—	1
*5/16	13/16	2-1/2	5/16	30139	—	39139	39039	30010	—	91284	1
5/16	1-1/8	3	5/16	33105	—	31730	31740	31763	—	—	1L
5/16	1-5/8	4	5/16	33125	—	31863	31873	31883	—	—	1EL
21/64	1	2-1/2	3/8	30141	—	39141	39041	30011	—	—	1
11/32	1	2-1/2	3/8	30143	—	39143	39043	30012	—	—	1
23/64	1	2-1/2	3/8	30145	—	39145	39045	30013	—	—	1
*3/8	1	2-1/2	3/8	30147	30179	39147	39047	30014	30379	91288	1
3/8	1-1/8	3	3/8	33107	—	31731	31741	31764	—	—	1L
3/8	1-3/4	4	3/8	33127	—	31864	31874	31884	—	—	1EL
25/64	1	2-3/4	7/16	30149	—	39149	39049	30015	—	—	1

continued on next page


TECH INFO 139





1 • 1L • 1EL

FRACTIONAL SERIES

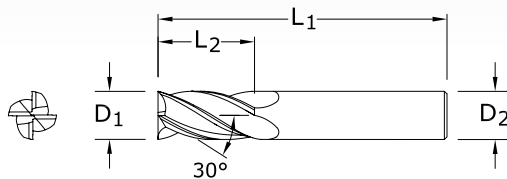

TOLERANCES (inch)


$D_1 = +0.0000/-0.0020$
 $D_2 = h_6$

TECH INFO 139


- STEELS
- STAINLESS STEELS
- CAST IRON
- HIGH TEMP ALLOYS
- TITANIUM
- NON-FERROUS
- PLASTICS/COMPOSITES

inch				EDP NO.							SERIES
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	UNCOATED	UNCOATED W/FLAT	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)	Ti-NAMITE-A (AlTiN) W/FLAT	Di-NAMITE (Diamond)	
13/32	1	2-3/4	7/16	30151	—	39151	39051	30016	—	—	1
27/64	1	2-3/4	7/16	30153	—	39153	39053	30017	—	—	1
7/16	1	2-3/4	7/16	30155	—	39155	39055	30018	—	—	1
7/16	2	4-1/2	7/16	33109	—	31732	31742	31765	—	—	1L
7/16	3	6	7/16	33129	—	31865	31875	31885	—	—	1EL
29/64	1	3	1/2	30157	—	39157	39057	30019	—	—	1
15/32	1	3	1/2	30159	—	39159	39059	30020	—	—	1
31/64	1	3	1/2	30161	—	39161	39061	30021	—	—	1
1/2	1	3	1/2	30163	30180	39163	39063	30022	30380	91292	1
1/2	2	4-1/2	1/2	33111	—	31733	31743	31766	—	—	1L
1/2	3	6	1/2	33131	—	31866	31876	31886	—	—	1EL
9/16	1-1/8	3-1/2	9/16	30165	—	39165	39065	30023	—	—	1
5/8	1-1/4	3-1/2	5/8	30167	30181	39167	39067	30024	30381	—	1
5/8	2-1/4	5	5/8	33113	—	31734	31744	31767	—	—	1L
5/8	3	6	5/8	33133	—	31867	31877	31887	—	—	1EL
11/16	1-3/8	4	3/4	30169	—	39169	39069	30025	—	—	1
3/4	1-1/2	4	3/4	30171	30182	39171	39071	30026	30382	—	1
3/4	2-1/4	5	3/4	33115	—	31735	31745	31768	—	—	1L
3/4	3	6	3/4	33135	—	31868	31878	31888	—	—	1EL
7/8	1-1/2	4	7/8	30173	—	39173	39073	30027	—	—	1
1	1-1/2	4	1	30175	30183	39175	39075	30028	30383	—	1
1	2-1/4	5	1	33117	—	31736	31746	31769	—	—	1L
1	3	6	1	33137	—	31869	31879	31889	—	—	1EL
*Series 1 Set				30189	—	39189	39089	30030	—	—	1





TOLERANCES (mm)

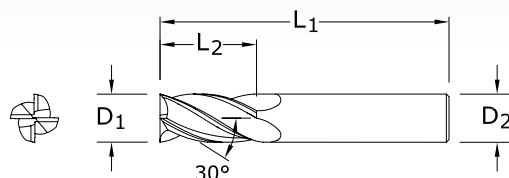D₁ = +0,000/-0,050D₂ = h₆


1M • 1XLM

METRIC SERIES

mm				EDP NO.				SERIES
CUTTING DIAMETER D ₁	LENGTH OF CUT L ₂	OVERALL LENGTH L ₁	SHANK DIAMETER D ₂	UNCOATED EDP NO.	TI-NAMITE (TiN)	TI-NAMITE-C (TiCN)	TI-NAMITE-A (AlTiN)	
1,0	4,0	38,0	3,0	40105	48500	48522	48543	1M
1,5	4,5	38,0	3,0	40109	48501	48523	48544	1M
2,0	6,3	38,0	3,0	40113	48502	48524	48545	1M
2,5	9,5	38,0	3,0	40117	48503	48525	48546	1M
3,0	12,0	38,0	3,0	40121	48504	48526	48547	1M
3,0	25,0	75,0	3,0	43101	49388	49401	49414	1XLM
3,5	12,0	50,0	4,0	40125	48505	48527	48548	1M
4,0	14,0	50,0	4,0	40129	48506	48528	48549	1M
4,0	25,0	75,0	4,0	43103	49389	49402	49415	1XLM
4,5	16,0	50,0	6,0	40133	48507	48529	48550	1M
5,0	16,0	50,0	6,0	40137	48508	48530	48551	1M
5,0	25,0	75,0	5,0	43107	49391	49404	49417	1XLM
6,0	19,0	50,0	6,0	40141	48509	48531	48552	1M
6,0	25,0	75,0	6,0	43105	49390	49403	49416	1XLM
7,0	19,0	63,0	8,0	40145	48510	48532	48553	1M
8,0	20,0	63,0	8,0	40149	48511	48533	48554	1M
8,0	25,0	75,0	8,0	43115	49392	49405	49418	1XLM
9,0	22,0	75,0	10,0	40153	48512	48534	48555	1M
10,0	22,0	75,0	10,0	40157	48513	48535	48556	1M
10,0	38,0	100,0	10,0	43125	49393	49406	49419	1XLM
11,0	25,0	75,0	12,0	40161	48514	48536	48557	1M
12,0	25,0	75,0	12,0	41665	48515	48537	48558	1M
12,0	50,0	100,0	12,0	43135	49394	49407	49420	1XLM
12,0	75,0	150,0	12,0	43145	49395	49408	49421	1XLM
14,0	32,0	89,0	14,0	40169	48516	48538	48559	1M
14,0	75,0	150,0	14,0	43155	49396	49409	49422	1XLM
16,0	32,0	89,0	16,0	40173	48517	48539	48560	1M
16,0	75,0	150,0	16,0	43165	49397	49410	49423	1XLM
18,0	38,0	100,0	18,0	40177	48518	48540	48561	1M
18,0	75,0	150,0	18,0	43175	49398	49411	49424	1XLM
20,0	38,0	100,0	20,0	40181	48519	48541	48562	1M
20,0	75,0	150,0	20,0	43185	49399	49412	49425	1XLM
25,0	38,0	100,0	25,0	40185	48520	48542	48563	1M
25,0	75,0	150,0	25,0	43195	49400	49413	49426	1XLM

TECH INFO 141


STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS
TITANIUM
NON-FERROUS
PLASTICS/COMPOSITES



14

FRACTIONAL SERIES

TECH INFO 139

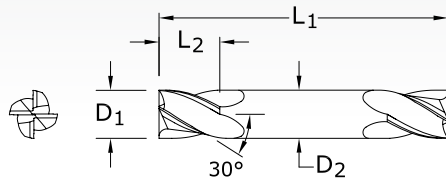

TOLERANCES (inch)



D₁ = +0.0000/-0.0020

D₂ = h₆

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS
TITANIUM
NON-FERROUS
PLASTICS/COMPOSITES

inch				EDP NO.			
CUTTING DIAMETER D ₁	LENGTH OF CUT L ₂	OVERALL LENGTH L ₁	SHANK DIAMETER D ₂	UNCOATED	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)
1/32	1/16	1-1/2	1/8	31401	31441	39601	31170
3/64	3/32	1-1/2	1/8	31403	31443	39603	31171
1/16	1/8	1-1/2	1/8	31405	31445	39605	31172
5/64	1/8	1-1/2	1/8	31407	31447	39607	31173
3/32	3/16	1-1/2	1/8	31409	31449	39609	31174
7/64	3/16	1-1/2	1/8	31411	31451	39611	31175
1/8	1/4	1-1/2	1/8	31413	31453	39613	31176
9/64	5/16	2	3/16	31415	31455	39615	31177
5/32	5/16	2	3/16	31417	31457	39617	31178
11/64	5/16	2	3/16	31419	31459	39619	31179
3/16	3/8	2	3/16	31421	31461	39621	31180
13/64	1/2	2-1/2	1/4	31423	31463	39623	31181
7/32	1/2	2-1/2	1/4	31425	31465	39625	31182
15/64	1/2	2-1/2	1/4	31427	31467	39627	31183
1/4	1/2	2-1/2	1/4	31429	31469	39629	31184
9/32	1/2	2-1/2	5/16	31431	31471	39631	31185
5/16	1/2	2-1/2	5/16	31433	31473	39633	31186
3/8	9/16	2-1/2	3/8	31435	31475	39635	31187
7/16	9/16	2-3/4	7/16	31437	31477	39637	31188
1/2	5/8	3	1/2	31439	31479	39639	31189

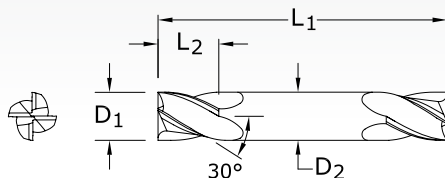


TOLERANCES (mm)
 $D_1 = +0,000/-0,050$
 $D_2 = h_6$

14M
METRIC SERIES

TECH INFO 141

mm				EDP NO.			
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	UNCOATED	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)
1,0	2,0	38,0	3,0	41405	48884	48905	48926
1,5	3,0	38,0	3,0	41409	48885	48906	48927
2,0	4,0	38,0	3,0	41413	48886	48907	48928
2,5	5,0	38,0	3,0	41417	48887	48908	48929
3,0	6,0	38,0	3,0	41421	48888	48909	48930
3,5	7,0	50,0	4,0	41425	48889	48910	48931
4,0	8,0	50,0	4,0	41429	48890	48911	48932
4,5	9,5	63,0	4,5	41433	48891	48912	48933
5,0	10,0	63,0	5,0	41437	48892	48913	48934
6,0	12,0	63,0	6,0	41441	48893	48914	48935
7,0	12,0	63,0	8,0	41445	48894	48915	48936
8,0	12,0	63,0	8,0	41449	48895	48916	48937
9,0	14,0	75,0	9,0	41453	48896	48917	48938
10,0	14,0	75,0	10,0	41457	48897	48918	48939
11,0	14,0	75,0	12,0	41461	48898	48919	48940
12,0	16,0	75,0	12,0	41465	48899	48920	48941

STEELS

STAINLESS STEELS

CAST IRON


HIGH TEMP ALLOYS

TITANIUM

NON-FERROUS


PLASTICS/COMPOSITES





1B • 1LB • 1ELB

FRACTIONAL SERIES

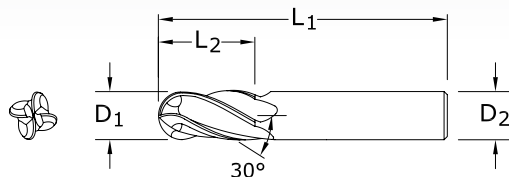

TOLERANCES (inch)

D₁ = +0.0000/-0.0020D₂ = h₆

TECH INFO 139

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS
TITANIUM
NON-FERROUS
PLASTICS/COMPOSITES

inch				EDP NO.							SERIES
CUTTING DIAMETER D ₁	LENGTH OF CUT L ₂	OVERALL LENGTH L ₁	SHANK DIAMETER D ₂	UNCOATED	UNCOATED W/FLAT	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)	Ti-NAMITE-A (AlTiN) W/FLAT	Di-NAMITE (Diamond)	
1/64	1/32	1-1/2	1/8	30102	—	39102	39002	30031	—	—	1B
1/32	5/64	1-1/2	1/8	30104	—	39104	39004	30032	—	—	1B
3/64	7/64	1-1/2	1/8	30106	—	39106	39006	30033	—	—	1B
1/16	3/16	1-1/2	1/8	30108	—	39108	39008	30034	—	91269	1B
5/64	3/16	1-1/2	1/8	30110	—	39110	39010	30035	—	—	1B
3/32	9/32	1-1/2	1/8	30112	—	39112	39012	30036	—	—	1B
7/64	3/8	1-1/2	1/8	30114	—	39114	39014	30037	—	—	1B
*1/8	3/8	1-1/2	1/8	30069	—	39178	39078	—	—	—	1B
1/8	1/2	1-1/2	1/8	30116	—	39116	39016	30038	—	91273	1B
1/8	3/4	2-1/4	1/8	33142	—	31770	31780	31790	—	—	1LB
1/8	1	3	1/8	33144	—	31900	31918	31928	—	—	1ELB
9/64	1/2	2	3/16	30118	—	39118	39018	30039	—	—	1B
5/32	1/2	2	3/16	30120	—	39120	39020	30040	—	—	1B
11/64	5/8	2	3/16	30122	—	39122	39022	30041	—	—	1B
*3/16	5/8	2	3/16	30124	—	39124	39024	30042	—	—	1B
3/16	3/4	2-1/2	3/16	33102	—	31771	31781	31791	—	91277	1LB
3/16	1-1/8	3	3/16	33122	—	31902	31919	31929	—	—	1ELB
13/64	5/8	2-1/2	1/4	30126	—	39126	39026	30043	—	—	1B
7/32	5/8	2-1/2	1/4	30128	—	39128	39028	30044	—	—	1B
15/64	3/4	2-1/2	1/4	30130	—	39130	39030	30045	—	—	1B
*1/4	3/4	2-1/2	1/4	30132	—	39132	39032	30046	—	91281	1B
1/4	1-1/8	3	1/4	33104	—	31772	31782	31792	—	—	1LB
1/4	1-1/2	4	1/4	33124	—	31904	31920	31930	—	—	1ELB
17/64	3/4	2-1/2	5/16	30134	—	39134	39034	30047	—	—	1B
9/32	3/4	2-1/2	5/16	30136	—	39136	39036	30048	—	—	1B
19/64	13/16	2-1/2	5/16	30138	—	39138	39038	30049	—	—	1B
*5/16	13/16	2-1/2	5/16	30140	—	39140	39040	30050	—	91285	1B
5/16	1-1/8	3	5/16	33106	—	31773	31783	31793	—	—	1LB

continued on next page






1B • 1LB • 1ELB

FRACTIONAL SERIES


CONTINUED

inch				EDP NO.							SERIES
CUTTING DIAMETER D ₁	LENGTH OF CUT L ₂	OVERALL LENGTH L ₁	SHANK DIAMETER D ₂	UNCOATED	UNCOATED W/FLAT	TI-NAMITE (TiN)	TI-NAMITE-C (TiCN)	TI-NAMITE-A (AlTiN)	TI-NAMITE-A (AlTiN) W/FLAT	DI-NAMITE (Diamond)	
5/16	1-5/8	4	5/16	33126	—	31906	31921	31931	—	—	1ELB
21/64	1	2-1/2	3/8	30142	—	39142	39042	30051	—	—	1B
11/32	1	2-1/2	3/8	30144	—	39144	39044	30052	—	—	1B
23/64	1	2-1/2	3/8	30146	—	39146	39046	30053	—	—	1B
*3/8	1	2-1/2	3/8	30148	30184	39148	39048	30054	30384	91289	1B
3/8	1-1/8	3	3/8	33108	—	31774	31784	31794	—	—	1LB
3/8	1-3/4	4	3/8	33128	—	31908	31922	31932	—	—	1ELB
25/64	1	2-3/4	7/16	30150	—	39150	39050	30055	—	—	1B
13/32	1	2-3/4	7/16	30152	—	39152	39052	30056	—	—	1B
27/64	1	2-3/4	7/16	30154	—	39154	39054	30057	—	—	1B
7/16	1	2-3/4	7/16	30156	—	39156	39056	30058	—	—	1B
7/16	2	4-1/2	7/16	33110	—	31775	31785	31795	—	—	1LB
7/16	3	6	7/16	33130	—	31910	31923	31933	—	—	1ELB
29/64	1	3	1/2	30158	—	39158	39058	30059	—	—	1B
15/32	1	3	1/2	30160	—	39160	39060	30060	—	—	1B
31/64	1	3	1/2	30162	—	39162	39062	30061	—	—	1B
*1/2	1	3	1/2	30164	30185	39164	39064	30062	30385	91293	1B
1/2	2	4-1/2	1/2	33112	—	31776	31786	31796	—	—	1LB
1/2	3	6	1/2	33132	—	31912	31924	31934	—	—	1ELB
9/16	1-1/8	3-1/2	9/16	30166	—	39166	39066	30063	—	—	1B
5/8	1-1/4	3-1/2	5/8	30168	30186	39168	39068	30064	30386	—	1B
5/8	2-1/4	5	5/8	33114	—	31777	31787	31797	—	—	1LB
5/8	3	6	5/8	33134	—	31914	31925	31935	—	—	1ELB
11/16	1-3/8	4	3/4	30170	—	39170	39070	30065	—	—	1B
3/4	1-1/2	4	3/4	30172	30187	39172	39072	30066	30387	—	1B
3/4	2-1/4	5	3/4	33116	—	31778	31788	31798	—	—	1LB
3/4	3	6	3/4	33136	—	31916	31926	31936	—	—	1ELB
7/8	1-1/2	4	7/8	30174	—	39174	39074	30067	—	—	1B
1	1-1/2	4	1	30176	30188	39176	39076	30068	30388	—	1B
1	2-1/4	5	1	33118	—	31779	31789	31799	—	—	1LB
1	3	6	1	33138	—	31917	31927	31937	—	—	1ELB
*Series 1B Set				30190	—	39190	39090	30070	—	—	1B



1MB • 1XLMB


METRIC SERIES

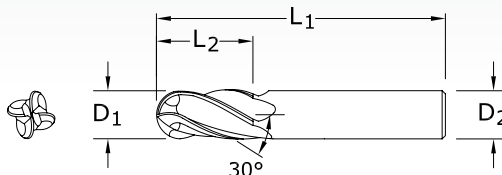

TOLERANCES (mm)



$D_1 = +0,000/-0,050$
 $D_2 = h_6$

TECH INFO 141



CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	EDP NO.				SERIES
				UNCOATED EDP NO.	TI-NAMITE (TiN)	TI-NAMITE-C (TiCN)	TI-NAMITE-A (AlTiN)	
1,0	4,0	38,0	3,0	40106	48564	48586	48607	1MB
1,5	4,5	38,0	3,0	40110	48565	48587	48608	1MB
2,0	6,3	38,0	3,0	40114	48566	48588	48609	1MB
2,5	9,5	38,0	3,0	40118	48567	48589	48610	1MB
3,0	12,0	38,0	3,0	40122	48568	48590	48611	1MB
3,0	25,0	75,0	3,0	43102	49505	49518	49531	1XLMB
3,5	12,0	50,0	4,0	40126	48569	48591	48612	1MB
4,0	14,0	50,0	4,0	40130	48570	48592	48613	1MB
4,0	25,0	75,0	4,0	43104	49506	49519	49532	1XLMB
4,5	16,0	50,0	6,0	40134	48571	48593	48614	1MB
5,0	16,0	50,0	6,0	40138	48572	48594	48615	1MB
5,0	25,0	75,0	5,0	43108	49508	49521	49534	1XLMB
6,0	19,0	50,0	6,0	40142	48573	48595	48616	1MB
6,0	25,0	75,0	6,0	43106	49507	49520	49533	1XLMB
7,0	19,0	63,0	8,0	40146	48574	48596	48617	1MB
8,0	20,0	63,0	8,0	40150	48575	48597	48618	1MB
8,0	25,0	75,0	8,0	43116	49509	49522	49535	1XLMB
9,0	22,0	75,0	10,0	40154	48576	48598	48619	1MB
10,0	22,0	75,0	10,0	40158	48577	48599	48620	1MB
10,0	38,0	100,0	10,0	43126	49510	49523	49536	1XLMB
11,0	25,0	75,0	12,0	40162	48578	48600	48621	1MB
12,0	25,0	75,0	12,0	40166	48579	48601	48622	1MB
12,0	50,0	100,0	12,0	43136	49511	49524	49537	1XLMB
12,0	75,0	150,0	12,0	43146	49512	49525	49538	1XLMB
14,0	32,0	89,0	14,0	40170	48580	48602	48623	1MB
14,0	75,0	150,0	14,0	43156	49513	49526	49539	1XLMB
16,0	32,0	89,0	16,0	40174	48581	48603	48624	1MB
16,0	75,0	150,0	16,0	43166	49514	49527	49540	1XLMB
18,0	38,0	100,0	18,0	40178	48582	48604	48625	1MB
18,0	75,0	150,0	18,0	43176	49515	49528	49541	1XLMB
20,0	38,0	100,0	20,0	40182	48583	48605	48626	1MB
20,0	75,0	150,0	20,0	43186	49516	49529	49542	1XLMB
25,0	38,0	100,0	25,0	40186	48584	48606	48627	1MB
25,0	75,0	150,0	25,0	43196	49517	49530	49543	1XLMB

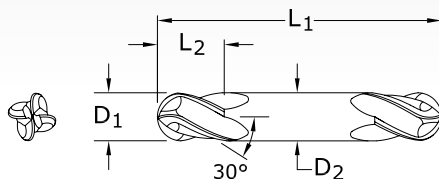

**TOLERANCES (inch)** $D_1 = +0.0000/-0.0020$ $D_2 = h_6$ 

14B

FRACTIONAL SERIES

TECH INFO 139

inch				EDP NO.			
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	UNCOATED	TI-NAMITE (TiN)	TI-NAMITE-C (TiCN)	TI-NAMITE-A (AlTiN)
1/32	1/16	1-1/2	1/8	31402	31442	39602	31218
3/64	3/32	1-1/2	1/8	31404	31444	39604	31219
1/16	1/8	1-1/2	1/8	31406	31446	39606	31220
5/64	1/8	1-1/2	1/8	31408	31448	39608	31221
3/32	3/16	1-1/2	1/8	31410	31450	39610	31222
7/64	3/16	1-1/2	1/8	31412	31452	39612	31223
*1/8	1/4	1-1/2	1/8	31414	31454	39614	31224
9/64	5/16	2	3/16	31416	31456	39616	31225
5/32	5/16	2	3/16	31418	31458	39618	31226
11/64	5/16	2	3/16	31420	31460	39620	31227
*3/16	3/8	2	3/16	31422	31462	39622	31228
13/64	1/2	2-1/2	1/4	31424	31464	39624	31229
7/32	1/2	2-1/2	1/4	31426	31466	39626	31230
15/64	1/2	2-1/2	1/4	31428	31468	39628	31231
*1/4	1/2	2-1/2	1/4	31430	31470	39630	31232
9/32	1/2	2-1/2	5/16	31432	31472	39632	31233
*5/16	1/2	2-1/2	5/16	31434	31474	39634	31234
*3/8	9/16	2-1/2	3/8	31436	31476	39636	31235
7/16	9/16	2-3/4	7/16	31438	31478	39638	31236
*1/2	5/8	3	1/2	31440	31480	39640	31237
*Series 14B Set				31490	31482	39642	31217

STEELS

STAINLESS STEELS

CAST IRON


HIGH TEMP ALLOYS

TITANIUM

NON-FERROUS


PLASTICS/COMPOSITES





14MB METRIC SERIES

TECH INFO 141

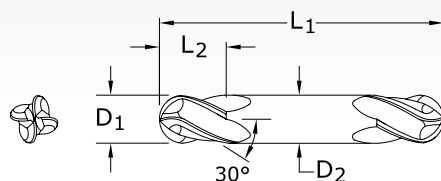

TOLERANCES (mm)

$D_1 = +0,000/-0,050$

$D_2 = h_6$


mm

EDP NO.

CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	UNCOATED	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)
1,0	2,0	38,0	3,0	41406	48947	48968	48989
1,5	3,0	38,0	3,0	41410	48948	48969	48990
2,0	4,0	38,0	3,0	41414	48949	48970	48991
2,5	5,0	38,0	3,0	41418	48950	48971	48992
3,0	6,0	38,0	3,0	41422	48951	48972	48993
3,5	7,0	50,0	4,0	41426	48952	48973	48994
4,0	8,0	50,0	4,0	41430	48953	48974	48995
4,5	9,5	63,0	4,5	41434	48954	48975	48996
5,0	10,0	63,0	5,0	41438	48955	48976	48997
6,0	12,0	63,0	6,0	41442	48956	48977	48998
7,0	12,0	63,0	8,0	41446	48957	48978	48999
8,0	12,0	63,0	8,0	41450	48958	48979	49000
9,0	14,0	75,0	9,0	41454	48959	48980	49001
10,0	14,0	75,0	10,0	41458	48960	48981	49002
11,0	14,0	75,0	12,0	41462	48961	48982	49003
12,0	16,0	75,0	12,0	41466	48962	48983	49004

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS
TITANIUM
NON-FERROUS
PLASTICS/COMPOSITES

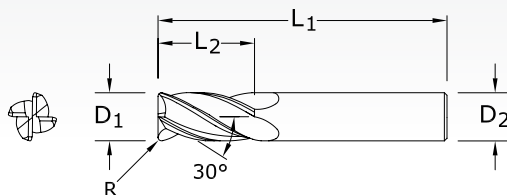

**TOLERANCES (inch)** $D_1 = -0.0010/-0.0020$ $D_2 = h_6$ $R = +0.0000/-0.0020$ **1CR**
FRACTIONAL SERIES

TECH INFO 139

CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIA. D_2	CORNER RADIUS R	EDP NO.			
					UNCOATED	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)
1/8*	1/2	1-1/2	1/8	.015	38001	38002	38115	38157
1/8*	1/2	1-1/2	1/8	.020	38003	38004	38116	38158
3/16*	5/8	2	3/16	.015	38009	38010	38117	38159
3/16*	5/8	2	3/16	.020	38011	38012	38118	38160
3/16*	5/8	2	3/16	.030	38013	38014	38119	38161
1/4*	3/4	2-1/2	1/4	.015	38019	38020	38120	38162
1/4*	3/4	2-1/2	1/4	.020	38021	38022	38121	38163
1/4*	3/4	2-1/2	1/4	.030	38023	38024	38122	38164
1/4*	3/4	2-1/2	1/4	.045	38025	38026	38123	38165
5/16*	13/16	2-1/2	5/16	.015	38031	38032	38124	38166
5/16*	13/16	2-1/2	5/16	.020	38033	38034	38125	38167
5/16*	13/16	2-1/2	5/16	.030	38035	38036	38126	38168
5/16*	13/16	2-1/2	5/16	.045	38037	38038	38127	38169
3/8	1	2-1/2	3/8	.015	38045	38046	38128	38170
3/8	1	2-1/2	3/8	.020	38047	38048	38129	38171
3/8	1	2-1/2	3/8	.030	38049	38050	38130	38172
3/8	1	2-1/2	3/8	.045	38051	38052	38131	38173
1/2	1	3	1/2	.015	38059	38060	38132	38174
1/2	1	3	1/2	.020	38061	38062	38133	38175
1/2	1	3	1/2	.030	38063	38064	38134	38176
1/2	1	3	1/2	.045	38065	38066	38135	38177
1/2	1	3	1/2	.060	38067	38068	38136	38178
5/8	1-1/4	3-1/2	5/8	.015	38073	38074	38137	38179
5/8	1-1/4	3-1/2	5/8	.020	38075	38076	38138	38180
5/8	1-1/4	3-1/2	5/8	.030	38077	38078	38139	38181
5/8	1-1/4	3-1/2	5/8	.045	38079	38080	38140	38182
5/8	1-1/4	3-1/2	5/8	.060	38081	38082	38141	38183
5/8	1-1/4	3-1/2	5/8	.090	38083	38084	38142	38184
3/4	1-1/2	4	3/4	.015	38087	38088	38143	38185
3/4	1-1/2	4	3/4	.020	38089	38090	38144	38186

*Without Flat


continued on next page

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS
TITANIUM
NON-FERROUS
PLASTICS/COMPOSITES



1CR FRACTIONAL SERIES

TECH INFO 139

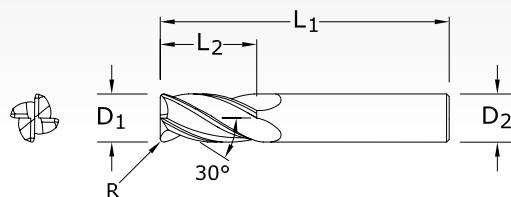

TOLERANCES (inch)

$D_1 = -0.0010/-0.0020$


$D_2 = h_6$

$R = +0.0000/-0.0020$

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS
TITANIUM
NON-FERROUS
PLASTICS/COMPOSITES

CUTTING DIAMETER D_1	LENGTH OF CUT L_2	inch			CORNER RADIUS R	EDP NO.			
		OVERALL LENGTH L_1	SHANK DIA. D_2			UNCOATED	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)
3/4	1-1/2	4	3/4		.030	38091	38092	38145	38187
3/4	1-1/2	4	3/4		.045	38093	38094	38146	38188
3/4	1-1/2	4	3/4		.060	38095	38096	38147	38189
3/4	1-1/2	4	3/4		.090	38097	38098	38148	38190
3/4	1-1/2	4	3/4		.125	38099	38100	38149	38191
1	1-1/2	4	1		.015	38101	38102	38150	38192
1	1-1/2	4	1		.020	38103	38104	38151	38193
1	1-1/2	4	1		.030	38105	38106	38152	38194
1	1-1/2	4	1		.045	38107	38108	38153	38195
1	1-1/2	4	1		.060	38109	38110	38154	38196
1	1-1/2	4	1		.090	38111	38112	38155	38197
1	1-1/2	4	1		.125	38113	38114	38156	38198

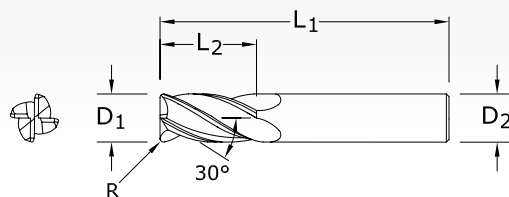

**TOLERANCES (mm)** $D_1 = +0,000/-0,050$ $D_2 = h_6$ $R = +0,000/-0,050$ **1MCR**
METRIC SERIES

TECH INFO 141

CUTTING DIAMETER D_1	LENGTH OF CUT L_2	mm		SHANK DIAMETER D_2	EDP NO. Ti-NAMITE-A (AITIN)
		OVERALL LENGTH L_1	CORNER RADIUS R		
4,0	14,0	50,0	0,25	4,0	40000
4,0	14,0	50,0	0,50	4,0	40001
4,0	14,0	50,0	1,00	4,0	40003
5,0	16,0	50,0	0,25	6,0	40004
5,0	16,0	50,0	0,50	6,0	40005
5,0	16,0	50,0	1,00	6,0	40007
6,0	19,0	50,0	0,25	6,0	40009
6,0	19,0	50,0	0,50	6,0	40010
6,0	19,0	50,0	0,75	6,0	40011
6,0	19,0	50,0	1,00	6,0	40012
8,0	20,0	63,0	0,50	8,0	40015
8,0	20,0	63,0	0,75	8,0	40016
8,0	20,0	63,0	1,00	8,0	40017
8,0	20,0	63,0	1,50	8,0	40019
8,0	20,0	63,0	2,00	8,0	40020
10,0	22,0	75,0	0,50	10,0	40021
10,0	22,0	75,0	1,00	10,0	40023
10,0	22,0	75,0	1,50	10,0	40024
10,0	22,0	75,0	2,00	10,0	40025
12,0	25,0	75,0	0,50	12,0	40028
12,0	25,0	75,0	1,00	12,0	40030
12,0	25,0	75,0	1,50	12,0	40031
12,0	25,0	75,0	2,00	12,0	40032
16,0	32,0	89,0	0,50	16,0	40035
16,0	32,0	89,0	1,00	16,0	40037
16,0	32,0	89,0	1,50	16,0	40038
16,0	32,0	89,0	2,00	16,0	40039

STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS

TITANIUM

NON-FERROUS

PLASTICS/COMPOSITES






54

FRACTIONAL SERIES

TECH INFO 144

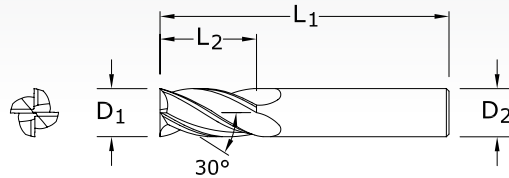

TOLERANCES (inch)

D1 = +0.0000/-0.0020

D2 = h₆

NON-FERROUS

PLASTICS/COMPOSITES

CUTTING DIAMETER D ₁	LENGTH OF CUT L ₂	OVERALL LENGTH L ₁	SHANK DIAMETER D ₂	EDP NO.	
				UNCOATED	TI-NAMITE-C (TiCN)
1/16	3/16	1-1/2	1/8	35473	35500
3/32	3/8	1-1/2	1/8	35475	35501
1/8	7/16	1-1/2	1/8	35477	35502
5/32	9/16	2	3/16	35478	35503
3/16	9/16	2	3/16	35479	35504
7/32	5/8	2-1/2	1/4	35480	35505
1/4	3/4	2-1/2	1/4	35481	35506
9/32	3/4	2-1/2	5/16	35482	35507
5/16	13/16	2-1/2	5/16	35483	35508
3/8	7/8	2-1/2	3/8	35485	35509
7/16	1	2-3/4	7/16	35487	35510
1/2	1	3	1/2	35489	35511
9/16	1-1/8	3-1/2	9/16	35491	35512
5/8	1-1/4	3-1/2	5/8	35493	35513
3/4	1-1/2	4	3/4	35495	35514
1	1-1/2	4	1	35497	35515

54M

METRIC SERIES

TECH INFO 145


CUTTING DIAMETER D ₁	LENGTH OF CUT L ₂	OVERALL LENGTH L ₁	SHANK DIAMETER D ₂	EDP NO.	
				UNCOATED	TI-NAMITE-C (TiCN)
3,0	8,0	38,0	3,0	45477	45478
3,5	10,0	57,0	6,0	45479	45480
4,0	11,0	57,0	6,0	45481	45482
4,5	11,0	57,0	6,0	45483	45484
5,0	13,0	57,0	6,0	45485	45486
6,0	13,0	57,0	6,0	45487	45488
8,0	19,0	63,0	8,0	45489	45490
10,0	22,0	72,0	10,0	45491	45492
12,0	26,0	83,0	12,0	45493	45494
14,0	26,0	83,0	14,0	45495	45496
16,0	32,0	92,0	16,0	45497	45498
20,0	38,0	104,0	20,0	45499	45500

TOLERANCES (mm)

D1 = +0,000/-0,050


D2 = h₆





TOLERANCES (inch)

D1 = +0.0000/-0.0020

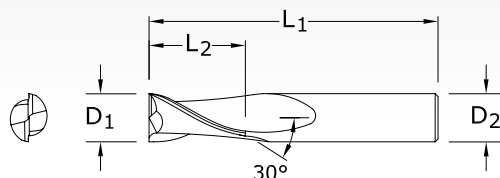D2 = h₆17
FRACTIONAL SERIES

TECH INFO 139

inch				EDP NO.			
CUTTING DIAMETER D ₁	LENGTH OF CUT L ₂	OVERALL LENGTH L ₁	SHANK DIAMETER D ₂	UNCOATED	TI-NAMITE (TiN)	TI-NAMITE-C (TiCN)	TI-NAMITE-A (AlTiN)
1/16	1/8	1-1/2	1/8	31701	31750	31303	31358
3/32	3/16	1-1/2	1/8	31703	31751	31304	31359
1/8	1/4	1-1/2	1/8	31705	31752	31305	31360
5/32	5/16	2	3/16	31707	31753	31306	31361
3/16	3/8	2	3/16	31709	31754	31307	31362
7/32	7/16	2	1/4	31711	31755	31308	31363
1/4	1/2	2	1/4	31713	31756	31309	31364
5/16	1/2	2	5/16	31715	31757	31310	31365
3/8	5/8	2	3/8	31717	31758	31311	31366
7/16	5/8	2-1/2	7/16	31719	31759	31312	31367
1/2	5/8	2-1/2	1/2	31721	31760	31313	31368
5/8	3/4	3	5/8	31723	31761	31314	31369
3/4	1	3	3/4	31725	31762	31315	31370

STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS

TITANIUM

NON-FERROUS

PLASTICS/COMPOSITES

TOLERANCES (mm)

D1 = +0,000/-0,050

D2 = h₆17M
METRIC SERIES

TECH INFO 141


mm				EDP NO.			
CUTTING DIAMETER D ₁	LENGTH OF CUT L ₂	OVERALL LENGTH L ₁	SHANK DIAMETER D ₂	UNCOATED	TI-NAMITE (TiN)	TI-NAMITE-C (TiCN)	TI-NAMITE-A (AlTiN)
1,0	2,0	38,0	3,0	41705	49262	49283	49304
1,5	3,0	38,0	3,0	41709	49263	49284	49305
2,0	4,0	38,0	3,0	41713	49264	49285	49306
2,5	5,0	38,0	3,0	41717	49265	49286	49307
3,0	6,0	38,0	3,0	41721	49266	49287	49308
3,5	7,0	50,0	4,0	41725	49267	49288	49309
4,0	8,0	50,0	4,0	41729	49268	49289	49310
4,5	9,5	50,0	4,5	41733	49269	49290	49311
5,0	10,0	50,0	5,0	41737	49270	49291	49312
6,0	12,0	50,0	6,0	41741	49271	49292	49313
7,0	12,0	50,0	8,0	41745	49272	49293	49314
8,0	12,0	50,0	8,0	41749	49273	49294	49315
9,0	14,0	50,0	9,0	41753	49274	49295	49316
10,0	16,0	50,0	10,0	41757	49275	49296	49317
11,0	19,0	63,0	12,0	41761	49276	49297	49318
12,0	19,0	63,0	12,0	41765	49277	49298	49319





3 • 3L • 3EL

FRACTIONAL SERIES

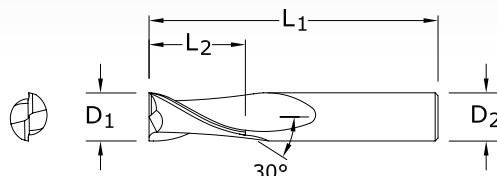


TOLERANCES (inch)

D₁ = +0.0000/-0.0020

D₂ = h₆

TECH INFO 139



CUTTING DIAMETER D ₁	LENGTH OF CUT L ₂	OVERALL LENGTH L ₁	SHANK DIAMETER D ₂	EDP NO.					SERIES
				UNCOATED	TI-NAMITE (TiN)	TI-NAMITE-C (TiCN)	TI-NAMITE-A (AlTiN)	DI-NAMITE (Diamond)	
1/64	1/32	1-1/2	1/8	30301	39301	39501	30397	—	3
1/32	5/64	1-1/2	1/8	30303	39303	39503	30398	—	3
3/64	7/64	1-1/2	1/8	30305	39305	39505	30399	—	3
1/16	3/16	1-1/2	1/8	30307	39307	39507	30400	91266	3
5/64	3/16	1-1/2	1/8	30309	39309	39509	30435	—	3
3/32	9/32	1-1/2	1/8	30311	39311	39511	30436	—	3
7/64	3/8	1-1/2	1/8	30313	39313	39513	30437	—	3
1/8	3/8	1-1/2	1/8	30377	39377	39577	30469	—	3
*1/8	1/2	1-1/2	1/8	30315	39315	39515	30438	91270	3
1/8	3/4	2-1/4	1/8	33341	31800	31810	31850	—	3L
1/8	1	3	1/8	33343	31938	31948	31958	—	3EL
9/64	1/2	2	3/16	30317	39317	39517	30439	—	3
5/32	1/2	2	3/16	30319	39319	39519	30440	—	3
11/64	5/8	2	3/16	30321	39321	39521	30441	—	3
*3/16	5/8	2	3/16	30323	39323	39523	30442	91274	3
3/16	3/4	2-1/2	3/16	33301	31820	31825	31851	—	3L
3/16	1-1/8	3	3/16	33321	31939	31949	31959	—	3EL
13/64	5/8	2-1/2	1/4	30325	39325	39525	30443	—	3
7/32	5/8	2-1/2	1/4	30327	39327	39527	30444	—	3
15/64	3/4	2-1/2	1/4	30329	39329	39529	30445	—	3
*1/4	3/4	2-1/2	1/4	30331	39331	39531	30446	91278	3
1/4	1-1/8	3	1/4	33303	31802	31812	31852	—	3L
1/4	1-1/2	4	1/4	33323	31940	31950	31960	—	3EL
17/64	3/4	2-1/2	5/16	30333	39333	39533	30447	—	3
9/32	3/4	2-1/2	5/16	30335	39335	39535	30448	—	3
19/64	13/16	2-1/2	5/16	30337	39337	39537	30449	—	3
*5/16	13/16	2-1/2	5/16	30339	39339	39539	30450	91282	3
5/16	1-1/8	3	5/16	33305	31821	31826	31853	—	3L

continued on next page






3 • 3L • 3EL

FRACTIONAL SERIES

CONTINUED

inch				EDP NO.					SERIES
CUTTING DIAMETER D ₁	LENGTH OF CUT L ₂	OVERALL LENGTH L ₁	SHANK DIAMETER D ₂	UNCOATED	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)	Di-NAMITE (Diamond)	
5/16	1-5/8	4	5/16	33325	31941	31951	31961	—	3EL
21/64	1	2-1/2	3/8	30341	39341	39541	30451	—	3
11/32	1	2-1/2	3/8	30343	39343	39543	30452	—	3
23/64	1	2-1/2	3/8	30345	39345	39545	30453	—	3
*3/8	1	2-1/2	3/8	30347	39347	39547	30454	91286	3
3/8	1-1/8	3	3/8	33307	31804	31814	31854	—	3L
3/8	1-3/4	4	3/8	33327	31942	31952	31962	—	3EL
25/64	1	2-3/4	7/16	30349	39349	39549	30455	—	3
13/32	1	2-3/4	7/16	30351	39351	39551	30456	—	3
27/64	1	2-3/4	7/16	30353	39353	39553	30457	—	3
7/16	1	2-3/4	7/16	30355	39355	39555	30458	—	3
7/16	2	4-1/2	7/16	33309	31822	31827	31855	—	3L
7/16	3	6	7/16	33329	31943	31953	31963	—	3EL
29/64	1	3	1/2	30357	39357	39557	30459	—	3
15/32	1	3	1/2	30359	39359	39559	30460	—	3
31/64	1	3	1/2	30361	39361	39561	30461	—	3
*1/2	1	3	1/2	30363	39363	39563	30462	91290	3
1/2	2	4-1/2	1/2	33311	31806	31816	31856	—	3L
1/2	3	6	1/2	33331	31944	31954	31964	—	3EL
9/16	1-1/8	3-1/2	9/16	30365	39365	39565	30463	—	3
5/8	1-1/4	3-1/2	5/8	30367	39367	39567	30464	—	3
5/8	2-1/4	5	5/8	33313	31823	31817	31857	—	3L
5/8	3	6	5/8	33333	31945	31955	31965	—	3EL
11/16	1-3/8	4	3/4	30369	39369	39569	30465	—	3
3/4	1-1/2	4	3/4	30371	39371	39571	30466	—	3
3/4	2-1/4	5	3/4	33315	31808	31818	31858	—	3L
3/4	3	6	3/4	33335	31946	31956	31966	—	3EL
7/8	1-1/2	4	7/8	30373	39373	39573	30467	—	3
1	1-1/2	4	1	30375	39375	39575	30468	—	3
1	2-1/4	5	1	33317	31824	31819	31859	—	3L
1	3	6	1	33337	31947	31957	31967	—	3EL
*Series 3 Set				30389	39389	39589	30470	—	3







3M • 3XLM

METRIC SERIES

TECH INFO 141

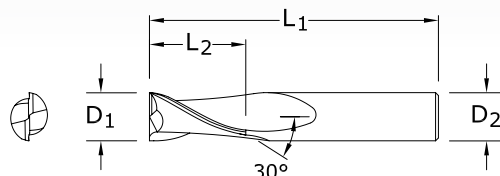



TOLERANCES (mm)

D₁ = +0,000/-0,050

D₂ = h₆

CUTTING DIAMETER D ₁	LENGTH OF CUT L ₂	OVERALL LENGTH L ₁	SHANK DIAMETER D ₂	EDP NO.				SERIES
				UNCOATED	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)	
1,0	4,0	38,0	3,0	40305	48628	48650	48671	3M
1,5	4,5	38,0	3,0	40309	48629	48651	48672	3M
2,0	6,3	38,0	3,0	40313	48630	48652	48673	3M
2,5	9,5	38,0	3,0	40317	48631	48653	48674	3M
3,0	12,0	38,0	3,0	40321	48632	48654	48675	3M
3,0	25,0	75,0	3,0	43301	49427	49440	49453	3XLM
3,5	12,0	50,0	4,0	40325	48633	48655	48676	3M
4,0	14,0	50,0	4,0	40329	48634	48656	48677	3M
4,0	25,0	75,0	4,0	43303	49428	49441	49454	3XLM
4,5	16,0	50,0	6,0	40333	48635	48657	48678	3M
5,0	16,0	50,0	6,0	40337	48636	48658	48679	3M
5,0	25,0	75,0	5,0	43307	49430	49443	49456	3XLM
6,0	19,0	50,0	6,0	40341	48637	48659	48680	3M
6,0	25,0	75,0	6,0	43305	49429	49442	49455	3XLM
7,0	19,0	63,0	8,0	40345	48638	48660	48681	3M
8,0	20,0	63,0	8,0	40349	48639	48661	48682	3M
8,0	25,0	75,0	8,0	43315	49431	49444	49457	3XLM
9,0	22,0	75,0	10,0	40353	48640	48662	48683	3M
10,0	22,0	75,0	10,0	40357	48641	48663	48684	3M
10,0	38,0	100,0	10,0	43325	49432	49445	49458	3XLM
11,0	25,0	75,0	12,0	40361	48642	48664	48685	3M
12,0	25,0	75,0	12,0	40365	48643	48665	48686	3M
12,0	50,0	100,0	12,0	43335	49433	49446	49459	3XLM
12,0	75,0	150,0	12,0	43345	49434	49447	49460	3XLM
14,0	32,0	89,0	14,0	40369	48644	48666	48687	3M
14,0	75,0	150,0	14,0	43355	49435	49448	49461	3XLM
16,0	32,0	89,0	16,0	40373	48645	48667	48688	3M
16,0	75,0	150,0	16,0	43365	49436	49449	49462	3XLM
18,0	38,0	100,0	18,0	40377	48646	48668	48689	3M
18,0	75,0	150,0	18,0	43375	49437	49450	49463	3XLM
20,0	38,0	100,0	20,0	40381	48647	48669	48690	3M
20,0	75,0	150,0	20,0	43385	49438	49451	49464	3XLM
25,0	38,0	100,0	25,0	40385	48648	48670	48691	3M
25,0	75,0	150,0	25,0	43395	49439	49452	49465	3XLM

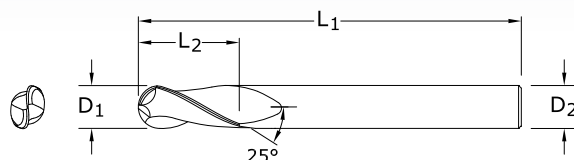


TOLERANCES (inch)
 $D_1 = +0.0000/-0.0020$
 $D_2 = h_6$

59
FRACTIONAL SERIES

TECH INFO 139

inch				EDP NO.		
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)
1/8	3/8	2-1/2	1/4	32280	32260	32270
3/16	9/16	3	1/4	32281	32261	32271
1/4	5/8	3-1/2	1/4	32282	32262	32272
5/16	11/16	4	5/16	32283	32263	32273
3/8	7/8	4	3/8	32284	32264	32274
1/2	1	4-1/2	1/2	32285	32265	32275
5/8	1-1/8	5	5/8	32286	32266	32276
3/4	1-3/8	5-1/4	3/4	32287	32267	32277

STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS

TITANIUM

NON-FERROUS

PLASTICS/COMPOSITES

HARDENED STEELS


TOLERANCES (mm)
 $D_1 = +0,000/-0,050$
 $D_2 = h_6$

mm				EDP NO.			
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	UNCOATED	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)
3,0	9,0	60,0	6,0	43910	43920	43930	43950
4,0	12,0	70,0	6,0	43911	43921	43931	43951
6,0	15,0	80,0	6,0	43912	43922	43932	43952
8,0	20,0	89,0	8,0	43913	43923	43933	43953
10,0	25,0	100,0	10,0	43914	43924	43934	43954
12,0	30,0	110,0	12,0	43915	43925	43935	43955
14,0	35,0	120,0	16,0	43916	43926	43936	43956
16,0	40,0	120,0	16,0	43917	43927	43937	43957
18,0	40,0	130,0	20,0	43918	43928	43938	43958
20,0	45,0	130,0	20,0	43919	43929	43939	43959

59M
METRIC SERIES

TECH INFO 141






15

FRACTIONAL SERIES

TECH INFO 139

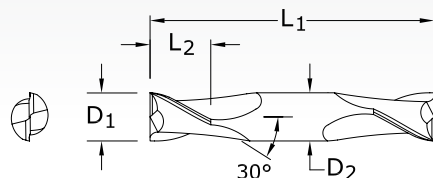

TOLERANCES (inch)



D₁ = +0.0000/-0.0020

D₂ = h₆

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS
TITANIUM
NON-FERROUS
PLASTICS/COMPOSITES

inch				EDP NO.			
CUTTING DIAMETER D ₁	LENGTH OF CUT L ₂	OVERALL LENGTH L ₁	SHANK DIAMETER D ₂	UNCOATED	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)
1/32	1/16	1-1/2	1/8	31501	31541	39651	31316
3/64	3/32	1-1/2	1/8	31503	31543	39653	31317
1/16	1/8	1-1/2	1/8	31505	31545	39655	31318
5/64	1/8	1-1/2	1/8	31507	31547	39657	31319
3/32	3/16	1-1/2	1/8	31509	31549	39659	31320
7/64	3/16	1-1/2	1/8	31511	31551	39661	31321
*1/8	1/4	1-1/2	1/8	31513	31553	39663	31322
9/64	5/16	2	3/16	31515	31555	39665	31323
5/32	5/16	2	3/16	31517	31557	39667	31324
11/64	5/16	2	3/16	31519	31559	39669	31325
*3/16	3/8	2	3/16	31521	31561	39671	31326
13/64	1/2	2-1/2	1/4	31523	31563	39673	31327
7/32	1/2	2-1/2	1/4	31525	31565	39675	31328
15/64	1/2	2-1/2	1/4	31527	31567	39677	31329
*1/4	1/2	2-1/2	1/4	31529	31569	39679	31330
9/32	1/2	2-1/2	5/16	31531	31571	39681	31331
*5/16	1/2	2-1/2	5/16	31533	31573	39683	31332
*3/8	9/16	2-1/2	3/8	31535	31575	39685	31333
7/16	9/16	2-3/4	7/16	31537	31577	39687	31334
*1/2	5/8	3	1/2	31539	31579	39689	31335
*Series 15 Set				31589	31581	39691	31336

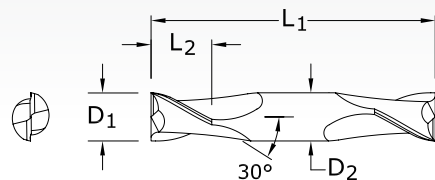

**TOLERANCES (mm)** $D_1 = +0,000/-0,050$ $D_2 = h_6$ **15M**
METRIC SERIES

TECH INFO 141

mm				EDP NO.			
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	UNCOATED	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)
1,0	2,0	38,0	3,0	41505	49010	49031	49052
1,5	3,0	38,0	3,0	41509	49011	49032	49053
2,0	4,0	38,0	3,0	41513	49012	49033	49054
2,5	5,0	38,0	3,0	41517	49013	49034	49055
3,0	6,0	38,0	3,0	41521	49014	49035	49056
3,5	7,0	50,0	4,0	41525	49015	49036	49057
4,0	8,0	50,0	4,0	41529	49016	49037	49058
4,5	9,5	63,0	4,5	41533	49017	49038	49059
5,0	10,0	63,0	5,0	41537	49018	49039	49060
6,0	12,0	63,0	6,0	41541	49019	49040	49061
7,0	12,0	63,0	8,0	41545	49020	49041	49062
8,0	12,0	63,0	8,0	41549	49021	49042	49063
9,0	14,0	75,0	9,0	41553	49022	49043	49064
10,0	14,0	75,0	10,0	41557	49023	49044	49065
11,0	14,0	75,0	12,0	41561	49024	49045	49066
12,0	16,0	75,0	12,0	41565	49025	49046	49067

STEELS

STAINLESS STEELS

CAST IRON



HIGH TEMP ALLOYS

TITANIUM

NON-FERROUS

PLASTICS/COMPOSITES



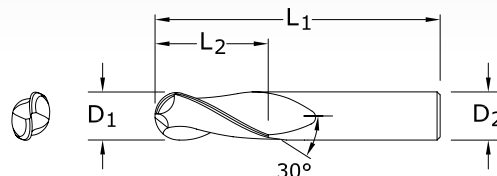


3B • 3LB • 3ELB

FRACTIONAL SERIES

TOLERANCES (inch)

 $D_1 = +0.0000/-0.0020$
 $D_2 = h_6$

TECH INFO 139



CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	EDP NO.				SERIES
				UNCOATED	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)	
1/64	1/32	1-1/2	1/8	30302	39302	39502	30471	3B
1/32	5/64	1-1/2	1/8	30304	39304	39504	30472	3B
3/64	7/64	1-1/2	1/8	30306	39306	39506	30473	3B
1/16	3/16	1-1/2	1/8	30308	39308	39508	30474	3B
5/64	3/16	1-1/2	1/8	30310	39310	39510	30475	3B
3/32	9/32	1-1/2	1/8	30312	39312	39512	30476	3B
7/64	3/8	1-1/2	1/8	30314	39314	39514	30477	3B
1/8	3/8	1-1/2	1/8	30378	39378	39578	30599	3B
*1/8	1/2	1-1/2	1/8	30316	39316	39516	30478	3B
1/8	3/4	2-1/4	1/8	33342	31830	31840	31890	3LB
1/8	1	3	1/8	33344	31968	31978	31988	3ELB
9/64	1/2	2	3/16	30318	39318	39518	30479	3B
5/32	1/2	2	3/16	30320	39320	39520	30480	3B
11/64	5/8	2	3/16	30322	39322	39522	30481	3B
*3/16	5/8	2	3/16	30324	39324	39524	30482	3B
3/16	3/4	2-1/2	3/16	33302	31831	31841	31891	3LB
3/16	1-1/8	3	3/16	33322	31969	31979	31989	3ELB
13/64	5/8	2-1/2	1/4	30326	39326	39526	30483	3B
7/32	5/8	2-1/2	1/4	30328	39328	39528	30484	3B
15/64	3/4	2-1/2	1/4	30330	39330	39530	30485	3B
*1/4	3/4	2-1/2	1/4	30332	39332	39532	30486	3B
1/4	1-1/8	3	1/4	33304	31832	31842	31892	3LB
1/4	1-1/2	4	1/4	33324	31970	31980	31990	3ELB
17/64	3/4	2-1/2	5/16	30334	39334	39534	30487	3B
9/32	3/4	2-1/2	5/16	30336	39336	39536	30488	3B
19/64	13/16	2-1/2	5/16	30338	39338	39538	30489	3B
*5/16	13/16	2-1/2	5/16	30340	39340	39540	30490	3B
5/16	1-1/8	3	5/16	33306	31833	31843	31893	3LB

continued on next page






3B • 3LB • 3ELB

FRACTIONAL SERIES


CONTINUED

inch				EDP NO.				SERIES
CUTTING DIAMETER D ₁	LENGTH OF CUT L ₂	OVERALL LENGTH L ₁	SHANK DIAMETER D ₂	UNCOATED	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)	
5/16	1-5/8	4	5/16	33326	31971	31981	31991	3ELB
21/64	1	2-1/2	3/8	30342	39342	39542	30491	3B
11/32	1	2-1/2	3/8	30344	39344	39544	30492	3B
23/64	1	2-1/2	3/8	30346	39346	39546	30493	3B
*3/8	1	2-1/2	3/8	30348	39348	39548	30494	3B
3/8	1-1/8	3	3/8	33308	31834	31844	31894	3LB
3/8	1-3/4	4	3/8	33328	31972	31982	31992	3ELB
25/64	1	2-3/4	7/16	30350	39350	39550	30495	3B
13/32	1	2-3/4	7/16	30352	39352	39552	30496	3B
27/64	1	2-3/4	7/16	30354	39354	39554	30497	3B
7/16	1	2-3/4	7/16	30356	39356	39556	30498	3B
7/16	2	4-1/2	7/16	33310	31835	31845	31895	3LB
7/16	3	6	7/16	33330	31973	31983	31993	3ELB
29/64	1	3	1/2	30358	39358	39558	30499	3B
15/32	1	3	1/2	30360	39360	39560	30500	3B
31/64	1	3	1/2	30362	39362	39562	30591	3B
*1/2	1	3	1/2	30364	39364	39564	30592	3B
1/2	2	4-1/2	1/2	33312	31836	31846	31896	3LB
1/2	3	6	1/2	33332	31974	31984	31994	3ELB
9/16	1-1/8	3-1/2	9/16	30366	39366	39566	30593	3B
5/8	1-1/4	3-1/2	5/8	30368	39368	39568	30594	3B
5/8	2-1/4	5	5/8	33314	31837	31847	31897	3LB
5/8	3	6	5/8	33334	31975	31985	31995	3ELB
11/16	1-3/8	4	3/4	30370	39370	39570	30595	3B
3/4	1-1/2	4	3/4	30372	39372	39572	30596	3B
3/4	2-1/4	5	3/4	33316	31838	31848	31898	3LB
3/4	3	6	3/4	33336	31976	31986	31996	3ELB
7/8	1-1/2	4	7/8	30374	39374	39574	30597	3B
1	1-1/2	4	1	30376	39376	39576	30598	3B
1	2-1/4	5	1	33318	31839	31849	31899	3LB
1	3	6	1	33338	31977	31987	31997	3ELB
*Series 3B Set				30390	39390	39590	30600	3B



3MB • 3XLMB

METRIC SERIES

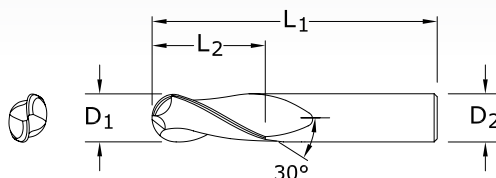


TOLERANCES (mm)

$D_1 = +0,000/-0,050$



$D_2 = h_6$

TECH INFO 141



CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	EDP NO.				SERIES
				UNCOATED	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)	
1,0	4,0	38,0	3,0	40306	48692	48714	48735	3MB
1,5	4,5	38,0	3,0	40310	48693	48715	48736	3MB
2,0	6,3	38,0	3,0	40314	48694	48716	48737	3MB
2,5	9,5	38,0	3,0	40318	48695	48717	48738	3MB
3,0	12,0	38,0	3,0	40322	48696	48718	48739	3MB
3,0	25,0	75,0	3,0	43302	49544	49557	49570	3XLMB
3,5	12,0	50,0	4,0	40326	48697	48719	48740	3MB
4,0	14,0	50,0	4,0	40330	48698	48720	48741	3MB
4,0	25,0	75,0	4,0	43304	49545	49558	49571	3XLMB
4,5	16,0	50,0	6,0	40334	48699	48721	48742	3MB
5,0	16,0	50,0	6,0	40338	48700	48722	48743	3MB
5,0	25,0	75,0	5,0	43308	49547	49560	49573	3XLMB
6,0	19,0	50,0	6,0	40342	48701	48723	48744	3MB
6,0	25,0	75,0	6,0	43306	49546	49559	49572	3XLMB
7,0	19,0	63,0	8,0	40346	48702	48724	48745	3MB
8,0	20,0	63,0	8,0	40350	48703	48725	48746	3MB
8,0	25,0	75,0	8,0	43316	49548	49561	49574	3XLMB
9,0	22,0	75,0	10,0	40354	48704	48726	48747	3MB
10,0	22,0	75,0	10,0	40358	48705	48727	48748	3MB
10,0	38,0	100,0	10,0	43326	49549	49562	49575	3XLMB
11,0	25,0	75,0	12,0	40362	48706	48728	48749	3MB
12,0	25,0	75,0	12,0	40366	48707	48729	48750	3MB
12,0	50,0	100,0	12,0	43336	49550	49563	49576	3XLMB
12,0	75,0	150,0	12,0	43346	49551	49564	49577	3XLMB
14,0	32,0	89,0	14,0	40370	48708	48730	48751	3MB
14,0	75,0	150,0	14,0	43356	49552	49565	49578	3XLMB
16,0	32,0	89,0	16,0	40374	48709	48731	48752	3MB
16,0	75,0	150,0	16,0	43366	49553	49566	49579	3XLMB
18,0	38,0	100,0	18,0	40378	48710	48732	48753	3MB
18,0	75,0	150,0	18,0	43376	49554	49567	49580	3XLMB
20,0	38,0	100,0	20,0	40382	48711	48733	48754	3MB
20,0	75,0	150,0	20,0	43386	49555	49568	49581	3XLMB
25,0	38,0	100,0	25,0	40386	48712	48734	48755	3MB
25,0	75,0	150,0	25,0	43396	49556	49569	49582	3XLMB

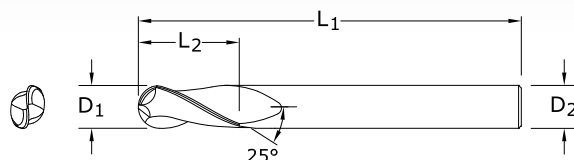

**TOLERANCES (inch)** $D_1 = +0.0000/-0.0020$ $D_2 = h_6$ **59B**
FRACTIONAL SERIES

TECH INFO 139

inch				EDP NO.		
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)
1/8	3/8	2-1/2	1/4	32210	32290	32200
3/16	9/16	3	1/4	32211	32291	32201
1/4	5/8	3-1/2	1/4	32212	32292	32202
5/16	11/16	4	5/16	32213	32293	32203
3/8	7/8	4	3/8	32214	32294	32204
1/2	1	4-1/2	1/2	32215	32295	32205
5/8	1-1/8	5	5/8	32216	32296	32206
3/4	1-3/8	5-1/4	3/4	32217	32297	32207

STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS

TITANIUM

NON-FERROUS

PLASTICS/COMPOSITES


TOLERANCES (mm) $D_1 = +0.000/-0.050$ $D_2 = h_6$ **59MB**
METRIC SERIES

TECH INFO 141

mm				EDP NO.			
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	UNCOATED	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)
3,0	9,0	60,0	6,0	43900	49622	49632	49642
4,0	12,0	70,0	6,0	43901	49623	49633	49643
6,0	15,0	80,0	6,0	43902	49624	49634	49644
8,0	20,0	89,0	8,0	43903	49625	49635	49645
10,0	25,0	100,0	10,0	43904	49626	49636	49646
12,0	30,0	110,0	12,0	43905	49627	49637	49647
14,0	35,0	120,0	16,0	43906	49628	49638	49648
16,0	40,0	120,0	16,0	43907	49629	49639	49649
18,0	40,0	130,0	20,0	43908	49630	49640	49650
20,0	45,0	130,0	20,0	43909	49631	49641	49651

Neck Option Available






15B

FRACTIONAL SERIES


TECH INFO 139

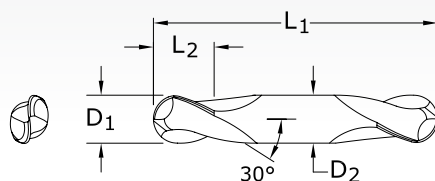

TOLERANCES (inch)


$D_1 = +0.0000/-0.0020$

$D_2 = h_6$



inch				EDP NO.			
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	UNCOATED	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)
1/32	1/16	1-1/2	1/8	31502	31542	39652	31337
3/64	3/32	1-1/2	1/8	31504	31544	39654	31338
1/16	1/8	1-1/2	1/8	31506	31546	39656	31339
5/64	1/8	1-1/2	1/8	31508	31548	39658	31340
3/32	3/16	1-1/2	1/8	31510	31550	39660	31341
7/64	3/16	1-1/2	1/8	31512	31552	39662	31342
*1/8	1/4	1-1/2	1/8	31514	31554	39664	31343
9/64	5/16	2	3/16	31516	31556	39666	31344
5/32	5/16	2	3/16	31518	31558	39668	31345
11/64	5/16	2	3/16	31520	31560	39670	31346
*3/16	3/8	2	3/16	31522	31562	39672	31347
13/64	1/2	2-1/2	1/4	31524	31564	39674	31348
7/32	1/2	2-1/2	1/4	31526	31566	39676	31349
15/64	1/2	2-1/2	1/4	31528	31568	39678	31350
*1/4	1/2	2-1/2	1/4	31530	31570	39680	31351
9/32	1/2	2-1/2	5/16	31532	31572	39682	31352
*5/16	1/2	2-1/2	5/16	31534	31574	39684	31353
*3/8	9/16	2-1/2	3/8	31536	31576	39686	31354
7/16	9/16	2-3/4	7/16	31538	31578	39688	31355
*1/2	5/8	3	1/2	31540	31580	39690	31356
*Series 15B Set				31590	31582	39692	31357

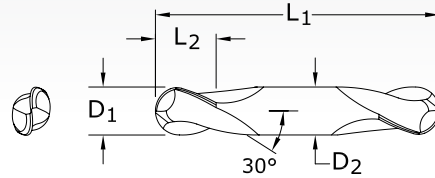

**TOLERANCES (mm)** $D_1 = +0,000/-0,050$ $D_2 = h_6$ **15MB**
METRIC SERIES

TECH INFO 141


mm				EDP NO.			
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	UNCOATED	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)
1,0	2,0	38,0	3,0	41506	49073	49094	49115
1,5	3,0	38,0	3,0	41510	49074	49095	49116
2,0	4,0	38,0	3,0	41514	49075	49096	49117
2,5	5,0	38,0	3,0	41518	49076	49097	49118
3,0	6,0	38,0	3,0	41522	49077	49098	49119
3,5	7,0	50,0	4,0	41526	49078	49099	49120
4,0	8,0	50,0	4,0	41530	49079	49100	49121
4,5	9,5	63,0	4,5	41534	49080	49101	49122
5,0	10,0	63,0	5,0	41538	49081	49102	49123
6,0	12,0	63,0	6,0	41542	49082	49103	49124
7,0	12,0	63,0	8,0	41546	49083	49104	49125
8,0	12,0	63,0	8,0	41550	49084	49105	49126
9,0	14,0	75,0	9,0	41554	49085	49106	49127
10,0	14,0	75,0	10,0	41558	49086	49107	49128
11,0	14,0	75,0	12,0	41562	49087	49108	49129
12,0	16,0	75,0	12,0	41566	49088	49109	49130

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS
TITANIUM
NON-FERROUS
PLASTICS/COMPOSITES



3CR

FRACTIONAL SERIES

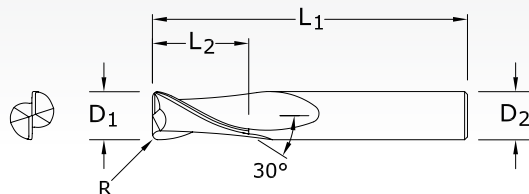


TOLERANCES (inch)

D₁ = -0.0010/-0.0020

D₂ = h₆

R = +0.0000/-0.0020


TECH INFO 139



NOMINAL CUTTING DIA. D ₁	LENGTH OF CUT L ₂	inch			EDP NO.			
		OVERALL LENGTH L ₁	SHANK DIA. D ₂	CORNER RADIUS R	UNCOATED	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)
1/8*	1/2	1-1/2	1/8	.015	38201	38202	38315	38357
1/8*	1/2	1-1/2	1/8	.020	38203	38204	38316	38358
3/16*	5/8	2	3/16	.015	38209	38210	38317	38359
3/16*	5/8	2	3/16	.020	38211	38212	38318	38360
3/16*	5/8	2	3/16	.030	38213	38214	38319	38361
1/4*	3/4	2-1/2	1/4	.015	38219	38220	38320	38362
1/4*	3/4	2-1/2	1/4	.020	38221	38222	38321	38363
1/4*	3/4	2-1/2	1/4	.030	38223	38224	38322	38364
1/4*	3/4	2-1/2	1/4	.045	38225	38226	38323	38365
5/16*	13/16	2-1/2	5/16	.015	38231	38232	38324	38366
5/16*	13/16	2-1/2	5/16	.020	38233	38234	38325	38367
5/16*	13/16	2-1/2	5/16	.030	38235	38236	38326	38368
5/16*	13/16	2-1/2	5/16	.045	38237	38238	38327	38369
3/8	1	2-1/2	3/8	.015	38245	38246	38328	38370
3/8	1	2-1/2	3/8	.020	38247	38248	38329	38371
3/8	1	2-1/2	3/8	.030	38249	38250	38330	38372
3/8	1	2-1/2	3/8	.045	38251	38252	38331	38373
1/2	1	3	1/2	.015	38259	38260	38332	38374
1/2	1	3	1/2	.020	38261	38262	38333	38375
1/2	1	3	1/2	.030	38263	38264	38334	38376
1/2	1	3	1/2	.045	38265	38266	38335	38377
1/2	1	3	1/2	.060	38267	38268	38336	38378
5/8	1-1/4	3-1/2	5/8	.015	38273	38274	38337	38379
5/8	1-1/4	3-1/2	5/8	.020	38275	38276	38338	38380
5/8	1-1/4	3-1/2	5/8	.030	38277	38278	38339	38381
5/8	1-1/4	3-1/2	5/8	.045	38279	38280	38340	38382
5/8	1-1/4	3-1/2	5/8	.060	38281	38282	38341	38383
5/8	1-1/4	3-1/2	5/8	.090	38283	38284	38342	38384
3/4	1-1/2	4	3/4	.015	38287	38288	38343	38385
3/4	1-1/2	4	3/4	.020	38289	38290	38344	38386
3/4	1-1/2	4	3/4	.030	38291	38292	38345	38387
3/4	1-1/2	4	3/4	.045	38293	38294	38346	38388
3/4	1-1/2	4	3/4	.060	38295	38296	38347	38389
3/4	1-1/2	4	3/4	.090	38297	38298	38348	38390
3/4	1-1/2	4	3/4	.125	38299	38300	38349	38391
1	1-1/2	4	1	.015	38301	38302	38350	38392
1	1-1/2	4	1	.020	38303	38304	38351	38393
1	1-1/2	4	1	.030	38305	38306	38352	38394
1	1-1/2	4	1	.045	38307	38308	38353	38395
1	1-1/2	4	1	.060	38309	38310	38354	38396
1	1-1/2	4	1	.090	38311	38312	38355	38397
1	1-1/2	4	1	.125	38313	38314	38356	38398

*Without Flat

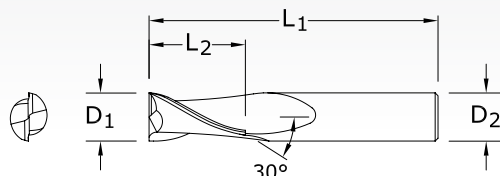

**TOLERANCES (inch)** $D_1 = +0.0000/-0.0020$ $D_2 = h_6$ **52**

FRACTIONAL SERIES

TECH INFO 144

inch				EDP NO.	
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	UNCOATED	Ti-NAMITE-C (TiCN)
1/16	3/16	1-1/2	1/8	35273	35300
3/32	3/8	1-1/2	1/8	35275	35301
1/8	7/16	1-1/2	1/8	35277	35302
5/32	9/16	2	3/16	35278	35303
3/16	9/16	2	3/16	35279	35304
7/32	5/8	2-1/2	1/4	35280	35305
1/4	3/4	2-1/2	1/4	35281	35306
9/32	3/4	2-1/2	5/16	35282	35307
5/16	13/16	2-1/2	5/16	35283	35308
3/8	7/8	2-1/2	3/8	35285	35309
7/16	1	2-3/4	7/16	35287	35310
1/2	1	3	1/2	35289	35311
9/16	1-1/8	3-1/2	9/16	35291	35312
5/8	1-1/4	3-1/2	5/8	35293	35313
3/4	1-1/2	4	3/4	35295	35314
1	1-1/2	4	1	35297	35315

NON-FERROUS

PLASTICS/COMPOSITES


TOLERANCES (mm) $D_1 = +0,000/-0,050$ $D_2 = h_6$ **52M**

FRACTIONAL SERIES

TECH INFO 145


mm				EDP NO.	
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	UNCOATED	Ti-NAMITE-C (TiCN)
3,0	7,0	38,0	3,0	45277	49829
3,5	7,0	57,0	6,0	45279	49830
4,0	8,0	57,0	6,0	45281	49831
4,5	8,0	57,0	6,0	45283	49832
5,0	10,0	57,0	6,0	45285	49833
6,0	10,0	57,0	6,0	45287	49834
8,0	16,0	63,0	8,0	45289	49835
10,0	19,0	72,0	10,0	45291	49836
12,0	22,0	83,0	12,0	45293	49837
14,0	22,0	83,0	14,0	45295	49838
16,0	26,0	92,0	16,0	45297	49839
20,0	32,0	104,0	20,0	45299	49840





5

FRACTIONAL SERIES

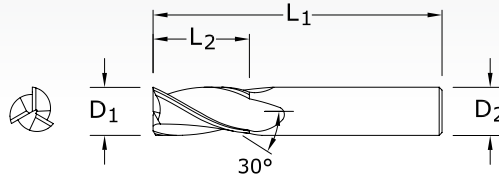


TOLERANCES (inch)

D₁ = +0.0000/-0.0020

D₂ = h₆

TECH INFO 139




CUTTING DIAMETER D ₁	LENGTH OF CUT L ₂	OVERALL LENGTH L ₁	SHANK DIAMETER D ₂	EDP NO.			
				UNCOATED	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)
1/64	1/32	1-1/2	1/8	30501	39701	30771	30811
1/32	5/64	1-1/2	1/8	30503	39703	30772	30812
3/64	7/64	1-1/2	1/8	30505	39705	30773	30813
1/16	3/16	1-1/2	1/8	30507	39707	30774	30814
5/64	3/16	1-1/2	1/8	30509	39709	30775	30815
3/32	9/32	1-1/2	1/8	30511	39711	30776	30816
7/64	3/8	1-1/2	1/8	30513	39713	30777	30817
1/8	3/8	1-1/2	1/8	30577	39777	30809	30849
1/8	1/2	1-1/2	1/8	30515	39715	30778	30818
9/64	1/2	2	3/16	30517	39717	30779	30819
5/32	1/2	2	3/16	30519	39719	30780	30820
11/64	5/8	2	3/16	30521	39721	30781	30821
3/16	5/8	2	3/16	30523	39723	30782	30822
13/64	5/8	2-1/2	1/4	30525	39725	30783	30823
7/32	5/8	2-1/2	1/4	30527	39727	30784	30824
15/64	3/4	2-1/2	1/4	30529	39729	30785	30825
1/4	3/4	2-1/2	1/4	30531	39731	30786	30826
17/64	3/4	2-1/2	5/16	30533	39733	30787	30827
9/32	3/4	2-1/2	5/16	30535	39735	30788	30828
19/64	13/16	2-1/2	5/16	30537	39737	30789	30829
5/16	13/16	2-1/2	5/16	30539	39739	30790	30830
21/64	1	2-1/2	3/8	30541	39741	30791	30831
11/32	1	2-1/2	3/8	30543	39743	30792	30832
23/64	1	2-1/2	3/8	30545	39745	30793	30833
3/8	1	2-1/2	3/8	30547	39747	30794	30834
25/64	1	2-3/4	7/16	30549	39749	30795	30835
13/32	1	2-3/4	7/16	30551	39751	30796	30836
27/64	1	2-3/4	7/16	30553	39753	30797	30837
7/16	1	2-3/4	7/16	30555	39755	30798	30838
29/64	1	3	1/2	30557	39757	30799	30839
15/32	1	3	1/2	30559	39759	30800	30840
31/64	1	3	1/2	30561	39761	30801	30841
1/2	1	3	1/2	30563	39763	30802	30842
9/16	1-1/8	3-1/2	9/16	30565	39765	30803	30843
5/8	1-1/4	3-1/2	5/8	30567	39767	30804	30844
11/16	1-3/8	4	3/4	30569	39769	30805	30845
3/4	1-1/2	4	3/4	30571	39771	30806	30846
7/8	1-1/2	4	7/8	30573	39773	30807	30847
1	1-1/2	4	1	30575	39775	30808	30848





TOLERANCES (mm)

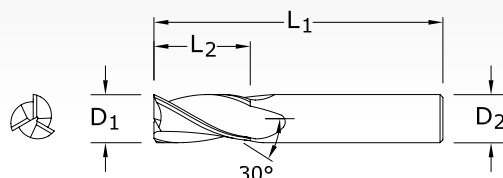D₁ = +0,000/-0,050D₂ = h₆

5M • 5XLM

METRIC SERIES

mm				EDP NO.				SERIES
CUTTING DIAMETER D ₁	LENGTH OF CUT L ₂	OVERALL LENGTH L ₁	SHANK DIAMETER D ₂	UNCOATED	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)	
1,0	4,0	38,0	3,0	40505	48756	48778	48799	5M
1,5	4,5	38,0	3,0	40509	48757	48779	48800	5M
2,0	6,3	38,0	3,0	40513	48758	48780	48801	5M
2,5	9,5	38,0	3,0	40517	48759	48781	48802	5M
3,0	12,0	38,0	3,0	40521	48760	48782	48803	5M
3,0	25,0	75,0	3,0	43501	49466	49479	49492	5XLM
3,5	12,0	50,0	4,0	40525	48761	48783	48804	5M
4,0	14,0	50,0	4,0	40529	48762	48784	48805	5M
4,0	25,0	75,0	4,0	43503	49467	49480	49493	5XLM
4,5	16,0	50,0	6,0	40533	48763	48785	48806	5M
5,0	16,0	50,0	6,0	40537	48764	48786	48807	5M
5,0	25,0	75,0	5,0	43507	49469	49482	49495	5XLM
6,0	19,0	50,0	6,0	40541	48765	48787	48808	5M
6,0	25,0	75,0	6,0	43505	49468	49481	49494	5XLM
7,0	19,0	63,0	8,0	40545	48766	48788	48809	5M
8,0	20,0	63,0	8,0	40549	48767	48789	48810	5M
8,0	25,0	75,0	8,0	43515	49470	49483	49496	5XLM
9,0	22,0	75,0	10,0	40553	48768	48790	48811	5M
10,0	22,0	75,0	10,0	40557	48769	48791	48812	5M
10,0	38,0	100,0	10,0	43525	49471	49484	49497	5XLM
11,0	25,0	75,0	12,0	40561	48770	48792	48813	5M
12,0	25,0	75,0	12,0	40565	48771	48793	48814	5M
12,0	50,0	100,0	12,0	43535	49472	49485	49498	5XLM
12,0	75,0	150,0	12,0	43545	49473	49486	49499	5XLM
14,0	32,0	89,0	14,0	40569	48772	48794	48815	5M
14,0	75,0	150,0	14,0	43555	49474	49487	49500	5XLM
16,0	32,0	89,0	16,0	40573	48773	48795	48816	5M
16,0	75,0	150,0	16,0	43565	49475	49488	49501	5XLM
18,0	38,0	100,0	18,0	40577	48774	48796	48817	5M
18,0	75,0	150,0	18,0	43575	49476	49489	49502	5XLM
20,0	38,0	100,0	20,0	40581	48775	48797	48818	5M
20,0	75,0	150,0	20,0	43585	49477	49490	49503	5XLM
25,0	38,0	100,0	25,0	40585	48776	48798	48819	5M
25,0	75,0	150,0	25,0	43595	49478	49491	49504	5XLM

TECH INFO 141

STEELS

STAINLESS STEELS

CAST IRON



HIGH TEMP ALLOYS

TITANIUM

NON-FERROUS

PLASTICS/COMPOSITES

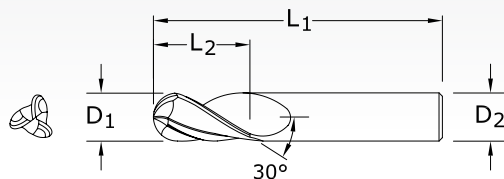


5B
FRACTIONAL SERIES

TOLERANCES (inch)
 $D_1 = +0.0000/-0.0020$
 $D_2 = h_6$

TECH INFO 139


inch

EDP NO.


CUTTING DIAMETER D ₁	LENGTH OF CUT L ₂	OVERALL LENGTH L ₁	SHANK DIAMETER D ₂	UNCOATED	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)
1/64	1/32	1-1/2	1/8	30502	30851	30602	31130
1/32	5/64	1-1/2	1/8	30504	30852	30604	31131
3/64	7/64	1-1/2	1/8	30506	30853	30606	31132
1/16	3/16	1-1/2	1/8	30508	30854	30608	31133
5/64	3/16	1-1/2	1/8	30510	30855	30610	31134
3/32	9/32	1-1/2	1/8	30512	30856	30612	31135
7/64	3/8	1-1/2	1/8	30514	30857	30902	31136
1/8	3/8	1-1/2	1/8	30578	30889	30943	31168
1/8	1/2	1-1/2	1/8	30516	30858	30904	31137
9/64	1/2	2	3/16	30518	30859	30906	31138
5/32	1/2	2	3/16	30520	30860	30908	31139
11/64	5/8	2	3/16	30522	30861	30910	31140
3/16	5/8	2	3/16	30524	30862	30912	31141
13/64	5/8	2-1/2	1/4	30526	30863	30914	31142
7/32	5/8	2-1/2	1/4	30528	30864	30916	31143
15/64	3/4	2-1/2	1/4	30530	30865	30918	31144
1/4	3/4	2-1/2	1/4	30532	30866	30920	31145
17/64	3/4	2-1/2	5/16	30534	30867	30921	31146
9/32	3/4	2-1/2	5/16	30536	30868	30922	31147
19/64	13/16	2-1/2	5/16	30538	30869	30923	31148
5/16	13/16	2-1/2	5/16	30540	30870	30924	31149
21/64	1	2-1/2	3/8	30542	30871	30925	31150
11/32	1	2-1/2	3/8	30544	30872	30926	31151
23/64	1	2-1/2	3/8	30546	30873	30927	31152
3/8	1	2-1/2	3/8	30548	30874	30928	31153
25/64	1	2-3/4	7/16	30550	30875	30929	31154
13/32	1	2-3/4	7/16	30552	30876	30930	31155
27/64	1	2-3/4	7/16	30554	30877	30931	31156
7/16	1	2-3/4	7/16	30556	30878	30932	31157
29/64	1	3	1/2	30558	30879	30933	31158
15/32	1	3	1/2	30560	30880	30934	31159
31/64	1	3	1/2	30562	30881	30935	31160
1/2	1	3	1/2	30564	30882	30936	31161
9/16	1-1/8	3-1/2	9/16	30566	30883	30937	31162
5/8	1-1/4	3-1/2	5/8	30568	30884	30938	31163
11/16	1-3/8	4	3/4	30570	30885	30939	31164
3/4	1-1/2	4	3/4	30572	30886	30940	31165
7/8	1-1/2	4	7/8	30574	30887	30941	31166
1	1-1/2	4	1	30576	30888	30942	31167
*Series 5B Set				30590	30900	30944	31169

- STEELS
- STAINLESS STEELS
- CAST IRON
- HIGH TEMP ALLOYS
- TITANIUM
- NON-FERROUS
- PLASTICS/COMPOSITES





TOLERANCES (mm)

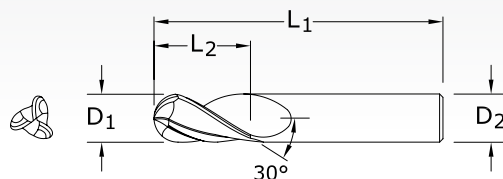 $D_1 = +0,000/-0,050$ $D_2 = h_6$ 

5MB • 5XLMB

METRIC SERIES

TECH INFO 141

mm				EDP NO.				SERIES
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	UNCOATED	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)	
1,0	4,0	38,0	3,0	40506	48820	48842	48863	5MB
1,5	4,5	38,0	3,0	40510	48821	48843	48864	5MB
2,0	6,3	38,0	3,0	40514	48822	48844	48865	5MB
2,5	9,5	38,0	3,0	40518	48823	48845	48866	5MB
3,0	12,0	38,0	3,0	40522	48824	48846	48867	5MB
3,0	25,0	75,0	3,0	43502	49583	49596	49609	5XLMB
3,5	12,0	50,0	4,0	40526	48825	48847	48868	5MB
4,0	14,0	50,0	4,0	40530	48826	48848	48869	5MB
4,0	25,0	75,0	4,0	43504	49584	49597	49610	5XLMB
4,5	16,0	50,0	6,0	40534	48827	48849	48870	5MB
5,0	16,0	50,0	6,0	40538	48828	48850	48871	5MB
5,0	25,0	75,0	5,0	43508	49586	49599	49612	5XLMB
6,0	19,0	50,0	6,0	40542	48829	48851	48872	5MB
6,0	25,0	75,0	6,0	43506	49585	49598	49611	5XLMB
7,0	19,0	63,0	8,0	40546	48830	48852	48873	5MB
8,0	20,0	63,0	8,0	40550	48831	48853	48874	5MB
8,0	25,0	75,0	8,0	43516	49587	49600	49613	5XLMB
9,0	22,0	75,0	10,0	40554	48832	48854	48875	5MB
10,0	22,0	75,0	10,0	40558	48833	48855	48876	5MB
10,0	38,0	100,0	10,0	43526	49588	49601	49614	5XLMB
11,0	25,0	75,0	12,0	40562	48834	48856	48877	5MB
12,0	25,0	75,0	12,0	40566	48835	48857	48878	5MB
12,0	50,0	100,0	12,0	43536	49589	49602	49615	5XLMB
12,0	75,0	150,0	12,0	43546	49590	49603	49616	5XLMB
14,0	32,0	89,0	14,0	40570	48836	48858	48879	5MB
14,0	75,0	150,0	14,0	43556	49591	49604	49617	5XLMB
16,0	32,0	89,0	16,0	40574	48837	48859	48880	5MB
16,0	75,0	150,0	16,0	43566	49592	49605	49618	5XLMB
18,0	38,0	100,0	18,0	40578	48838	48860	48881	5MB
18,0	75,0	150,0	18,0	43576	49593	49606	49619	5XLMB
20,0	38,0	100,0	20,0	40582	48839	48861	48882	5MB
20,0	75,0	150,0	20,0	43586	49594	49607	49620	5XLMB
25,0	38,0	100,0	25,0	40586	48840	48862	48883	5MB
25,0	75,0	150,0	25,0	43596	49595	49608	49621	5XLMB


STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS
TITANIUM
NON-FERROUS
PLASTICS/COMPOSITES



61

FRACTIONAL SERIES

TECH INFO 146

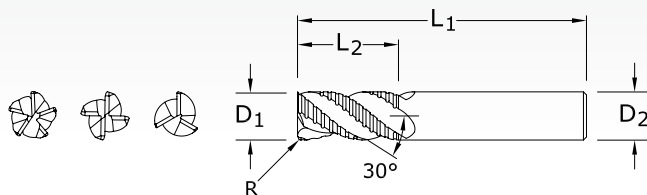


TOLERANCES (inch)

$D_1 = +0.0000/-0.0040$

$D_2 = h_6$

$R = +0.0050/-0.0050$



inch						EDP NO.		
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	CORNER RADIUS R	NO. OF FLUTES	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)
1/4*	3/4	2-1/2	1/4	.045	3	36107	36106	36110
5/16*	3/4	2-1/2	5/16	.045	3	36109	36108	36111
3/8	7/8	2-1/2	3/8	.060	3	36113	36112	36114
1/2	1	3	1/2	.060	4	36117	36116	36118
5/8	1-1/4	3-1/2	5/8	.060	4	36121	36120	36222
3/4	1-5/8	4	3/4	.060	4	36125	36124	36126
1	1-3/4	4	1	.060	5	36129	36128	36130

*Without Flat

61M

METRIC SERIES

TECH INFO 147

mm						EDP NO.		
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	CORNER RADIUS R	NO. OF FLUTES	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)
6,0	19,0	63,0	6,0	1,14	3	46107	46106	46110
8,0	19,0	63,0	8,0	1,14	3	46109	46108	46111
10,0	22,0	72,0	10,0	1,52	3	46113	46112	46114
12,0	26,0	83,0	12,0	1,52	4	46117	46116	46118
16,0	32,0	92,0	16,0	1,52	4	46121	46120	46122
20,0	38,0	104,0	20,0	1,52	4	46129	46128	46132
25,0	44,0	104,0	25,0	1,52	5	46131	46130	46133

TOLERANCES h10 (mm)

$D_1 = +0,000/-0,100$

$D_2 = h_6$

$R = +0,127/-0,127$



**TOLERANCES (inch)** $D_1 = +0.0000/-0.0040$ $D_2 = h_6$ $R = +0.0050/-0.0050$

62

FRACTIONAL SERIES

TECH INFO 148

CUTTING DIAMETER D_1	LENGTH OF CUT L_2	inch			NO. OF FLUTES	EDP NO.		
		OVERALL LENGTH L_1	SHANK DIAMETER D_2			Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)
1/4*	3/4	2-1/2	1/4	3		36207	36206	36210
5/16*	3/4	2-1/2	5/16	3		36209	36208	36211
3/8	7/8	2-1/2	3/8	3		36213	36212	36214
1/2	1	3	1/2	4		36217	36216	36218
5/8	1-1/4	3-1/2	5/8	4		36221	36220	36222
3/4	1-5/8	4	3/4	4		36225	36224	36226
1	1-3/4	4	1	6		36229	36228	36230

*Without Flat

STEELS

STAINLESS STEELS

CAST IRON

TOLERANCES h10 (mm) $D_1 = +0,000/-0,100$ $D_2 = h_6$ $R = +0,127/-0,127$

62M

METRIC SERIES

TECH INFO 149


CUTTING DIAMETER D_1	LENGTH OF CUT L_2	mm			NO. OF FLUTES	EDP NO.		
		OVERALL LENGTH L_1	SHANK DIAMETER D_2			Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)
6	19	63	6	3		46207	46206	46210
8	19	63	8	3		46209	46208	46211
10	22	72	10	3		46213	46212	46214
12	26	83	12	4		46217	46216	46218
16	32	92	16	4		46221	46220	46222
20	38	104	20	4		46229	46228	46232
25	44	104	25	6		46231	46230	46233





MK2 FRACTIONAL SERIES

TECH INFO 150

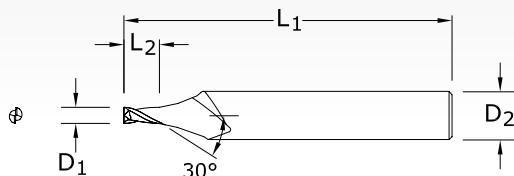

TOLERANCES (inch)

$D_1 = \pm 0.0005$

$D_2 = h_6$


STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS
TITANIUM
NON-FERROUS
PLASTICS/COMPOSITES

	inch			EDP NO.
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	UNCOATED
0.008	0.012	1-1/2	1/8	39208
0.009	0.014	1-1/2	1/8	39209
0.010	0.015	1-1/2	1/8	39210
0.011	0.017	1-1/2	1/8	39211
0.012	0.018	1-1/2	1/8	39212
0.013	0.020	1-1/2	1/8	39213
0.014	0.021	1-1/2	1/8	39214
0.015	0.023	1-1/2	1/8	39215
0.016	0.024	1-1/2	1/8	39216
0.017	0.026	1-1/2	1/8	39217
0.018	0.027	1-1/2	1/8	39218
0.019	0.029	1-1/2	1/8	39219
0.020	0.030	1-1/2	1/8	39220
0.021	0.032	1-1/2	1/8	39221
0.022	0.033	1-1/2	1/8	39222
0.023	0.035	1-1/2	1/8	39223
0.024	0.036	1-1/2	1/8	39224
0.025	0.038	1-1/2	1/8	39225
0.026	0.039	1-1/2	1/8	39226
0.027	0.041	1-1/2	1/8	39227
0.028	0.042	1-1/2	1/8	39228
0.029	0.044	1-1/2	1/8	39229
0.030	0.045	1-1/2	1/8	39230
0.031	0.047	1-1/2	1/8	39231
0.035	0.053	1-1/2	1/8	39235
0.040	0.060	1-1/2	1/8	39240
0.047	0.071	1-1/2	1/8	39247
0.050	0.075	1-1/2	1/8	39250
0.055	0.083	1-1/2	1/8	39255
0.060	0.090	1-1/2	1/8	39260





TOLERANCES (mm)

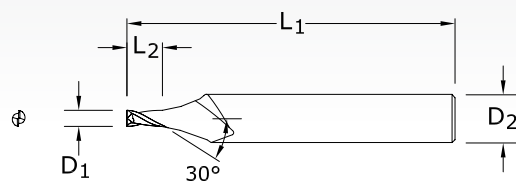 $D_1 = \pm 0,013$ $D_2 = h_6$ 
MK2M
 METRIC SERIES

TECH INFO 152

mm				EDP NO. UNCOATED
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	
0,20	0,30	38,0	3,17	39208
0,23	0,36	38,0	3,17	39209
0,25	0,38	38,0	3,17	39210
0,28	0,43	38,0	3,17	39211
0,30	0,46	38,0	3,17	39212
0,33	0,51	38,0	3,17	39213
0,36	0,53	38,0	3,17	39214
0,38	0,58	38,0	3,17	39215
0,41	0,61	38,0	3,17	39216
0,43	0,66	38,0	3,17	39217
0,46	0,69	38,0	3,17	39218
0,48	0,74	38,0	3,17	39219
0,51	0,76	38,0	3,17	39220
0,53	0,81	38,0	3,17	39221
0,56	0,84	38,0	3,17	39222
0,58	0,89	38,0	3,17	39223
0,61	0,91	38,0	3,17	39224
0,63	0,96	38,0	3,17	39225
0,66	0,99	38,0	3,17	39226
0,69	1,04	38,0	3,17	39227
0,71	1,07	38,0	3,17	39228
0,74	1,12	38,0	3,17	39229
0,76	1,14	38,0	3,17	39230
0,79	1,19	38,0	3,17	39231
0,89	1,35	38,0	3,17	39235
1,02	1,52	38,0	3,17	39240
1,19	1,80	38,0	3,17	39247
1,27	1,90	38,0	3,17	39250
1,40	2,11	38,0	3,17	39255
1,52	2,29	38,0	3,17	39260

STEELS

STAINLESS STEELS


CAST IRON

HIGH TEMP ALLOYS

TITANIUM

NON-FERROUS


PLASTICS/COMPOSITES



23

FRACTIONAL SERIES

TECH INFO 139

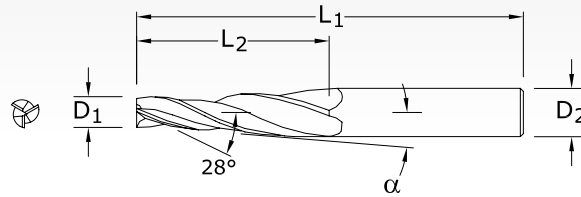



TOLERANCES (inch)

 $D_1 = +0.0010/-0.0020$
 $D_2 = h_6$

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS
TITANIUM
NON-FERROUS
PLASTICS/COMPOSITES

SHANK DIAMETER D ₂	CENTER LINE ANGLE α	inch			EDP NO.			
		SMALL DIAMETER D ₁	APPROX. LENGTH OF CUT L ₂	OVERALL LENGTH L ₁	UNCOATED	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)
1/4	1°	1/8	1-1/2	3	32301	32370	32302	32345
1/4	1°30'	1/8	1-1/2	3	32303	32371	32304	32346
1/4	2°	1/8	1-1/4	3	32305	32372	32306	32347
1/4	3°	1/8	1	3	32307	32373	32308	32348
1/4	5°	1/8	3/4	3	32309	32374	32310	32349
1/4	7°	1/8	1/2	3	32311	32375	32312	32350
1/4	10°	3/32	1/2	3	32313	32376	32314	32351
3/8	1°	3/16	1-3/4	3-1/2	32315	32377	32316	32352
3/8	1°30'	3/16	1-3/4	3-1/2	32317	32378	32318	32353
3/8	2°	3/16	1-3/4	3-1/2	32319	32379	32320	32354
3/8	3°	5/32	1-3/4	3-1/2	32321	32380	32322	32355
3/8	5°	1/8	1-1/2	3-1/2	32323	32381	32324	32356
3/8	7°	1/8	1	3-1/2	32325	32382	32326	32357
3/8	10°	1/8	3/4	3-1/2	32327	32383	32328	32358
1/2	1°	1/4	2	4	32329	32384	32330	32359
1/2	2°	1/4	2	4	32333	32385	32334	32360
1/2	3°	1/4	2	4	32335	32386	32336	32361
1/2	5°	1/4	1-1/4	4	32337	32387	32388	32362
1/2	7°	1/4	1-1/4	4	32339	32388	32340	32363
1/2	10°	1/8	1	4	32341	32389	32342	32364

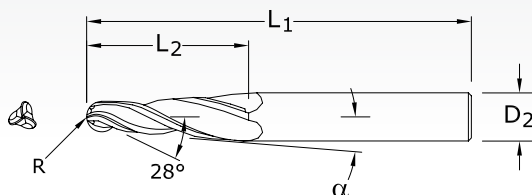

**TOLERANCES (inch)** $D_2 = h_6$ $R = +0.0005/-0.0010$ **24**

FRACTIONAL SERIES

TECH INFO 139

SHANK DIAMETER D_2	CENTER LINE ANGLE α	inch			EDP NO.			
		RADIUS R	LENGTH OF CUT L_2	OVERALL LENGTH L_1	UNCOATED	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)
1/4	1°	0.062	1-1/2	3	32402	32403	32445	32470
1/4	1°30'	0.062	1-1/2	3	32404	32405	32446	32471
1/4	2°	0.062	1-1/4	3	32406	32407	32447	32472
1/4	3°	0.062	1	3	32408	32409	32448	32473
1/4	5°	0.062	3/4	3	32410	32411	32449	32474
1/4	7°	0.062	1/2	3	32412	32413	32450	32475
1/4	10°	0.047	1/2	3	32414	32415	32451	32476
3/8	1°	0.093	1-3/4	3-1/2	32416	32417	32452	32477
3/8	1°30'	0.093	1-3/4	3-1/2	32418	32419	32453	32478
3/8	2°	0.093	1-3/4	3-1/2	32420	32421	32454	32479
3/8	3°	0.078	1-3/4	3-1/2	32422	32423	32455	32480
3/8	5°	0.062	1-1/2	3-1/2	32424	32425	32456	32481
3/8	7°	0.062	1	3-1/2	32426	32427	32457	32482
3/8	10°	0.062	3/4	3-1/2	32428	32429	32458	32483
1/2	1°	0.125	2	4	32430	32431	32459	32484
1/2	2°	0.125	2	4	32434	32435	32460	32485
1/2	3°	0.125	2	4	32436	32437	32461	32486
1/2	5°	0.125	1-1/4	4	32438	32439	32462	32487
1/2	7°	0.093	1-1/4	4	32440	32441	32463	32488
1/2	10°	0.062	1	4	32442	32443	32464	32489

STEELS

STAINLESS STEELS

CAST IRON


HIGH TEMP ALLOYS

TITANIUM

NON-FERROUS

PLASTICS/COMPOSITES



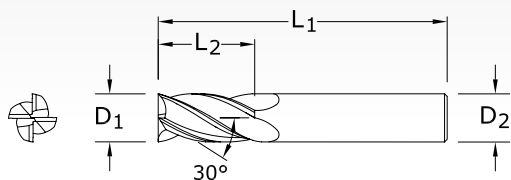

CUTTING DIAMETER D_1	SINGLE END LENGTH OF CUT L_2	DOUBLE END LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2
1/8	1/2	1/4	1-1/2	1/8
3/16	5/8	3/8	2	3/16
1/4	3/4	1/2	2-1/2	1/4
5/16	13/16	1/2	2-1/2	5/16
3/8	1	9/16	2-1/2	3/8
1/2	1	5/8	3	1/2

Square End

FRACTIONAL SERIES



DESCRIPTION	EDP NO.			
	UNCOATED	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)
Series 1 – 4 Flute, Single End	30189	39189	39089	30030
Series 3 – 2 Flute, Single End	30389	39389	39589	30470
Series 5 – 3 Flute, Single End	30589	39789	30810	30850
Series 14 – 4 Flute, Double End	31489	31481	39641	31190
Series 15 – 2 Flute, Double End	31589	31581	39691	31336


Ball End

FRACTIONAL SERIES




DESCRIPTION	EDP NO.			
	UNCOATED	Ti-NAMITE (TiN)	Ti-NAMITE-C (TiCN)	Ti-NAMITE-A (AlTiN)
Series 1B – 4 Flute, Single End	30190	39109	39090	30070
Series 3B – 2 Flute, Single End	30390	39390	39590	30600
Series 5B – 3 Flute, Single End	30590	30900	30944	31169
Series 14B – 4 Flute, Double End	31490	31482	39642	31217
Series 15B – 2 Flute, Double End	31590	31582	39692	31357



Series 1, 3, 5, 14, 15, 16, 17, 23, 24, 59 Fractional		Hardness BRINELL				Vc (SFM)	Diameter (D ₁) (inch)													
			Flutes	Ae x D ₁	Ap x D ₁		1/64	1/32	1/16	1/8	1/4	3/8	1/2	3/4	1					
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175		Profile	2 ≤ 0.50 ≤ 1.5 3 ≤ 0.25 ≤ 1.5 4 ≤ 0.25 ≤ 1.5	(368-552)	460	RPM	112461	56230	28115	14058	7029	4686	3514	2343	1757			
							Fz	0.00003	0.00006	0.00013	0.0003	0.0008	0.0015	0.0020	0.0024	0.0028				
							Feed (IPM)	6.7	6.7	7.3	8.4	11.2	14.1	14.1	11.2	9.8				
								10.1	10.1	11.0	12.7	16.9	21.1	21.1	16.9	14.8				
				Slot	2 1 ≤ 1 3 1 ≤ 0.5 4 1 ≤ 0.4	(268-402)	335	RPM	81901	40950	20475	10238	5119	3413	2559	1706	1280			
							Fz	0.00003	0.00006	0.00013	0.0003	0.0008	0.0015	0.0020	0.0024	0.0028				
							Feed (IPM)	4.9	4.9	5.3	6.1	8.2	10.2	10.2	8.2	7.2				
								7.4	7.4	8.0	9.2	12.3	15.4	15.4	12.3	10.7				
			P	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275		Profile	2 ≤ 0.50 ≤ 1.5 3 ≤ 0.25 ≤ 1.5 4 ≤ 0.25 ≤ 1.5	(268-402)	335	RPM	81901	40950	20475	10238	5119	3413	2559	1706	1280
										Fz	0.00002	0.00005	0.00009	0.0002	0.0006	0.0011	0.0015	0.0018	0.0021	
										Feed (IPM)	3.3	4.1	3.7	4.1	6.1	7.5	7.7	6.1	5.4	
											4.9	6.1	5.5	6.1	9.2	11.3	11.5	9.2	8.1	
	Slot	2 1 ≤ 1 3 1 ≤ 0.5 4 1 ≤ 0.4				(196-294)	245	RPM	59898	29949	14974	7487	3744	2496	1872	1248	936			
							Fz	0.00002	0.00005	0.00009	0.0002	0.0006	0.0011	0.0015	0.0018	0.0021				
							Feed (IPM)	2.4	3.0	2.7	3.0	4.5	5.5	5.6	4.5	3.9				
								3.6	4.5	4.0	4.5	6.7	8.2	8.4	6.7	5.9				
P	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 250					Profile	2 ≤ 0.50 ≤ 1.5 3 ≤ 0.25 ≤ 1.5 4 ≤ 0.25 ≤ 1.5	(252-378)	315	RPM	77011	38506	19253	9626	4813	3209	2407	1604	1203
										Fz	0.00002	0.00005	0.00009	0.0002	0.0006	0.0011	0.0015	0.0018	0.0021	
										Feed (IPM)	3.1	3.9	3.5	3.9	5.8	7.1	7.2	5.8	5.1	
											4.6	5.8	5.2	5.8	8.7	10.6	10.8	8.7	7.6	
				Slot	2 1 ≤ 1 3 1 ≤ 0.5 4 1 ≤ 0.4	(184-276)	230	RPM	56230	28115	14058	7029	3514	2343	1757	1171	879			
							Fz	0.00002	0.00005	0.00009	0.0002	0.0006	0.0011	0.0015	0.0018	0.0021				
							Feed (IPM)	2.2	2.8	2.5	2.8	4.2	5.2	5.3	4.2	3.7				
								3.4	4.2	3.8	4.2	6.3	7.7	7.9	6.3	5.5				
			K	CAST IRONS Gray, Malleable, Ductile	≤ 220		Profile	2 ≤ 0.50 ≤ 1.5 3 ≤ 0.25 ≤ 1.5 4 ≤ 0.25 ≤ 1.5	(268-402)	335	RPM	81901	40950	20475	10238	5119	3413	2559	1706	1280
										Fz	0.00003	0.00006	0.00013	0.0003	0.0008	0.0015	0.0020	0.0024	0.0028	
										Feed (IPM)	4.9	4.9	5.3	6.1	8.2	10.2	10.2	8.2	7.2	
											7.4	7.4	8.0	9.2	12.3	15.4	15.4	12.3	10.7	
	Slot	2 1 ≤ 1 3 1 ≤ 0.5 4 1 ≤ 0.4				(196-294)	245	RPM	59898	29949	14974	7487	3744	2496	1872	1248	936			
							Fz	0.00003	0.00006	0.00013	0.0003	0.0008	0.0015	0.0020	0.0024	0.0028				
							Feed (IPM)	3.6	3.6	3.9	4.5	6.0	7.5	7.5	6.0	5.2				
								5.4	5.4	5.8	6.7	9.0	11.2	11.2	9.0	7.9				
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	≤ 275					Profile	2 ≤ 0.50 ≤ 1.5 3 ≤ 0.25 ≤ 1.5 4 ≤ 0.25 ≤ 1.5	(296-444)	370	RPM	90458	45229	22614	11307	5654	3769	2827	1885	1413
										Fz	0.00002	0.00005	0.00009	0.0002	0.0006	0.0011	0.0015	0.0018	0.0021	
										Feed (IPM)	3.6	4.5	4.1	4.5	6.8	8.3	8.5	6.8	5.9	
											5.4	6.8	6.1	6.8	10.2	12.4	12.7	10.2	8.9	
				Slot	2 1 ≤ 1 3 1 ≤ 0.5 4 1 ≤ 0.4	(216-324)	270	RPM	66010	33005	16502	8251	4126	2750	2063	1375	1031			
							Fz	0.00002	0.00005	0.00009	0.0002	0.0006	0.0011	0.0015	0.0018	0.0021				
							Feed (IPM)	2.6	3.3	3.0	3.3	5.0	6.1	6.2	5.0	4.3				
								4.0	5.0	4.5	5.0	7.4	9.1	9.3	7.4	6.5				
			M	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L, 17-4 PH, 15-5, 13-4, Custom 450	≤ 275		Profile	2 ≤ 0.50 ≤ 1.5 3 ≤ 0.25 ≤ 1.5 4 ≤ 0.25 ≤ 1.5	(204-306)	255	RPM	62342	31171	15586	7793	3896	2598	1948	1299	974
										Fz	0.00002	0.00004	0.00008	0.0002	0.0005	0.0009	0.0012	0.0014	0.0017	
										Feed (IPM)	2.5	2.5	2.5	2.6	3.9	4.7	4.7	3.6	3.3	
											3.7	3.7	3.7	4.0	5.8	7.0	7.0	5.5	5.0	
	Slot	2 1 ≤ 1 3 1 ≤ 0.5 4 1 ≤ 0.4				(148-222)	185	RPM	45229	22614	11307	5654	2827	1885	1413	942	707			
							Fz	0.00002	0.00004	0.00008	0.0002	0.0005	0.0009	0.0012	0.0014	0.0017				
							Feed (IPM)	1.8	1.8	1.8	1.9	2.8	3.4	3.4	2.6	2.4				
								2.7	2.7	2.7	2.9	4.2	5.1	5.1	4.0	3.6				

continued on next page

Series 1, 3, 5, 14, 15, 16, 17, 23, 24, 59 Fractional		Hardness BRINELL				Vc (SFM)	Diameter (D ₁) (inch)																
			Flutes	Ae x D ₁	Ap x D ₁		1/64	1/32	1/16	1/8	1/4	3/8	1/2	3/4	1								
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, 718, Incoloy 800, Monel 400,Rene, Waspalloy		≤ 300	Profile		2	≤ 0.50	≤ 1.5	(52-78)	65	RPM	15891	7946	3973	1986	993	662	497	331	248			
										Fz	0.00002	0.00003	0.00006	0.0002	0.0004	0.0008	0.0010	0.0012	0.0014				
										0.6	0.5	0.5	0.7	0.7	1.1	1.0	0.8	0.7					
										1.0	0.7	0.7	1.1	1.0	1.6	1.5	1.2	1.0					
			45	Feed (IPM)	1.3	1.0	1.0	1.4	1.4	2.1	2.0	1.6	1.4										
					Fz	0.00002	0.00003	0.00006	0.0002	0.0004	0.0008	0.0010	0.0012	0.0014									
					0.4	0.3	0.3	0.5	0.5	0.7	0.7	0.6	0.5										
					0.7	0.5	0.5	0.7	0.7	1.1	1.0	0.8	0.7										
			4	Slot		2	1	≤ 1	(36-54)	45	RPM	11002	5501	2750	1375	688	458	344	229	172			
										Fz	0.00002	0.00003	0.00006	0.0002	0.0004	0.0008	0.0010	0.0012	0.0014				
0.4	0.3	0.3								0.5	0.5	0.7	0.7	0.6	0.5								
0.9	0.7	0.7								1.0	1.0	1.5	1.4	1.1	1.0								
S	TITANIUM ALLOYS Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti10Al2Fe3Al, Ti5Al53Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti152 Cr3Sn3Al		≤ 350	Profile		2	≤ 0.50	≤ 1.5	(144-216)	180	RPM	44006	22003	11002	5501	2750	1834	1375	917	688			
										Fz	0.00002	0.00004	0.00008	0.0002	0.0005	0.0009	0.0012	0.0014	0.0017				
										1.8	1.8	1.8	2.2	2.8	3.3	3.3	2.6	2.3					
										2.6	2.6	2.6	3.3	4.1	5.0	5.0	3.9	3.5					
			130	Feed (IPM)	3.5	3.5	3.5	4.4	5.5	6.6	6.6	5.1	4.7										
					Fz	0.00002	0.00004	0.00008	0.0002	0.0005	0.0009	0.0012	0.0014	0.0017									
					1.3	1.3	1.3	1.6	2.0	2.4	2.4	1.9	1.7										
					1.9	1.9	1.9	2.4	3.0	3.6	3.6	2.8	2.5										
			4	Slot		2	1	≤ 1	(104-156)	130	RPM	31782	15891	7946	3973	1986	1324	993	662	497			
										Fz	0.00002	0.00004	0.00008	0.0002	0.0005	0.0009	0.0012	0.0014	0.0017				
1.3	1.3	1.3								1.6	2.0	2.4	2.4	1.9	1.7								
1.9	1.9	1.9								2.4	3.0	3.6	3.6	2.8	2.5								
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075		≤ 150	Profile		2	≤ 0.50	≤ 1.5	(704-1056)	880	RPM	215142	107571	53786	26893	13446	8964	6723	4482	3362			
										Fz	0.00006	0.00013	0.00025	0.0006	0.0016	0.0030	0.0040	0.0048	0.0056				
										25.8	28.0	26.9	32.3	43.0	53.8	53.8	43.0	37.6					
										38.7	42.0	40.3	48.4	64.5	80.7	80.7	64.5	56.5					
			640	Feed (IPM)	156467	78234	39117	19558	9779	6519	4890	3260	2445										
					Fz	0.00006	0.00013	0.00025	0.0006	0.0016	0.0030	0.0040	0.0048	0.0056									
					18.8	20.3	19.6	23.5	31.3	39.1	39.1	31.3	27.4										
					28.2	30.5	29.3	35.2	46.9	58.7	58.7	46.9	41.1										
			N	COPPER ALLOYS Alum Bronze, C110, Muntz Brass		≤ 140	Profile		2	≤ 0.50	≤ 1.5	(388-582)	485	RPM	118573	59286	29643	14822	7411	4941	3705	2470	1853
													Fz	0.00003	0.00006	0.00013	0.0003	0.0008	0.0015	0.0020	0.0024	0.0028	
7.1	7.1	7.7											8.9	11.9	14.8	14.8	11.9	10.4					
10.7	10.7	11.6											13.3	17.8	22.2	22.2	17.8	15.6					
350	Feed (IPM)	14.2				14.2	15.4	17.8	23.7	29.6	29.6	23.7	20.8										
		Fz				0.00003	0.00006	0.00013	0.0003	0.0008	0.0015	0.0020	0.0024	0.0028									
		5.1				5.1	5.6	6.4	8.6	10.7	10.7	8.6	7.5										
		7.7				7.7	8.3	9.6	12.8	16.0	16.0	12.8	11.2										
S	PLASTICS Polycarbonate, PVC, Polypropylene					≤ 150	Profile		2	≤ 0.50	≤ 1.5	(704-1056)	880	RPM	215142	107571	53786	26893	13446	8964	6723	4482	3362
													Fz	0.00006	0.00013	0.00025	0.0006	0.0016	0.0030	0.0040	0.0048	0.0056	
			25.8	28.0	26.9								32.3	43.0	53.8	53.8	43.0	37.6					
			38.7	42.0	40.3								48.4	64.5	80.7	80.7	64.5	56.5					
			640	Feed (IPM)	156467	78234	39117	19558	9779	6519	4890	3260	2445										
					Fz	0.00006	0.00013	0.00025	0.0006	0.0016	0.0030	0.0040	0.0048	0.0056									
					18.8	20.3	19.6	23.5	31.3	39.1	39.1	31.3	27.4										
					28.2	30.5	29.3	35.2	46.9	58.7	58.7	46.9	41.1										
			S	GRAPHITE		≤ 150	Profile		2	≤ 0.50	≤ 1.5	(528-792)	660	RPM	161357	80678	40339	20170	10085	6723	5042	3362	2521
													Fz	0.00006	0.00013	0.00025	0.0006	0.0016	0.0030	0.0040	0.0048	0.0056	
19.4	21.0	20.2											24.2	32.3	40.3	40.3	32.3	28.2					
29.0	31.5	30.3											36.3	48.4	60.5	60.5	48.4	42.4					
480	Feed (IPM)	38.7				42.0	40.3	48.4	64.5	80.7	80.7	64.5	56.5										
		Fz				0.00006	0.00013	0.00025	0.0006	0.0016	0.0030	0.0040	0.0048	0.0056									
		14.1				15.3	14.7	17.6	23.5	29.3	29.3	23.5	20.5										
		21.1				22.9	22.0	26.4	35.2	44.0	44.0	35.2	30.8										
4	Slot					2	1	≤ 1	(384-576)	480	RPM	117350	58675	29338	14669	7334	4890	3667	2445	1834			
										Fz	0.00006	0.00013	0.00025	0.0006	0.0016	0.0030	0.0040	0.0048	0.0056				
			14.1	15.3	14.7					17.6	23.5	29.3	29.3	23.5	20.5								
			21.1	22.9	22.0					26.4	35.2	44.0	44.0	35.2	30.8								
4	Slot		2	1	≤ 1	(384-576)	480	RPM	117350	58675	29338	14669	7334	4890	3667	2445	1834						
							Fz	0.00006	0.00013	0.00025	0.0006	0.0016	0.0030	0.0040	0.0048	0.0056							
							14.1	15.3	14.7	17.6	23.5	29.3	29.3	23.5	20.5								
							21.1	22.9	22.0	26.4	35.2	44.0	44.0	35.2	30.8								

rpm = sfm x 3.82 / D₁

ipm = (inch / flute) x number of flutes x rpm


reduce speed and feed for materials harder than listed

for tapered end mills, base the speed on the largest diameter contacting the workpiece and the feed on the smallest diameter


limit cut depths of long and extra long flute mills to .05 x D₁ when slotting or profiling

reduce feed and Ae when finish milling (.02 x D₁ maximum)

refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)

Series 1M, 3M, 5M, 14M, 15M, 16M, 17M, 59M Metric							Vc (m/min)	Diameter (D ₁) (mm)								
Hardness BRINELL	Flutes	Ae x D ₁	Ap x D ₁	0.4	0.75	1.5		3	6	10	12	20	25			
P CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175		Profile	140	RPM	111483	59458	29729	14864	7432	4459	3716	2230	1784		
					(112-168)	Fz	0.0008	0.0015	0.0031	0.007	0.019	0.040	0.048	0.064	0.070	
						Feed (mm/ min)	178	178	184	208	282	357	285	250		
							268	268	276	312	424	535	535	428	375	
			Slot	102	RPM	81189	43301	21650	10825	5413	3248	2706	1624	1299		
					Fz	0.0008	0.0015	0.0031	0.007	0.019	0.040	0.048	0.064	0.070		
					Feed (mm/ min)	130	130	134	152	206	260	260	208	182		
						195	195	201	227	309	390	390	312	273		
		P ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275		Profile	102	RPM	81189	43301	21650	10825	5413	3248	2706	1624	1299
							(82-123)	Fz	0.0005	0.0012	0.0022	0.006	0.014	0.029	0.036	0.048
Feed (mm/ min)	81							104	95	130	152	188	195	156	135	
	122							156	143	195	227	283	292	234	203	
	Slot			75	RPM	59377	31668	15834	7917	3958	2375	1979	1188	950		
					Fz	0.0005	0.0012	0.0022	0.006	0.014	0.029	0.036	0.048	0.052		
					Feed (mm/ min)	59	76	70	95	111	138	143	114	99		
						119	152	139	190	222	276	285	228	198		
P TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 250				Profile	96	RPM	76342	40715	20358	10179	5089	3054	2545	1527	1221
							(77-115)	Fz	0.0005	0.0012	0.0022	0.006	0.014	0.029	0.036	0.048
		Feed (mm/ min)	76					98	90	122	143	177	183	147	127	
			115					147	134	183	214	266	275	220	191	
			Slot	70	RPM	55741	29729	14864	7432	3716	2230	1858	1115	892		
					Fz	0.0005	0.0012	0.0022	0.006	0.014	0.029	0.036	0.048	0.052		
					Feed (mm/ min)	56	71	65	89	104	129	134	107	93		
						84	107	98	134	156	194	201	161	139		
		K CAST IRONS Gray, Malleable, Ductile	≤ 220		Profile	102	RPM	81189	43301	21650	10825	5413	3248	2706	1624	1299
							(82-123)	Fz	0.0008	0.0015	0.0031	0.007	0.019	0.040	0.048	0.064
Feed (mm/ min)	130							130	134	152	206	260	260	208	182	
	195							195	201	227	309	390	390	312	273	
	Slot			75	RPM	59377	31668	15834	7917	3958	2375	1979	1188	950		
					Fz	0.0008	0.0015	0.0031	0.007	0.019	0.040	0.048	0.064	0.070		
					Feed (mm/ min)	95	95	98	111	150	190	190	152	133		
						143	143	147	166	226	285	285	228	200		
M STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	≤ 275				Profile	113	RPM	89671	47825	23912	11956	5978	3587	2989	1793	1435
							(90-135)	Fz	0.0005	0.0012	0.0022	0.006	0.014	0.029	0.036	0.048
		Feed (mm/ min)	90					115	105	143	167	208	215	172	149	
			135					172	158	215	251	312	323	258	224	
			Slot	82	RPM	65436	34899	17449	8725	4362	2617	2181	1309	1047		
					Fz	0.0005	0.0012	0.0022	0.006	0.014	0.029	0.036	0.048	0.052		
					Feed (mm/ min)	65	84	77	105	122	152	157	126	109		
						98	126	115	157	183	228	236	188	163		
		M STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L, 17-4 PH, 15-5, 13-4, Custom 450	≤ 275		Profile	78	RPM	61800	32960	16480	8240	4120	2472	2060	1236	989
							(62-93)	Fz	0.0005	0.0010	0.0019	0.004	0.012	0.024	0.029	0.037
Feed (mm/ min)	62							66	63	66	99	119	119	91	83	
	93							99	94	99	148	178	179	137	125	
	Slot			56	RPM	44836	23912	11956	5978	2989	1793	1495	897	717		
					Fz	0.0005	0.0010	0.0019	0.004	0.012	0.024	0.029	0.037	0.042		
					Feed (mm/ min)	45	48	45	48	72	86	87	66	60		
						67	72	68	72	108	129	130	100	90		

continued on next page

Series 1M, 3M, 5M, 14M, 15M, 16M, 17M, 59M Metric	Hardness BRINELL				Vc (m/min)	Diameter (D ₁) (mm)									
		Flutes	Ae x D ₁	Ap x D ₁		0.4	0.75	1.5	3	6	10	12	20	25	
S SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, 718, Incoly 800, Monel 400, Rene, Waspalloy	≤ 300		Profile	20	RPM	15753	8402	4201	2100	1050	630	525	315	252	
					(16-24)	Fz	0.0005	0.0007	0.0014	0.004	0.010	0.021	0.024	0.032	0.035
						Feed (mm/ min)	16	12	12	17	21	26	25	20	18
							24	18	18	25	32	40	38	30	26
		(11-16)	RPM	10906	5816	2908	1454	727	436	364	218	174			
			Fz	0.0005	0.0007	0.0014	0.004	0.010	0.021	0.024	0.032	0.035			
			Feed (mm/ min)	11	8	8	12	15	18	17	14	12			
				16	12	12	17	22	27	26	21	18			
		(32-48)	RPM	31506	16803	8402	4201	2100	1260	1050	630	504			
			Fz	0.0005	0.0010	0.0019	0.004	0.012	0.024	0.029	0.037	0.042			
Feed (mm/ min)	32		34	32	34	50	60	61	47	42					
	47		50	48	50	76	91	91	70	64					
S TITANIUM ALLOYS Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti10Al2Fe3Al, Ti5Al53Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti152 Cr3Sn3Al	≤ 350		Profile	55	RPM	43624	23266	11633	5816	2908	1745	1454	872	698	
					(44-66)	Fz	0.0005	0.0010	0.0019	0.004	0.012	0.024	0.029	0.037	0.042
						Feed (mm/ min)	44	47	44	47	70	84	84	65	59
							65	70	66	70	105	126	127	97	88
		(32-48)	RPM	31506	16803	8402	4201	2100	1260	1050	630	504			
			Fz	0.0005	0.0010	0.0019	0.004	0.012	0.024	0.029	0.037	0.042			
			Feed (mm/ min)	32	34	32	34	50	60	61	47	42			
				47	50	48	50	76	91	91	70	64			
		(32-48)	RPM	31506	16803	8402	4201	2100	1260	1050	630	504			
			Fz	0.0005	0.0010	0.0019	0.004	0.012	0.024	0.029	0.037	0.042			
Feed (mm/ min)	32		34	32	34	50	60	61	47	42					
	47		50	48	50	76	91	91	70	64					
N ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 150		Profile	268	RPM	213272	113745	56872	28436	14218	8531	7109	4265	3412	
					(215-322)	Fz	0.0015	0.0032	0.0060	0.014	0.038	0.080	0.096	0.128	0.140
						Feed (mm/min)	640	728	682	796	1081	1365	1365	1092	955
							960	1092	1024	1194	1621	2047	2047	1638	1433
		(156-234)	RPM	155107	82724	41362	20681	10340	6204	5170	3102	2482			
			Fz	0.0015	0.0032	0.0060	0.014	0.038	0.080	0.096	0.128	0.140			
			Feed (mm/ min)	465	529	496	579	786	993	993	794	695			
				698	794	745	869	1179	1489	1489	1191	1042			
		(118-177)	RPM	117542	62689	31344	15672	7836	4702	3918	2351	1881			
			Fz	0.0008	0.0015	0.0031	0.007	0.019	0.040	0.048	0.064	0.070			
Feed (mm/ min)	188		188	194	219	298	376	376	301	263					
	282		282	292	329	447	564	564	451	395					
N COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 140		Profile	148	RPM	117542	62689	31344	15672	7836	4702	3918	2351	1881	
					(118-177)	Fz	0.0008	0.0015	0.0031	0.007	0.019	0.040	0.048	0.064	0.070
						Feed (mm/ min)	188	188	194	219	298	376	376	301	263
							282	282	292	329	447	564	564	451	395
		(156-234)	RPM	84824	45239	22620	11310	5655	3393	2827	1696	1357			
			Fz	0.0008	0.0015	0.0031	0.007	0.019	0.040	0.048	0.064	0.070			
			Feed (mm/ min)	136	136	140	158	215	271	271	217	190			
				204	204	210	238	322	407	407	326	285			
		(118-177)	RPM	84824	45239	22620	11310	5655	3393	2827	1696	1357			
			Fz	0.0008	0.0015	0.0031	0.007	0.019	0.040	0.048	0.064	0.070			
Feed (mm/ min)	136		136	140	158	215	271	271	217	190					
	204		204	210	238	322	407	407	326	285					
P PLASTICS Polycarbonate, PVC, Polypropylene	≤ 100		Profile	268	RPM	213272	113745	56872	28436	14218	8531	7109	4265	3412	
					(215-322)	Fz	0.0015	0.0032	0.0060	0.014	0.038	0.080	0.096	0.128	0.140
						Feed (mm/ min)	640	728	682	796	1081	1365	1365	1092	955
							960	1092	1024	1194	1621	2047	2047	1638	1433
		(156-234)	RPM	155107	82724	41362	20681	10340	6204	5170	3102	2482			
			Fz	0.0015	0.0032	0.0060	0.014	0.038	0.080	0.096	0.128	0.140			
			Feed (mm/ min)	465	529	496	579	786	993	993	794	695			
				698	794	745	869	1179	1489	1489	1191	1042			
		(118-177)	RPM	117542	62689	31344	15672	7836	4702	3918	2351	1881			
			Fz	0.0008	0.0015	0.0031	0.007	0.019	0.040	0.048	0.064	0.070			
Feed (mm/ min)	188		188	194	219	298	376	376	301	263					
	282		282	292	329	447	564	564	451	395					
G GRAPHITE	≤ 100		Profile	201	RPM	159954	85309	42654	21327	10664	6398	5332	3199	2559	
					(161-241)	Fz	0.0015	0.0032	0.0060	0.014	0.038	0.080	0.096	0.128	0.140
						Feed (mm/ min)	480	546	512	597	810	1024	1024	819	717
							720	819	768	896	1216	1536	1536	1228	1075
		(117-176)	RPM	116330	62043	31021	15511	7755	4653	3878	2327	1861			
			Fz	0.0015	0.0032	0.0060	0.014	0.038	0.080	0.096	0.128	0.140			
			Feed (mm/ min)	349	397	372	434	589	745	745	596	521			
				523	596	558	651	884	1117	1117	893	782			
		(117-176)	RPM	116330	62043	31021	15511	7755	4653	3878	2327	1861			
			Fz	0.0015	0.0032	0.0060	0.014	0.038	0.080	0.096	0.128	0.140			
Feed (mm/ min)	349		397	372	434	589	745	745	596	521					
	523		596	558	651	884	1117	1117	893	782					

rpm = (1000 x m/min) / (3.14 x D₁)

mm / min = (mm / flute) x number of flutes x rpm


reduce speed and feed for materials harder than listed

for tapered end mills, base the speed on the largest diameter contacting the workpiece and the feed on the smallest diameter

limit cut depths of long and extra long flute mills to .05 x D₁ when slotting or profiling

reduce feed and Ae when finish milling (.02 x D₁ maximum)

refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)

Diamond 1, 1B, 3, 3B Fractional	Hardness BRINELL			Vc (SFM)	Diameter (D ₁) (inch)						
		Ae x D ₁	Ap x D ₁		1/8	1/4	5/16	3/8	1/2		
GRAPHITE Ultrafine, Superfine	N/A	 Profile	≤ 0.25	≤ 1.5	720	RPM	22003	11002	8801	7334	5501
					(576-864)	Fz	0.0009	0.0023	0.0036	0.0043	0.0058
						Feed 2 flutes (IPM)	38.3	50.6	63.4	63.1	63.8
						Feed 3 flutes (IPM)	76.6	101.2	126.7	126.2	127.6
		 Slot	≤ 1	≤ 1	580	RPM	17725	8862	7090	5908	4431
					(464-696)	Fz	0.0075	0.0020	0.0031	0.0038	0.0050
						Feed 2 flutes (IPM)	265.9	35.4	44.0	44.9	44.3
						Feed 3 flutes (IPM)	531.7	70.9	87.9	89.8	88.6
COMPOSITES FRP, CFRP, GRP	N/A	 Profile	≤ 0.25	≤ 1.5	385	RPM	11766	5883	4706	3922	2941
					(308-462)	Fz	0.0005	0.0014	0.0022	0.0026	0.0035
						Feed 2 flutes (IPM)	12.2	16.5	20.7	20.4	20.6
						Feed 3 flutes (IPM)	24.5	32.9	41.4	40.8	41.2
		 Slot	≤ 1	≤ 1	350	RPM	10696	5348	4278	3565	2674
					(280-420)	Fz	0.0005	0.0012	0.0019	0.0023	0.0030
						Feed 2 flutes (IPM)	9.6	12.8	16.3	16.4	16.0
						Feed 3 flutes (IPM)	19.3	25.7	32.5	32.8	32.1
PLASTICS Polycarbonate, PVC, Polypropylene	N/A	 Profile	≤ 0.25	≤ 1.5	1200	RPM	36672	18336	14669	12224	9168
					(960-1440)	Fz	0.0009	0.0023	0.0036	0.0043	0.0058
						Feed 2 flutes (IPM)	63.8	84.3	105.6	105.1	106.3
						Feed 3 flutes (IPM)	127.6	168.7	211.2	210.3	212.7
		 Slot	≤ 1	≤ 1	960	RPM	29338	14669	11735	9779	7334
					(768-1152)	Fz	0.0008	0.0020	0.0031	0.0038	0.0050
						Feed 2 flutes (IPM)	44.0	58.7	72.8	74.3	73.3
						Feed 3 flutes (IPM)	88.0	117.4	145.5	148.6	146.7


rpm = sfm x 3.82 / D₁

ipm = (inch / flute) x number of flutes x rpm

limit cut depths on long and extra long flute mills to .05 x D₁ when slotting or profiling

finish cuts typically require reduced feed and cut depths (.02 x D₁ maximum)

refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)



Series 52, 54 Fractional		Flutes		Ae x D ₁	Ap x D ₁	Vc (SFM)		Diameter (D ₁) (inch)					
								1/8	1/4	3/8	1/2	3/4	1
N	ALUMINUM ALLOYS 2024, 5052, 5086, 6061, 6063, 7075	Profile				1360	RPM	41562	20781	13854	10390	6927	5195
						(1088-1632)	Fz	0.00069	0.0018	0.0034	0.0046	0.0055	0.0064
				2	≤ 0.3		Feed (IPM)	57.4	74.8	94.2	95.6	76.2	66.5
		Slot				1090	RPM	33310	16655	11103	8328	5552	4164
						(872-1308)	Fz	0.00063	0.0017	0.0032	0.0042	0.0050	0.0059
				2	1		Feed (IPM)	42.0	56.6	71.1	70.0	55.5	49.1
N	ALUMINUM DIE CAST ALLOYS (HIGH SILICON) A-390, A-392, B-390	Profile				510	RPM	15586	7793	5195	3896	2598	1948
						(408-612)	Fz	0.00069	0.0018	0.0034	0.0046	0.0055	0.0064
				2	≤ 0.3		Feed (IPM)	21.5	28.1	35.3	35.8	28.6	24.9
		Slot				410	RPM	12530	6265	4177	3132	2088	1566
						(328-492)	Fz	0.00063	0.0017	0.0032	0.0042	0.0050	0.0059
				2	1		Feed (IPM)	15.8	21.3	26.7	26.3	20.9	18.5
N	COPPER ALLOYS Aluminum Bronze, Nuntz Brass, Naval, Brass, Red Brass	Profile				590	RPM	18030	9015	6010	4508	3005	2254
						(472-708)	Fz	0.00039	0.0010	0.0020	0.0026	0.0031	0.0037
				2	≤ 0.3		Feed (IPM)	14.1	18.0	24.0	23.4	18.6	16.7
		Slot				475	RPM	14516	7258	4839	3629	2419	1815
						(380-570)	Fz	0.00036	0.0010	0.0018	0.0024	0.0029	0.0034
				2	1		Feed (IPM)	10.5	14.5	17.4	17.4	14.0	12.3
N	COPPER ALLOYS Beryllium Copper, C110, Manganese Bronze, Tin Bronze	Profile				235	RPM	7182	3591	2394	1795	1197	898
						(188-282)	Fz	0.00039	0.0010	0.0020	0.0026	0.0031	0.0037
				2	≤ 0.3		Feed (IPM)	5.6	7.2	9.6	9.3	7.4	6.6
		Slot				190	RPM	5806	2903	1935	1452	968	726
						(152-228)	Fz	0.00036	0.0010	0.0018	0.0024	0.0029	0.0034
				2	1		Feed (IPM)	4.2	5.8	7.0	7.0	5.6	4.9
	PLASTICS ABS, Polycarbonate, PVC, Polypropylene	Profile				1600	RPM	48896	24448	16299	12224	8149	6112
						(1280-1920)	Fz	0.00110	0.0030	0.0056	0.0074	0.0089	0.0100
				2	≤ 0.3		Feed (IPM)	107.6	146.7	182.5	180.9	145.1	122.2
		Slot				1280	RPM	39117	19558	13039	9779	6519	4890
						(1024-1536)	Fz	0.00100	0.0027	0.0051	0.0068	0.0082	0.0095
				2	1		Feed (IPM)	78.2	105.6	133.0	133.0	106.9	92.9
	PLASTICS Fiberglass, Glass Filled	Profile				1600	RPM	22003	11002	7334	5501	3667	2750
						(1280-1920)	Fz	0.00082	0.0022	0.0041	0.0055	0.0065	0.0076
				2	≤ 0.3		Feed (IPM)	36.1	48.4	60.1	60.5	47.7	41.8
		Slot				1280	RPM	17572	8786	5857	4393	2929	2197
						(1024-1536)	Fz	0.00075	0.0020	0.0037	0.0050	0.0060	0.0070
				2	1		Feed (IPM)	26.4	35.1	43.3	43.9	35.1	30.8


rpm = sfm x 3.82 / D₁

ipm = (inch / flute) x number of flutes x rpm

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x D₁ maximum)

refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)



Series 52, 54 Metric	Flutes	Ae x D1	Ap x D1	Vc (m/min)	Diameter (D1) (mm)							
					3	6	10	12	20	25		
N ALUMINUM ALLOYS 2024, 5052, 5086, 6061, 6063, 7075					415	RPM	43947	21973	13184	10987	6592	5274
					(332-497)	Fz	0.0166	0.043	0.091	0.110	0.147	0.160
						Feed (mm/min)	1459	1890	2399	2417	1938	1688
					332	RPM	35222	17611	10567	8806	5283	4227
					(266-399)	Fz	0.0151	0.041	0.085	0.101	0.133	0.148
						Feed (mm/min)	1064	1444	1796	1779	1405	1251
					4		2127	2888	3593	3557	2811	2502
					2	1	≤ 1					
					4	1	≤ 0.25					
	N ALUMINUM DIE CAST ALLOYS (HIGH SILICON) A-390, A-392, B-390					155	RPM	16480	8240	4944	4120	2472
(124-187)						Fz	0.0166	0.043	0.091	0.110	0.147	0.160
						Feed (mm/min)	547	709	900	906	727	633
					125	RPM	13249	6624	3975	3312	1987	1590
					(100-150)	Fz	0.0151	0.041	0.085	0.101	0.133	0.148
						Feed (mm/min)	400	543	676	669	529	471
					4		800	1086	1351	1338	1057	941
					2	1	≤ 1					
					4	1	≤ 0.25					
N COPPER ALLOYS Aluminum Bronze, Nuntz Brass, Naval, Brass, Red Brass						180	RPM	19065	9533	5720	4766	2860
	(144-216)					Fz	0.0094	0.024	0.053	0.062	0.083	0.093
						Feed (mm/min)	358	458	606	591	475	426
					145	RPM	15349	7675	4605	3837	2302	1842
					(116-174)	Fz	0.0086	0.024	0.048	0.058	0.077	0.085
						Feed (mm/min)	264	368	442	445	355	313
					4		528	737	884	890	709	626
					2	1	≤ 1					
					4	1	≤ 0.25					
	N COPPER ALLOYS Beryllium Copper, C110, Manganese Bronze, Tin Bronze					72	RPM	7594	3797	2278	1898	1139
(57-86)						Fz	0.0094	0.024	0.053	0.062	0.083	0.093
						Feed (mm/min)	143	182	241	235	189	169
					58	RPM	6140	3070	1842	1535	921	737
					(46-69)	Fz	0.0086	0.024	0.048	0.058	0.077	0.085
						Feed (mm/min)	106	147	177	178	142	125
					4		211	295	354	356	284	250
					2	1	≤ 1					
					4	1	≤ 0.25					
PLASTICS ABS, Polycarbonate, PVC, Polypropylene						488	RPM	51702	25851	15511	12926	7755
	(390-585)					Fz	0.0264	0.072	0.149	0.178	0.237	0.250
						Feed (mm/min)	2730	3723	4622	4601	3676	3102
					390	RPM	41362	20681	12409	10340	6204	4963
					(312-468)	Fz	0.0240	0.065	0.136	0.163	0.210	0.238
						Feed (mm/min)	1985	2689	3375	3371	2606	2363
					4		3971	5377	6750	6742	5212	4725
					2	1	≤ 1					
					4	1	≤ 0.25					
	PLASTICS Fiberglass, Glass Filled					219	RPM	23266	11633	6980	5816	3490
(176-263)						Fz	0.0197	0.053	0.109	0.132	0.173	0.190
						Feed (mm/min)	917	1233	1522	1536	1208	1061
					175	RPM	18580	9290	5574	4645	2787	2230
					(140-210)	Fz	0.0180	0.048	0.101	0.120	0.160	0.175
						Feed (mm/min)	669	892	1126	1115	892	780
					4		1338	1784	2252	2230	1784	1561
					2	1	≤ 1					
					4	1	≤ 0.25					


rpm = sfm x 3.82 / D1

ipm = (inch / flute) x number of flutes x rpm

reduce speed and feed for materials harder than listed

reduce feed and Ae when finish milling (.02 x D1 maximum)

refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)


Series 61 Fractional	Hardness BRINELL			Vc (SFM)		Diameter (D ₁) (inch)						
		Ae x D ₁	Ap x D ₁			1/4	3/8	1/2	3/4	1		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175		≤ 0.5	≤ 1.5	500	RPM	7640	5093	3820	2547	1910
						(400-600)	Fz	0.0006	0.0011	0.0014	0.0017	0.0020
							Feed (IPM)	13.8	16.8	21.4	17.3	19.1
				1	≤ 1	400	RPM	6112	4075	3056	2037	1528
						(320-480)	Fz	0.0006	0.0011	0.0014	0.0017	0.0020
							Feed (IPM)	7.3	9.0	8.6	6.9	6.1
P	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275		≤ 0.5	≤ 1.5	365	RPM	5577	3718	2789	1859	1394
						(292-438)	Fz	0.0004	0.0008	0.0011	0.0013	0.0015
							Feed (IPM)	4.5	5.9	6.1	4.8	4.2
				1	≤ 1	295	RPM	4508	3005	2254	1503	1127
						(236-354)	Fz	0.0004	0.0008	0.0011	0.0013	0.0015
							Feed (IPM)	3.6	4.8	5.0	3.9	3.4
P	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 250		≤ 0.5	≤ 1.5	345	RPM	5272	3514	2636	1757	1318
						(276-414)	Fz	0.0006	0.0009	0.0015	0.0018	0.0021
							Feed (IPM)	6.3	6.3	7.9	6.3	5.5
				1	≤ 1	275	RPM	4202	2801	2101	1401	1051
						(220-330)	Fz	0.0006	0.0009	0.0015	0.0018	0.0021
							Feed (IPM)	5.0	5.0	6.3	5.0	4.4
K	CAST IRONS Gray, Malleable, Ductile	≤ 220		≤ 0.5	≤ 1.5	365	RPM	5577	3718	2789	1859	1394
						(292-438)	Fz	0.0008	0.0015	0.0020	0.0024	0.0028
							Feed (IPM)	8.9	11.2	11.2	8.9	7.8
				1	≤ 1	295	RPM	4508	3005	2254	1503	1127
						(236-354)	Fz	0.0008	0.0015	0.0020	0.0024	0.0028
							Feed (IPM)	7.2	9.0	9.0	7.2	6.3

rpm = sfm x 3.82 / D₁

ipm = (inch / flute) x number of flutes x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)


Series 61M Metric	Hardness BRINELL			Vc (m/min)	Diameter (D ₁) (mm)				
		Ae x D ₁	Ap x D ₁		6	10	12	20	25
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	 ≤ 0.5 ≤ 1.5	152 (122-183)	RPM	8078	4847	4039	2424	1939
				Fz	0.014	0.029	0.034	0.045	0.050
				Feed (mm/min)	339	422	549	436	485
		 1 ≤ 1	122 (98-146)	RPM	6463	3878	3231	1939	1551
				Fz	0.014	0.029	0.034	0.045	0.050
				Feed (mm/min)	271	337	439	349	388
P	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	 ≤ 0.5 ≤ 1.5	111 (89-134)	RPM	5897	3538	2949	1769	1415
				Fz	0.010	0.021	0.026	0.035	0.038
				Feed (mm/min)	177	223	307	248	269
		 1 ≤ 1	90 (72-108)	RPM	4766	2860	2383	1430	1144
				Fz	0.010	0.021	0.026	0.035	0.038
				Feed (mm/min)	143	180	248	200	217
P	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	 ≤ 0.5 ≤ 1.5	105 (84-126)	RPM	5574	3344	2787	1672	1338
				Fz	0.014	0.024	0.036	0.048	0.053
				Feed (mm/min)	234	241	401	321	355
		 1 ≤ 1	84 (67-101)	RPM	4443	2666	2222	1333	1066
				Fz	0.014	0.024	0.036	0.048	0.053
				Feed (mm/min)	187	192	320	256	283
K	CAST IRONS Gray, Malleable, Ductile	 ≤ 0.5 ≤ 1.5	111 (89-134)	RPM	5897	3538	2949	1769	1415
				Fz	0.019	0.040	0.048	0.064	0.070
				Feed (mm/min)	336	425	566	453	495
		 1 ≤ 1	90 (72-108)	RPM	4766	2860	2383	1430	1144
				Fz	0.019	0.040	0.048	0.064	0.070
				Feed (mm/min)	272	343	458	366	400

$$\text{rpm} = (1000 \times \text{m/min}) / (3.14 \times D_1)$$

$$\text{mm / min} = (\text{mm / flute}) \times \text{number of flutes} \times \text{rpm}$$

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)


Series 62 Fractional	Hardness BRINELL			Vc (SFM)	Diameter (D ₁) (inch)						
		Ae x D ₁	Ap x D ₁		1/4	3/8	1/2	3/4	1		
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	 Profile	≤ 0.5	≤ 1.5	405	RPM	6188	4126	3094	2063	1547
					(324-486)	Fz	0.0006	0.0011	0.0015	0.0019	0.0021
						Feed (IPM)	11.1	13.6	18.6	15.7	19.5
		 Slot	1	≤ 1	325	RPM	4966	3311	2483	1655	1242
					(260-390)	Fz	0.0006	0.0011	0.0015	0.0019	0.0021
						Feed (IPM)	8.9	10.9	14.9	12.6	15.6
M	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L, 17-4PH, 15-5PH, 13-4PH, Custom 450	 Profile	≤ 0.5	≤ 1.5	280	RPM	4278	2852	2139	1426	1070
					(224-336)	Fz	0.0005	0.0009	0.0012	0.0015	0.0017
						Feed (IPM)	6.4	7.7	10.3	8.6	10.9
		 Slot	1	≤ 1	225	RPM	3438	2292	1719	1146	860
					(180-270)	Fz	0.0005	0.0009	0.0012	0.0015	0.0017
						Feed (IPM)	5.2	6.2	8.3	6.9	8.8
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoly 800, Monel 400, Rene, Waspalloy	 Profile	≤ 0.5	≤ 1.5	70	RPM	1070	713	535	357	267
					(56-84)	Fz	0.0004	0.0008	0.0010	0.0013	0.0014
						Feed (IPM)	1.3	1.7	2.1	1.9	2.2
		 Slot	1	≤ 1	56	RPM	856	570	428	285	214
					(45-67)	Fz	0.0004	0.0008	0.0010	0.0013	0.0014
						Feed (IPM)	1.0	1.4	1.7	1.5	1.8
S	TITANIUM ALLOYS Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti10Al2Fe3Al, Ti5Al53Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti152 Cr3Sn3Al	 Profile	≤ 0.5	≤ 1.5	155	RPM	2368	1579	1184	789	592
					(124-186)	Fz	0.0005	0.0009	0.0012	0.0015	0.0017
						Feed (IPM)	3.6	4.3	5.7	4.7	6.0
		 Slot	1	≤ 1	195	RPM	2980	1986	1490	993	745
					(156-234)	Fz	0.0005	0.0009	0.0012	0.0015	0.0017
						Feed (IPM)	4.5	5.4	7.2	6.0	7.6

rpm = sfm x 3.82 / D₁

ipm = (inch / flute) x number of flutes x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)


Series 62M Metric	Hardness BRINELL			Vc (m/min)	Diameter (D ₁) (mm)						
		Ae x D ₁	Ap x D ₁		6	10	12	20	25		
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F, 440F	 Profile	≤ 0.5	≤ 1.5	123	RPM	6544	3926	3272	1963	1570
					(99-148)	Fz	0.014	0.029	0.036	0.051	0.053
						Feed (mm/min)	283	345	471	398	495
		 Slot	1	≤ 1	99	RPM	5251	3151	2626	1575	1260
					(79-119)	Fz	0.014	0.029	0.036	0.051	0.053
						Feed (mm/min)	227	277	378	319	397
M	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L, 17-4PH, 15-5PH, 13-4PH, Custom 450	 Profile	≤ 0.5	≤ 1.5	85	RPM	4524	2714	2262	1357	1086
					(68-102)	Fz	0.012	0.024	0.029	0.040	0.043
						Feed (mm/min)	163	195	261	217	277
		 Slot	1	≤ 1	69	RPM	3635	2181	1818	1091	872
					(55-82)	Fz	0.012	0.024	0.029	0.040	0.043
						Feed (mm/min)	131	157	209	174	222
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoly 800, Monel 400, Rene, Waspalloy	 Profile	≤ 0.5	≤ 1.5	21	RPM	1131	679	565	339	271
					(17-26)	Fz	0.010	0.021	0.024	0.035	0.035
						Feed (mm/min)	33	43	54	47	57
		 Slot	1	≤ 1	17	RPM	905	543	452	271	217
					(14-20)	Fz	0.010	0.021	0.024	0.035	0.035
						Feed (mm/min)	26	35	43	38	46
S	TITANIUM ALLOYS Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti10Al2Fe3Al, Ti5Al53Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti152 Cr3Sn3Al	 Profile	≤ 0.5	≤ 1.5	47	RPM	2504	1503	1252	751	601
					(38-57)	Fz	0.012	0.024	0.029	0.040	0.043
						Feed (mm/min)	90	108	144	120	153
		 Slot	1	≤ 1	59	RPM	3151	1890	1575	945	756
					(48-71)	Fz	0.012	0.024	0.029	0.040	0.043
						Feed (mm/min)	113	136	181	151	193

$\text{rpm} = (1000 \times \text{m/min}) / (3.14 \times D_1)$


$\text{mm/min} = (\text{mm/flute}) \times \text{number of flutes} \times \text{rpm}$

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)

	Series MK2 Fractional	Hardness BRINELL			Vc (SFM)		Diameter (D ₁) (inch)				
			Ae x D ₁	Ap x D ₁			0.008	0.016	0.031	0.04	0.06
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 175	 Profile ≤ 0.5 ≤ 1.5		320	RPM	152800	76400	39432	30560	20373
					(256-384)	Fz	0.000018	0.000040	0.000070	0.000110	0.000140
						Feed (IPM)	5.5	6.1	5.5	6.7	5.7
			 Slot 1 ≤ 1		255	RPM	121763	60881	31423	24353	16235
					(204-306)	Fz	0.000016	0.000030	0.000060	0.000090	0.000130
						Feed (IPM)	3.9	3.7	3.8	4.4	4.2
P	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275	 Profile ≤ 0.5 ≤ 1.5		235	RPM	112213	56106	28958	22443	14962
					(188-282)	Fz	0.000014	0.000030	0.000050	0.000080	0.000110
						Feed (IPM)	3.1	3.4	2.9	3.6	3.3
			 Slot 1 ≤ 1		190	RPM	90725	45363	23413	18145	12097
					(152-228)	Fz	0.000012	0.000020	0.000050	0.000070	0.000090
						Feed (IPM)	2.2	1.8	2.3	2.5	2.2
P	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 250	 Profile ≤ 0.5 ≤ 1.5		220	RPM	105050	52525	27110	21010	14007
					(176-264)	Fz	0.000014	0.000030	0.000050	0.000080	0.000110
						Feed (IPM)	2.9	3.2	2.7	3.4	3.1
			 Slot 1 ≤ 1		175	RPM	83563	41781	21565	16713	11142
					(140-210)	Fz	0.000012	0.000020	0.000050	0.000070	0.000090
						Feed (IPM)	2.0	1.7	2.2	2.3	2.0
K	CAST IRONS Gray, Malleable, Ductile	≤ 220	 Profile ≤ 0.5 ≤ 1.5		235	RPM	112213	56106	28958	22443	14962
					(188-282)	Fz	0.000018	0.000040	0.000070	0.000110	0.000140
						Feed (IPM)	4.0	4.5	4.1	4.9	4.2
			 Slot 1 ≤ 1		190	RPM	90725	45363	23413	18145	12097
					(152-228)	Fz	0.000016	0.000030	0.000060	0.000090	0.000130
						Feed (IPM)	2.9	2.7	2.8	3.3	3.1
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	≤ 275	 Profile ≤ 0.5 ≤ 1.5		260	RPM	124150	62075	32039	24830	16553
					(208-312)	Fz	0.000014	0.000030	0.000050	0.000080	0.000110
						Feed (IPM)	3.5	3.7	3.2	4.0	3.6
			 Slot 1 ≤ 1		210	RPM	100275	50138	25877	20055	13370
					(168-252)	Fz	0.000012	0.000020	0.000050	0.000070	0.000090
						Feed (IPM)	2.4	2.0	2.6	2.8	2.4
M	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	≤ 275	 Profile ≤ 0.5 ≤ 1.5		180	RPM	85950	42975	22181	17190	11460
					(144-216)	Fz	0.000011	0.000020	0.000040	0.000060	0.000090
						Feed (IPM)	1.9	1.7	1.8	2.1	2.1
			 Slot 1 ≤ 1		145	RPM	69238	34619	17868	13848	9232
					(116-174)	Fz	0.000010	0.000020	0.000040	0.000060	0.000080
						Feed (IPM)	1.4	1.4	1.4	1.7	1.5

continued on next page



Series MK2 Fractional	Hardness BRINELL		Ae x D ₁	Ap x D ₁	Vc (SFM)	Diameter (D ₁) (inch)						
						0.008	0.016	0.031	0.04	0.06		
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, 718, Incoly 800, Monel 400, Rene, Waspalloy	≤ 300		≤ 0.5	≤ 1.5	45	RPM	21488	10744	5545	4298	2865
						(36-54)	Fz	0.000009	0.000020	0.000040	0.000050	0.000070
							Feed (IPM)	0.4	0.4	0.4	0.4	0.4
				1	≤ 1	35	RPM	16713	8356	4313	3343	2228
						(28-42)	Fz	0.000008	0.000015	0.000030	0.000040	0.000060
							Feed (IPM)	0.3	0.3	0.3	0.3	0.3
S	TITANIUM ALLOYS (DIFFICULT) Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti10Al2Fe3Al, Ti5Al53Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti152 Cr3Sn3Al	≤ 350		≤ 0.5	≤ 1.5	125	RPM	59688	29844	15403	11938	7958
						(100-150)	Fz	0.000011	0.000020	0.000040	0.000060	0.000090
							Feed (IPM)	1.3	1.2	1.2	1.4	1.4
				1	≤ 1	100	RPM	47750	23875	12323	9550	6367
						(80-120)	Fz	0.000010	0.000020	0.000040	0.000060	0.000080
							Feed (IPM)	1.0	1.0	1.0	1.1	1.0
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 150		≤ 0.5	≤ 1.5	800	RPM	382000	191000	98581	76400	50933
						(640-960)	Fz	0.000037	0.000070	0.000140	0.000220	0.000290
							Feed (IPM)	28.3	26.7	27.6	33.6	29.5
				1	≤ 1	640	RPM	305600	152800	78865	61120	40747
						(512-768)	Fz	0.000032	0.000060	0.000130	0.000190	0.000250
							Feed (IPM)	19.6	18.3	20.5	23.2	20.4
N	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 140		≤ 0.5	≤ 1.5	240	RPM	114600	57300	29574	22920	15280
						(192-288)	Fz	0.000018	0.000040	0.000070	0.000110	0.000140
							Feed (IPM)	4.1	4.6	4.1	5.0	4.3
				1	≤ 1	190	RPM	90725	45363	23413	18145	12097
						(152-228)	Fz	0.000016	0.000030	0.000060	0.000090	0.000130
							Feed (IPM)	2.9	2.7	2.8	3.3	3.1
	PLASTICS Polycarbonate, PVC, Polypropylene			≤ 0.5	≤ 1.5	800	RPM	382000	191000	98581	76400	50933
						(640-960)	Fz	0.000037	0.000070	0.000140	0.000220	0.000290
							Feed (IPM)	28.3	26.7	27.6	33.6	29.5
				1	≤ 1	640	RPM	305600	152800	78865	61120	40747
						(512-768)	Fz	0.000032	0.000060	0.000130	0.000190	0.000250
							Feed (IPM)	19.6	18.3	20.5	23.2	20.4
	GRAPHITE	≤ 140		≤ 0.5	≤ 1.5	600	RPM	286500	143250	73935	57300	38200
						(480-720)	Fz	0.000037	0.000070	0.000140	0.000220	0.000290
							Feed (IPM)	21.2	20.1	20.7	25.2	22.2
				1	≤ 1	480	RPM	229200	114600	59148	45840	30560
						(384-576)	Fz	0.000032	0.000060	0.000130	0.000190	0.000250
							Feed (IPM)	14.7	13.8	15.4	17.4	15.3

rpm = sfm x 3.82 / D₁


ipm = (inch / flute) x 2 x rpm

reduce speed and feed for materials harder than listed


reduce speed to meet machine limitations

reduce feed and Ae when finish milling (.02 x D₁ maximum)

refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)

Series MK2 Metric	Hardness BRINELL			Vc (m/min)		Diameter (D ₁) (mm)				
		Ae x D ₁	Ap x D ₁			0.2	0.41	0.79	1.02	1.52
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	 Profile ≤ 0.5 ≤ 1.5		98	RPM	155107	75662	39267	30413	20409
				(78-117)	Fz	0.00046	0.0010	0.0018	0.0028	0.0036
					Feed (mm/min)	143	151	141	170	147
		 Slot 1 ≤ 1		78	RPM	123601	60293	31291	24235	16263
				(62-93)	Fz	0.00041	0.0008	0.0015	0.0023	0.0033
					Feed (IPM)	101	96	94	111	107
P	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	 Profile ≤ 0.5 ≤ 1.5		72	RPM	113906	55564	28837	22335	14988
				(57-86)	Fz	0.00036	0.0008	0.0013	0.0002	0.0028
					Feed (IPM)	82	89	75	9	84
		 Slot 1 ≤ 1		58	RPM	92095	44924	23315	18058	12118
				(46-69)	Fz	0.00030	0.0005	0.0013	0.0018	0.0023
					Feed (IPM)	55	45	61	65	56
P	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	 Profile ≤ 0.5 ≤ 1.5		67	RPM	106636	52017	26996	20909	14031
				(54-80)	Fz	0.00036	0.0008	0.0013	0.0002	0.0028
					Feed (IPM)	77	83	70	8	79
		 Slot 1 ≤ 1		53	RPM	84824	41378	21474	16632	11161
				(43-64)	Fz	0.00030	0.0005	0.0013	0.0018	0.0023
					Feed (IPM)	51	41	56	60	51
K	CAST IRONS Gray, Malleable, Ductile	 Profile ≤ 0.5 ≤ 1.5		72	RPM	113906	55564	28837	22335	14988
				(57-86)	Fz	0.00046	0.0010	0.0018	0.0028	0.0036
					Feed (IPM)	105	111	104	125	108
		 Slot 1 ≤ 1		58	RPM	92095	44924	23315	18058	12118
				(46-69)	Fz	0.00041	0.0008	0.0015	0.0023	0.0033
					Feed (IPM)	76	72	70	83	80
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	 Profile ≤ 0.5 ≤ 1.5		79	RPM	126024	61475	31905	24711	16582
				(63-95)	Fz	0.00036	0.0008	0.0013	0.0002	0.0028
					Feed (IPM)	91	98	83	10	93
		 Slot 1 ≤ 1		64	RPM	101789	49653	25769	19959	13393
				(51-77)	Fz	0.00030	0.0005	0.0013	0.0018	0.0023
					Feed (IPM)	61	50	67	72	62
M	STAINLESS STEELS (DIFFICULT) 304, 304L, 316, 316L	 Profile ≤ 0.5 ≤ 1.5		55	RPM	87247	42560	22088	17107	11480
				(44-66)	Fz	0.00028	0.0005	0.0010	0.0015	0.0023
					Feed (IPM)	49	43	44	51	53
		 Slot 1 ≤ 1		44	RPM	70283	34284	17793	13781	9248
				(35-53)	Fz	0.00025	0.0005	0.0010	0.0015	0.0020
					Feed (IPM)	35	34	36	41	37

continued on next page

Series MK2 Metric	Hardness BRINELL		Ae x D ₁	Ap x D ₁	Vc (m/min)	Diameter (D ₁) (mm)					
						0.2	0.41	0.79	1.02	1.52	
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, 718, Incoly 800, Monel 400, Rene, Waspalloy		≤ 0.5	≤ 1.5	14	RPM	21812	10640	5522	4277	2870
					(11-16)	Fz	0.00023	0.0005	0.0010	0.0013	0.0018
						Feed (IPM)	10	11	11	11	10
			1	≤ 1	11	RPM	16965	8276	4295	3326	2232
					(9-13)	Fz	0.00020	0.0005	0.0008	0.0013	0.0015
						Feed (IPM)	7	8	7	9	7
S	TITANIUM ALLOYS (DIFFICULT) Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti10Al2Fe3Al, Ti5Al53Mo3Cr, Ti7Al4Mo, Ti3Al8V6Cr4Zr4Mo, Ti6Al6V6Sn, Ti152 Cr3Sn3Al		≤ 0.5	≤ 1.5	38	RPM	60589	29555	15339	11880	7972
					(30-46)	Fz	0.00028	0.0005	0.0010	0.0015	0.0023
						Feed (IPM)	34	30	31	36	37
			1	≤ 1	30	RPM	48471	23644	12271	9504	6378
					(24-37)	Fz	0.00025	0.0005	0.0010	0.0015	0.0020
						Feed (IPM)	24	24	25	29	26
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075		≤ 0.5	≤ 1.5	244	RPM	387767	189154	98169	76033	51022
					(195-293)	Fz	0.00094	0.0018	0.0036	0.0056	0.0074
						Feed (IPM)	729	681	707	852	755
			1	≤ 1	195	RPM	310213	151324	78535	60826	40818
					(156-234)	Fz	0.00081	0.0015	0.0033	0.0048	0.0064
						Feed (IPM)	503	454	518	584	522
N	COPPER ALLOYS Alum Bronze, C110, Muntz Brass		≤ 0.5	≤ 1.5	73	RPM	116330	56746	29451	22810	15307
					(59-88)	Fz	0.00046	0.0010	0.0018	0.0028	0.0036
						Feed (IPM)	107	113	106	128	110
			1	≤ 1	58	RPM	92095	44924	23315	18058	12118
					(46-69)	Fz	0.00041	0.0008	0.0015	0.0023	0.0033
						Feed (IPM)	76	72	70	83	80
	PLASTICS Polycarbonate, PVC, Polypropylene		≤ 0.5	≤ 1.5	244	RPM	387767	189154	98169	76033	51022
					(195-293)	Fz	0.00094	0.0018	0.0036	0.0056	0.0074
						Feed (IPM)	729	681	707	852	755
			1	≤ 1	195	RPM	310213	151324	78535	60826	40818
					(156-234)	Fz	0.00081	0.0015	0.0033	0.0048	0.0064
						Feed (IPM)	503	454	518	584	522
	GRAPHITE		≤ 0.5	≤ 1.5	183	RPM	290825	141866	73627	57024	38266
					(146-219)	Fz	0.00094	0.0018	0.0036	0.0056	0.0074
						Feed (IPM)	547	511	530	639	566
			1	≤ 1	146	RPM	232660	113493	58901	45620	30613
					(117-176)	Fz	0.00081	0.0015	0.0033	0.0048	0.0064
						Feed (IPM)	377	340	389	438	392

$$\text{rpm} = (1000 \times \text{m/min}) / (3.14 \times D_1)$$

$$\text{mm/min} = (\text{mm/flute}) \times 2 \times \text{rpm}$$

reduce speed and feed for materials harder than listed

reduce speed to meet machine limitations

reduce feed and Ae when finish milling (.02 x D₁ maximum)

refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)



Application Tips

Tool	• Whenever possible, select an end mill with the largest diameter, shortest flute length, and shortest overall length for the best rigidity • Long flute tools are not intended for pocketing, slotting, or heavy profiling – limit Rw to .02D • High Performance tools minimize cycle time and extend tool life
Tool Holders	• Holders with adequate gripping pressure and TIR are required • Stub holders or zero length collet style holders are recommended for heavy stock removal • When using solid holders, hand ground screw flats are not recommended
Workpiece	• Secure clamping of the workpiece will reduce chatter and deflection
Machine	• Spindle must be in optimum condition for precise TIR and maximum tool life • Sufficient horsepower is required to perform at recommended speeds and feeds • Reduce rates for low power machines to prevent workpiece and / or tool damage
Coolant	• Avoid re-milling chips through use of air blast or liquid coolant as necessary • Maintain clean coolant with appropriate concentration • General recommendations: –Water Soluble Oil or Air Blast: Tool Steels, Mold & Die Steels, Carbon or Alloy Steels –Water Soluble Oil: Stainless Steels, Titanium, High Temperature Alloys, Non-Ferrous Alloys
Methods	• Climb milling is generally preferred • Attention to programming details, tool holders, TIR, balance, fixturing, etc. improve cutting tool performance and extend tool life

END MILLING GUIDELINE

D_1 = cutting diameter L_2 = flute length

Speeds and Feeds for Cut Types are based on Radial Width ($\overline{Rw}$) and Axial Depth ($\overline{Ad}$)

Reductions to Speeds and Feeds may be necessary when:

- Rw and Ad exceed recommendations
- Using long flute or extended reach tools
- Using long tool holders
- Machining materials harder than listed

ENTRY METHODS

Pre-Drilled Hole




Pre-drilling is the preferred entry method for most applications.

Helical Ramp



Straight Ramp



Alternative methods are helical and straight ramping. High ramp angles require reduced feed. Lower ramp angles will allow higher feed rates and extend tool life. Use slotting speeds and feeds for ramp angles of 1° to 2° . Reduce feed to 25% when ramp angles approach 6° . General purpose tools and/or difficult to machine materials will require lower ramp angles and reduced feed.

Plunge



Plunge only in non-ferrous and short-chipping materials using slotting speeds and 25% slotting feeds.

Puntas para aplicaciones

Herramientas	• Siempre que sea posible, seleccione el cortador con el mayor diámetro, largo de filo y largo total mas corto posible para obtener una mejor rigidez. • Las herramientas con filos largos no son recomendadas para operaciones de apertura de cajas en el maquinado, operación de ranurado o perfilado pesado – limitar la profundidad radial (R_w) a .02D • Las herramientas de alto desempeño minimizan el tiempo de ciclo del maquinado y extienden la vida útil de la herramienta
Portaherramientas	• Los Portaherramientas deberán tener buena presión de agarre para la sujeción de la herramienta y una concentricidad máxima indicada (TIR) • Se recomienda usar portaherramientas de agarre directo cortos, o de boquilla con longitud cero para lograr un máximo arranque de viruta • Cuando se utilicen portaherramientas de agarre directo, no se recomienda hacer manualmente el plano para la sujeción del tornillo en el zanco de la herramienta
Pieza a maquinar	• La buena sujeción de la pieza a maquinar reducirá la vibración y la desviación de la herramienta
Máquina	• El uso de la maquina debe estar en condiciones optimas, para asegurar la concentricidad de giro (TIR) y asegurar el máximo rendimiento de la herramienta • Para lograr los avances y velocidades recomendados, se necesita suficiente potencia (HP) en la maquina • Reducir los parámetros de corte en maquinas de baja potencia (HP) para prevenir el daño en la herramienta o pieza de trabajo
Refrigerante	• Evite el re-maquinado de virutas usando aire a presión o líquido refrigerante según sea necesario • Mantener limpio el refrigerante con su concentración adecuada • Recomendaciones generales: – Para el maquinado de Aceros Grado Herramienta, para Moldes y Dados o Aleaciones de Bajo Carbón, utilice Aceite Soluble en Agua o aire a presión – Para el maquinado de Aleaciones Inoxidables, Aleaciones de Alta Temperatura, Titanio y Aleaciones No Ferrosas, utilice solamente Aceite Soluble en Agua
Métodos	• Se recomienda el maquinado en sentido ascendente o trepado • El cuidado en los detalles de la programación, la concentricidad de giro (TIR) el balance de los portaherramientas, la sujeción de la pieza a maquinar, etc. son factores que contribuyen a prolongar la vida de la herramienta

GUÍAS DE FRESADO

D_1 = diámetro de corte L_2 = largo de filo

Las velocidades y avances para cortes están basados en la profundidad radial (R_w), y profundidad axial (Ad)

Reducciones en velocidades y avances serán necesarias cuando:

- R_w y Ad exceda las recomendaciones
- Se utilicen filos largos o herramientas de largo alcance
- Se utilicen portaherramientas largos
- Se maquinen materiales más duros que los recomendados

MÉTODOS DE ENTRADA

Barreno previo




Preferentemente usar un barreno previo como método de entrada para la mayor parte de las aplicaciones.

Rampa helicoidal



Rampa recta



Los métodos alternativos son las rampas helicoidales y rectas. Un ángulo elevado de rampa necesita un avance reducido. Un ángulo de rampa inferior permitirá tasas de avance más elevadas y una mayor duración de la herramienta. Usar velocidades y alcances de ranurado para ángulos de rampa de 1° a 2°. Disminuir el avance un 25% cuando los ángulos de rampa se aproximan a 6°. Las herramientas de uso general y/o materiales difíciles de mecanizar precisarán ángulos de rampa inferiores y un avance reducido.

Agujero o Barrenado



Este método se puede utilizar únicamente en materiales no ferrosos y materiales de formación de virutas cortas, usando la velocidad de ranurado y el 25% de su avance.

Outil	• Chaque fois que possible, choisissez une fraise de plus grand diamètre possible, la plus courte possible, elle garantira la meilleure rigidité • Les outils longs ne sont pas optimum pour l'ébauche, le pocketing, le rainurage – ae limité à 0,02 D • Les outils Haute performance optimisent les temps de cycle et de augmentent la durée de vie
Porte-outils	• Des attachements à serrage puissant et à faux rond précis sont recommandés • Attachements à méplats ou pinces à serrage nominale sont recommandées pour les ébauches • Lorsque vous utilisez des attachement rigides, les serrage de l'outil par vis ne sont pas recommandés
Pièce	• Le système de fixation et de bridage de la pièce devra permettre de réduire les vibrations et la déformation
Machine	• Broche doit être en bon état optimal au niveau de son faux rond • Suffisamment puissance est nécessaire pour effectuer à des vitesses recommandées et se nourrit • Réduire les efforts pour les machines de faible puissance pour éviter l'endommagement de la pièce et / ou de l'outil
Liquide de refroidissement	• Évitez les recyclage de copeaux par l'utilisation de soufflage d'air comprimé ou de liquide de refroidissement. • Maintenir le lubrifiant propre à la concentration appropriée • Recommandations générales – –Huile soluble ou Air comprimé: aciers à outils, aciers pour moules, aciers au carbone ou alliés –Huile soluble: aciers inoxydables, titane, alliages à haute température, alliages non ferreux
Méthodes	• L'usinage en avalant est généralement préconisé • Attention à la programmation, porte-outils, faux rond, équilibrage, fixation, etc améliorent les performances de l'outil en coupe et prolonge la durée de vie

GUIDE DU FRAISAGE


D_1 = diamètre de coupe L_2 = longueur de coupe

Vitesses & avances pour ces cas d'usinage sont basées sur l'engagement radial ($-\left|ae\right|-\left|-\right|$), et axial ($\left|ap\right|$)


La réduction de la vitesse et de l'avance doit être nécessaire quand:

- Les engagements ap et ae sont importants
- Des dentures longues ou des séries longues sont utilisées
- Des attachement longs sont utilisés
- Lors d'usinage de matériaux durs


TYPES D'ENTREE MATIERE



Le pré-perçage est la méthode préférée dans la plupart de applications.

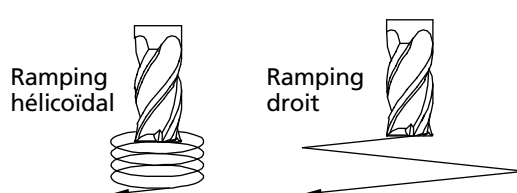

Les autres méthodes sont un ramping hélicoïdal et un ramping droit. Les angles de ramping élevés exigent une avance inférieure. Les angles de ramping inférieurs permettent les taux d'avance supérieurs et prolongeront la vie de l'outil. Utilisez des avances et vitesses de mortaisage pour les angles de ramping de 1° à 2°. Réduisez l'avance à 25 % lorsque les angles de ramping avoisinent 6°. Les outils tout usage et/ou les matériaux difficiles à usiner exigeront des angles de ramping inférieurs et une charge réduite.



Plongée uniquement dans les non ferreux. Vitesse rainurage et avances réduites de 25%.



DRILLS



Hole Making

HIGH PERFORMANCE DRILLS	SERIES	PAGE
Hi-PerCarb Double Margin Drills	135 3xD, 135 5xD	163
ICe-Carb Internal Coolant Drills	140 5xD, 140 8xD	170
CFRP 8 Facet Drills	120	178
TECHNICAL INFORMATION		
Speed & Feed Recommendations		179
Drilling Operations		194
Coolant Recommendations		194
GENERAL PURPOSE DRILLS	SERIES	PAGE
2 Flute Drills	101	197
Short Length Self Centering Drill • DIN 6539	108M Plus	203
Straight Flute Drills	106	206
3 Flute Drills with 150 Point Geometry	103	209
TECHNICAL INFORMATION		
Speed & Feed Recommendations		214
COUNTERSINKS	SERIES	PAGE
Combined Drill & Countersink	301, 301M	221
Single Flute Countersink	601	222
3 Flute Countersink	603	223
6 Flute Countersink	606	224
TECHNICAL INFORMATION		
Speed & Feed Recommendations		225
REAMERS	SERIES	PAGE
Straight Flute Reamer	201M	235
Straight Flute Accu-Reamer	200	236
TECHNICAL INFORMATION		
Speed & Feed Recommendations		238



Taladrado

TALADROS DE ALTO RENDIMIENTO	SERIE	PÁGINA
Taladros de doble margen Hi-PerCarb	135 3xD, 135 5xD	163
Taladros con refrigerante interno ICe-Carb	140 5xD, 140 8xD	170
Taladros de 8 caras CFRP	120	178
INFORMACIÓN TÉCNICA		
Velocidades y avances recomendados		179
Operaciones de taladrado		194
Refrigerantes recomendados		194
TALADROS DE USO GENERAL	SERIE	PÁGINA
Taladros de 2 filos	101	197
Taladro autocentrante de longitud corta • DIN 6539	108M Plus	203
Taladros de filo recto	106	206
Taladros de 3 filos con geometría de 150 puntos	103	209
INFORMACIÓN TÉCNICA		
Velocidades y avances recomendados		214
AVELLANADORES	SERIE	PÁGINA
Taladro y avellanador combinados	301, 301M	221
Avellanador de filo único	601	222
Avellanador de 3 filos	603	223
Avellanador de 6 filos	606	224
INFORMACIÓN TÉCNICA		
Velocidades y avances recomendados		225
ESCARIADORES	SERIE	PÁGINA
Escariador de filo recto	201M	235
Escariador Accu de filo recto	200	236
INFORMACIÓN TÉCNICA		
Velocidades y avances recomendados		238

Outils de perçage

PERCEUSES HAUTE PERFORMANCE	SERIES	PAGE
Foret à double listel Hi-PerCarb	135 3xD, 135 5xD	163
Perceuse ICe-Carb à refroidissement interne	140 5xD, 140 8xD	170
Perceuse CFRP à 8 facettes	120	178
INFORMATIONS TECHNIQUES		
Recommandations de vitesse et avance		179
Opérations de forage		194
Agents de refroidissement recommandés		194
PERCEUSES UNIVERSELLE	SERIES	PAGE
2 forets à hélice	101	197
Foret court à centrage automatique DIN 6539	108M Plus	203
Perceuses taille droite	106	206
3 forets à hélice à point géométriques 150	103	209
INFORMATIONS TECHNIQUES		
Recommandations de vitesse et avance		214
FORETS FRAISEUSES	SERIES	PAGE
Foret fraiseuse	301, 301M	221
Foret fraiseuse à dent simple	601	222
Foret fraiseuse 3 dents	603	223
foret fraiseuse 6 dents	606	224
INFORMATIONS TECHNIQUES		
Recommandations de vitesse et avance		225
ALESOIRS	SERIES	PAGE
Alésoir denture droit	201M	235
Alésoirs denture droite Accu-Reamer	200	236
INFORMATIONS TECHNIQUES		
Recommandations de vitesse et avance		238

Drill Icon Legend **Leyenda del icono de los taladros** **Légende d'icone de perçage**

END CONFIGURATIONS **CONFIGURACIONES DE LA PUNTA** **CONFIGURATIONS TERMINALES**



Drill
Fresa
Fraise

SHANK TYPE **TIPO DE VÁSTAGO** **TYPE DE TIGE**



Common
Normal
Commune



Straight
Recto
Droite

REACH **ALCANCE** **LONGUEUR**

3xD

>3xD Reach
Alcance >3xD
>Longueur 3xD

5xD

5xD Reach
Alcance 5xD
Longueur 5xD

8xD

8xD Reach
Alcance 8xD
Longueur 8xD

HELIX ANGLES **ÁNGULOS HELICOIDALES** **ANGLES DE L'HÉLICE**



Right Spiral
Espiral sentido derecho
Spirale droite



None
Ninguno
Aucun

ADDITIONAL GEOMETRY **CARACTERÍSTICAS GEOMÉTRICAS ADICIONALES** **GÉOMÉTRIE SUPPLÉMENTAIRE**



Right Cut Direction
Fresado sentido derecha
Coupe vers la droite

COOLANT OPTIONS **OPCIONES DE REFRIGERACIÓN** **OPTIONS DE REFOIDISSEMENT**



Internal Coolant
Refrigerante externo
Refrroidissement interne



External Coolant
Refrigerante interno
Refrroidissement externe

COATINGS **REVESTIMIENTOS** **REVÊTEMENTS**




Uncoated



Ti-NAMITE-A
(AlTiN)



Di-NAMITE
(Diamond)

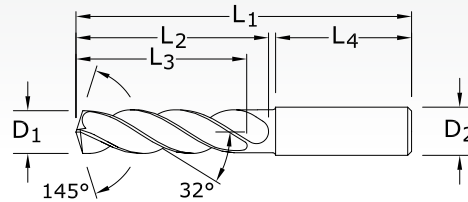

TOLERANCES (inch)

≤.1181 DIAMETER

D₁ = +.00008/+0.00047

D₂ = h₆

>.1181-.2362 DIAMETER

D₁ = +.00016/+0.00063

D₂ = h₆

>.2362-.3937 DIAMETER

D₁ = +.00024/+0.00083

D₂ = h₆

>.3937-.7087 DIAMETER

D₁ = +.00028/+0.00098

D₂ = h₆

>.7087-1.1811 DIAMETER

D₁ = +.00031/+0.00114

D₂ = h₆

TOLERANCES (mm)

≤3 DIAMETER

D₁ = +0,002/+0,012

D₂ = h₆

>3-6 DIAMETER

D₁ = +0,004/+0,016

D₂ = h₆

>6-10 DIAMETER

D₁ = +0,006/+0,021

D₂ = h₆

>10-18 DIAMETER

D₁ = +0,007/+0,025

D₂ = h₆

>18-30 DIAMETER

D₁ = +0,008/+0,029

D₂ = h₆

135 3xD

FRACTIONAL & METRIC SERIES

TECH INFO 179-182

CUTTING DIAMETER	DECIMAL EQUIV.	TAP SIZE REFERENCE ONLY	SHANK DIAMETER	OVERALL LENGTH	FLUTE LENGTH	CLEARED LENGTH	SHANK LENGTH	Ti-NAMITE-A (AlTiN)
D ₁			D ₂	L ₁	L ₂	L ₃	L ₄	EDP NO.
1/64*	0.0156		1/8	1-1/2	1/8	5/64	1	51752
1/32*	0.0312		1/8	1-1/2	1/4	3/16	1	51269
3/64*	0.0469	1/16-64	1/8	1-1/2	3/8	5/16	1	51270
1/16*	0.0625	5/64-60	1/8	2	7/16	3/8	1-1/4	51271
5/64*	0.0781		1/8	2	1/2	7/16	1-1/4	51272
3/32	0.0938	1/8-32	1/8	2	1/2	7/16	1-1/4	51273
#40	0.0980		1/8	2	9/16	1/2	1-1/4	51274
#39	0.0995		1/8	2	9/16	1/2	1-1/4	51753
#38	0.1015	5-40	1/8	2	9/16	1/2	1-1/4	51754
#37	0.1040	5-44	1/8	2	9/16	1/2	1-1/4	51755
#36	0.1065	6-32	1/8	2	9/16	1/2	1-1/4	51756
7/64	0.1094		1/8	2	5/8	9/16	1-1/4	51275
#35	0.1100		1/8	2	5/8	9/16	1-1/4	51276
#34	0.1110		1/8	2	5/8	9/16	1-1/4	51277
#33	0.1130	6-40	1/8	2	5/8	9/16	1-1/4	51757
#32	0.1160		1/8	2	5/8	9/16	1-1/4	51758
3,0mm	0.1181		6,0mm	62,0mm	20,1mm	17,0	36,0mm	63155
#31	0.1200		1/8	2	5/8	9/16	1-1/4	51759
3.1mm	0.1220		6,0mm	62,0mm	20,0mm	17,0	36,0mm	63741
1/8	0.1250		1/4	2-9/16	3/4	21/32	1-7/16	51330
3.2mm	0.1260	M3,5 X 0,35	6,0mm	62,0mm	20,0mm	17,0	36,0mm	63156
#30	0.1285		1/4	2-9/16	3/4	21/32	1-7/16	51278
3.3mm	0.1299	M4 X 0,7	6,0mm	62,0mm	20,0mm	17,0	36,0mm	63157
3.4mm	0.1339		6,0mm	62,0mm	20,0mm	17,0	36,0mm	63158
#29	0.1360	8-32,8-36	1/4	2-1/2	3/4	21/32	1-7/16	51331
3.5mm	0.1378	M4 X 0,5	6,0mm	62,0mm	20,0mm	17,0	36,0mm	63159
#28	0.1405	8-40	1/4	2-1/2	3/4	21/32	1-7/16	51760
9/64	0.1406		1/4	2-1/2	3/4	21/32	1-7/16	51332
3.6mm	0.1417	M4 X 0,35	6,0mm	62,0mm	20,0mm	17,0	36,0mm	63160
#27	0.1440		1/4	2-1/2	3/4	21/32	1-7/16	51761
3.7mm	0.1457	M4.5 X 0,75	6,0mm	62,0mm	20,0mm	17,0	36,0mm	63161
#26	0.1470	3/16-24	1/4	2-1/2	3/4	21/32	1-7/16	51762
#25	0.1495	10-24	1/4	2-5/8	7/8	23/32	1-7/16	51333
3.8mm	0.1496		6,0	66,0	24,0	21,0	36,0	63742
#24	0.1520	10-28	1/4	2-5/8	7/8	23/32	1-7/16	51763
3.9mm	0.1535		6,0mm	66,0mm	20,0mm	21,0	43,5mm	63743
#23	0.1540		1/4	2-5/8	7/8	23/32	1-7/16	51764
5/32	0.1562		1/4	2-5/8	7/8	23/32	1-7/16	51334
#22	0.1570	10-30	1/4	2-5/8	7/8	23/32	1-7/16	51765
4.0mm	0.1575	M4,5 X 0,5	6,0mm	66,0mm	24,1mm	21,0	36,0mm	63162
#21	0.1590	10-32	1/4	2-5/8	7/8	23/32	1-7/16	51335
#20	0.1610	13/64-24	1/4	2-5/8	7/8	23/32	1-7/16	51279
4.1mm	0.1614		6,0mm	66,0mm	20,0mm	21,0	36,0mm	63744
4.2mm	0.1654	M5 / M5 X 0,75	6,0mm	66,0mm	24,1mm	21,0	36,0mm	63163

*Single Margin

continued on next page



STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS
TITANIUM
HARDENED STEELS



135 3xD

FRACTIONAL & METRIC SERIES

TECH INFO 179-182

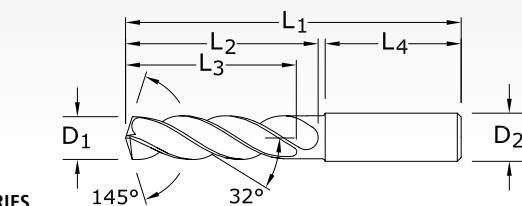

CUTTING DIAMETER	DECIMAL EQUIV.	TAP SIZE REFERENCE ONLY	SHANK DIAMETER	OVERALL LENGTH	FLUTE LENGTH	CLEARED LENGTH	SHANK LENGTH	EDP NO.
D ₁			D ₂	L ₁	L ₂	L ₃	L ₄	
#19	0.1660		1/4	2-5/8	7/8	23/32	1-7/16	51766
4.3mm	0.1693		6,0mm	66,0mm	24,1mm	21,0	36,0mm	63164
#18	0.1695		1/4	2-5/8	7/8	23/32	1-7/16	51767
11/64	0.1719		1/4	2-5/8	7/8	23/32	1-7/16	51336
#17	0.1730		1/4	2-5/8	7/8	23/32	1-7/16	51768
4.4mm	0.1732		6,0mm	66,0mm	20,0mm	21,0	36,0mm	63745
#16	0.1770	12-24	1/4	2-5/8	7/8	23/32	1-7/16	51769
4.5mm	0.1772	M5 X 0,5	6,0mm	66,0mm	24,1mm	21,0	36,0mm	63165
#15	0.1800		1/4	2-5/8	7/8	23/32	1-7/16	51770
4.6mm	0.1811	12-28	6,0mm	66,0mm	24,1mm	21,0	36,0mm	63166
#14	0.1820		1/4	2-5/8	7/8	23/32	1-7/16	51771
#13	0.1850	12-32	1/4	2-5/8	7/8	23/32	1-7/16	51772
4.7mm	0.1850		6,0mm	66,0mm	20,0mm	21,0	36,0mm	63746
3/16	0.1875		1/4	2-5/8	1	53/64	1-7/16	51337
#12	0.1890	7/32-32	1/4	2-5/8	1	53/64	1-7/16	51773
4.8mm	0.1890		6,0mm	66,0mm	28,0mm	24,0	36,0mm	63167
#11	0.1910		1/4	2-5/8	1	53/64	1-7/16	51774
4.9mm	0.1929		6,0mm	66,0mm	28,0mm	24,0	36,0mm	63747
#10	0.1935	14-20	1/4	2-5/8	1	53/64	1-7/16	51775
#09	0.1960		1/4	2-5/8	1	53/64	1-7/16	51776
5mm	0.1969	M6 X 1	6,0mm	66,0mm	28,0mm	24,0	36,0mm	63168
#08	0.1990		1/4	2-5/8	1	53/64	1-7/16	51777
5.1mm	0.2008		6,0mm	66,0mm	28,0mm	24,0	36,0mm	63748
#07	0.2010	1/4-20	1/4	2-5/8	1	53/64	1-7/16	51338
13/64	0.2031		1/4	2-5/8	1	53/64	1-7/16	51339
#06	0.2040		1/4	2-5/8	1	53/64	1-7/16	51778
5.2mm	0.2047	M6 X 0,75	6,0mm	66,0mm	28,0mm	24,0	36,0mm	63749
#05	0.2055		1/4	2-5/8	1	53/64	1-7/16	51779
5.25mm	0.2067		6,0mm	66,0mm	28,0mm	24,0	36,0mm	63169
5.3mm	0.2087		6,0mm	66,0mm	28,0mm	24,0	36,0mm	63170
#04	0.2090	1/4-24	1/4	2-5/8	1	53/64	1-7/16	51780
5.4mm	0.2126		6,0mm	66,0mm	28,0mm	24,0	36,0	63750
#03	0.2130	1/4-28	1/4	2-5/8	1	53/64	1-7/16	51340
5.5mm	0.2165	M6 X 0,5	6,0mm	66,0mm	28,0mm	24,0	36,0mm	63171
7/32	0.2188	1/4-32	1/4	2-5/8	1	53/64	1-7/16	51341
5.6mm	0.2205		6,0mm	66,0mm	28,0mm	24,0	36,0	63751
#02	0.2210		1/4	2-5/8	1	53/64	1-7/16	51781
5.7mm	0.2244		6,0mm	66,0mm	28,0mm	24,0	36,0	63752
#01	0.2280		1/4	2-5/8	1	53/64	1-7/16	51782
5.8mm	0.2283		6,0mm	66,0mm	28,0mm	24,0	36,0mm	63172
5.9mm	0.2323		6,0mm	66,0mm	28,0mm	24,0	36,0	63753
A	0.2340		1/4	2-5/8	1	53/64	1-7/16	51601
15/64	0.2344		1/4	2-5/8	1	53/64	1-7/16	51342
6mm	0.2362	M7 X 1	6,0mm	66,0mm	28,0mm	24,0	36,0mm	63173

continued on next page

TOLERANCES (inch)

≤.1181 DIAMETER

D₁ = +.00008/+0.00047

D₂ = h₆

>.1181-.2362 DIAMETER

D₁ = +.00016/+0.00063

D₂ = h₆

>.2362-.3937 DIAMETER

D₁ = +.00024/+0.00083

D₂ = h₆

>.3937-.7087 DIAMETER

D₁ = +.00028/+0.00098

D₂ = h₆

>.7087-1.1811 DIAMETER

D₁ = +.00031/+0.00114

D₂ = h₆

TOLERANCES (mm)

≤3 DIAMETER

D₁ = +0,002/+0,012

D₂ = h₆

>3-6 DIAMETER

D₁ = +0,004/+0,016

D₂ = h₆

>6-10 DIAMETER

D₁ = +0,006/+0,021

D₂ = h₆

>10-18 DIAMETER

D₁ = +0,007/+0,025

D₂ = h₆

>18-30 DIAMETER

D₁ = +0,008/+0,029

D₂ = h₆




135 3xD

FRACTIONAL & METRIC SERIES

CONTINUED

CUTTING DIAMETER	DECIMAL EQUIV.	TAP SIZE REFERENCE ONLY	SHANK DIAMETER	OVERALL LENGTH	FLUTE LENGTH	CLEARED LENGTH	SHANK LENGTH	TI-NAMITE-A (AlTiN)
D ₁			D ₂	L ₁	L ₂	L ₃	L ₄	EDP NO.
B	0.2380		1/4	3-1/8	1-5/16	1-3/64	1-7/16	51602
6.1mm	0.2402		8,0mm	79,0mm	34,0mm	28,0	36,0	63754
C	0.2420		1/4	3-1/8	1-5/16	1-3/64	1-7/16	51603
6.2mm	0.2441		8,0mm	79,0mm	34,0mm	28,0	36,0	63755
D	0.2460		1/4	3-1/8	1-5/16	1-3/64	1-7/16	51604
6.25mm	0.2461	M7 X 0, 75	8,0mm	79,0mm	34,0mm	28,0	36,0mm	63174
6.3mm	0.2480		8,0mm	79,0mm	34,0mm	28,0	36,0	63756
1/4	0.2500		1/4	3-1/8	1-5/16	1-3/64	1-7/16	51343
6.4mm	0.2520		8,0mm	79,0mm	34,0mm	28,0	36,0mm	63175
6.5mm	0.2559		8,0mm	79,0mm	34,0mm	28,0	36,0mm	63213
F	0.2570	5/16-18	5/16	3-1/8	1-5/16	1-3/64	1-7/16	51344
6.6mm	0.2598		8,0mm	79,0mm	34,0mm	28,0	36,0	63757
G	0.2610		5/16	3-1/8	1-5/16	1-3/64	1-7/16	51606
6.7mm	0.2638		8,0mm	79,0mm	28,0	28,0	36,0	63758
17/64	0.2656	5/16-20	5/16	3-1/8	1-5/16	1-3/64	1-7/16	51345
H	0.2660		5/16	3-1/8	1-5/16	1-3/64	1-7/16	51607
6.8mm	0.2677	M8 X 1,25	8,0mm	79,0mm	34,0mm	28,0	36,0mm	63176
6.9mm	0.2717		8,0mm	79,0mm	34,0mm	28,0	36,0	63759
I	0.2720	5/16-24	5/16	3-1/8	1-5/16	1-3/64	1-7/16	51346
7mm	0.2756	M8 X 1	8,0mm	79,0mm	34,0mm	28,0	36,0mm	63177
J	0.2770		5/16	3-1/8	1-5/16	1-3/64	1-7/16	51608
7.1mm	0.2795		8,0mm	79,0mm	41,0mm	34,0	36,0	63760
K	0.2810		5/16	3-1/8	1-9/16	1-3/16	1-7/16	51609
9/32	0.2812	5/16-32	5/16	3-1/8	1-9/16	1-3/16	1-7/16	51347
7.2mm	0.2835		8,0mm	79,0mm	41,0mm	34,0	36,0	63761
7.25mm	0.2854	M8 X 0, 75	8,0mm	79,0mm	41,0mm	34,0	36,0mm	63178
7.3mm	0.2874		8,0mm	79,0mm	41,0mm	34,0	36,0	63762
L	0.2900		5/16	3-1/8	1-9/16	1-3/16	1-7/16	51610
7.4mm	0.2913		8,0mm	79,0mm	41,0	34,0	36,0	63763
M	0.2950		5/16	3-1/8	1-9/16	1-3/16	1-7/16	51611
7.5mm	0.2953	M8 X 0,5	8,0mm	79,0mm	41,0mm	34,0	36,0mm	63179
19/64	0.2969		5/16	3-1/8	1-9/16	1-3/16	1-7/16	51348
7.6mm	0.2992		8,0mm	79,0mm	41,0	34,0	30,0mm	63764
N	0.3020		5/16	3-1/8	1-9/16	1-3/16	1-7/16	51612
7.7mm	0.3031		8,0mm	79,0mm	41,0	34,0	36,0	63765
7.8mm	0.3071	M9 X 1,25	8,0mm	79,0mm	41,0mm	34,0	36,0mm	63180
7.9mm	0.3110		8,0mm	79,0mm	41,0	34,0	36,0	63766
5/16	0.3125	3/8-16	5/16	3-1/8	1-9/16	1-3/16	1-7/16	51349
8mm	0.3150	M9 X 1	8,0mm	79,0mm	41,0mm	34,0	36,0mm	63181
O	0.3160		3/8	3-1/2	1-27/32	1-37/64	1-9/16	51613
8.1mm	0.3189		10,0mm	89,0mm	47,0mm	40,0	40,0	63767
8.2mm	0.3228		10,0mm	89,0mm	47,0mm	40,0	40,0	63768
P	0.3230		3/8	3-1/2	1-27/32	1-37/64	1-9/16	51614
8.3mm	0.3268		10,0mm	89,0mm	41,0	40,0	40,0	63769
21/64	0.3281	3/8-20	3/8	3-1/2	1-27/32	1-37/64	1-9/16	51350
8.4mm	0.3307		10,0mm	89,0	47,0mm	40,0	40,0mm	63182
Q	0.3320	3/8-24	3/8	3-1/2	1-27/32	1-37/64	1-9/16	51351
8.5mm	0.3346	M10 X 1,5	10,0mm	89,0	47,0mm	40,0	40,0mm	63183
8.6mm	0.3386		10,0mm	89,0mm	47,0	40,0	40,0	63770
R	0.3390		3/8	3-1/2	1-27/32	1-37/64	1-9/16	51615

continued on next page




135 3xD

FRACTIONAL & METRIC SERIES

TECH INFO 179-182

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS
TITANIUM
HARDENED STEELS

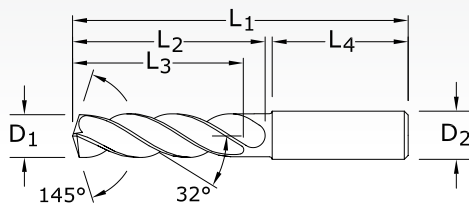

CUTTING DIAMETER	DECIMAL EQUIV.	TAP SIZE REFERENCE ONLY	SHANK DIAMETER	OVERALL LENGTH	FLUTE LENGTH	CLEARED LENGTH	SHANK LENGTH	EDP NO.
D ₁			D ₂	L ₁	L ₂	L ₃	L ₄	
8.7mm	0.3425		10,0mm	89,0mm	47,0	40,0	40,0	63771
11/32	0.3438	3/8-32	3/8	3-1/2	1-27/32	1-37/64	1-9/16	51352
8.8mm	0.3465	M10 X 1,25	10,0mm	89,0	47,0mm	40,0	40,0mm	63184
S	0.3480		3/8	3-1/2	1-27/32	1-37/64	1-9/16	51616
8.9mm	0.3504		10,0mm	89,0mm	47,0	40,0	40,0	63772
9mm	0.3543	M10 X 1	10,0mm	89,0	47,0mm	40,0	40,0mm	63185
T	0.3580		3/8	3-1/2	1-27/32	1-37/64	1-9/16	51617
9.1mm	0.3583		10,0mm	89,0mm	47,0	40,0	40,0	63773
23/64	0.3594		3/8	3-1/2	1-27/32	1-37/64	1-9/16	51353
9.2mm	0.3622	M10 X 0,75	10,0mm	89,0mm	47,0	40,0	40,0	63774
9.25mm	0.3642		10,0mm	89,0	47,0mm	40,0	40,0mm	63186
9.3mm	0.3661		10,0mm	89,0mm	47,0	40,0	40,0	63775
U	0.3680	7/16-14	3/8	3-1/2	1-27/32	1-37/64	1-9/16	51354
9.4mm	0.3701		10,0mm	89,0mm	47,0	40,0	40,0	63776
9.5mm	0.3740	M10 X 0,5	10,0mm	89,0	47,0mm	40,0	40,0mm	63187
3/8	0.3750		3/8	3-1/2	1-27/32	1-37/64	1-9/16	51355
V	0.3770		1/2	3-1/2	1-27/32	1-37/64	1-9/16	51618
9.6mm	0.3780		10,0mm	89,0mm	47,0	40,0	40,0	63777
9.7mm	0.3819		10,0mm	89,0mm	47,0	40,0	40,0	63778
9.8mm	0.3858		10,0mm	89,0mm	47,0	40,0	40,0	63779
W	0.3860		1/2	3-1/2	1-27/32	1-37/64	2-9/16	51619
9.9mm	0.3898		10,0mm	89,0mm	47,0	40,0	40,0	63780
25/64	0.3906	7/16-20	1/2	3-1/2	1-27/32	1-37/64	1-9/16	51356
10mm	0.3937		10,0mm	89,0	47,0mm	40,0	40,0mm	63188
X	0.3970	7/16-24	1/2	4-1/16	2-3/11	1-51/64	1-49/64	51620
10.1mm	0.3976		12,0mm	102,0mm	33,0mm	55,0	45,0	63781
10.2mm	0.4016	M12 X 1,75	12,0mm	102,0	55,0mm	45,0	45,0mm	63189
Y	0.4040	7/16-28	1/2	4-1/16	2-3/16	1-51/64	1-49/64	51621
10.3mm	0.4055		12,0mm	102,0mm	55,0	45,0	45,0	63782
13/32	0.4062		1/2	4-1/16	2-3/16	1-51/64	1-49/64	51357
10.4mm	0.4095		12,0mm	102,0mm	55,0mm	45,0	45,0	63783
Z	0.4130		1/2	4-1/16	2-3/16	1-51/64	1-49/64	51622
10.5mm	0.4134	M12 X 1,5	12,0mm	102,0	55,0mm	45,0	45,0mm	63190
10.6mm	0.4173		12,0mm	102,0mm	55,0	45,0	45,0	63784
10.7mm	0.4213		12,0mm	102,0mm	55,0	45,0	45,0	63785
27/64	0.4219	1/2-13	1/2	4-1/16	2-3/16	1-51/64	1-49/64	51358
10.8mm	0.4252	M12 X 1,25	12,0mm	102,0	55,0mm	45,0	45,0mm	63191
10.9mm	0.4291		12,0mm	102,0mm	55,0	45,0	45,0	63786
11mm	0.4331	M12 X 1	12,0mm	102,0	55,0mm	45,0	45,0mm	63192
11.1mm	0.4370		12,0mm	102,0mm	55,0	45,0	45,0	63787
7/16	0.4375	1/4-18 NPT	1/2	4-1/16	2-3/16	1-51/64	1-49/64	51359
11.2mm	0.4409		12,0mm	102,0mm	55,0	45,0	45,0	63788
11.25mm	0.4429		12,0mm	102,0	55,0mm	45,0	45,0	63193
11.3mm	0.4449		12,0mm	102,0mm	55,0	45,0	45,0	63789

continued on next page

TOLERANCES (inch)

≤.1181 DIAMETER

D₁ = +.00008/+0.00047

D₂ = h₆

>.1181-.2362 DIAMETER

D₁ = +.00016/+0.00063

D₂ = h₆

>.2362-.3937 DIAMETER

D₁ = +.00024/+0.00083

D₂ = h₆

>.3937-.7087 DIAMETER

D₁ = +.00028/+0.00098

D₂ = h₆

>.7087-1.1811 DIAMETER

D₁ = +.00031/+0.00114

D₂ = h₆

TOLERANCES (mm)

≤3 DIAMETER

D₁ = +0,002/+0,012

D₂ = h₆

>3-6 DIAMETER

D₁ = +0,004/+0,016

D₂ = h₆

>6-10 DIAMETER

D₁ = +0,006/+0,021

D₂ = h₆

>10-18 DIAMETER

D₁ = +0,007/+0,025

D₂ = h₆

>18-30 DIAMETER

D₁ = +0,008/+0,029

D₂ = h₆



135 3xD

FRACTIONAL & METRIC SERIES

CONTINUED


CUTTING DIAMETER	DECIMAL EQUIV.	TAP SIZE REFERENCE ONLY	SHANK DIAMETER	OVERALL LENGTH	FLUTE LENGTH	CLEARED LENGTH	SHANK LENGTH	TI-NAMITE-A (AlTiN)
D ₁			D ₂	L ₁	L ₂	L ₃	L ₄	EDP NO.
11.4mm	0.4488		12,0mm	102,0mm	55,0	45,0	45,0	63790
11.5mm	0.4528	M12 X 0,5	12,0mm	102,0	55,0mm	45,0	45,0mm	63194
29/64	0.4531	1/2-20	1/2	4-1/16	2-3/16	1-51/64	1-49/64	51360
11.6mm	0.4567		12,0mm	102,0mm	55,0	45,0	45,0	63791
11.7mm	0.4606		12,0mm	102,0mm	55,0	45,0	45,0	63792
11.8mm	0.4646		12,0mm	102,0mm	55,0	45,0	45,0	63793
11.9mm	0.4685		12,0mm	102,0mm	55,0	45,0	45,0	63794
15/32	0.4688	1/2-28	1/2	4-1/16	2-3/16	1-51/64	1-49/64	51361
12mm	0.4724	M14 X 2	12,0mm	102,0	55,0mm	45,0	45,0mm	63195
31/64	0.4844	9/16-12	1/2	4-1/4	2-5/16	1-7/8	1-49/64	51362
12.5mm	0.4921	M14 X 1,5	14,0mm	107,0	60,0mm	45,0	45,0mm	63196
1/2	0.5000		1/2	4-1/4	2-5/16	1-7/8	1-49/64	51363
12.8mm	0.5039	M14 X 1,25	14,0mm	107,0	60,0mm	45,0	45,0mm	63197
13mm	0.5118	M14 X 1	14,0mm	107,0	60,0mm	45,0	45,0mm	63198
33/64	0.5156	9/16-18	5/8	4-1/4	2-5/16	1-7/8	1-49/64	51364
17/32	0.5312	5/8-11	5/8	4-1/4	2-5/16	1-7/8	1-49/64	51365
13.5mm	0.5315		14,0mm	107,0	60,0mm	45,0	45,0mm	63199
35/64	0.5469	5/8-12	5/8	4-1/4	2-5/16	1-7/8	1-49/64	51783
14mm	0.5512	M16 X 2	14,0mm	107,0mm	60,0mm	49,0	45,0mm	63200
9/16	0.5625		5/8	4-9/16	2-1/2	2	1-57/64	51366
14.5mm	0.5709	M16 X 1,5	16,0mm	115,0mm	65,0mm	51,0	48,0mm	63201
37/64	0.5781	5/8-18	5/8	4-9/16	2-1/2	2	1-57/64	51367
15mm	0.5906	M16 X 1	16,0mm	115,0mm	65,0mm	51,0	48,0mm	63202
19/32	0.5938	11/16-11	5/8	4-9/16	2-1/2	2	1-57/64	51784
39/64	0.6094	11/16-12	5/8	4-9/16	2-1/2	2	1-57/64	51785
15.5mm	0.6102	M18 X 2,5	16,0mm	115,0mm	65,0mm	51,0	48,0mm	63203
5/8	0.6250	11/16-16	5/8	4-9/16	2-1/2	2	1-57/64	51368
16mm	0.6299		16,0mm	115,0mm	65,0mm	51,0	48,0mm	63204
41/64	0.6406	11/16-24	3/4	4-7/8	2-3/4	2-5/16	1-57/64	51786
16.5mm	0.6496	M18 X 1,5	18,0mm	123,0mm	73,0mm	58,0	48,0mm	63205
21/32	0.6562	3/4-10	3/4	4-7/8	2-3/4	2-5/16	1-57/64	51369
17mm	0.6693		18,0mm	123,0mm	73,0mm	58,0	48,0mm	63206
43/64	0.6719	3/4-12	3/4	4-7/8	2-3/4	2-5/16	1-57/64	51787
11/16	0.6875	3/4-16	3/4	4-7/8	2-3/4	2-5/16	1-57/64	51370
17.5mm	0.6890	M20 X 2,5	18,0mm	123,0mm	73,0mm	58,0	48,0mm	63207
45/64	0.7031	3/4-20, 1/2-14	3/4	4-7/8	2-3/4	2-5/16	1-57/64	51788
18mm	0.7087		18,0mm	131,0mm	73,0mm	58,0	48,0mm	63208
23/32	0.7188		3/4	4-7/8	2-3/4	2-5/16	1-57/64	51789
18.5mm	0.7283	M20 X 1,5	20,0mm	131,0mm	79,0mm	63,0	50,0mm	63209
47/64	0.7344	13/16-12	3/4	4-7/8	2-3/4	2-5/16	1-57/64	51790
19mm	0.7480		20,0mm	131,0mm	79,0mm	63,0	50,0mm	63210
3/4	0.7500	13/16-16	3/4	5-1/4	3-1/16	2-7/16	1-31/32	51371
49/64	0.7656	7/8-9	7/8	5-1/4	3-1/16	2-7/16	1-31/32	51372
19.5mm	0.7677	M22 X 2,5	20,0mm	131,0mm	79,0mm	63,0	50,0mm	63211
25/32	0.7812		7/8	6	3-11/16	2-11/16	2-1/8	51791
20mm	0.7874		20,0mm	131,0mm	79,0mm	63,0	50,0mm	63212
51/64	0.7969	7/8-12	7/8	6	3-11/16	2-11/16	2-1/8	51792
13/16	0.8125	7/8-14	7/8	6	3-11/16	2-11/16	2-1/8	51373
7/8	0.8750	15/16-16, 1-8	7/8	6	3-11/16	2-11/16	2-1/8	51374
59/64	0.9219	1-12	1	6	3-11/16	2-11/16	2-1/8	51375



135 5xD

FRACTIONAL SERIES

TECH INFO 183-184

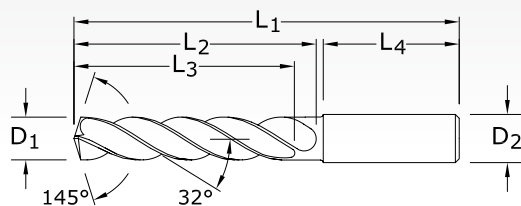

CUTTING DIAMETER	DECIMAL EQUIV.	TAP SIZE REFERENCE ONLY	SHANK DIAMETER	OVERALL LENGTH	inch FLUTE LENGTH	CLEARED LENGTH	SHANK LENGTH	EDP NO.
D ₁			D ₂	L ₁	L ₂	L ₃	L ₄	Ti-NAMITE-A (AITiN)
1/8	0.1250		1/4	3	1	53/64	1-15/16	51580
#30	0.1285		1/4	3	1	53/64	1-15/16	51581
#29	0.1360	8-32,8-36	1/4	3	1	53/64	1-15/16	51582
9/64	0.1406		1/4	3	1	53/64	1-15/16	51583
#25	0.1495	10-24	1/4	3-1/4	1-1/4	1-5/64	1-15/16	51584
5/32	0.1562		1/4	3-1/4	1-1/4	1-5/64	1-15/16	51585
#21	0.1590	10-32	1/4	3-1/4	1-1/4	1-5/64	1-15/16	51586
#20	0.1610	13/64-24	1/4	3-1/4	1-1/4	1-5/64	1-15/16	51587
11/64	0.1719		1/4	3-1/4	1-1/4	1-5/64	1-15/16	51588
3/16	0.1875		1/4	3-1/4	1-3/4	1-37/64	1-7/16	51589
#07	0.2010	1/4-20	1/4	3-1/4	1-3/4	1-37/64	1-7/16	51506
13/64	0.2031		1/4	3-1/4	1-3/4	1-37/64	1-7/16	51507
#05	0.2055		1/4	3-1/4	1-3/4	1-37/64	1-7/16	51590
#04	0.2090	1/4-24	1/4	3-1/4	1-3/4	1-37/64	1-7/16	51508
#03	0.2090	1/4-28	1/4	3-1/4	1-3/4	1-37/64	1-7/16	51509
7/32	0.2188	1/4-32	1/4	3-1/4	1-3/4	1-37/64	1-7/16	51510
15/64	0.2344		1/4	3-1/4	1-3/4	1-37/64	1-7/16	51591
1/4	0.2500		1/4	3-5/8	2-5/64	1-51/64	1-7/16	51511
F	0.2570	5/16-18	5/16	3-5/8	2-5/64	1-51/64	1-7/16	51512
17/64	0.2656	5/16-20	5/16	3-5/8	2-5/64	1-51/64	1-7/16	51513
I	0.2720	5/16-24	5/16	3-5/8	2-5/64	1-51/64	1-7/16	51514
9/32	0.2812	5/16-32	5/16	3-5/8	2-5/64	1-51/64	1-7/16	51515
19/64	0.2969		5/16	3-5/8	2-5/64	1-51/64	1-7/16	51516
5/16	0.3125	3/8-16	5/16	3-5/8	2-5/64	1-51/64	1-7/16	51517
P	0.3230		3/8	4	2-13/32	2-1/8	1-9/16	51518
21/64	0.3281	3/8-20	3/8	4	2-13/32	2-1/8	1-9/16	51519
Q	0.3320	3/8-24	3/8	4	2-13/32	2-1/8	1-9/16	51520
11/32	0.3438	3/8-32	3/8	4	2-13/32	2-1/8	1-9/16	51521
S	0.3480		3/8	4	2-13/32	2-1/8	1-9/16	51522
23/64	0.3594		3/8	4	2-13/32	2-1/8	1-9/16	51523

continued on next page

TOLERANCES (inch)

≤.1181 DIAMETER

D₁ = +.00008/+0.00047

D₂ = h₆

>.1181-.2362 DIAMETER

D₁ = +.00016/+0.00063

D₂ = h₆

>.2362-.3937 DIAMETER

D₁ = +.00024/+0.00083

D₂ = h₆


>.3937-.7087 DIAMETER

D₁ = +.00028/+0.00098

D₂ = h₆

>.7087-1.1811 DIAMETER

D₁ = +.00031/+0.00114

D₂ = h₆




135 5xD

FRACTIONAL SERIES

CONTINUED


CUTTING DIAMETER	DECIMAL EQUIV.	TAP SIZE REFERENCE ONLY	inch					EDP NO. Ti-NAMITE-A (AITiN)
			SHANK DIAMETER	OVERALL LENGTH	FLUTE LENGTH	CLEARED LENGTH	SHANK LENGTH	
D ₁			D ₂	L ₁	L ₂	L ₃	L ₄	
U	0.3680	7/16-14	3/8	4	2-13/32	2-1/8	1-9/16	51524
3/8	0.3750		3/8	4	2-13/32	2-1/8	1-9/16	51525
W	0.3860		1/2	4	2-13/32	2-1/8	1-9/16	51526
25/64	0.3906	7/16-20	1/2	4	2-13/32	2-1/8	1-9/16	51527
13/32	0.4062		1/2	4-11/16	2-3/4	2-23/64	1-49/64	51528
27/64	0.4219	1/2-13	1/2	4-11/16	2-3/4	2-23/64	1-49/64	51529
7/16	0.4375	1/4-18 NPT	1/2	4-11/16	2-3/4	2-23/64	1-49/64	51530
29/64	0.4531	1/2-20	1/2	4-11/16	2-3/4	2-23/64	1-49/64	51531
15/32	0.4688	1/2-28	1/2	4-11/16	2-3/4	2-23/64	1-49/64	51532
31/64	0.4844	9/16-12	1/2	4-7/8	3-1/32	2-19/32	1-49/64	51533
1/2	0.5000		1/2	4-7/8	3-1/32	2-19/32	1-49/64	51534
33/64	0.5156	9/16-18	5/8	4-7/8	3-1/32	2-19/32	1-49/64	51535
17/32	0.5312	5/8-11	5/8	4-7/8	3-1/32	2-19/32	1-49/64	51536
35/64	0.5469	5/8-12	5/8	4-7/8	3-1/32	2-19/32	1-49/64	51537
9/16	0.5625		5/8	5-1/4	3-1/4	2-3/4	1-57/64	51538
37/64	0.5781	5/8-18	5/8	5-1/4	3-1/4	2-3/4	1-57/64	51539
19/32	0.5938	11/16-11	5/8	5-1/4	3-1/4	2-3/4	1-57/64	51592
39/64	0.6094	11/16-12	5/8	5-1/4	3-1/4	2-3/4	1-57/64	51593
5/8	0.6250	11/16-16	5/8	5-1/4	3-1/4	2-3/4	1-57/64	51540
41/64	0.6406	11/16-24	3/4	5-5/8	3-5/8	3-3/16	1-57/64	51594
21/32	0.6562	3/4-10	3/4	5-5/8	3-5/8	3-3/16	1-57/64	51541
43/64	0.6719	3/4-12	3/4	5-5/8	3-5/8	3-3/16	1-57/64	51595
11/16	0.6875	3/4-16	3/4	5-5/8	3-5/8	3-3/16	1-57/64	51542
45/64	0.7031	3/4-20, 1/2-14 NPT	3/4	5-5/8	3-5/8	3-3/16	1-57/64	51543
23/32	0.7188		3/4	6	4	3-3/8	1-31/32	51596
47/64	0.7344	13/16-12	3/4	6	4	3-3/8	1-31/32	51544
3/4	0.7500	13/16-16	3/4	6	4	3-3/8	1-31/32	51545



140 5xD

FRACTIONAL & METRIC SERIES

TECH INFO 185-188

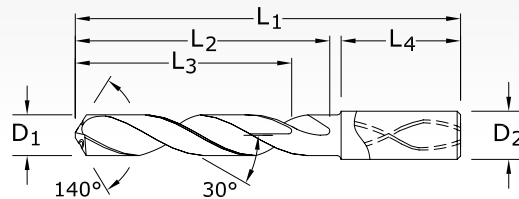

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS
TITANIUM
HARDENED STEELS

CUTTING DIAMETER	DECIMAL EQUIV.	TAP SIZE REFERENCE ONLY	SHANK DIAMETER	OVERALL LENGTH	FLUTE LENGTH	CLEARED LENGTH	SHANK LENGTH	EDP NO.
D ₁			D ₂	L ₁	L ₂	L ₃	L ₄	Ti-NAMITE-A (AITIN)
3,0 mm	0.1181		6,0	66,0	28,0	23,0	36,0	63901
3,1 mm	0.1220		6,0	66,0	28,0	23,0	36,0	63902
1/8	0.1250		6,0	66,0	28,0	23,0	36,0	51901
3,2 mm	0.1260	M3,5 X 0,35	6,0	66,0	28,0	23,0	36,0	63903
3,3 mm	0.1299	M4 X 0,7	6,0	66,0	28,0	23,0	36,0	63904
3,4 mm	0.1339		6,0	66,0	28,0	23,0	36,0	63905
29	0.1360	8-32,8-36	6,0	66,0	28,0	23,0	36,0	51902
3,5 mm	0.1378	M4 X 0,5	6,0	66,0	28,0	23,0	36,0	63906
9/64	0.1406		6,0	66,0	28,0	23,0	36,0	51903
3,6 mm	0.1417	M4 X 0,35	6,0	66,0	28,0	23,0	36,0	63907
3,7 mm	0.1457	M4,5 X 0,75	6,0	66,0	28,0	23,0	36,0	63908
3,8 mm	0.1496	10-24	6,0	74,0	36,0	29,0	36,0	51904
3,9 mm	0.1535		6,0	74,0	36,0	29,0	36,0	63909
5/32	0.1562		6,0	74,0	36,0	29,0	36,0	51905
4,0 mm	0.1575	M4,5 X 0,5	6,0	74,0	36,0	29,0	36,0	63910
21	0.1590	10-32	6,0	74,0	36,0	29,0	36,0	51906
4,1 mm	0.1614		6,0	74,0	36,0	29,0	36,0	63911
4,2 mm	0.1654	M5 / M5 x 0,75	6,0	74,0	36,0	29,0	36,0	63912
4,3 mm	0.1693		6,0	74,0	36,0	29,0	36,0	63913
11/64	0.1719		6,0	74,0	36,0	29,0	36,0	51907
4,4 mm	0.1732	12-24	6,0	74,0	36,0	29,0	36,0	63914
4,5 mm	0.1772	M5 X 0,5	6,0	74,0	36,0	29,0	36,0	63915
4,6 mm	0.1811	12-28,0	6,0	74,0	36,0	29,0	36,0	63916
4,7 mm	0.1850	12-32	6,0	74,0	36,0	29,0	36,0	63917
3/16	0.1875		6,0	82,0	44,0	35,0	36,0	51908
4,8 mm	0.1890	7/32-32	6,0	82,0	44,0	35,0	36,0	63918
4,9 mm	0.1929		6,0	82,0	44,0	35,0	36,0	63919
5,0 mm	0.1969	M6 X 1	6,0	82,0	44,0	35,0	36,0	63920
5,1 mm	0.2008	1/4-20	6,0	82,0	44,0	35,0	36,0	63900
13/64	0.2031		6,0	82,0	44,0	35,0	36,0	51910
5,2 mm	0.2047	M6 X 0,75	6,0	82,0	44,0	35,0	36,0	63921
5,3 mm	0.2087		6,0	82,0	44,0	35,0	36,0	63922

continued on next page

TOLERANCES (inch)

≤.1181 DIAMETER
D₁ = +.00008/+0.00047
D₂ = h₆

>.1181-.2362 DIAMETER
D₁ = +.00016/+0.00063
D₂ = h₆

>.2362-.3937 DIAMETER
D₁ = +.00024/+0.00083
D₂ = h₆

>.3937-.7087 DIAMETER
D₁ = +.00028/+0.00098
D₂ = h₆

>.7087-1.1811 DIAMETER
D₁ = +.00031/+0.00114
D₂ = h₆

TOLERANCES (mm)

≤3 DIAMETER
D₁ = +0,002/+0,012
D₂ = h₆

>3-6 DIAMETER
D₁ = +0,004/+0,016
D₂ = h₆

>6-10 DIAMETER
D₁ = +0,006/+0,021
D₂ = h₆

>10-18 DIAMETER
D₁ = +0,007/+0,025
D₂ = h₆

>18-30 DIAMETER
D₁ = +0,008/+0,029
D₂ = h₆



140 5xD

FRACTIONAL & METRIC SERIES

CONTINUED

CUTTING DIAMETER	DECIMAL EQUIV.	TAP SIZE REFERENCE ONLY	mm					EDP NO. Ti-NAMITE-A (AITiN)
			SHANK DIAMETER	OVERALL LENGTH	FLUTE LENGTH	CLEARED LENGTH	SHANK LENGTH	
D ₁			D ₂	L ₁	L ₂	L ₃	L ₄	
5,4 mm	0.2126		6,0	82,0	44,0	35,0	36,0	63998
5,5 mm	0.2165	M6 X 0,5	6,0	82,0	44,0	35,0	36,0	63923
7/32	0.2188	1/4-32	6,0	82,0	44,0	35,0	36,0	51912
5,6 mm	0.2205		6,0	82,0	44,0	35,0	36,0	63924
5,7 mm	0.2244		6,0	82,0	44,0	35,0	36,0	63925
5,8 mm	0.2283		6,0	82,0	44,0	35,0	36,0	63926
5,9 mm	0.2323		6,0	82,0	44,0	35,0	36,0	63927
15/64	0.2344		6,0	82,0	44,0	35,0	36,0	51913
6,0 mm	0.2362	M7 X 1	6,0	82,0	44,0	35,0	36,0	63928,0
6,1 mm	0.2402		8,0	91,0	53,0	43,0	36,0	63929
6,2 mm	0.2441	M7 X 0,75	8,0	91,0	53,0	43,0	36,0	63930
6,3 mm	0.2480		8,0	91,0	53,0	43,0	36,0	63931
1/4	0.2500		8,0	91,0	53,0	43,0	36,0	51914
6,4 mm	0.2520		8,0	91,0	53,0	43,0	36,0	63932
6,5 mm	0.2559		8,0	91,0	53,0	43,0	36,0	63933
F	0.2570	5/16-18	8,0	91,0	53,0	43,0	36,0	51915
6,6 mm	0.2598		8,0	91,0	53,0	43,0	36,0	63934
6,7 mm	0.2638		8,0	91,0	53,0	43,0	36,0	63935
17/64	0.2657	5/16-20	8,0	91,0	53,0	43,0	36,0	51916
6,8 mm	0.2677	M8 X 1,25	8,0	91,0	53,0	43,0	36,0	63936
6,9 mm	0.2717	5/16-24	8,0	91,0	53,0	43,0	36,0	63999
7,0 mm	0.2756	M8 X 1	8,0	91,0	53,0	43,0	36,0	63937
7,1 mm	0.2795		8,0	91,0	53,0	43,0	36,0	63938
9/32	0.2812	5/16-32	8,0	91,0	53,0	43,0	36,0	51918
7,2 mm	0.2835	M8 X 0,75	8,0	91,0	53,0	43,0	36,0	63939
7,3 mm	0.2874		8,0	91,0	53,0	43,0	36,0	63940
7,4 mm	0.2913		8,0	91,0	53,0	43,0	36,0	63941
7,5 mm	0.2953	M8 X 0,5	8,0	91,0	53,0	43,0	36,0	63942
19/64	0.2969		8,0	91,0	53,0	43,0	36,0	51919
7,6 mm	0.2992		8,0	91,0	53,0	43,0	36,0	63943
7,7 mm	0.3031		8,0	91,0	53,0	43,0	36,0	63944
7,8 mm	0.3071	M9 X 1,25	8,0	91,0	53,0	43,0	36,0	63945
7,9 mm	0.3110		8,0	91,0	53,0	43,0	36,0	63946
5/16	0.3125	3/8-16	8,0	91,0	53,0	43,0	36,0	51920
8,0 mm	0.3150	M9 X 1	8,0	91,0	53,0	43,0	36,0	63947
8,1 mm	0.3189		10,0	103,0	61,0	49,0	40,0	63948
8,2 mm	0.3228		10,0	103,0	61,0	49,0	40,0	63949
8,3 mm	0.3268		10,0	103,0	61,0	49,0	40,0	63950


continued on next page



140 5xD

FRACTIONAL & METRIC SERIES

TECH INFO 185-188

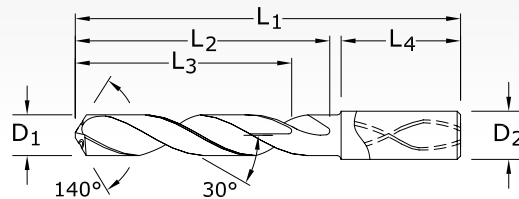

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS
TITANIUM
HARDENED STEELS

CUTTING DIAMETER	DECIMAL EQUIV.	TAP SIZE REFERENCE ONLY	SHANK DIAMETER	OVERALL LENGTH	FLUTE LENGTH	CLEARED LENGTH	SHANK LENGTH	EDP NO.
D ₁			D ₂	L ₁	L ₂	L ₃	L ₄	Ti-NAMITE-A (AlTiN)
21/64	0.3281	3/8-20	10,0	103,0	61,0	49,0	40,0	51921
8,4 mm	0.3307		10,0	103,0	61,0	49,0	40,0	63951
Q	0.3320	3/8-24	10,0	103,0	61,0	49,0	40,0	51922
8,5 mm	0.3346	M10 X 1,5	10,0	103,0	61,0	49,0	40,0	63952
8,6 mm	0.3386		10,0	103,0	61,0	49,0	40,0	63953
8,7 mm	0.3425		10,0	103,0	61,0	49,0	40,0	63954
11/32	0.3438	3/8-32	10,0	103,0	61,0	49,0	40,0	51923
8,8 mm	0.3465	M10 X 1,25	10,0	103,0	61,0	49,0	40,0	63955
8,9 mm	0.3504		10,0	103,0	61,0	49,0	40,0	63956
9,0 mm	0.3543	M10 X 1	10,0	103,0	61,0	49,0	40,0	63957
9,1 mm	0.3583		10,0	103,0	61,0	49,0	40,0	63958
23/64	0.3594		10,0	103,0	61,0	49,0	40,0	51924
9,2 mm	0.3622	M10 X 0,75	10,0	103,0	61,0	49,0	40,0	63959
9,3 mm	0.3661		10,0	103,0	61,0	49,0	40,0	63960
U	0.3680	7/16-14	10,0	103,0	61,0	49,0	40,0	51925
9,4 mm	0.3701		10,0	103,0	61,0	49,0	40,0	63961
9,5 mm	0.3740	M11 / M10 X 0,5	10,0	103,0	61,0	49,0	40,0	63962
3/8	0.3750		10,0	103,0	61,0	49,0	40,0	51926
9,6 mm	0.3780		10,0	103,0	61,0	49,0	40,0	63963
9,7 mm	0.3819		10,0	103,0	61,0	49,0	40,0	63964
9,8 mm	0.3858		10,0	103,0	61,0	49,0	40,0	63965
9,9 mm	0.3898		10,0	103,0	61,0	49,0	40,0	63966
25/64	0.3906	7/16-20	10,0	103,0	61,0	49,0	40,0	51927
10,0 mm	0.3937		10,0	103,0	61,0	49,0	40,0	63967
10,1 mm	0.3976		12,0	118,0	71,0	56,0	45,0	63968
10,2 mm	0.4016	M12 X 1,75	12,0	118,0	71,0	56,0	45,0	63969
10,3 mm	0.4055		12,0	118,0	71,0	56,0	45,0	63970
13/32	0.4062		12,0	118,0	71,0	56,0	45,0	51928
10,4 mm	0.4094		12,0	118,0	71,0	56,0	45,0	63971
10,5 mm	0.4134	M12 X 1,5	12,0	118,0	71,0	56,0	45,0	63972
10,6 mm	0.4173		12,0	118,0	71,0	56,0	45,0	63973
10,7 mm	0.4213		12,0	118,0	71,0	56,0	45,0	63974

continued on next page

TOLERANCES (inch)

≤.1181 DIAMETER
D₁ = +.00008/+0.00047
D₂ = h₆

>.1181-.2362 DIAMETER
D₁ = +.00016/+0.00063
D₂ = h₆

>.2362-.3937 DIAMETER
D₁ = +.00024/+0.00083
D₂ = h₆

>.3937-.7087 DIAMETER
D₁ = +.00028/+0.00098
D₂ = h₆

>.7087-1.1811 DIAMETER
D₁ = +.00031/+0.00114
D₂ = h₆

TOLERANCES (mm)

≤3 DIAMETER
D₁ = +0,002/+0,012
D₂ = h₆

>3-6 DIAMETER
D₁ = +0,004/+0,016
D₂ = h₆

>6-10 DIAMETER
D₁ = +0,006/+0,021
D₂ = h₆

>10-18 DIAMETER
D₁ = +0,007/+0,025
D₂ = h₆

>18-30 DIAMETER
D₁ = +0,008/+0,029
D₂ = h₆





140 5xD

FRACTIONAL & METRIC SERIES

CONTINUED


CUTTING DIAMETER	DECIMAL EQUIV.	TAP SIZE REFERENCE ONLY	mm					EDP NO. Ti-NAMITE-A (AITiN)
			SHANK DIAMETER	OVERALL LENGTH	FLUTE LENGTH	CLEARED LENGTH	SHANK LENGTH	
D ₁			D ₂	L ₁	L ₂	L ₃	L ₄	
27/64	0.4219	1/2-13	12,0	118,0	71,0	56,0	45,0	51929
10,8 mm	0.4252	M12 X 1,25	12,0	118,0	71,0	56,0	45,0	63975
10,9 mm	0.4291		12,0	118,0	71,0	56,0	45,0	63976
11,0 mm	0.4331	M12 X 1	12,0	118,0	71,0	56,0	45,0	63977
11,1 mm	0.4370		12,0	118,0	71,0	56,0	45,0	63978
7/16	0.4375	1/4-18NPT	12,0	118,0	71,0	56,0	45,0	51930
11,2 mm	0.4409		12,0	118,0	71,0	56,0	45,0	63979
11,3 mm	0.4449		12,0	118,0	71,0	56,0	45,0	63980
11,4 mm	0.4488		12,0	118,0	71,0	56,0	45,0	63981
11,5 mm	0.4528	M12 X 0,5	12,0	118,0	71,0	56,0	45,0	64000
11,6 mm	0.4567		12,0	118,0	71,0	56,0	45,0	63982
11,7 mm	0.4606		12,0	118,0	71,0	56,0	45,0	63983
11,8 mm	0.4646		12,0	118,0	71,0	56,0	45,0	63984
11,9 mm	0.4685		12,0	118,0	71,0	56,0	45,0	63985
15/32	0.4688	1/2-28,0	12,0	118,0	71,0	56,0	45,0	51932
12,0 mm	0.4724	M14 X 2	12,0	118,0	71,0	56,0	45,0	63986
31/64	0.4844	9/16-12	14,0	124,0	77,0	60,0	45,0	51933
12,5 mm	0.4921	M14 X 1,5	14,0	124,0	77,0	60,0	45,0	63987
1/2	0.5000		14,0	124,0	77,0	60,0	45,0	51934
12,8 mm	0.5039	M14 X 1,25	14,0	124,0	77,0	60,0	45,0	63988
13,0 mm	0.5118	M14 X 1	14,0	124,0	77,0	60,0	45,0	63989
33/64	0.5156	9/16-18	14,0	124,0	77,0	60,0	45,0	51935
13,5 mm	0.5315	5/8-11	14,0	124,0	77,0	60,0	45,0	64001
13,8 mm	0.5433		14,0	124,0	77,0	60,0	45,0	63990
14,0 mm	0.5512	M16 X 2	14,0	124,0	77,0	60,0	45,0	63991
9/16	0.5625		16,0	133,0	83,0	63,0	48,0	51937
14,5 mm	0.5709	M16 X 1,5	16,0	133,0	83,0	63,0	48,0	63992
37/64	0.5781	5/8-18	16,0	133,0	83,0	63,0	48,0	51938
14,8 mm	0.5827		16,0	133,0	83,0	63,0	48,0	63993
15,0 mm	0.5906	M16 X 1	16,0	133,0	83,0	63,0	48,0	63994
15,5 mm	0.6102	M18 X 2,5	16,0	133,0	83,0	63,0	48,0	63995
15,8 mm	0.6220		16,0	133,0	83,0	63,0	48,0	63996
5/8	0.6250	11/16-16	16,0	133,0	83,0	63,0	48,0	51939
16,0 mm	0.6299		16,0	133,0	83,0	63,0	48,0	63997
21/32	0.6562	3/4-10	18,0	143,0	93,0	71,0	48,0	51940
11/16	0.6875	3/4-16	18,0	143,0	93,0	71,0	48,0	51941
3/4	0.7500	13/16-16	20,0	153,0	101,0	77,0	50,0	51942



140 8xD

FRACTIONAL & METRIC SERIES

TECH INFO 189-192

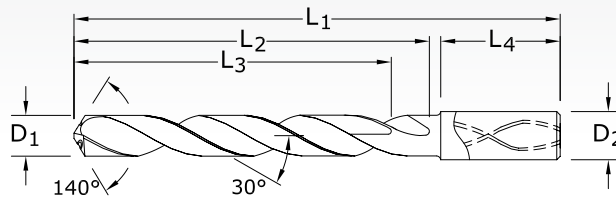

- STEELS
- STAINLESS STEELS
- CAST IRON
- HIGH TEMP ALLOYS
- TITANIUM
- HARDENED STEELS

CUTTING DIAMETER	DECIMAL EQUIV.	TAP SIZE REFERENCE ONLY	SHANK DIAMETER	OVERALL LENGTH	FLUTE LENGTH	CLEARED LENGTH	SHANK LENGTH	EDP NO.
D ₁			D ₂	L ₁	L ₂	L ₃	L ₄	Ti-NAMITE-A (AITiN)
3,0 mm	0.1181		6,0	72,0	34,0	29,0	36,0	63575
3,1 mm	0.1220		6,0	72,0	34,0	29,0	36,0	63576
1/8	0.1250		6,0	72,0	34,0	29,0	36,0	51801
3,2 mm	0.1260	M3,5 X 0,35	6,0	72,0	34,0	29,0	36,0	63577
3,3 mm	0.1299	M4 X 0,7	6,0	72,0	34,0	29,0	36,0	63578
3,4 mm	0.1339		6,0	72,0	34,0	29,0	36,0	63579
#29	0.1360	8-32,8-36	6,0	72,0	34,0	29,0	36,0	51802
3,5 mm	0.1378	M4 X 0,5	6,0	72,0	34,0	29,0	36,0	63580
9/64	0.1406		6,0	72,0	34,0	29,0	36,0	51803
3,6 mm	0.1417	M4 X 0,35	6,0	72,0	34,0	29,0	36,0	63581
3,7 mm	0.1457	M4,5 X 0,75	6,0	72,0	34,0	29,0	36,0	63582
3,8 mm	0.1496	10-24	6,0	81,0	43,0	36,0	36,0	63583
3,9 mm	0.1535		6,0	81,0	43,0	36,0	36,0	63584
5/32	0.1562		6,0	81,0	43,0	36,0	36,0	51804
4,0 mm	0.1575	M4,5 X 0,5	6,0	81,0	43,0	36,0	36,0	63585
#21	0.1590	10-32	6,0	81,0	43,0	36,0	36,0	51805
4,1 mm	0.1614		6,0	81,0	43,0	36,0	36,0	63586
4,2 mm	0.1654	M5 / M5 x 0,75	6,0	81,0	43,0	36,0	36,0	63587
4,3 mm	0.1693		6,0	81,0	43,0	36,0	36,0	63588
11/64	0.1719		6,0	81,0	43,0	36,0	36,0	51806
4,4 mm	0.1732	12-24	6,0	81,0	43,0	36,0	36,0	63589
4,5 mm	0.1772	M5 X 0,5	6,0	81,0	43,0	36,0	36,0	63590
4,6 mm	0.1811	12-28	6,0	81,0	43,0	36,0	36,0	63591
4,7 mm	0.1850	12-32	6,0	81,0	43,0	36,0	36,0	63592
3/16	0.1875		6,0	95,0	57,0	48,0	36,0	51807
4,8 mm	0.1890	7/32-32	6,0	95,0	57,0	48,0	36,0	63593
4,9 mm	0.1929		6,0	95,0	57,0	48,0	36,0	63594
5,0 mm	0.1969	M6 X 1	6,0	95,0	57,0	48,0	36,0	63595
5,1 mm	0.2008	1/4-20	6,0	95,0	57,0	48,0	36,0	63596
13/64	0.2031		6,0	95,0	57,0	48,0	36,0	51808
5,2 mm	0.2047	M6 X 0,75	6,0	95,0	57,0	48,0	36,0	63597
5,3 mm	0.2087		6,0	95,0	57,0	48,0	36,0	63598

continued on next page

TOLERANCES (inch)

≤.1181 DIAMETER

D₁ = +.00008/+0.00047

D₂ = h₆

>.1181-.2362 DIAMETER

D₁ = +.00016/+0.00063

D₂ = h₆

>.2362-.3937 DIAMETER

D₁ = +.00024/+0.00083

D₂ = h₆

>.3937-.7087 DIAMETER

D₁ = +.00028/+0.00098

D₂ = h₆

>.7087-1.1811 DIAMETER

D₁ = +.00031/+0.00114

D₂ = h₆

TOLERANCES (mm)

≤3 DIAMETER

D₁ = +0,002/+0,012

D₂ = h₆

>3-6 DIAMETER

D₁ = +0,004/+0,016

D₂ = h₆

>6-10 DIAMETER

D₁ = +0,006/+0,021

D₂ = h₆

>10-18 DIAMETER

D₁ = +0,007/+0,025

D₂ = h₆

>18-30 DIAMETER

D₁ = +0,008/+0,029

D₂ = h₆





140 8xD

FRACTIONAL & METRIC SERIES

CONTINUED

CUTTING DIAMETER	DECIMAL EQUIV.	TAP SIZE REFERENCE ONLY	mm					EDP NO. Ti-NAMITE-A (AITiN)
			SHANK DIAMETER	OVERALL LENGTH	FLUTE LENGTH	CLEARED LENGTH	SHANK LENGTH	
D ₁			D ₂	L ₁	L ₂	L ₃	L ₄	
5,4 mm	0.2126		6,0	95,0	57,0	48,0	36,0	63599
5,5 mm	0.2165	M6 X 0,5	6,0	95,0	57,0	48,0	36,0	63600
7/32	0.2188	1/4-32	6,0	95,0	57,0	48,0	36,0	51809
5,6 mm	0.2205		6,0	95,0	57,0	48,0	36,0	63601
5,7 mm	0.2244		6,0	95,0	57,0	48,0	36,0	63602
5,8 mm	0.2283		6,0	95,0	57,0	48,0	36,0	63603
5,9 mm	0.2323		6,0	95,0	57,0	48,0	36,0	63604
15/64	0.2344		6,0	95,0	57,0	48,0	36,0	51810
6,0 mm	0.2362	M7 X 1	6,0	95,0	57,0	48,0	36,0	63605
6,1 mm	0.2402		8,0	114,0	76,0	64,0	36,0	63606
6,2 mm	0.2441	M7 X 0,75	8,0	114,0	76,0	64,0	36,0	63607
6,3 mm	0.2480		8,0	114,0	76,0	64,0	36,0	63608
1/4	0.2500		8,0	114,0	76,0	64,0	36,0	51811
6,4 mm	0.2520		8,0	114,0	76,0	64,0	36,0	63609
6,5 mm	0.2559		8,0	114,0	76,0	64,0	36,0	63610
F	0.2570	5/16-18	8,0	114,0	76,0	64,0	36,0	51812
6,6 mm	0.2598		8,0	114,0	76,0	64,0	36,0	63611
6,7 mm	0.2638		8,0	114,0	76,0	64,0	36,0	63612
17/64	0.2657	5/16-20	8,0	114,0	76,0	64,0	36,0	51813
6,8 mm	0.2677	M8 X 1,25	8,0	114,0	76,0	64,0	36,0	63613
6,9 mm	0.2717		8,0	114,0	76,0	64,0	36,0	63614
7,0 mm	0.2756	M8 X 1	8,0	114,0	76,0	64,0	36,0	63615
7,1 mm	0.2795		8,0	114,0	76,0	64,0	36,0	63616
9/32	0.2812	5/16-32	8,0	114,0	76,0	64,0	36,0	51814
7,2 mm	0.2835	M8 X 0,75	8,0	114,0	76,0	64,0	36,0	63617
7,3 mm	0.2874		8,0	114,0	76,0	64,0	36,0	63618
7,4 mm	0.2913		8,0	114,0	76,0	64,0	36,0	63619
7,5 mm	0.2953	M8 X 0,5	8,0	114,0	76,0	64,0	36,0	63620
19/64	0.2969		8,0	114,0	76,0	64,0	36,0	51815
7,6 mm	0.2992		8,0	114,0	76,0	64,0	36,0	63621
7,7 mm	0.3031		8,0	114,0	76,0	64,0	36,0	63622
7,8 mm	0.3071	M9 X 1,25	8,0	114,0	76,0	64,0	36,0	63623
7,9 mm	0.3110		8,0	114,0	76,0	64,0	36,0	63624
5/16	0.3125	3/8-16	8,0	114,0	76,0	64,0	36,0	51816
8,0 mm	0.3150	M9 X 1	8,0	114,0	76,0	64,0	36,0	63625
8,1 mm	0.3189		10,0	142,0	95,0	80,0	40,0	63626
8,2 mm	0.3228		10,0	142,0	95,0	80,0	40,0	63627
8,3 mm	0.3268		10,0	142,0	95,0	80,0	40,0	63628


continued on next page



140 8xD

FRACTIONAL & METRIC SERIES

TECH INFO 189-192

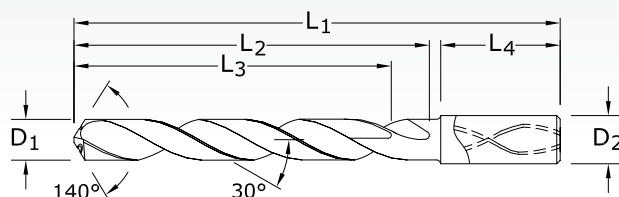

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS
TITANIUM
HARDENED STEELS

CUTTING DIAMETER	DECIMAL EQUIV.	TAP SIZE REFERENCE ONLY	SHANK DIAMETER	OVERALL LENGTH	FLUTE LENGTH	CLEARED LENGTH	SHANK LENGTH	EDP NO.
D ₁			D ₂	L ₁	L ₂	L ₃	L ₄	Ti-NAMITE-A (AITiN)
21/64	0.3281	3/8-20	10,0	142,0	95,0	80,0	40,0	51817
8,4 mm	0.3307		10,0	142,0	95,0	80,0	40,0	63629
Q	0.3320	3/8-24	10,0	142,0	95,0	80,0	40,0	51818
8,5 mm	0.3346	M10 X 1,5	10,0	142,0	95,0	80,0	40,0	63630
8,6 mm	0.3386		10,0	142,0	95,0	80,0	40,0	63631
8,7 mm	0.3425		10,0	142,0	95,0	80,0	40,0	63632
11/32	0.3438	3/8-32	10,0	142,0	95,0	80,0	40,0	51819
8,8 mm	0.3465	M10 X 1,25	10,0	142,0	95,0	80,0	40,0	63633
8,9 mm	0.3504		10,0	142,0	95,0	80,0	40,0	63634
9,0 mm	0.3543	M10 X 1	10,0	142,0	95,0	80,0	40,0	63635
9,1 mm	0.3583		10,0	142,0	95,0	80,0	40,0	63636
23/64	0.3594		10,0	142,0	95,0	80,0	40,0	51820
9,2 mm	0.3622	M10 X 0,75	10,0	142,0	95,0	80,0	40,0	63637
9,3 mm	0.3661		10,0	142,0	95,0	80,0	40,0	63638
U	0.3680	7/16-14	10,0	142,0	95,0	80,0	40,0	51821
9,4 mm	0.3701		10,0	142,0	95,0	80,0	40,0	63639
9,5 mm	0.3740	M11 / M10 X 0,5	10,0	142,0	95,0	80,0	40,0	63640
3/8	0.3750		10,0	142,0	95,0	80,0	40,0	51822
9,6 mm	0.3780		10,0	142,0	95,0	80,0	40,0	63641
9,7 mm	0.3819		10,0	142,0	95,0	80,0	40,0	63642
9,8 mm	0.3858		10,0	142,0	95,0	80,0	40,0	63643
9,9 mm	0.3898		10,0	142,0	95,0	80,0	40,0	63644
25/64	0.3906	7/16-20	10,0	142,0	95,0	80,0	40,0	51823
10,0 mm	0.3937		10,0	142,0	95,0	80,0	40,0	63645
10,1 mm	0.3976		12,0	162,0	114,0	96,0	45,0	63646
10,2 mm	0.4016	M12 X 1,75	12,0	162,0	114,0	96,0	45,0	63647
10,3 mm	0.4055		12,0	162,0	114,0	96,0	45,0	63648
13/32	0.4062		12,0	162,0	114,0	96,0	45,0	51824
10,4 mm	0.4094		12,0	162,0	114,0	96,0	45,0	63649
10,5 mm	0.4134	M12 X 1,5	12,0	162,0	114,0	96,0	45,0	63650
10,6 mm	0.4173		12,0	162,0	114,0	96,0	45,0	63651
10,7 mm	0.4213		12,0	162,0	114,0	96,0	45,0	63652

continued on next page

TOLERANCES (inch)

≤.1181 DIAMETER
D₁ = +.00008/+0.00047
D₂ = h₆

>.1181-.2362 DIAMETER
D₁ = +.00016/+0.00063
D₂ = h₆

>.2362-.3937 DIAMETER
D₁ = +.00024/+0.00083
D₂ = h₆

>.3937-.7087 DIAMETER
D₁ = +.00028/+0.00098
D₂ = h₆

>.7087-1.1811 DIAMETER
D₁ = +.00031/+0.00114
D₂ = h₆

TOLERANCES (mm)

≤3 DIAMETER
D₁ = +0,002/+0,012
D₂ = h₆

>3-6 DIAMETER
D₁ = +0,004/+0,016
D₂ = h₆

>6-10 DIAMETER
D₁ = +0,006/+0,021
D₂ = h₆

>10-18 DIAMETER
D₁ = +0,007/+0,025
D₂ = h₆

>18-30 DIAMETER
D₁ = +0,008/+0,029
D₂ = h₆




140 8xD

FRACTIONAL & METRIC SERIES

CONTINUED

CUTTING DIAMETER	DECIMAL EQUIV.	TAP SIZE REFERENCE ONLY	mm					EDP NO. Ti-NAMITE-A (AlTiN)
			SHANK DIAMETER	OVERALL LENGTH	FLUTE LENGTH	CLEARED LENGTH	SHANK LENGTH	
D ₁			D ₂	L ₁	L ₂	L ₃	L ₄	
27/64	0.4219	1/2-13	12,0	162,0	114,0	96,0	45,0	51825
10,8 mm	0.4252	M12 X 1,25	12,0	162,0	114,0	96,0	45,0	63653
10,9 mm	0.4291		12,0	162,0	114,0	96,0	45,0	63654
11,0 mm	0.4331	M12 X 1	12,0	162,0	114,0	96,0	45,0	63655
11,1 mm	0.4370		12,0	162,0	114,0	96,0	45,0	63656
7/16	0.4375	1/4-18NPT	12,0	162,0	114,0	96,0	45,0	51826
11,2 mm	0.4409		12,0	162,0	114,0	96,0	45,0	63657
11,3 mm	0.4449		12,0	162,0	114,0	96,0	45,0	63658
11,4 mm	0.4488		12,0	162,0	114,0	96,0	45,0	63659
11,5 mm	0.4528	M12 X 0,5	12,0	162,0	114,0	96,0	45,0	63660
11,6 mm	0.4567		12,0	162,0	114,0	96,0	45,0	63661
11,7 mm	0.4606		12,0	162,0	114,0	96,0	45,0	63662
11,8 mm	0.4646		12,0	162,0	114,0	96,0	45,0	63663
11,9 mm	0.4685		12,0	162,0	114,0	96,0	45,0	63664
15/32	0.4688	1/2-28	12,0	162,0	114,0	96,0	45,0	51827
12,0 mm	0.4724	M14 X 2	12,0	162,0	114,0	96,0	45,0	63665
31/64	0.4844	9/16-12	14,0	178,0	133,0	112,0	45,0	51828
12,5 mm	0.4921	M14 X 1,5	14,0	178,0	133,0	112,0	45,0	63666
1/2	0.5000		14,0	178,0	133,0	112,0	45,0	51829
12,8 mm	0.5039	M14 X 1,25	14,0	178,0	133,0	112,0	45,0	63667
13,0 mm	0.5118	M14 X 1	14,0	178,0	133,0	112,0	45,0	63668
33/64	0.5156	9/16-18	14,0	178,0	133,0	112,0	45,0	51830
13,5 mm	0.5315	5/8-11	14,0	178,0	133,0	112,0	45,0	63669
13,8 mm	0.5433		14,0	178,0	133,0	112,0	45,0	63670
14,0 mm	0.5512	M16 X 2	14,0	178,0	133,0	112,0	45,0	63671
9/16	0.5625		16,0	203,0	152,0	128,0	48,0	51831
14,5 mm	0.5709	M16 X 1,5	16,0	203,0	152,0	128,0	48,0	63672
37/64	0.5781	5/8-18	16,0	203,0	152,0	128,0	48,0	51832
14,8 mm	0.5827		16,0	203,0	152,0	128,0	48,0	63673
15,0 mm	0.5906	M16 X 1,5	16,0	203,0	152,0	128,0	48,0	63674
15,5 mm	0.6102	M18 X 2,5	16,0	203,0	152,0	128,0	48,0	63675
15,8 mm	0.6220		16,0	203,0	152,0	128,0	48,0	63676
5/8	0.6250	11/16-16	16,0	203,0	152,0	128,0	48,0	51833
16,0 mm	0.6299		16,0	203,0	152,0	128,0	48,0	63677
21/32	0.6562	3/4-10	18,0	222,0	171,0	144,0	48,0	51834
11/16	0.6875	3/4-16	18,0	222,0	171,0	144,0	48,0	51835
3/4	0.7500	13/16-16	20,0	243,0	190,0	160,0	50,0	51836

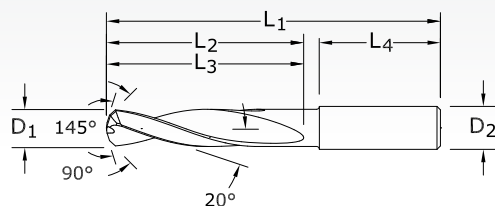**120**

FRACTIONAL & METRIC SERIES

TECH INFO 193

PLASTICS/COMPOSITES

CUTTING DIAMETER D ₁	DECIMAL EQUIV.	SHANK DIAMETER D ₂	OVERALL LENGTH L ₁	FLUTE LENGTH L ₂ / L ₃	SHANK LENGTH L ₄	Di-NAMITE (Diamond) EDP NO.
#40	0.0980	1/8	2	9/16	1-1/4	50000
2,7 mm	0.1063	6,0	63,0	20,0	32,0	50001
3,0 mm	0.1181	6,0	63,0	20,0	36,0	50002
1/8	0.1250	1/4	2-1/2	3/4	1-7/16	50003
3,2 mm	0.1260	6,0	63,0	20,0	36,0	50004
#30	0.1285	1/4	2-1/2	3/4	1-7/16	50005
#28	0.1405	1/4	2-1/2	3/4	1-7/16	50006
#22	0.1570	1/4	2-5/8	7/8	1-7/16	50007
#21	0.1590	1/4	2-5/8	7/8	1-7/16	50008
4,1 mm	0.1614	6,0	66,0	24,0	36,0	50009
#19	0.1660	1/4	2-5/8	7/8	1-7/16	50010
11/64	0.1719	1/4	2-5/8	7/8	1-7/16	50011
3/16	0.1875	1/4	2-5/8	1	1-7/16	50012
#11	0.1910	1/4	2-5/8	1	1-7/16	50013
#8	0.1990	1/4	2-5/8	1	1-7/16	50014
#7	0.2010	1/4	2-5/8	1	1-7/16	50015
#2	0.2210	1/4	2-5/8	1	1-7/16	50016
6,0 mm	0.2362	6,0	66,0	28,0	36,0	50017
1/4	0.2500	1/4	3-1/8	1-5/16	1-7/16	50018
.2510	0.2510	5/16	3-1/8	1-5/16	1-7/16	50019
F	0.2570	5/16	3-1/8	1-5/16	1-7/16	50020
I	0.2720	5/16	3-1/8	1-5/16	1-7/16	50021
J	0.2770	5/16	3-1/8	1-5/16	1-7/16	50022
K	0.2810	5/16	3-1/8	1-9/16	1-7/16	50023
5/16	0.3125	5/16	3-1/8	1-9/16	1-7/16	50024
8,0 mm	0.3150	8,0	79,0	41,0	36,0	50025
3/8	0.3750	3/8	3-1/2	1-27/32	1-9/16	50026
V	0.3770	1/2	3-1/2	1-27/32	1-9/16	50027
10,0 mm	0.3937	10,0	89,0	47,0	40,0	50028
7/16	0.4375	1/2	4-1/4	2-3/16	1-9/16	50029
12,0 mm	0.4724	12,0	102,0	55,0	45,0	50030
1/2	0.5000	1/2	4-1/4	2-5/16	1-3/4	50031

TOLERANCES (inch)D₁ = +.0000/-0.0005D₂ = h₆**TOLERANCES (mm)**D₁ = +0,000/-0,013D₂ = h₆

Series 135 3D Fractional	Hardness BRINELL	Vc (SFM)	Diameter (D ₁) (inch)								
			1/32	1/8	1/4	3/8	1/2	5/8	7/8		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	400	RPM	48896	12224	6112	4075	3056	2445	1746	
		≤ 200	(320-480)	Fr	0.001	0.0040	0.0080	0.0120	0.0160	0.0200	0.0280
			Feed (IPM)	48.9	48.9	48.9	48.9	48.9	48.9	48.9	
		> 200 ≤ 300	350	RPM	42784	10696	5348	3565	2674	2139	1528
			(280-420)	Fr	0.0009	0.0035	0.0070	0.0105	0.0140	0.0175	0.0245
				Feed (IPM)	38.5	37.4	37.4	37.4	37.4	37.4	37.4
		> 300 ≤ 420	160	RPM	19558	4890	2445	1630	1222	978	699
			(128-192)	Fz	0.0008	0.0030	0.0060	0.0090	0.0120	0.0150	0.0210
				Feed (IPM)	15.6	14.7	14.7	14.7	14.7	14.7	14.7
P	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	300	RPM	36672	9168	4584	3056	2292	1834	1310	
		≤ 275	(240-360)	Fz	0.0008	.0030	0.0060	0.0090	0.0120	0.0150	0.0210
			Feed (IPM)	29.3	27.5	27.5	27.5	27.5	27.5	27.5	
		> 275 ≤ 375	220	RPM	26893	6723	3362	2241	1681	1345	960
			(176-264)	Fr	0.0006	.0025	0.0050	0.0075	0.0100	0.0125	0.0175
				Feed (IPM)	16.1	16.8	16.8	16.8	16.8	16.8	16.8
		> 375 ≤ 450	120	RPM	14669	3667	1834	1222	917	733	524
			(96-144)	Fr	0.0005	.0018	0.0035	0.0055	0.0070	0.0090	0.0125
				Feed (IPM)	7.3	6.6	6.4	6.7	6.4	6.6	6.5
P	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	220	RPM	26893	6723	3362	2241	1681	1345	960	
		≤ 250	(176-264)	Fr	0.0006	0.0025	0.0050	0.0075	0.0100	0.0125	0.0175
			Feed (IPM)	16.1	16.8	16.8	16.8	16.8	16.8	16.8	
		> 250 ≤ 330	150	RPM	18336	4584	2292	1528	1146	917	655
			(120-180)	Fr	0.0005	0.0018	0.0035	0.0055	0.0070	0.0090	0.0125
				Feed (IPM)	9.2	8.0	8.0	8.4	8.0	8.3	8.2
		> 330 ≤ 450	70	RPM	8557	2139	1070	713	535	428	306
			(56-84)	Fr	0.0003	0.0010	0.0020	0.0030	0.0040	0.0050	0.0070
				Feed (IPM)	2.6	2.1	2.1	2.1	2.1	2.1	2.1
K	CAST IRONS Gray, Malleable, Ductile	400	RPM	48896	12224	6112	4075	3056	2445	1746	
		≤ 200	(320-480)	Fr	0.0013	0.0050	0.0100	0.0150	0.0200	0.0250	0.0350
			Feed (IPM)	63.6	61.1	61.1	61.1	61.1	61.1	61.1	
		> 200 ≤ 330	250	RPM	30560	7640	3820	2547	1910	1528	1091
			(200-300)	Fr	0.0011	0.0045	0.0090	0.0135	0.0180	0.0225	0.0315
				Feed (IPM)	33.6	34.4	34.4	34.4	34.4	34.4	34.4
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	200	RPM	24448	6112	3056	2037	1528	1222	873	
		< 250	(160-240)	Fr	0.0006	0.0025	0.0050	0.0075	0.0100	0.0125	0.0175
			Feed (IPM)	14.7	15.3	15.3	15.3	15.3	15.3	15.3	
		> 250 ≤ 330	150	RPM	18336	4584	2292	1528	1146	917	655
			(120-180)	Fr	0.0005	0.0018	0.0035	0.0055	0.0070	0.0090	0.0125
				Feed (IPM)	9.2	8.0	8.0	8.4	8.0	8.3	8.2

continued on next page

Series 135 3D Fractional	Hardness BRINELL	Vc (SFM)	Diameter (D ₁) (inch)								
			1/32	1/8	1/4	3/8	1/2	5/8	7/8		
M	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	90	RPM	11002	2750	1375	917	688	550	393	
		> 270 ≤ 370	(72-108)	Fr	0.0005	0.0018	0.0035	0.0055	0.0070	0.0090	0.0125
				Feed (IPM)	5.5	5.0	4.8	5.0	4.8	5.0	4.9
		> 270 ≤ 370	70	RPM	8557	2139	1070	713	535	428	306
			(56-84)	Fr	0.0004	0.0015	0.0030	0.0045	0.0060	0.0075	0.0105
				Feed (IPM)	3.4	3.2	3.2	3.2	3.2	3.2	3.2
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoly 800, Monel 400, Rene, Waspaloy	60	RPM	7334	1834	917	611	458	367	262	
		≤ 220	(48-72)	Fr	0.0003	0.0010	0.0020	0.0030	0.0040	0.0050	0.0070
				Feed (IPM)	2.2	1.8	1.8	1.8	1.8	1.8	1.8
		> 220 ≤ 330	40	RPM	4890	1222	611	407	306	244	175
			(32-48)	Fr	0.0002	0.0008	0.0015	0.0025	0.0030	0.0040	0.0055
				Feed (IPM)	1.0	0.9	0.9	1.0	0.9	1.0	1.0
		> 330 ≤ 420	30	RPM	3667	917	458	306	229	183	131
			(24-36)	Fr	0.0001	0.0003	0.0010	0.0015	0.0020	0.0025	0.0035
				Feed (IPM)	0.4	0.3	0.5	0.5	0.5	0.5	0.5
S	TITANIUM ALLOYS (DIFFICULT) Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	120	RPM	14669	3667	1834	1222	917	733	524	
		≤ 280	(96-144)	Fr	0.0005	0.0018	0.0035	0.0055	0.0070	0.0090	0.0125
				Feed (IPM)	7.3	6.4	6.4	6.7	6.4	6.6	6.5
		> 280 ≤ 350	100	RPM	12224	3056	1528	1019	764	611	437
			(80-120)	Fr	0.0004	0.0015	0.0030	0.0045	0.0060	0.0075	0.0105
				Feed (IPM)	4.9	4.6	4.6	4.6	4.6	4.6	4.6
		> 350 ≤ 440	70	RPM	8557	2139	1070	713	535	428	306
			(56-84)	Fr	0.0003	0.0013	0.0025	0.0040	0.0050	0.0065	0.0090
				Feed (IPM)	2.6	2.7	2.7	2.9	2.7	2.8	2.8
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	700	RPM	85568	21392	10696	7131	5348	4278	3056	
		≤ 80	(560-840)	Fr	0.0014	0.0055	0.0110	0.0165	0.0220	0.0275	0.0385
				Feed (IPM)	119.8	117.7	117.7	117.7	117.7	117.7	117.7
		> 80	600	RPM	73344	18336	9168	6112	4584	3667	2619
			(480-720)	Fr	0.0013	0.0050	0.0100	0.0150	0.0200	0.0250	0.0350
				Feed (IPM)	95.3	91.7	91.7	91.7	91.7	91.7	91.7
N	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	500	RPM	61120	15280	7640	5093	3820	3056	2183	
		≤ 140	(400-600)	Fr	0.0005	0.0020	0.0040	0.0060	0.0080	0.0100	0.0140
				Feed (IPM)	30.6	30.6	30.6	30.6	30.6	30.6	30.6
		> 140	400	RPM	48896	12224	6112	4075	3056	2445	1746
			(320-480)	Fr	0.0005	0.0020	0.0040	0.0060	0.0080	0.0100	0.0140
				Feed (IPM)	24.4	24.4	24.4	24.4	24.4	24.4	24.4

rpm = sfm x 3.82 / D₁

ipm = (inch / revolution) x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)

	Series 135M 3D Metric	Hardness BRINELL	Vc (m/min)	Diameter (D ₁) (mm)							
				3	6	8	10	12	16	20	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 200	122	RPM	12926	6463	4847	3878	3231	2424	1939
			(98-146)	Fr	0.095	0.195	0.255	0.320	0.385	0.515	0.640
				Feed (mm/min)	1228	1260	1236	1241	1244	1248	1241
		> 200 ≤ 300	107	RPM	11310	5655	4241	3393	2827	2121	1696
			(85-128)	Fr	0.085	0.170	0.225	0.280	0.340	0.450	0.560
				Feed (mm/min)	961	961	954	950	961	954	950
		> 300 ≤ 420	49	RPM	5170	2585	1939	1551	1293	969	776
			(39-59)	Fz	0.070	0.145	0.190	0.240	0.290	0.385	0.480
				Feed (mm/min)	362	375	368	372	375	373	372
P	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275	91	RPM	9694	4847	3635	2908	2424	1818	1454
			(73-110)	Fz	0.070	0.145	0.190	0.240	0.290	0.385	0.480
				Feed (mm/min)	679	703	691	698	703	700	698
		> 275 ≤ 375	67	RPM	7109	3555	2666	2133	1777	1333	1066
			(54-80)	Fr	0.060	0.120	0.160	0.200	0.240	0.320	0.400
				Feed (mm/min)	427	427	427	427	427	427	427
		> 375 ≤ 450	37	RPM	3878	1939	1454	1163	969	727	582
			(29-44)	Fr	0.040	0.085	0.115	0.145	0.170	0.230	0.285
				Feed (mm/min)	155	165	167	169	165	167	166
P	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 250	67	RPM	7109	3555	2666	2133	1777	1333	1066
			(54-80)	Fr	0.060	0.120	0.160	0.200	0.240	0.320	0.400
				Feed (mm/min)	427	427	427	427	427	427	427
		> 250 ≤ 330	46	RPM	4847	2424	1818	1454	1212	909	727
			(37-55)	Fr	0.040	0.085	0.115	0.145	0.170	0.230	0.285
				Feed (mm/min)	194	206	209	211	206	209	207
		> 330 ≤ 450	21	RPM	2262	1131	848	679	565	424	339
			(17-26)	Fr	0.025	0.050	0.065	0.080	0.095	0.130	0.160
				Feed (mm/min)	57	57	55	54	54	55	54
K	CAST IRONS Gray, Malleable, Ductile	≤ 200	122	RPM	12926	6463	4847	3878	3231	2424	1939
			(98-146)	Fr	0.120	0.240	0.320	0.400	0.485	0.640	0.800
				Feed (mm/min)	1551	1551	1551	1551	1567	1551	1551
		> 200 ≤ 330	76	RPM	8078	4039	3029	2424	2020	1515	1212
			(61-91)	Fr	0.110	0.215	0.290	0.360	0.435	0.575	0.720
				Feed (mm/min)	889	868	879	872	879	871	872
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	< 250	61	RPM	6463	3231	2424	1939	1616	1212	969
			(49-73)	Fr	0.060	0.120	0.160	0.200	0.240	0.320	0.400
				Feed (mm/min)	388	388	388	388	388	388	388
		> 250 ≤ 330	46	RPM	4847	2424	1818	1454	1212	909	727
			(37-55)	Fr	0.050	0.095	0.130	0.160	0.195	0.255	0.320
				Feed (mm/min)	242	230	236	233	236	232	233

continued on next page

Series 135M 3D Metric	Hardness BRINELL	Vc (m/min)	Diameter (D ₁) (mm)								
			3	6	8	10	12	16	20		
M	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	27	RPM	2908	1454	1091	872	727	545	436	
		> 270 ≤ 370	(22-33)	Fr	0.035	0.070	0.095	0.120	0.145	0.190	0.240
				Feed (mm/min)	102	102	104	105	105	104	105
		21	RPM	2262	1131	848	679	565	424	339	
		> 270 ≤ 370	(17-26)	Fr	0.035	0.070	0.095	0.120	0.145	0.190	0.240
				Feed (mm/min)	79	79	81	81	82	81	81
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoly 800, Monel 400, Rene, Waspaloy	18	RPM	1939	969	727	582	485	364	291	
		≤ 220	(15-22)	Fr	0.025	0.050	0.065	0.080	0.095	0.130	0.160
				Feed (mm/min)	48	48	47	47	46	47	47
		12	RPM	1293	646	485	388	323	242	194	
		> 220 ≤ 330	(10-15)	Fr	0.020	0.035	0.050	0.065	0.070	0.105	0.125
				Feed (mm/min)	26	23	24	25	23	25	24
		9	RPM	969	485	364	291	242	182	145	
		> 330 ≤ 420	(7-11)	Fr	0.010	0.025	0.030	0.040	0.050	0.065	0.080
				Feed (mm/min)	10	12	11	12	12	12	12
S	TITANIUM ALLOYS (DIFFICULT) Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	37	RPM	3878	1939	1454	1163	969	727	582	
		≤ 280	(29-44)	Fr	0.040	0.085	0.115	0.145	0.170	0.230	0.285
				Feed (mm/min)	155	165	167	169	165	167	166
		30	RPM	3231	1616	1212	969	808	606	485	
		> 280 ≤ 350	(24-37)	Fr	0.035	0.070	0.095	0.120	0.145	0.190	0.240
				Feed (mm/min)	113	113	115	116	117	115	116
		21	RPM	2262	1131	848	679	565	424	339	
		> 350 ≤ 440	(17-26)	Fr	0.030	0.060	0.085	0.105	0.120	0.165	0.205
				Feed (mm/min)	68	68	72	71	68	70	70
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	213	RPM	22620	11310	8482	6786	5655	4241	3393	
		≤ 80	(171-256)	Fr	0.135	0.265	0.355	0.440	0.530	0.705	0.880
				Feed (mm/min)	3054	2997	3011	2986	2997	2990	2986
		183	RPM	19388	9694	7271	5816	4847	3635	2908	
		> 80	(146-219)	Fr	0.120	0.240	0.320	0.400	0.485	0.640	0.800
				Feed (mm/min)	2327	2327	2327	2327	2351	2327	2327
N	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	152	RPM	16157	8078	6059	4847	4039	3029	2424	
		≤ 140	(122-183)	Fr	0.050	0.095	0.130	0.160	0.195	0.255	0.320
				Feed (mm/min)	808	767	788	776	788	773	776
		122	RPM	12926	6463	4847	3878	3231	2424	1939	
		> 140	(98-146)	Fr	0.050	0.095	0.130	0.160	0.195	0.255	0.320
				Feed (mm/min)	646	614	630	620	630	618	620

rpm = (1000 x m/min) / (3.14 x D₁)

mm / min = (mm / revolution) x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)

Series 135 5D Fractional	Hardness BRINELL	Vc (SFM)	Diameter (D ₁) (inch)								
			1/8	3/16	1/4	3/8	1/2	5/8	3/4		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 200	360	RPM	11002	7334	5501	3667	2750	2200	1834
			(288-432)	Fr	0.0040	0.0060	0.0080	0.0120	0.0160	0.0200	0.0280
				Feed (IPM)	44.0	44.0	44.0	44.0	44.0	44.0	51.3
		> 200 ≤ 300	310	RPM	9474	6316	4737	3158	2368	1895	1579
			(248-372)	Fr	0.0035	0.0053	0.0070	0.0105	0.0140	0.0175	0.0245
				Feed (IPM)	33.2	33.5	33.2	33.2	33.2	33.2	38.7
		> 300 ≤ 420	150	RPM	4584	3056	2292	1528	1146	917	764
			(120-180)	Fz	0.0030	0.0045	0.0060	0.0090	0.0120	0.0150	0.0210
				Feed (IPM)	13.8	13.8	13.8	13.8	13.8	13.8	16.0
P	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 270	270	RPM	8251	5501	4126	2750	2063	1650	1375
			(216-324)	Fz	0.0030	0.0045	0.0060	0.0090	0.0120	0.0150	0.0210
				Feed (IPM)	24.8	24.8	24.8	24.8	24.8	24.8	28.9
		> 270 ≤ 370	200	RPM	6112	4075	3056	2037	1528	1222	1019
			(160-240)	Fr	0.0025	0.0038	0.0050	0.0075	0.0100	0.0125	0.0175
				Feed (IPM)	15.3	15.5	15.3	15.3	15.3	15.3	17.8
		> 375 ≤ 450	110	RPM	3362	2241	1681	1121	840	672	560
			(88-132)	Fr	0.0018	0.0026	0.0035	0.0055	0.0070	0.0090	0.0125
				Feed (IPM)	5.9	5.8	5.9	6.2	5.9	6.1	7.0
P	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 250	200	RPM	6112	4075	3056	2037	1528	1222	1019
			(160-240)	Fr	0.0025	0.0038	0.0050	0.0075	0.0100	0.0125	0.0175
				Feed (IPM)	15.3	15.5	15.3	15.3	15.3	15.3	17.8
		> 250 ≤ 330	130	RPM	3973	2649	1986	1324	993	795	662
			(104-156)	Fr	0.0018	0.0027	0.0035	0.0055	0.0070	0.0090	0.0125
				Feed (IPM)	7.0	7.2	7.0	7.3	7.0	7.2	8.3
		> 330 ≤ 450	60	RPM	1834	1222	917	611	458	367	306
			(48-72)	Fr	0.0010	0.0015	0.0020	0.0030	0.0040	0.0050	0.0070
				Feed (IPM)	1.8	1.8	1.8	1.8	1.8	1.8	2.1
K	CAST IRONS Gray, Malleable, Ductile	≤ 200	360	RPM	11002	7334	5501	3667	2750	2200	1834
			(288-432)	Fr	0.0050	0.0075	0.0100	0.0150	0.0200	0.0250	0.0350
				Feed (IPM)	55.0	55.0	55.0	55.0	55.0	55.0	64.2
		> 200 ≤ 330	230	RPM	7029	4686	3514	2343	1757	1406	1171
			(184-276)	Fr	0.0045	0.0068	0.0090	0.0135	0.0180	0.0225	0.0315
				Feed (IPM)	31.6	31.9	31.6	31.6	31.6	31.6	36.9
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	< 250	180	RPM	5501	3667	2750	1834	1375	1100	917
			(144-216)	Fr	0.0025	0.0038	0.0050	0.0075	0.0100	0.0125	0.0175
				Feed (IPM)	13.8	13.9	13.8	13.8	13.8	13.8	16.0
		> 250 ≤ 330	130	RPM	3973	2649	1986	1324	993	795	662
			(104-156)	Fr	0.0020	0.0030	0.0040	0.0060	0.0080	0.0100	0.0140
				Feed (IPM)	7.9	7.9	7.9	7.9	7.9	7.9	9.3

continued on next page

	Series 135 5D Fractional	Hardness BRINELL	Vc (SFM)	Diameter (D ₁) (inch)							
				1/8	3/16	1/4	3/8	1/2	5/8	3/4	
M	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	> 270 ≤ 370	80	RPM	2445	1630	1222	815	611	489	407
			(64-96)	Fr	0.0018	0.0026	0.0035	0.0055	0.0070	0.0090	0.0125
				Feed (IPM)	4.3	4.2	4.3	4.5	4.3	4.4	5.1
		> 270 ≤ 370	60	RPM	1834	1222	917	611	458	367	306
			(48-72)	Fr	0.0015	0.0023	0.0030	0.0045	0.0060	0.0075	0.0105
				Feed (IPM)	2.8	2.8	2.8	2.8	2.8	2.8	3.2
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoly 800, Monel 400, Rene, Waspaloy	≤ 220	50	RPM	1528	1019	764	509	382	306	255
			(40-60)	Fr	0.0010	0.0015	0.0020	0.0030	0.0040	0.0050	0.0070
				Feed (IPM)	1.5	1.5	1.5	1.5	1.5	1.5	1.8
		> 220 ≤ 330	30	RPM	917	611	458	306	229	183	153
			(24-36)	Fr	0.0008	0.0012	0.0015	0.0025	0.0030	0.0040	0.0055
				Feed (IPM)	0.7	0.7	0.7	0.8	0.7	0.7	0.8
		> 330 ≤ 420	20	RPM	611	407	306	204	153	122	102
			(16-24)	Fr	0.0005	0.0008	0.0010	0.0015	0.0020	0.0025	0.0035
				Feed (IPM)	0.3	0.3	0.3	0.3	0.3	0.3	0.4
S	TITANIUM ALLOYS (DIFFICULT) Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 280	100	RPM	3056	2037	1528	1019	764	611	509
			(80-120)	Fr	0.0018	0.0027	0.0035	0.0055	0.0070	0.0090	0.0125
				Feed (IPM)	5.3	5.5	5.3	5.6	5.3	5.5	6.4
		> 280 ≤ 350	80	RPM	2445	1630	1222	815	611	489	407
			(64-96)	Fr	0.0015	0.0023	0.0030	0.0045	0.0060	0.0075	0.0105
				Feed (IPM)	3.7	3.7	3.7	3.7	3.7	3.7	4.3
		> 350 ≤ 440	60	RPM	1834	1222	917	611	458	367	306
			(48-72)	Fr	0.0013	0.0019	0.0025	0.0040	0.0050	0.0065	0.0090
				Feed (IPM)	2.3	2.3	2.3	2.4	2.3	2.4	2.8
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80	630	RPM	19253	12835	9626	6418	4813	3851	3209
			(504-756)	Fr	0.0055	0.0083	0.0110	0.0165	0.0220	0.0275	0.0385
				Feed (IPM)	105.9	106.5	105.9	105.9	105.9	105.9	123.5
		> 80	540	RPM	16502	11002	8251	5501	4126	3300	2750
			(432-648)	Fr	0.0050	0.0075	0.0100	0.0150	0.0200	0.0250	0.0350
				Feed (IPM)	82.5	82.5	82.5	82.5	82.5	82.5	96.3
N	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 140	450	RPM	13752	9168	6876	4584	3438	2750	2292
			(360-540)	Fr	0.0020	0.0030	0.0040	0.0060	0.0080	0.0100	0.0140
				Feed (IPM)	27.5	27.5	27.5	27.5	27.5	27.5	32.1
		> 140	360	RPM	11002	7334	5501	3667	2750	2200	1834
			(288-432)	Fr	0.0020	0.0030	0.0040	0.0060	0.0080	0.0100	0.0140
				Feed (IPM)	22.0	22.0	22.0	22.0	22.0	22.0	25.7

rpm = sfm x 3.82 / D₁

ipm = (inch / revolution) x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)

Series 140 5D Fractional	Hardness BRINELL	Vc (SFM)	Diameter (D ₁) (inch)								
			1/8	3/16	1/4	3/8	1/2	5/8	3/4		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 200	440	RPM	13446	8964	6723	4482	3362	2689	2241
			(352-528)	Fr	0.0040	0.0060	0.0080	0.0120	0.0160	0.0200	0.0240
				Feed (IPM)	53.8	53.8	53.8	53.8	53.8	53.8	53.8
		> 200 ≤ 300	380	RPM	11613	7742	5806	3871	2903	2323	1935
			(304-456)	Fr	0.0035	0.0053	0.0070	0.0105	0.0140	0.0175	0.0210
				Feed (IPM)	40.6	41.0	40.6	40.6	40.6	40.6	40.6
		> 300 ≤ 420	180	RPM	5501	3667	2750	1834	1375	1100	917
			(144-216)	Fz	0.0030	0.0045	0.0060	0.0090	0.0120	0.0150	0.0180
				Feed (IPM)	16.5	16.5	16.5	16.5	16.5	16.5	16.5
P	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 270	330	RPM	10085	6723	5042	3362	2521	2017	1681
			(264-396)	Fz	0.0030	0.0045	0.0060	0.0090	0.0120	0.0150	0.0180
				Feed (IPM)	30.3	30.3	30.3	30.3	30.3	30.3	30.3
		> 270 ≤ 370	240	RPM	7334	4890	3667	2445	1834	1467	1222
			(192-288)	Fr	0.0025	0.0038	0.0050	0.0075	0.0100	0.0125	0.0150
				Feed (IPM)	18.3	18.6	18.3	18.3	18.3	18.3	18.3
		> 375 ≤ 450	140	RPM	4278	2852	2139	1426	1070	856	713
			(112-168)	Fr	0.0018	0.0027	0.0035	0.0055	0.0070	0.0090	0.0110
				Feed (IPM)	7.7	7.7	7.5	7.8	7.5	7.7	7.8
P	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 250	240	RPM	7334	4890	3667	2445	1834	1467	1222
			(192-288)	Fr	0.0025	0.0038	0.0050	0.0075	0.0100	0.0125	0.0150
				Feed (IPM)	18.3	18.6	18.3	18.3	18.3	18.3	18.3
		> 250 ≤ 330	180	RPM	5501	3667	2750	1834	1375	1100	917
			(144-216)	Fr	0.0018	0.0027	0.0035	0.0055	0.0070	0.0090	0.0110
				Feed (IPM)	9.9	9.9	9.6	10.1	9.6	9.9	10.1
		> 330 ≤ 450	90	RPM	2750	1834	1375	917	688	550	458
			(72-108)	Fr	0.0010	0.0015	0.0020	0.0030	0.0040	0.0050	0.0060
				Feed (IPM)	2.8	2.8	2.8	2.8	2.8	2.8	2.8
K	CAST IRONS Gray, Malleable, Ductile	≤ 200	440	RPM	13446	8964	6723	4482	3362	2689	2241
			(352-528)	Fr	0.0050	0.0075	0.0100	0.0150	0.0200	0.0250	0.0300
				Feed (IPM)	67.2	67.2	67.2	67.2	67.2	67.2	67.2
		> 200 ≤ 330	280	RPM	8557	5705	4278	2852	2139	1711	1426
			(224-336)	Fr	0.0045	0.0068	0.0090	0.0135	0.0180	0.0225	0.0270
				Feed (IPM)	38.5	38.8	38.5	38.5	38.5	38.5	38.5
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	< 250	220	RPM	6723	4482	3362	2241	1681	1345	1121
			(176-264)	Fr	0.0025	0.0038	0.0050	0.0075	0.0100	0.0125	0.0150
				Feed (IPM)	16.8	17.0	16.8	16.8	16.8	16.8	16.8
		> 250 ≤ 330	170	RPM	5195	3463	2598	1732	1299	1039	866
			(136-204)	Fr	0.0020	0.0030	0.0040	0.0060	0.0080	0.0100	0.0120
				Feed (IPM)	10.4	10.4	10.4	10.4	10.4	10.4	10.4

continued on next page

				High Performance Internal Coolant Drills						
Series 140 5D Fractional	Hardness BRINELL	Vc (SFM)		Diameter (D ₁) (inch)						
				1/8	3/16	1/4	3/8	1/2	5/8	3/4
M	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	150	RPM	4584	3056	2292	1528	1146	917	764
		> 270 (120-180)	Fr	0.0018	0.0027	0.0035	0.0055	0.0070	0.0090	0.0110
			Feed (IPM)	8.3	8.3	8.0	8.4	8.0	8.3	8.4
		120	RPM	3667	2445	1834	1222	917	733	611
		> 270 ≤ 370 (96-144)	Fr	0.0012	0.0023	0.0030	0.0045	0.0060	0.0075	0.0090
			Feed (IPM)	4.4	132.0	5.5	5.5	5.5	5.5	5.5
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoly 800, Monel 400, Rene, Waspaloy	100	RPM	3056	2037	1528	1019	764	611	509
		≤ 220 (80-120)	Fr	0.0010	0.0015	0.0020	0.0030	0.0040	0.0050	0.0060
			Feed (IPM)	3.1	3.1	3.1	3.1	3.1	3.1	3.1
		70	RPM	2139	1426	1070	713	535	428	357
		> 220 ≤ 330 (56-84)	Fr	0.0008	0.0012	0.0015	0.0025	0.0030	0.0040	0.0050
			Feed (IPM)	1.7	1.7	1.6	1.8	1.6	1.7	1.8
		50	RPM	1528	1019	764	509	382	306	255
		> 330 ≤ 420 (40-60)	Fr	0.0005	0.0008	0.0010	0.0015	0.0020	0.0025	0.0030
			Feed (IPM)	0.8	0.8	0.8	0.8	0.8	0.8	0.8
S	TITANIUM ALLOYS (DIFFICULT) Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	200	RPM	6112	4075	3056	2037	1528	1222	1019
		≤ 280 (160-240)	Fr	0.0018	0.0027	0.0035	0.0055	0.0070	0.0090	0.0110
			Feed (IPM)	11.0	11.0	10.7	11.2	10.7	11.0	11.2
		160	RPM	4890	3260	2445	1630	1222	978	815
		> 280 ≤ 350 (128-192)	Fr	0.0015	0.0023	0.0030	0.0045	0.0060	0.0075	0.0090
			Feed (IPM)	7.3	7.5	7.3	7.3	7.3	7.3	7.3
		120	RPM	3667	2445	1834	1222	917	733	611
		> 350 ≤ 440 (96-144)	Fr	0.0013	0.0019	0.0025	0.0040	0.0050	0.0065	0.0080
			Feed (IPM)	4.8	4.6	4.6	4.9	4.6	4.8	4.9
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	770	RPM	23531	15687	11766	7844	5883	4706	3922
		≤ 80 (616-924)	Fr	0.0055	0.0083	0.0110	0.0165	0.0220	0.0275	0.0330
			Feed (IPM)	129.4	130.2	129.4	129.4	129.4	129.4	129.4
		660	RPM	20170	13446	10085	6723	5042	4034	3362
		> 80 (528-792)	Fr	0.0050	0.0075	0.0100	0.0150	0.0200	0.0250	0.0300
			Feed (IPM)	100.8	100.8	100.8	100.8	100.8	100.8	100.8
N	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	550	RPM	16808	11205	8404	5603	4202	3362	2801
		≤ 140 (440-660)	Fr	0.0020	0.0030	0.0040	0.0060	0.0080	0.0100	0.0120
			Feed (IPM)	33.6	33.6	33.6	33.6	33.6	33.6	33.6
		440	RPM	13446	8964	6723	4482	3362	2689	2241
		> 140 (352-528)	Fr	0.0020	0.0030	0.0040	0.0060	0.0080	0.0100	0.0120
			Feed (IPM)	26.9	26.9	26.9	26.9	26.9	26.9	26.9

rpm = sfm x 3.82 / D₁

ipm = (inch / revolution) x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)

High Performance Internal Coolant Drills				Diameter (D ₁) (mm)									
Series 140M 5D Metric	Hardness BRINELL	Vc (m/min)		3	6	8	10	12	14	16			
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536		134	RPM	14206	7103	5327	4262	3552	3044	2664		
		≤ 200	(107-161)	Fr	0.145	0.195	0.255	0.320	0.385	0.450	0.515		
				Feed (mm/min)	2060	1385	1358	1364	1367	1370	1372		
		> 200 ≤ 300	(93-139)	RPM	12298	6149	4612	3689	3074	2635	2306		
				Fr	0.125	0.170	0.225	0.280	0.340	0.395	0.450		
				Feed (mm/min)	1537	1045	1038	1033	1045	1041	1038		
		> 300 ≤ 420	(44-66)	RPM	5831	2915	2187	1749	1458	1249	1093		
				Fz	0.110	0.145	0.190	0.240	0.290	0.335	0.385		
				Feed (mm/min)	641	423	415	420	423	419	421		
		P	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100		101	RPM	10708	5354	4015	3212	2677	2295	2008
				≤ 270	(81-121)	Fz	0.110	0.145	0.190	0.240	0.290	0.335	0.385
						Feed (mm/min)	1178	776	763	771	776	769	773
> 270 ≤ 370	(58-88)			RPM	7739	3870	2902	2322	1935	1658	1451		
				Fr	0.090	0.120	0.160	0.200	0.240	0.280	0.320		
				Feed (mm/min)	697	464	464	464	464	464	464		
> 370 ≤ 450	(34-52)			RPM	4559	2279	1710	1368	1140	977	855		
				Fr	0.065	0.085	0.115	0.145	0.170	0.200	0.230		
				Feed (mm/min)	296	194	197	198	194	195	197		
P	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2				73	RPM	7739	3870	2902	2322	1935	1658	1451
				≤ 250	(58-88)	Fr	0.090	0.120	0.160	0.200	0.240	0.280	0.320
						Feed (mm/min)	697	464	464	464	464	464	464
		> 250 ≤ 330	(44-66)	RPM	5831	2915	2187	1749	1458	1249	1093		
				Fr	0.065	0.085	0.115	0.145	0.170	0.200	0.230		
				Feed (mm/min)	379	248	251	254	248	250	251		
		> 330 ≤ 450	(22-32)	RPM	2862	1431	1073	859	716	613	537		
				Fr	0.035	0.050	0.065	0.080	0.095	0.110	0.130		
				Feed (mm/min)	100	72	70	69	68	67	70		
		K	CAST IRONS Gray, Malleable, Ductile		134	RPM	14206	7103	5327	4262	3552	3044	2664
				≤ 200	(107-161)	Fr	0.180	0.240	0.320	0.400	0.485	0.560	0.640
						Feed (mm/min)	2557	1705	1705	1705	1723	1705	1705
> 200 ≤ 330	(68-102)			RPM	9011	4506	3379	2703	2253	1931	1690		
				Fr	0.165	0.215	0.290	0.360	0.435	0.505	0.575		
				Feed (mm/min)	1487	969	980	973	980	975	972		
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F		67	RPM	7103	3552	2664	2131	1776	1522	1332		
		< 250	(54-80)	Fr	0.090	0.120	0.160	0.200	0.240	0.280	0.320		
				Feed (mm/min)	639	426	426	426	426	426	426	426	
		> 250 ≤ 330	(40-60)	RPM	5301	2650	1988	1590	1325	1136	994		
				Fr	0.070	0.095	0.130	0.160	0.195	0.225	0.255		
				Feed (mm/min)	371	252	258	254	258	256	253		

continued on next page

Series 140M 5D Metric					Diameter (D ₁) (mm)							High Performance Internal Coolant Drills
					Hardness BRINELL	Vc (m/min)	3	6	8	10	12	14
M	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	> 270 ≤ 370	46	RPM	4877	2438	1829	1463	1219	1045	914	
			(37-55)	Fr	0.065	0.085	0.115	0.145	0.170	0.200	0.230	
				Feed (mm/min)	317	207	210	212	207	209	210	
		> 270 ≤ 370	37	RPM	3923	1961	1471	1177	981	841	735	
			(30-44)	Fr	0.055	0.070	0.095	0.120	0.145	0.170	0.190	
				Feed (mm/min)	132	137	140	141	142	143	140	
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoly 800, Monel 400, Rene, Waspaloy	≤ 220	30	RPM	3181	1590	1193	954	795	682	596	
			(24-36)	Fr	0.035	0.050	0.065	0.080	0.095	0.110	0.130	
				Feed (mm/min)	111	80	78	62	76	75	78	
		> 220 ≤ 330	21	RPM	2226	1113	835	668	557	477	417	
			(17-25)	Fr	0.030	0.035	0.050	0.065	0.070	0.090	0.105	
				Feed (mm/min)	67	39	42	43	39	43	44	
		> 330 ≤ 420	15	RPM	1590	795	596	477	398	341	298	
			(12-18)	Fr	0.020	0.025	0.030	0.040	0.050	0.055	0.065	
				Feed (mm/min)	32	20	18	19	20	19	19	
S	TITANIUM ALLOYS (DIFFICULT) Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 280	61	RPM	6467	3234	2425	1940	1617	1386	1213	
			(49-73)	Fr	0.065	0.085	0.115	0.145	0.170	0.200	0.230	
				Feed (mm/min)	420	275	279	281	275	277	279	
		> 280 ≤ 350	49	RPM	5195	2597	1948	1558	1299	1113	974	
			(39-59)	Fr	0.055	0.070	0.095	0.120	0.145	0.170	0.190	
				Feed (mm/min)	286	182	185	187	188	189	185	
		> 350 ≤ 440	37	RPM	3923	1961	1471	1177	981	841	735	
			(30-44)	Fr	0.045	0.060	0.085	0.105	0.120	0.145	0.165	
				Feed (mm/min)	177	118	125	124	118	122	121	
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80	235	RPM	24914	12457	9343	7474	6228	5339	4671	
			(188-282)	Fr	0.200	0.265	0.355	0.440	0.530	0.620	0.705	
				Feed (mm/min)	4983	3301	3317	3289	3301	3310	3293	
		> 80	201	RPM	21309	10655	7991	6393	5327	4566	3996	
			(161-241)	Fr	0.180	0.240	0.320	0.400	0.485	0.560	0.640	
				Feed (mm/min)	3836	2557	2557	2557	2584	2557	2557	
N	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 140	168	RPM	17811	8905	6679	5343	4453	3817	3340	
			(134-202)	Fr	0.070	0.095	0.130	0.160	0.195	0.225	0.255	
				Feed (mm/min)	1247	846	868	855	868	859	852	
		> 140	134	RPM	14206	7103	5327	4262	3552	3044	2664	
			(107-161)	Fr	0.070	0.095	0.130	0.160	0.195	0.225	0.255	
				Feed (mm/min)	994	675	693	682	693	685	679	

rpm = (1000 x m/min) / (3.14 x D₁)

mm / min = (mm / revolution) x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)

Series 140 8D Fractional				Diameter (D ₁) (inch)							
Hardness BRINELL	Vc (SFM)										
		1/8	3/16	1/4	3/8	1/2	5/8	3/4			
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	420	RPM	12835	8557	6418	4278	3209	2567	2139	
		≤ 200	(336-504)	Fr	0.0035	0.0053	0.0070	0.0105	0.0140	0.0175	0.0210
			Feed (IPM)	44.9	45.4	44.9	44.9	44.9	44.9	44.9	
		370	RPM	11307	7538	5654	3769	2827	2261	1885	
			Fr	0.0030	0.0045	0.0060	0.0090	0.0120	0.0150	0.0180	
				Feed (IPM)	33.9	33.9	33.9	33.9	33.9	33.9	33.9
		> 200 ≤ 300	(296-444)	RPM	5195	3463	2598	1732	1299	1039	866
			Fz	0.0025	0.0038	0.0050	0.0075	0.0100	0.0125	0.0150	
				Feed (IPM)	13.0	13.2	13.0	13.0	13.0	13.0	13.0
P	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	320	RPM	9779	6519	4890	3260	2445	1956	1630	
		≤ 270	(256-384)	Fz	0.0025	0.0038	0.0050	0.0075	0.0100	0.0125	0.0150
			Feed (IPM)	24.4	24.8	24.4	24.4	24.4	24.4	24.4	
		230	RPM	7029	4686	3514	2343	1757	1406	1171	
			Fr	0.0020	0.0030	0.0040	0.0060	0.0080	0.0100	0.0125	
				Feed (IPM)	70288.0	14.1	14.1	14.1	14.1	14.1	14.6
		> 270 ≤ 370	(184-276)	RPM	3973	2649	1986	1324	993	795	662
			Fr	0.0015	0.0023	0.0030	0.0045	0.0060	0.0075	0.0090	
				Feed (IPM)	156.0	6.1	6.0	6.0	6.0	6.0	6.0
P	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	230	RPM	7029	4686	3514	2343	1757	1406	1171	
		≤ 250	(184-276)	Fr	0.0020	0.0030	0.0040	0.0060	0.0080	0.0100	0.0125
			Feed (IPM)	240.0	14.1	14.1	14.1	14.1	14.1	14.6	
		160	RPM	4890	3260	2445	1630	1222	978	815	
			Fr	0.0015	0.0023	0.0030	0.0045	0.0060	0.0075	0.0090	
				Feed (IPM)	342.0	7.5	7.3	7.3	7.3	7.3	7.3
		> 250 ≤ 330	(128-192)	RPM	2445	1630	1222	815	611	489	407
			Fr	0.0008	0.0013	0.0015	0.0025	0.0030	0.0040	0.0045	
				Feed (IPM)	2.0	2.1	1.8	2.0	1.8	2.0	1.8
K	CAST IRONS Gray, Malleable, Ductile	420	RPM	12835	8557	6418	4278	3209	2567	2139	
		≤ 200	(336-504)	Fr	0.0045	0.0068	0.0090	0.0135	0.0180	0.0225	0.0270
			Feed (IPM)	57.8	58.2	57.8	57.8	57.8	57.8	57.8	
		270	RPM	8251	5501	4126	2750	2063	1650	1375	
			Fr	0.0040	0.0060	0.0080	0.0120	0.0160	0.0200	0.0240	
				Feed (IPM)	33.0	33.0	33.0	33.0	33.0	33.0	33.0
		> 200 ≤ 330	(216-324)	RPM	6418	4278	3209	2139	1604	1284	1070
			Fr	0.0020	0.0030	0.0040	0.0060	0.0080	0.0100	0.0120	
				Feed (IPM)	12.8	12.8	12.8	12.8	12.8	12.8	12.8
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	160	RPM	4890	3260	2445	1630	1222	978	815	
		> 250 ≤ 330	(128-192)	Fr	0.0018	0.0028	0.0035	0.0055	0.0070	0.0090	0.0105
			Feed (IPM)	8.8	9.1	8.6	9.0	8.6	8.8	8.6	

continued on next page

Series 140 8D Fractional	Hardness BRINELL	Vc (SFM)		Diameter (D ₁) (inch)						
				1/8	3/16	1/4	3/8	1/2	5/8	3/4
M	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	130	RPM	3973	2649	1986	1324	993	795	662
		> 270 (104-156)	Fr	0.0015	0.0023	0.0030	0.0045	0.0060	0.0075	0.0090
			Feed (IPM)	6.0	6.1	6.0	6.0	6.0	6.0	6.0
		100	RPM	3056	2037	1528	1019	764	611	509
		> 270 ≤ 370 (80-120)	Fr	0.0015	0.0023	0.0030	0.0045	0.0060	0.0075	0.0090
			Feed (IPM)	4.6	4.7	4.6	4.6	4.6	4.6	4.6
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoly 800, Monel 400, Rene, Waspaloy	80	RPM	2445	1630	1222	815	611	489	407
		≤ 220 (64-96)	Fr	0.0008	0.0013	0.0015	0.0025	0.0030	0.0040	0.0045
			Feed (IPM)	2.0	2.1	1.8	2.0	1.8	2.0	1.8
		50	RPM	1528	1019	764	509	382	306	255
		> 220 ≤ 330 (40-60)	Fr	0.0005	0.0008	0.0010	0.0015	0.0020	0.0025	0.0030
			Feed (IPM)	0.8	0.8	0.8	0.8	0.8	0.8	0.8
		35	RPM	1070	713	535	357	267	214	178
		> 330 ≤ 420 (28-42)	Fr	0.0005	0.0008	0.0010	0.0015	0.0020	0.0025	0.0030
			Feed (IPM)	0.5	0.6	0.5	0.5	0.5	0.5	0.5
		180	RPM	5501	3667	2750	1834	1375	1100	917
		≤ 280 (144-216)	Fr	0.0015	0.0023	0.0030	0.0045	0.0060	0.0075	0.0090
			Feed (IPM)	8.3	8.4	8.3	8.3	8.3	8.3	8.3
S	TITANIUM ALLOYS (DIFFICULT) Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	140	RPM	4278	2852	2139	1426	1070	856	713
		> 280 ≤ 350 (112-168)	Fr	0.0013	0.0020	0.0025	0.0040	0.0050	0.0065	0.0080
			Feed (IPM)	5.6	5.7	5.3	5.7	5.3	5.6	5.7
		110	RPM	3362	2241	1681	1121	840	672	560
		> 350 ≤ 440 (88-132)	Fr	0.0013	0.0020	0.0025	0.0040	0.0050	0.0065	0.0080
			Feed (IPM)	4.4	4.5	4.2	4.5	4.2	4.4	4.5
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	730	RPM	22309	14873	11154	7436	5577	4462	3718
		≤ 80 (584-876)	Fr	0.0050	0.0075	0.0100	0.0150	0.0200	0.0250	0.0300
			Feed (IPM)	111.5	111.5	111.5	111.5	111.5	111.5	111.5
		630	RPM	19253	12835	9626	6418	4813	3851	3209
		> 80 (504-756)	Fr	0.0045	0.0068	0.0090	0.0135	0.0180	0.0225	0.0270
			Feed (IPM)	86.6	87.3	86.6	86.6	86.6	86.6	86.6
N	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	520	RPM	15891	10594	7946	5297	3973	3178	2649
		≤ 140 (416-624)	Fr	0.0018	0.0028	0.0035	0.0055	0.0070	0.0090	0.0105
			Feed (IPM)	28.6	29.7	27.8	29.1	27.8	28.6	27.8
		420	RPM	12835	8557	6418	4278	3209	2567	2139
		> 140 (336-504)	Fr	0.0018	0.0028	0.0035	0.0055	0.0070	0.0090	0.0105
			Feed (IPM)	23.1	24.0	22.5	23.5	22.5	23.1	22.5

rpm = sfm x 3.82 / D₁

ipm = (inch / revolution) x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)

High Performance Internal Coolant Drills				Diameter (D ₁) (mm)							
Series 140M 8D Metric	Hardness BRINELL	Vc (m/min)		3	6	8	10	12	14	16	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	128	RPM	13570	6785	5089	4071	3393	2908	2544	
		≤ 200	(100-170)	Fr	0.125	0.170	0.225	0.280	0.340	0.395	0.450
				Feed (mm/min)	1696	1153	1145	1140	1153	1149	1145
		113	RPM	11980	5990	4492	3594	2995	2567	31	
		> 200 ≤ 300	(90-136)	Fr	0.110	0.145	0.190	0.240	0.290	0.335	0.385
				Feed (mm/min)	1318	869	854	863	869	860	12
		52	RPM	5513	2756	2067	1654	1378	1181	1034	
		> 300 ≤ 420	(42-62)	Fz	0.090	0.120	0.160	0.200	0.240	0.280	0.320
				Feed (mm/min)	496	331	331	331	331	331	331
P	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	98	RPM	10390	5195	3896	3117	2597	2226	1948	
		≤ 270	(78-118)	Fz	0.090	0.120	0.160	0.200	0.240	0.280	0.320
				Feed (mm/min)	935	623	623	2494	623	2494	623
		70	RPM	7421	3711	2783	2226	1855	1590	1391	
		> 270 ≤ 370	(56-84)	Fr	0.070	0.095	0.130	0.160	0.195	0.225	0.255
				Feed (mm/min)	519	353	362	356	362	358	355
		40	RPM	4241	2120	1590	1272	1060	909	795	
		> 370 ≤ 450	(32-48)	Fr	0.055	0.070	0.095	0.120	0.145	0.170	0.190
				Feed (mm/min)	233	148	151	153	154	154	151
P	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	70	RPM	7421	3711	2783	2226	1855	1590	1391	
		≤ 250	(56-84)	Fr	0.070	0.095	0.130	0.160	0.195	0.225	0.255
				Feed (mm/min)	519	353	362	356	362	358	355
		49	RPM	5195	2597	1948	1558	1299	1113	974	
		> 250 ≤ 330	(39-59)	Fr	0.055	0.070	0.095	0.120	0.145	0.170	0.190
				Feed (mm/min)	286	182	185	187	188	189	185
		24	RPM	2544	1272	954	763	636	545	477	
		> 330 ≤ 450	(19-29)	Fr	0.030	0.035	0.050	0.065	0.070	0.090	0.105
				Feed (mm/min)	76	45	48	50	45	49	50
K	CAST IRONS Gray, Malleable, Ductile	128	RPM	13570	6785	5089	4071	3393	2908	2544	
		≤ 200	(102-154)	Fr	0.165	0.215	0.290	0.360	0.435	0.505	0.575
				Feed (mm/min)	2239	1459	1476	1466	1476	1468	1463
		82	RPM	8693	4347	3260	2608	2173	1863	1630	
		> 200 ≤ 330	(66-98)	Fr	0.145	0.195	0.255	0.320	0.385	0.450	0.515
				Feed (mm/min)	1261	848	831	835	2510	838	2518
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	64	RPM	6785	3393	2544	2036	1696	1454	1272	
		< 250	(51-77)	Fr	0.070	0.095	0.130	0.160	0.195	0.225	0.255
				Feed (mm/min)	475	322	331	326	331	327	324
		49	RPM	5195	2597	1948	1558	1299	1113	974	
		> 250 ≤ 330	(39-59)	Fr	0.065	0.085	0.115	0.145	0.170	0.200	0.230
				Feed (mm/min)	338	221	224	226	221	223	224

continued on next page

				High Performance Internal Coolant Drills							
Series 140M 8D Metric	Hardness BRINELL	Vc (m/min)		Diameter (D ₁) (mm)							
				3	6	8	10	12	14	16	
M	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	40	RPM	4241	2120	1590	1272	1060	909	795	
		> 270 ≤ 370 (32-48)	Fr	0.065	0.085	0.115	0.145	0.170	0.200	0.230	
			Feed (mm/min)	276	180	183	184	180	182	183	
		30	RPM	3181	1590	1193	954	795	682	596	
		> 270 ≤ 370 (24-36)	Fr	0.055	0.070	0.095	0.120	0.145	0.170	0.190	
			Feed (mm/min)	175	111	113	114	115	116	113	
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoly 800, Monel 400, Rene, Waspaloy	24	RPM	2544	1272	954	763	636	545	477	
		≤ 220 (19-29)	Fr	0.030	0.035	0.050	0.065	0.070	0.090	0.105	
			Feed (mm/min)	76	45	132	9160	45	49	50	
		15	RPM	1590	795	596	477	398	341	298	
		> 220 ≤ 330 (12-18)	Fr	0.020	0.025	0.030	0.040	0.050	0.055	0.065	
			Feed (mm/min)	32	20	210	19	20	19	19	
		11	RPM	1166	583	437	350	292	250	219	
		> 330 ≤ 420 (9-13)	Fr	0.020	0.025	0.030	0.040	0.050	0.055	0.065	
			Feed (mm/min)	23	15	13	14	15	14	14	
S	TITANIUM ALLOYS (DIFFICULT) Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	55	RPM	5831	2915	2187	1749	1458	1249	1093	
		≤ 280 (44-66)	Fr	0.055	0.070	0.095	0.120	0.145	0.170	0.190	
			Feed (mm/min)	321	204	208	210	211	212	208	
		48	RPM	5089	2544	1908	1527	1272	1090	954	
		> 280 ≤ 350 (38-58)	Fr	0.045	0.060	0.085	0.105	0.120	0.145	0.165	
			Feed (mm/min)	229	153	162	160	153	158	157	
		34	RPM	3605	1802	1352	1081	901	772	676	
		> 350 ≤ 440 (27-41)	Fr	0.035	0.050	0.065	0.080	0.095	0.110	0.130	
			Feed (mm/min)	126	90	88	87	86	85	88	
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	223	RPM	23642	11821	8866	7093	5910	5066	4433	
		≤ 80 (178-268)	Fr	0.180	0.240	0.320	0.400	0.485	0.560	0.640	
			Feed (mm/min)	4256	2837	2837	2837	2867	2837	2837	
		192	RPM	20355	10178	7633	6107	5089	4362	3817	
		> 80 (154-230)	Fr	0.165	0.215	0.290	0.360	0.435	0.505	0.575	
			Feed (mm/min)	3359	2188	2214	2198	2214	2203	2195	
N	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	158	RPM	16751	8375	6281	5025	4188	3589	3141	
		≤ 140 (126-190)	Fr	0.065	0.085	0.115	0.145	0.170	0.200	0.230	
			Feed (mm/min)	1089	712	722	729	712	718	722	
		128	RPM	13570	6785	5089	4071	3393	2908	2544	
		> 140 (102-154)	Fr	0.065	0.085	0.115	0.145	0.170	0.200	0.230	
			Feed (mm/min)	882	577	585	590	577	582	585	

rpm = (1000 x m/min) / (3.14 x D₁)

mm / min = (mm / revolution) x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)

Series 120 Fractional	Vc (SFM)		Diameter (D ₁) (inch)						
			1/8	3/16	1/4	5/16	3/8	7/16	1/2
CFRP, AFRP (Carbon Fiber, Aramid Fiber)	320	RPM	9779	6519	4890	3912	3260	2794	2445
	(256-384)	Fr	0.0006	0.0008	0.0012	0.0015	0.0018	0.0021	0.0024
		Feed (IPM)	5.9	5.2	5.9	5.9	5.9	5.9	5.9
GFRP (Fiberglass)	240	RPM	7334	4890	3667	2934	2445	2096	1834
	(192-288)	Fr	0.0006	0.0008	0.0012	0.0015	0.0018	0.0021	0.0024
		Feed (IPM)	4.4	3.9	4.4	4.4	4.4	4.4	4.4
CARBON, GRAPHITE	400	RPM	12224	8149	6112	4890	4075	3493	3056
	(320-480)	Fr	0.0008	0.0012	0.0016	0.0020	0.0024	0.0028	0.0032
		Feed (IPM)	9.8	9.8	9.8	9.8	9.8	9.8	9.8

rpm = sfm x 3.82 / D₁

ipm = (inch / revolution) x rpm

adjust speed and / or feed based on resin type and / or fiber structure

refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)

Series 120 Metric	Vc (m/min)		Diameter (D ₁) (mm)						
			2.5	3	4	6	8	10	12
CFRP, AFRP (Carbon Fiber, Aramid Fiber)	100	RPM	12722	10602	7951	5301	3976	3181	2650
	(80-120)	Fr	0.015	0.018	0.020	0.030	0.038	0.046	0.053
		Feed (mm/min)	191	191	159	159	151	146	140
GFRP (Fiberglass)	75	RPM	9542	7951	5963	3976	2982	2385	1988
	(65-90)	Fr	0.015	0.018	0.020	0.030	0.038	0.046	0.053
		Feed (mm/min)	143	143	119	119	113	110	105
CARBON, GRAPHITE	120	RPM	15266	12722	9542	6361	4771	3817	3181
	(96-144)	Fr	0.020	0.024	0.030	0.041	0.051	0.061	0.071
		Feed (mm/min)	305	305	286	261	243	233	226

rpm = (1000 x m/min) / (3.14 x D₁)




mm / min = (mm / revolution) x rpm

adjust speed and / or feed based on resin type and / or fiber structure


refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)

Drilling Operations Coolant Recommendations

- Coolant works to mobilize chips away from the cut zone, reduce the heat created during the cutting process and minimize friction.
- It is important to optimize the coolant pressure and position in order to gain the full benefits coolant offers the cutting process.
- Proper coolant application promotes greater operating parameters, greater material removal rates, improved surface finishes, predictable tool life, reduced power consumption and reduced cycle times.
- Pressure is important, but more importantly is consistency of the pressure and application onto the tool; intermittent cooling of carbide leads to thermal stressing of the material and the formation of "microcracks."
- Proper cleanliness and filtration of coolants is important in order for the coolant to maintain its beneficial properties, and also to avoid a reduction in coolant pressure or the possibility of clogging the coolant channels in coolant through drills.

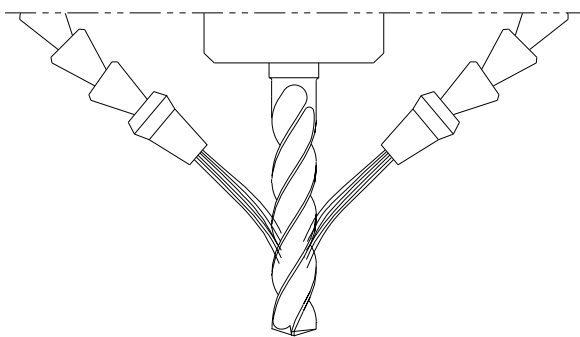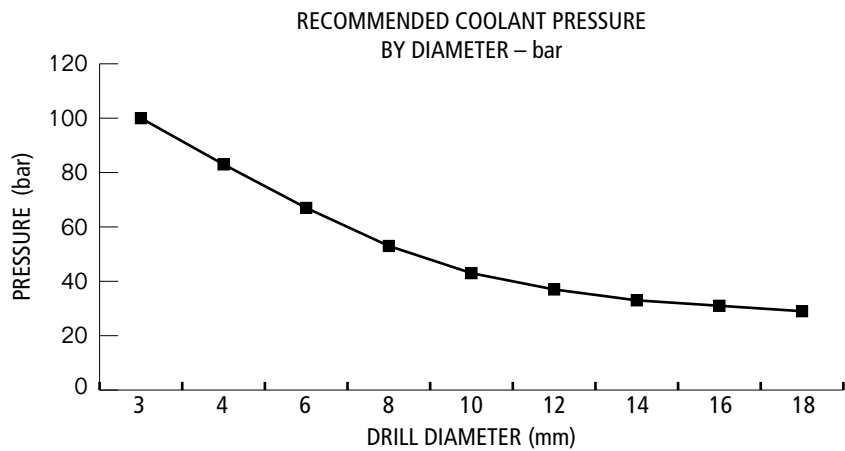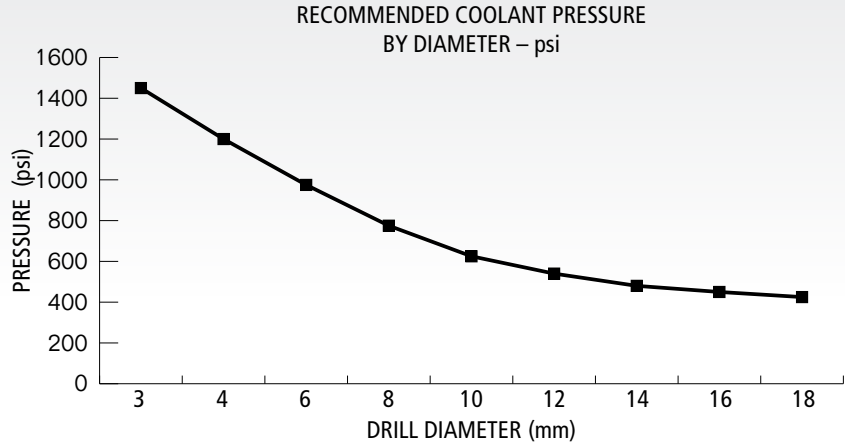

LARGE TIP – LOW VELOCITY
NO COVERAGE AT MAXIMUM DEPTH

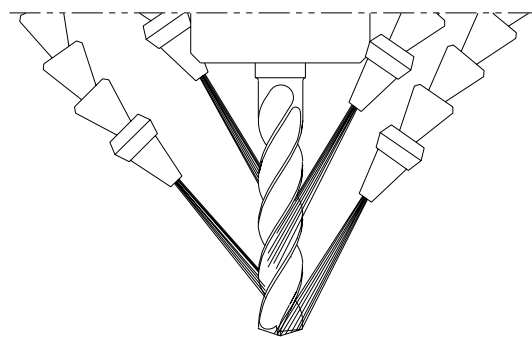




SMALL TIP – HIGH VELOCITY
COMPLETE COVERAGE

- Reducing the nozzle size helps maximize the cooling benefits of the unique double margin design on the Hi-PerCarb drill by increasing velocity. Aim the nozzles in line with the secondary flute located between the two margins as well as the flute for best results.


Operaciones de taladrado

Refrigerantes recomendados

- El líquido refrigerante actúa movilizandando las virutas fuera de la zona de corte, disminuyendo el calor generado durante el proceso de corte y minimizando la fricción.
- Es importante optimizar la presión del refrigerante y la posición para poder obtener todos los beneficios del refrigerante durante el proceso de corte.
- Una aplicación apropiada del refrigerante fomenta mayores parámetros de operación, mayores índices de eliminación de material, acabados de superficie mejorados, una duración de la herramienta más predecible, bajo consumo de energía y un tiempo de ciclo reducido.
- La presión es importante pero lo es más la estabilidad de la presión y la aplicación en la herramienta; la refrigeración intermitente del carburo conlleva un estrés térmico del material y la formación de "microfisuras".
- La limpieza adecuada y la filtración de refrigerantes es importante para que el mismo mantenga sus propiedades beneficiosas, y también para evitar una reducción en la presión o la posibilidad de obstruir los canales del refrigerante del taladro.

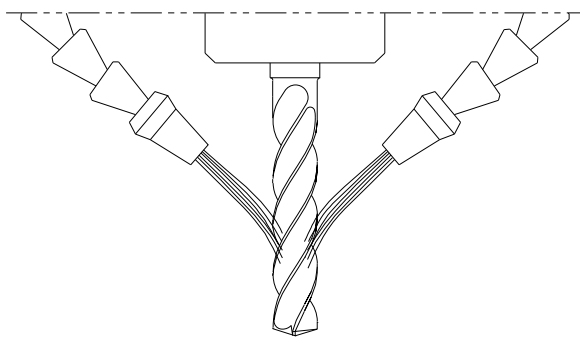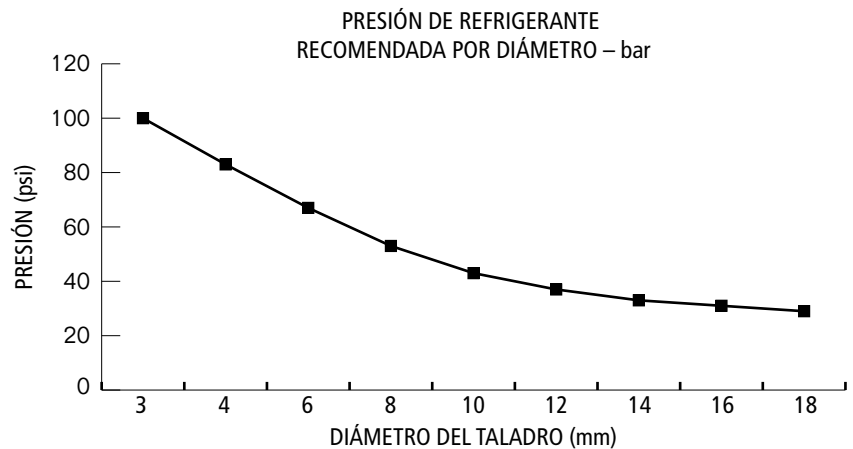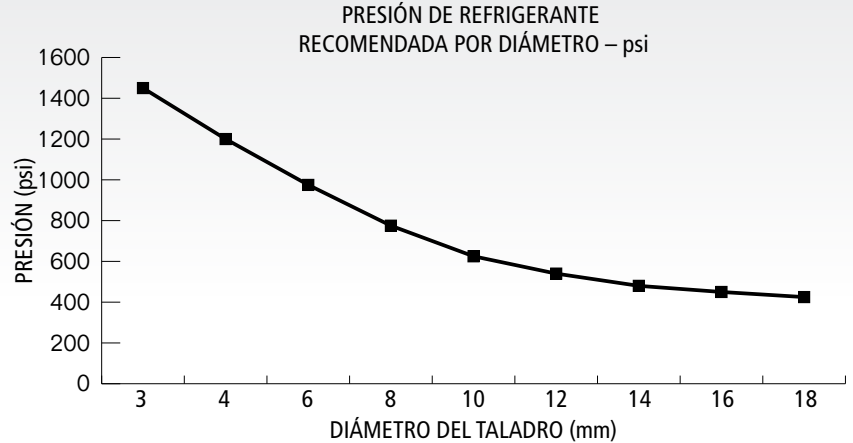

PUNTA GRANDE – BAJA VELOCIDAD
SIN ALCANCE A PROFUNDIDAD MÁXIMA

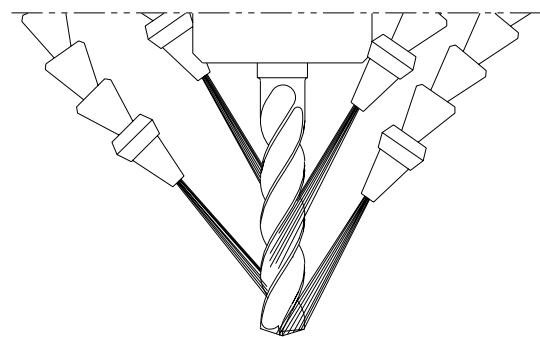




PUNTA PEQUEÑA – ALTA VELOCIDAD
COMPLETO ALCANCE

- Reducir el tamaño de la boquilla ayuda a maximizar los beneficios de refrigeración del exclusivo diseño de doble margen del taladro Hi-PerCarb aumentando la velocidad. Coloque las boquillas en línea con el segundo filo que se encuentra entre los dos márgenes y también el filo para obtener mejores resultados.


Opérations de forage

Recommandations en matière de refroidissement

- Le réfrigérant sert à éloigner les copeaux de la zone de coupe, à réduire la chaleur dégagée durant la coupe et à minimiser la friction.
- Il est important d'optimiser la pression et la position du réfrigérant pour en retirer les bénéfices maximums durant la coupe.
- L'application adéquate de réfrigérant se traduit par des paramètres opératoires supérieurs, des taux d'élimination supérieurs des matériaux, de plus belles finitions des surfaces, une durée de vie des outils prévisible, moins de consommation d'énergie et des temps de cycle réduits.
- La pression est importante, mais une pression régulière et l'application sur l'outil sont des facteurs encore plus importants ; le refroidissement intermittent du carbure se traduit par des contraintes thermiques pour le matériau et la formation de microfissures.
- La propreté et le filtrage adéquats des réfrigérants sont importants pour qu'ils conservent leur propriétés, mais aussi pour éviter la réduction de pression du réfrigérant ou le risque d'obturation des conduits à réfrigérant dans les perceuses à réfrigérant intégré.

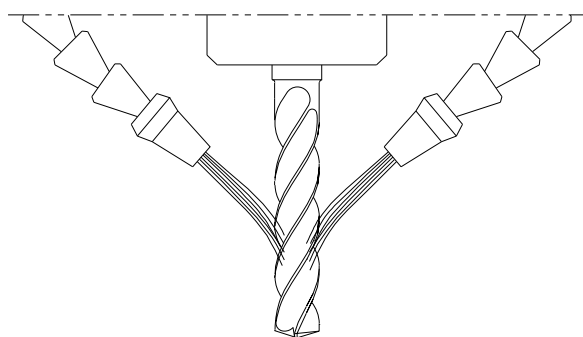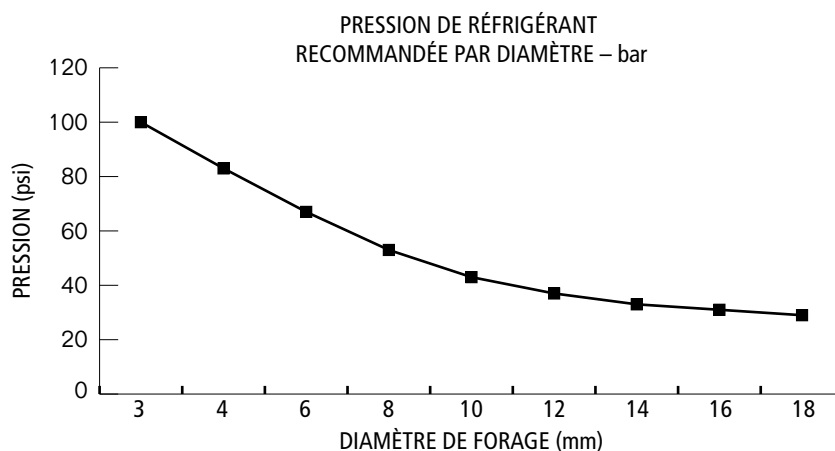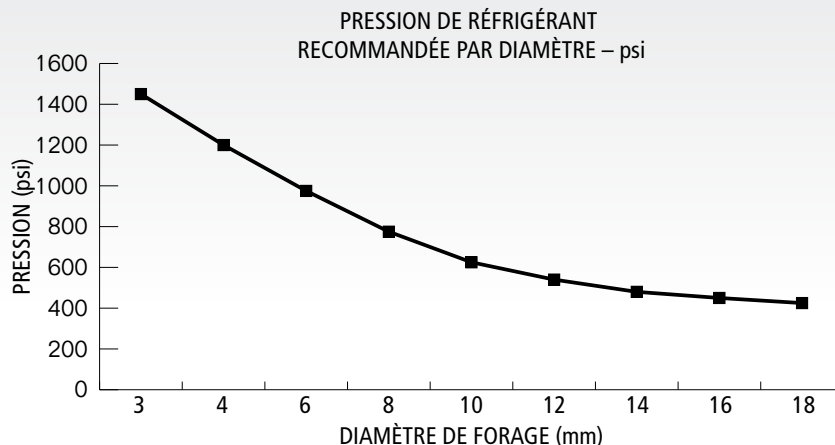


POINTE LARGE – BASSE VITESSE
PAS DE COUVERTURE À LA PROFONDEUR MAXIMUM

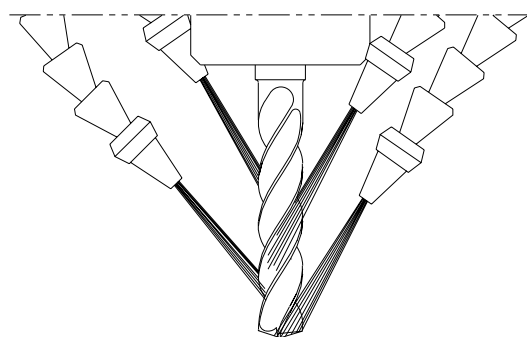

POINTE FINE – GRANDE VITESSE
COUVERTURE COMPLÈTE

- La réduction de la taille de l'embout permet de maximiser les bienfaits du refroidissement du concept à double listel original de la perceuse Hi-PerCarb en augmentant la vitesse. Pour les meilleurs résultats, orientez les embouts dans l'axe de la goujure secondaire située entre les deux listels, de même que la goujure primaire.

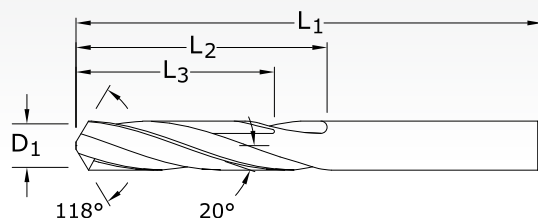**TOLERANCES (inch)** $D_1 = +0.0000/-0.0005$ **TOLERANCES (mm)** $D_1 = +0.0000/-0.0127$ **101**

FRACTIONAL & METRIC SERIES

TECH INFO 214-217

CUTTING DIAMETER D_1	DECIMAL EQUIV.	OVERALL LENGTH L_1	FLUTE LENGTH L_2	CLEARED LENGTH L_3	EDP NO.	
					UNCOATED	Ti-NAMITE-A (AlTiN)
#80	0.0135	3/4	3/16	5/32	51080	57076
#79	0.0145	3/4	3/16	5/32	51079	57077
1/64	0.0156	3/4	3/16	5/32	51101	57078
#78	0.0160	3/4	3/16	5/32	51078	57079
#77	0.0180	3/4	3/16	5/32	51077	57080
#76	0.0200	7/8	1/4	13/64	51076	57081
#75	0.0210	7/8	1/4	13/64	51075	57082
#74	0.0225	7/8	1/4	13/64	51074	57083
#73	0.0240	7/8	1/4	13/64	51073	57084
#72	0.0250	1	5/16	1/4	51072	57085
#71	0.0260	1	5/16	1/4	51071	57086
0,7 mm	0.0276	28,0	9,0	7,0	61001	68268
#70	0.0280	1-1/4	1/2	13/32	51070	57087
#69	0.0292	1-1/4	1/2	13/32	51069	57088
#68	0.0310	1-1/4	1/2	13/32	51068	57089
1/32	0.0312	1-1/4	1/2	13/32	51102	57090
0,8 mm	0.0315	30,0	10,0	8,0	61003	68269
#67	0.0320	1-1/4	1/2	13/32	51067	57091
#66	0.0330	1-1/4	1/2	13/32	51066	57092
#65	0.0350	1-3/8	5/8	1/2	51065	57093
0,9 mm	0.0354	32,0	11,0	8,0	61005	68270
#64	0.0360	1-3/8	5/8	1/2	51064	57094
#63	0.0370	1-3/8	5/8	1/2	51063	57095
#62	0.0380	1-3/8	5/8	1/2	51062	57096
#61	0.0390	1-3/8	5/8	1/2	51061	57097
1,0 mm	0.0394	34,0	12,0	9,0	61007	68271
#60	0.0400	1-1/2	3/4	39/64	51060	57098
#59	0.0410	1-1/2	3/4	39/64	51059	57099
#58	0.0420	1-1/2	3/4	39/64	51058	57100
#57	0.0430	1-1/2	3/4	39/64	51057	57101
1,1 mm	0.0433	36,0	14,0	11,0	61052	68294
#56	0.0465	1-1/2	3/4	39/64	51056	57102
3/64	0.0469	1-1/2	3/4	39/64	51103	57103
1,2 mm	0.0472	38,0	16,0	12,0	61053	68295
1,3 mm	0.0512	38,0	16,0	12,0	61054	68296
#55	0.0520	1-1/2	3/4	39/64	51055	57104
#54	0.0550	1-1/2	3/4	39/64	51054	57105
1,4 mm	0.0551	40,0	18,0	14,0	61055	68297
1,5 mm	0.0591	40,0	18,0	14,0	61009	68272

continued on next page


STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS
TITANIUM
HARDENED STEELS



101

FRACTIONAL & METRIC SERIES

TECH INFO 214-217

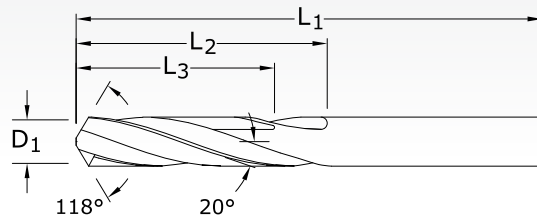

TOLERANCES (inch)

 $D_1 = +0.0000/-0.0005$

TOLERANCES (mm)

 $D_1 = +0.0000/-0.0127$

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS
TITANIUM
NON-FERROUS
PLASTICS/COMPOSITES

CUTTING DIAMETER D_1	DECIMAL EQUIV.	OVERALL LENGTH L_1	FLUTE LENGTH L_2	CLEARED LENGTH L_3	EDP NO.	
					UNCOATED	Ti-NAMITE-A (AlTiN)
#53	0.0595	1-1/2	3/4	39/64	51053	57106
*1/16	0.0625	1-1/2	3/4	39/64	51104	57107
1,6 mm	0.0630	43,0	20,0	16,0	61056	68298
#52	0.0635	1-1/2	3/4	39/64	51052	57108
1,7 mm	0.0669	43,0	20,0	17,0	61057	68299
#51	0.0670	1-1/2	3/4	39/64	51051	57109
#50	0.0700	1-3/4	7/8	45/64	51050	57110
1,8 mm	0.0709	46,0	22,0	17,0	61058	68300
#49	0.0730	1-3/4	7/8	45/64	51049	57111
1,9 mm	0.0748	46,0	22,0	17,0	61059	68301
#48	0.0760	1-3/4	7/8	45/64	51048	57112
5/64	0.0781	1-3/4	7/8	45/64	51105	57113
#47	0.0785	1-3/4	7/8	45/64	51047	57114
2,0 mm	0.0787	49,0	24,0	19,0	61011	68273
#46	0.0810	1-3/4	7/8	45/64	51046	57115
#45	0.0820	1-3/4	7/8	45/64	51045	57116
2,1 mm	0.0827	49,0	24,0	19,0	61060	68302
#44	0.0860	2	1	51/64	51044	57117
2,2 mm	0.0866	53,0	27,0	21,0	61061	68303
#43	0.0890	2	1	51/64	51043	57118
2,3 mm	0.0906	53,0	27,0	21,0	61062	68304
#42	0.0935	2	1	51/64	51042	57119
3/32 mm	0.0938	2	1	51/64	51106	57120
2,4 mm	0.0945	57,0	30,0	24,0	61063	68305
#41	0.0960	2	1	51/64	51041	57121
#40	0.0980	2	1	51/64	51040	57122
2,5 mm	0.0984	57,0	30,0	24,0	61013	68274
#39	0.0995	2-1/4	1-1/4	1	51039	57123
#38	0.1015	2-1/4	1-1/4	1	51038	57124
2,6 mm	0.1024	57,0	30,0	24,0	61064	68306
#37	0.1040	2-1/4	1-1/4	1	51037	57125
2,7 mm	0.1063	61,0	33,0	26,0	61065	68307
#36	0.1065	2-1/4	1-1/4	1	51036	57126
7/64	0.1094	2-1/4	1-1/4	1	51107	57127
#35	0.1100	2-1/4	1-1/4	1	51035	57128
2,8 mm	0.1102	61,0	33,0	26,0	61066	68308
#34	0.1110	2-1/4	1-1/4	1	51034	57129
#33	0.1130	2-1/4	1-1/4	1	51033	57130
2,9 mm	0.1142	61,0	33,0	26,0	61067	68309

continued on next page





101

FRACTIONAL & METRIC SERIES

CONTINUED

CUTTING DIAMETER D ₁	DECIMAL EQUIV.	OVERALL LENGTH L ₁	FLUTE LENGTH L ₂	CLEARED LENGTH L ₃	EDP NO.	
					UNCOATED	Ti-NAMITE-A (AlTiN)
#32	0.1160	2-1/4	1-1/4	1	51032	57131
3,0 mm	0.1181	61,0	33,0	26,0	61015	68275
#31	0.1200	2-1/4	1-1/4	1	51031	57132
3,1 mm	0.1220	65,0	36,0	28,0	61068	68310
*1/8	0.1250	2-1/4	1-1/4	1	51108	57133
3,2 mm	0.1260	65,0	36,0	28,0	61069	68311
#30	0.1285	2-1/4	1-1/4	1	51030	57134
3,3 mm	0.1299	65,0	36,0	28,0	61070	68312
3,4 mm	0.1339	70,0	39,0	31,0	61071	68313
#29	0.1360	2-1/2	1-3/8	1-7/64	51029	57135
3,5 mm	0.1378	70,0	39,0	31,0	61017	68276
#28	0.1405	2-1/2	1-3/8	1-7/64	51028	57136
9/64	0.1406	2-1/2	1-3/8	1-7/64	51109	57137
3,6 mm	0.1417	70,0	39,0	31,0	61072	68314
#27	0.1440	2-1/2	1-3/8	1-7/64	51027	57138
3,7 mm	0.1457	70,0	39,0	31,0	61073	68315
#26	0.1470	2-1/2	1-3/8	1-7/64	51026	57139
#25	0.1495	2-1/2	1-3/8	1-7/64	51025	57140
3,8 mm	0.1496	75,0	43,0	34,0	61074	68316
#24	0.1520	2-1/2	1-3/8	1-7/64	51024	57141
3,9 mm	0.1535	75,0	43,0	34,0	61075	68317
#23	0.1540	2-1/2	1-3/8	1-7/64	51023	57142
5/32	0.1562	2-1/2	1-3/8	1-7/64	51110	57143
#22	0.1570	2-1/2	1-3/8	1-7/64	51022	57144
4,0 mm	0.1575	75,0	43,0	34,0	61019	68277
#21	0.1590	2-1/2	1-3/8	1-7/64	51021	57145
#20	0.1610	2-1/2	1-3/8	1-7/64	51020	57146
4,1 mm	0.1614	75,0	43,0	34,0	61076	68318
4,2 mm	0.1654	75,0	43,0	34,0	61077	68319
#19	0.1660	2-1/2	1-5/8	1-19/64	51019	57147
4,3 mm	0.1693	80,0	47,0	37,0	61078	68320
#18	0.1695	2-3/4	1-5/8	1-19/64	51018	57148
11/64	0.1719	2-3/4	1-5/8	1-19/64	51111	57149
#17	0.1730	2-3/4	1-5/8	1-19/64	51017	57150
4,4 mm	0.1732	80,0	47,0	37,0	61079	68321
#16	0.1770	2-3/4	1-5/8	1-19/64	51016	57151
4,5 mm	0.1772	80,0	47,0	37,0	61021	68278
#15	0.1800	2-3/4	1-5/8	1-19/64	51015	57152
4,6 mm	0.1811	80,0	47,0	37,0	61080	68322
#14	0.1820	2-3/4	1-5/8	1-19/64	51014	57153
4,7 mm	0.1850	80,0	47,0	37,0	61081	68323
#13	0.1850	2-3/4	1-5/8	1-19/64	51013	57154
*3/16	0.1875	2-3/4	1-5/8	1-19/64	51112	57155
4,8 mm	0.1890	86,0	52,0	41,0	61082	68324


continued on next page



101

FRACTIONAL & METRIC SERIES

TECH INFO 214-217

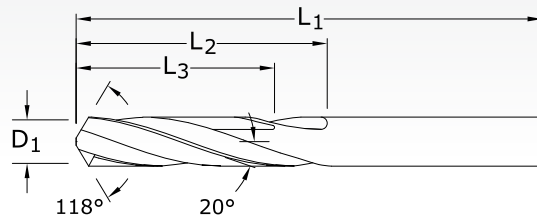

TOLERANCES (inch)

 $D_1 = +.0000/-0.0005$

TOLERANCES (mm)

 $D_1 = +0,0000/-0,0127$

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS
TITANIUM
NON-FERROUS
PLASTICS/COMPOSITES

CUTTING DIAMETER D_1	DECIMAL EQUIV.	OVERALL LENGTH L_1	FLUTE LENGTH L_2	CLEARED LENGTH L_3	EDP NO.	
					UNCOATED	Ti-NAMITE-A (AlTiN)
#12	0.1890	2-3-4	1-5/8	1-19/64	51012	57156
#11	0.1910	2-3-4	1-5/8	1-19/64	51011	57157
4,9 mm	0.1929	86,0	52,0	41,0	61083	68325
#10	0.1935	2-3-4	1-5/8	1-19/64	51010	57158
#9	0.1960	3	1-3/4	1-13/32	51009	57159
5,0 mm	0.1969	86,0	52,0	41,0	61023	68279
#8	0.1990	3	1-3/4	1-13/32	51008	57160
5,1 mm	0.2008	86,0	52,0	41,0	61084	68326
#7	0.2010	3	1-3/4	1-13/32	51007	57161
13/64	0.2031	3	1-3/4	1-13/32	51113	57162
#6	0.2040	3	1-3/4	1-13/32	51006	57163
5,2 mm	0.2047	86,0	52,0	41,0	61085	68327
#5	0.2055	3	1-3/4	1-13/32	51005	57164
5,3 mm	0.2087	86,0	52,0	41,0	61086	68328
#4	0.2090	3	1-3/4	1-13/32	51004	57165
5,4 mm	0.2126	93,0	57,0	45,0	61087	68329
#3	0.2130	3	1-3/4	1-13/32	51003	57166
5,5 mm	0.2165	94,5	57,0	1-13/32	61025	68280
7/32	0.2188	3	1-3/4	1-13/32	51114	57167
5,6 mm	0.2205	93,0	57,0	45,0	61088	68330
#2	0.2210	3	1-3/4	1-13/32	51002	57168
5,7 mm	0.2244	93,0	57,0	45,0	61089	68331
#1	0.2280	3	1-3/4	1-13/32	51001	57169
5,8 mm	0.2283	93,0	57,0	45,0	61090	68332
5,9 mm	0.2323	93,0	57,0	45,0	61091	68333
A	0.2340	3-1/4	2	1-39/64	51201	57170
15/64	0.2344	3-1/4	2	1-39/64	51115	57171
6,0 mm	0.2362	93,0	57,0	45,0	61027	68281
B	0.2380	3-1/4	2	1-39/64	51202	57172
6,1 mm	0.2402	101,0	63,0	50,0	61092	68334
C	0.2420	3-1/4	2	1-39/64	51203	57173
6,2 mm	0.2441	101,0	63,0	50,0	61093	68335
D	0.2460	3-1/4	2	1-39/64	51204	57174
6,3 mm	0.2480	101,0	63,0	50,0	61094	68336
1/4	0.2500	3-1/4	2	1-39/64	51205	57176
6,4 mm	0.2520	101,0	63,0	50,0	61095	68337
6,5 mm	0.2559	101,0	63,0	50,0	61029	68282
F	0.2570	3-1/4	2	1-39/64	51206	57177

continued on next page






101

FRACTIONAL & METRIC SERIES

CONTINUED

CUTTING DIAMETER D ₁	DECIMAL EQUIV.	OVERALL LENGTH L ₁	FLUTE LENGTH L ₂	CLEARED LENGTH L ₃	EDP NO.	
					UNCOATED	TI-NAMITE-A (AlTiN)
6,6 mm	0.2598	101,0	63,0	50,0	61096	68338
G	0.2610	3-1/2	2-1/8	1-45/64	51207	57178
6,7 mm	0.2638	101,0	63,0	50,0	61097	68339
17/64	0.2656	3-1/2	2-1/8	1-45/64	51117	57179
H	0.2660	3-1/2	2-1/8	1-45/64	51208	57180
6,8 mm	0.2677	109,0	69,0	55,0	61098	68340
6,9 mm	0.2717	109,0	69,0	55,0	61099	68341
I	0.2720	3-1/2	2-1/8	1-45/64	51209	57181
7,0 mm	0.2756	109,0	69,0	55,0	61031	68283
J	0.2770	3-1/2	2-1/8	1-45/64	51210	57182
7,1 mm	0.2795	109,0	69,0	55,0	61100	68342
K	0.2810	3-1/2	2-1/8	1-45/64	51211	57183
9/32	0.2812	3-1/2	2-1/8	1-45/64	51118	57184
7,2 mm	0.2835	109,0	69,0	55,0	61101	68343
7,3 mm	0.2874	109,0	69,0	55,0	61102	68344
L	0.2900	3-1/2	2-1/8	1-45/64	51212	57185
7,4 mm	0.2913	109,0	69,0	55,0	61103	68345
M	0.2950	3-3/4	2-3/8	1-29/32	51213	57186
7,5 mm	0.2953	109,0	69,0	55,0	61033	68284
19/64	0.2969	3-3/4	2-3/8	1-29/32	51119	57187
7,6 mm	0.2992	117,0	75,0	60,0	61104	68346
N	0.3020	3-3/4	2-3/8	1-29/32	51214	57188
7,7 mm	0.3031	117,0	75,0	60,0	61105	68347
7,8 mm	0.3071	117,0	75,0	60,0	61106	68348
7,9 mm	0.3110	117,0	75,0	60,0	61107	68349
*5/16	0.3125	3-3/4	2-3/8	1-29/32	51120	57189
8,0 mm	0.3150	117,0	75,0	60,0	61035	68285
O	0.3160	3-3/4	2-3/8	1-29/32	51215	57190
8,1 mm	0.3189	117,0	75,0	60,0	61108	68350
8,2 mm	0.3228	117,0	75,0	60,0	61109	68351
P	0.3230	3-3/4	2-3/8	1-29/32	51216	57191
8,3 mm	0.3268	117,0	75,0	60,0	61110	68352
21/64	0.3281	4	2-1/2	2	51121	57192
8,4 mm	0.3307	117,0	75,0	60,0	61111	68353
Q	0.3320	4	2-1/2	2	51217	57193
8,5 mm	0.3346	117,0	75,0	60,0	61037	68286
8,6 mm	0.3386	125,0	81,0	64,0	61112	68354
R	0.3390	4	2-1/2	2	51218	57194
8,7 mm	0.3425	125,0	81,0	64,0	61113	68355
11/32	0.3438	4	2-1/2	2	51122	57195
8,8 mm	0.3465	125,0	81,0	64,0	61114	68356
S	0.3480	4	2-1/2	2	51219	57196
8,9 mm	0.3504	125,0	81,0	64,0	61115	68357
9,0 mm	0.3543	125,0	81,0	64,0	61039	68287

continued on next page

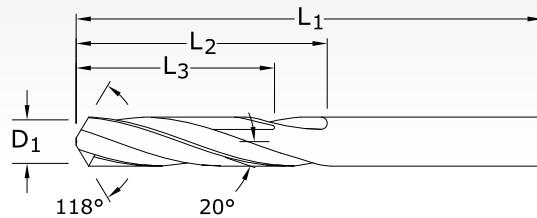

101

FRACTIONAL & METRIC SERIES

TECH INFO 214-217

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS
TITANIUM
NON-FERROUS
PLASTICS/COMPOSITES


CUTTING DIAMETER D ₁	DECIMAL EQUIV.	OVERALL LENGTH L ₁	FLUTE LENGTH L ₂	CLEARED LENGTH L ₃	EDP NO.	
					UNCOATED	Ti-NAMITE-A (AlTiN)
T	0.3580	4-1/4	2-3/4	2-13/64	51220	57197
9,1 mm	0.3583	125,0	81,0	64,0	61116	68358
23/64	0.3594	4-1/4	2-3/4	2-13/64	51123	57198
9,2 mm	0.3622	125,0	81,0	64,0	61117	68359
9,3 mm	0.3661	125,0	81,0	64,0	61118	68360
U	0.3680	4-1/4	2-3/4	2-13/64	51221	57199
9,4 mm	0.3701	125,0	81,0	64,0	61119	68361
9,5 mm	0.3740	125,0	81,0	64,0	61041	68288
*3/8	0.3750	4-1/4	2-3/4	2-13/64	51124	57200
V	0.3770	4-1/4	2-3/4	2-13/64	51222	57201
9,6 mm	0.3780	133,0	87,0	69,0	61120	68362
9,7 mm	0.3819	133,0	87,0	69,0	61121	68363
9,8 mm	0.3858	133,0	87,0	69,0	61122	68364
W	0.3860	4-1/2	2-7/8	2-19/64	51223	57202
9,9 mm	0.3898	133,0	87,0	69,0	61123	68365
25/64	0.3906	4-1/2	2-7/8	2-19/64	51125	57203
10,0 mm	0.3937	133,0	87,0	69,0	61043	68289
X	0.3970	4-1/2	2-7/8	2-19/64	51224	57204
10,2 mm	0.4016	133,0	87,0	69,0	61124	68366
Y	0.4040	4-1/2	2-7/8	2-19/64	51225	57205
13/32	0.4062	4-1/2	2-7/8	2-19/64	51126	57206
Z	0.4130	4-1/2	2-7/8	2-19/64	51226	57207
10,5 mm	0.4134	133,0	87,0	69,0	61045	68290
27/64	0.4219	4-1/2	2-7/8	2-19/64	51127	57208
11,0 mm	0.4331	142,0	94,0	75,0	61047	68291
7/16	0.4375	4-1/2	2-7/8	2-19/64	51128	57209
11,5 mm	0.4528	142,0	94,0	75,0	61049	68292
29/64	0.4531	4-3/4	3	2-13/32	51129	57210
15/32	0.4688	4-3/4	3	2-13/32	51130	57211
12,0 mm	0.4724	151,0	101,0	80,0	61051	68293
31/64	0.4844	4-3/4	3	2-13/32	51131	57212
1/2	0.5000	4-3/4	3	2-13/32	51132	57213
*Series 101 Set					61175	57351

TOLERANCES (inch)

D₁ = +0.0000/-0.0005

TOLERANCES (mm)

D₁ = +0,0000/-0,0127

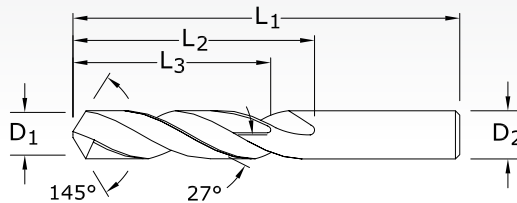
**TOLERANCES h_6 (mm)****≤3 DIAMETER** $D_1 = +0,000/-0,010$ $D_2 = h_6$ **>3–6 DIAMETER** $D_1 = +0,000/-0,012$ $D_2 = h_6$ **>6–10 DIAMETER** $D_1 = +0,000/-0,015$ $D_2 = h_6$ **>10–18 DIAMETER** $D_1 = +0,000/-0,018$ $D_2 = h_6$ **>18–30 DIAMETER** $D_1 = +0,000/-0,021$ $D_2 = h_6$ **108M Plus**

METRIC SERIES

TECH INFO 216

mm				EDP NO.	
CUTTING DIAMETER D_1 / D_2	OVERALL LENGTH L_1	FLUTE LENGTH L_2	CLEARED LENGTH L_3	UNCOATED	Ti-NAMITE-A (AlTiN)
0,5	20,0	3,0	2,1	62001	68643
0,55	21,0	3,5	2,5	62003	68644
0,6	21,0	3,5	2,5	62005	68645
0,65	22,0	4,0	2,9	62007	68646
0,7	23,0	4,5	3,2	62009	68647
0,75	23,0	4,5	3,2	62011	68648
0,8	24,0	5,0	3,6	62013	68649
0,85	24,0	5,0	3,6	62015	68650
0,9	25,0	5,5	4,0	62017	68651
0,95	25,0	5,5	4,0	62019	68652
1,0	26,0	6,0	4,7	62021	68653
1,05	26,0	6,0	4,7	62023	68654
1,1	28,0	7,0	5,4	62025	68655
1,15	28,0	7,0	5,4	62027	68656
1,2	30,0	8,0	6,0	62029	68657
1,25	30,0	8,0	6,0	62031	68658
1,3	30,0	8,0	6,0	62033	68659
1,35	32,0	9,0	7,0	62035	68660
1,4	32,0	9,0	7,0	62037	68661
1,45	32,0	9,0	7,0	62039	68662
1,5	32,0	9,0	7,0	62041	68663
1,6	34,0	10,0	7,0	62043	68664
1,7	34,0	10,0	7,0	62045	68665
1,8	36,0	11,0	8,0	62047	68666
1,9	36,0	11,0	8,0	62049	68667
2,0	38,0	12,0	9,0	62051	68668
2,1	38,0	12,0	9,0	62053	68669
2,2	40,0	13,0	10,0	62055	68670
2,3	40,0	13,0	10,0	62057	68671
2,4	43,0	14,0	11,0	62059	68672
2,5	43,0	14,0	11,0	62061	68673
2,6	43,0	14,0	11,0	62063	68674
2,7	46,0	16,0	12,0	62065	68675
2,8	46,0	16,0	12,0	62067	68676
2,9	46,0	16,0	12,0	62069	68677
3,0	46,0	16,0	12,0	62071	68678
3,1	49,0	18,0	14,0	62073	68679
3,2	49,0	18,0	14,0	62075	68680

continued on next page


STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS
TITANIUM
NON-FERROUS
PLASTICS/COMPOSITES



108M Plus

METRIC SERIES

TECH INFO 216

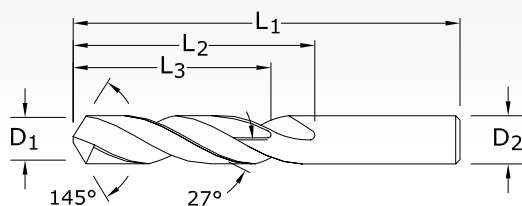

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS
TITANIUM
NON-FERROUS
PLASTICS/COMPOSITES

CUTTING DIAMETER D ₁ / D ₂	mm			EDP NO.	
	OVERALL LENGTH L ₁	FLUTE LENGTH L ₂	CLEARED LENGTH L ₃	UNCOATED	Ti-NAMITE-A (AlTiN)
3,3	49,0	18,0	14,0	62077	68681
3,4	52,0	20,0	15,0	62079	68682
3,5	52,0	20,0	15,0	62081	68683
3,6	52,0	20,0	15,0	62083	68684
3,7	52,0	20,0	15,0	62085	68685
3,8	55,0	22,0	17,0	62087	68686
3,9	55,0	22,0	17,0	62089	68687
4,0	55,0	22,0	17,0	62091	68688
4,1	55,0	22,0	17,0	62093	68689
4,2	55,0	22,0	17,0	62095	68690
4,3	58,0	24,0	18,0	62097	68691
4,4	58,0	24,0	18,0	62099	68692
4,5	58,0	24,0	18,0	62101	68693
4,6	58,0	24,0	18,0	62103	68694
4,7	58,0	24,0	18,0	62105	68695
4,8	62,0	26,0	20,0	62107	68696
4,9	62,0	26,0	20,0	62109	68697
5,0	62,0	26,0	20,0	62111	68698
5,1	62,0	26,0	20,0	62113	68699
5,2	62,0	26,0	20,0	62115	68700
5,3	62,0	26,0	20,0	62117	68701
5,4	66,0	28,0	21,0	62119	68702
5,5	66,0	28,0	21,0	62121	68703
5,6	66,0	28,0	21,0	62123	68704
5,7	66,0	28,0	21,0	62125	68705
5,8	66,0	28,0	21,0	62127	68706
5,9	66,0	28,0	21,0	62129	68707
6,0	66,0	28,0	21,0	62131	68708
6,1	70,0	31,0	23,0	62133	68709
6,2	70,0	31,0	23,0	62135	68710
6,3	70,0	31,0	23,0	62137	68711
6,4	70,0	31,0	23,0	62139	68712
6,5	70,0	31,0	23,0	62141	68713
6,8	70,0	31,0	23,0	62142	68603
7,0	74,0	34,0	25,0	62143	68718
7,5	74,0	34,0	25,0	62145	68723
7,8	79,0	37,0	27,0	62146	68604
8,0	79,0	37,0	27,0	62147	68728

TOLERANCES h₆ (mm)

≤3 DIAMETER

D₁ = +0,000/-0,010D₂ = h₆

>3-6 DIAMETER

D₁ = +0,000/-0,012D₂ = h₆

>6-10 DIAMETER

D₁ = +0,000/-0,015D₂ = h₆

>10-18 DIAMETER

D₁ = +0,000/-0,018D₂ = h₆

>18-30 DIAMETER

D₁ = +0,000/-0,021D₂ = h₆

continued on next page






108M Plus

METRIC SERIES

CONTINUED


CUTTING DIAMETER D ₁ / D ₂	mm			EDP NO.	
	OVERALL LENGTH L ₁	FLUTE LENGTH L ₂	CLEARED LENGTH L ₃	UNCOATED	TI-NAMITE-A (AlTiN)
8,5	79,0	37,0	27,0	62149	68733
9,0	84,0	40,0	29,0	62151	68738
9,5	84,0	40,0	29,0	62153	68743
9,8	89,0	43,0	31,0	62154	68606
10,0	89,0	43,0	31,0	62155	68748
10,2	89,0	43,0	31,0	62156	68607
10,5	89,0	43,0	31,0	62066	68753
11,0	95,0	47,0	33,0	62157	68758
11,5	95,0	47,0	33,0	62084	68763
11,8	102,0	51,0	35,0	62158	68608
12,0	102,0	51,0	35,0	62159	68768
12,5	102,0	51,0	35,0	62102	68773
13,0	102,0	51,0	35,0	62112	68778
13,8	107,0	54,0	37,0	62164	68609
14,0	107,0	54,0	37,0	62116	68780
14,5	111,0	56,0	38,0	62166	68611
14,8	111,0	56,0	38,0	62167	68612
15,0	111,0	56,0	38,0	62168	68613
15,8	115,0	58,0	38,0	62170	68614
16,0	115,0	58,0	38,0	62171	68616



106

FRACTIONAL & METRIC SERIES

TECH INFO 218

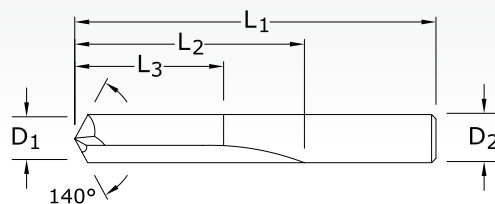

TOLERANCES (inch)


$D_1 = +.0000/-0.0005$

$D_2 = h6$

TOLERANCES (mm)

$D_1 = +0.0000/-0.0127$

$D_2 = h6$



CUTTING DIAMETER D_1 / D_2	DECIMAL EQUIV.	OVERALL LENGTH L_1	FLUTE LENGTH L_2	CLEARED LENGTH L_3	EDP NO.	
					UNCOATED	Ti-NAMITE-A (AlTiN)
1,0 mm	0.0394	26,0	6,0	4,5	66001	66002
#60	0.0400	1-1/2	1/2	13/32	56060	56269
#59	0.0410	1-1/2	1/2	13/32	56059	56268
#58	0.0420	1-1/2	1/2	13/32	56058	56267
#57	0.0430	1-1/2	1/2	13/32	56057	56266
#56	0.0465	1-1/2	1/2	13/32	56056	56265
3/64	0.0469	1-1/2	1/2	13/32	56103	56135
#55	0.0520	1-1/2	1/2	13/32	56055	56264
#54	0.0550	1-1/2	1/2	13/32	56054	56263
1,5 mm	0.0591	32,0	9,0	7,0	66003	66004
#53	0.0595	1-1/2	1/2	13/32	56053	56262
1/16	0.0625	1-1/2	5/8	1/2	56104	56136
#52	0.0635	1-11/16	11/16	35/64	56052	56261
#51	0.0670	1-11/16	11/16	35/64	56051	56260
#50	0.0700	1-11/16	11/16	35/64	56050	56259
#49	0.0730	1-11/16	11/16	35/64	56049	56258
#48	0.0760	1-11/16	11/16	35/64	56048	56257
5/64	0.0781	1-11/16	11/16	35/64	56105	56137
#47	0.0785	1-3/4	3/4	39/64	56047	56256
2,0 mm	0.0787	38,0	12,0	9,0	66005	66006
#46	0.0810	1-3/4	3/4	39/64	56046	56255
#45	0.0820	1-3/4	3/4	39/64	56045	56254
#44	0.0860	1-3/4	3/4	39/64	56044	56253
#43	0.0890	1-3/4	3/4	39/64	56043	56252
#42	0.0935	1-3/4	3/4	39/64	56042	56251
3/32	0.0938	1-3/4	3/4	39/64	56106	56138
#41	0.0960	1-13/16	13/16	21/32	56041	56250
#40	0.0980	1-13/16	13/16	21/32	56040	56249
2,5 mm	0.0984	43,0	14,0	11,0	66007	66008
#39	0.0995	1-13/16	13/16	21/32	56039	56248
#38	0.1015	1-13/16	13/16	21/32	56038	56247
#37	0.1040	1-13/16	13/16	21/32	56037	56246
#36	0.1065	1-13/16	13/16	21/32	56036	56245
7/64	0.1094	1-13/16	13/16	21/32	56107	56139
#35	0.1100	1-7/8	7/8	45/64	56035	56244
#34	0.1110	1-7/8	7/8	45/64	56034	56243
#33	0.1130	1-7/8	7/8	45/64	56033	56242
#32	0.1160	1-7/8	7/8	45/64	56032	56241
3,0 mm	0.1181	46,0	16,0	12,0	66009	66010

continued on next page







106

FRACTIONAL & METRIC SERIES

CONTINUED

CUTTING DIAMETER D ₁ / D ₂	DECIMAL EQUIV.	OVERALL LENGTH L ₁	FLUTE LENGTH L ₂	CLEARED LENGTH L ₃	EDP NO.	
					UNCOATED	Ti-NAMITE-A (AlTiN)
#31	0.1200	1-7/8	7/8	45/64	56031	56240
1/8	0.1250	1-7/8	7/8	45/64	56108	56140
#30	0.1285	1-15/16	15/16	3/4	56030	56239
#29	0.1360	1-15/16	15/16	3/4	56029	56238
3,5 mm	0.1378	52,0	20,0	15,0	66011	66012
#28	0.1405	1-15/16	15/16	3/4	56028	56237
9/64	0.1406	1-15/16	15/16	3/4	56109	56141
#27	0.1440	2-1/16	1	51/64	56027	56236
#26	0.1470	2-1/16	1	51/64	56026	56235
#25	0.1495	2-1/16	1	51/64	56025	56234
#24	0.1520	2-1/16	1	51/64	56024	56233
#23	0.1540	2-1/16	1	51/64	56023	56232
5/32	0.1562	2-1/16	1	51/64	56110	56142
#22	0.1570	2-1/8	1-1/16	55/64	56022	56231
4,0 mm	0.1575	55,0	22,0	17,0	66013	66014
#21	0.1590	2-1/8	1-1/16	55/64	56021	56230
#20	0.1610	2-1/8	1-1/16	55/64	56020	56229
#19	0.1660	2-1/8	1-1/16	55/64	56019	56228
#18	0.1695	2-1/8	1-1/16	55/64	56018	56227
11/64	0.1719	2-1/8	1-1/16	55/64	56111	56143
#17	0.1730	2-3/16	1-1/8	29/32	56017	56226
#16	0.1770	2-3/16	1-1/8	29/32	56016	56225
4,5 mm	0.1772	58,0	24,0	18,0	66015	66016
#15	0.1800	2-3/16	1-1/8	29/32	56015	56224
#14	0.1820	2-3/16	1-1/8	29/32	56014	56223
#13	0.1850	2-3/16	1-1/8	29/32	56013	56222
3/16	0.1875	2-3/16	1-1/8	29/32	56112	56144
#12	0.1890	2-3/16	1-1/8	29/32	56012	56221
#11	0.1910	2-3/16	1-1/8	29/32	56011	56220
#10	0.1935	2-3/16	1-1/8	29/32	56010	56219
#9	0.1960	2-1/4	1-3/16	61/64	56009	56218
5,0 mm	0.1969	62,0	26,0	20,0	66017	66018
#8	0.1990	2-1/4	1-3/16	61/64	56008	56217
#7	0.2010	2-1/4	1-3/16	61/64	56007	56216
13/64	0.2031	2-1/4	1-3/16	61/64	56113	56145
#6	0.2040	2-3/8	1-1/4	1	56006	56215
#5	0.2055	2-3/8	1-1/4	1	56005	56214
#4	0.2090	2-3/8	1-1/4	1	56004	56213
#3	0.2130	2-3/8	1-1/4	1	56003	56212
5,5 mm	0.2165	66,0	28,0	21,0	66019	66020
7/32	0.2188	2-3/8	1-1/4	1	56114	56146
#2	0.2210	2-7/16	1-5/16	1-3/64	56002	56211
#1	0.2280	2-7/16	1-5/16	1-3/64	56001	56210
15/64	0.2344	2-7/16	1-5/16	1-3/64	56115	56147
6,0 mm	0.2362	66,0	28,0	21,0	66021	66045

continued on next page

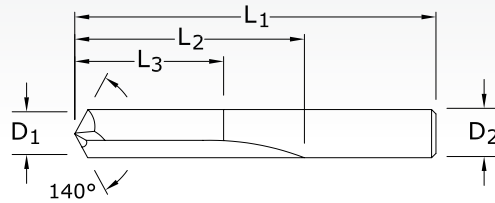


FRACTIONAL & METRIC SERIES

CAST IRON
HARDENED STEELS

CUTTING DIAMETER D ₁ / D ₂	DECIMAL EQUIV.	OVERALL LENGTH L ₁	FLUTE LENGTH L ₂	CLEARED LENGTH L ₃	EDP NO.	
					UNCOATED	Ti-NAMITE-A (AlTiN)
1/4	0.2500	2-1/2	1-3/8	1-7/64	56116	56148
6,5 mm	0.2559	70,0	31,0	23,0	66022	66046
17/64	0.2656	2-5/8	1-7/16	1-7/64	56117	56149
7,0 mm	0.2756	74,0	34,0	25,0	66023	66024
9/32	0.2812	2-11/16	1-1/2	1-13/64	56118	56150
7,5 mm	0.2953	74,0	34,0	25,0	66025	66026
19/64	0.2969	2-3/4	1-9/16	1-1/4	56119	56151
5/16	0.3125	2-13/16	1-5/8	1-19/64	56120	56152
8,0 mm	0.3150	79,0	37,0	27,0	66027	66028
21/64	0.3281	2-15/16	1-11/16	1-23/64	56121	56153
8,5 mm	0.3346	79,0	37,0	27,0	66029	66030
11/32	0.3438	3-11/64	1-11/16	1-23/64	56122	56154
9,0 mm	0.3543	84,0	40,0	29,0	66031	66032
23/64	0.3594	3-1/16	1-3/4	1-13/32	56123	56155
9,5 mm	0.3740	84,0	40,0	29,0	66033	66034
3/8	0.3750	3-1/8	1-13/16	1-29/64	56124	56156
25/64	0.3906	3-1/4	1-7/8	1-1/2	56125	56157
10,0 mm	0.3937	89,0	43,0	31,0	66035	66036
13/32	0.4062	3-5/16	1-15/16	1-35/64	56126	56158
10,5 mm	0.4134	95,0	43,0	31,0	66037	66038
27/64	0.4219	3-3/8	2	1-39/64	56127	56159
11,0 mm	0.4331	95,0	47,0	33,0	66039	66040
7/16	0.4375	3-7/16	2-1/16	1-21/32	56128	56160
11,5 mm	0.4528	95,0	47,0	33,0	66041	66042
29/64	0.4531	3-9/16	2-1/8	1-45/64	56129	56161
15/32	0.4688	3-5/8	2-1/8	1-45/64	56130	56162
12,0 mm	0.4724	102,0	51,0	35,0	66043	66044
31/64	0.4844	3-11/16	2-3/16	1-3/4	56131	56163
1/2	0.5000	3-3/4	2-1/4	1-51/64	56132	56164

$D_1 = +0,0000/-0,0127$
 $D_2 = h6$

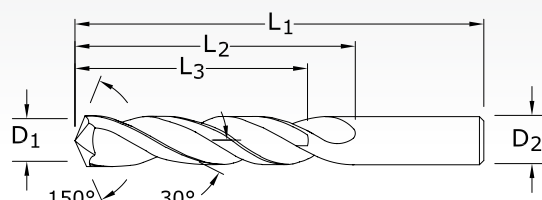**TOLERANCES (inch)** $D_1 = +.0000/-0.0005$ $D_2 = h_6$ **TOLERANCES (mm)** $D_1 = +0.0000/-0.0127$ $D_2 = h_6$ **103**

FRACTIONAL & METRIC SERIES

TECH INFO 219-220

CUTTING DIAMETER D_1 / D_2	DECIMAL EQUIV.	OVERALL LENGTH L_1	FLUTE LENGTH L_2	CLEARED LENGTH L_3	EDP NO.	
					UNCOATED	Ti-NAMITE-A (AlTiN)
#36	0.1065	2-1/4	1-1/4	1	53036	58011
7/64	0.1094	2-1/4	1-1/4	1	53107	58012
#35	0.1100	2-1/4	1-1/4	1	53035	58013
#34	0.1110	2-1/4	1-1/4	1	53034	58014
#33	0.1130	2-1/4	1-1/4	1	53033	58015
#32	0.1160	2-1/4	1-1/4	1	53032	58016
3,0 mm	0.1181	46,0	16,0	12,0	63000	68965
#31	0.1200	2-1/4	1-1/4	1	53031	58017
3,1 mm	0.1220	49,0	18,0	14,0	63044	68966
1/8	0.1250	2-1/4	1-1/4	1	53108	58018
3,2 mm	0.1260	49,0	18,0	14,0	63045	68967
#30	0.1285	2-1/4	1-1/4	1	53030	58019
3,3 mm	0.1299	49,0	18,0	14,0	63001	68968
3,4 mm	0.1339	52,0	20,0	15,0	63046	68969
#29	0.1360	2-1/2	1-3/8	1-7/64	53029	58020
3,5 mm	0.1378	52,0	20,0	15,0	63002	68970
#28	0.1405	2-1/2	1-3/8	1-7/64	53028	58021
9/64	0.1406	2-1/2	1-3/8	1-7/64	53109	58022
3,6 mm	0.1417	52,0	20,0	15,0	63047	68971
#27	0.1440	2-1/2	1-3/8	1-7/64	53027	58023
3,7 mm	0.1457	52,0	20,0	15,0	63003	68972
#26	0.1470	2-1/2	1-3/8	1-7/64	53026	58024
#25	0.1495	2-1/2	1-3/8	1-7/64	53025	58025
3,8 mm	0.1496	55,0	22,0	17,0	63048	68973
#24	0.1520	2-1/2	1-3/8	1-7/64	53024	58026
3,9 mm	0.1535	55,0	22,0	17,0	63049	68974
#23	0.1540	2-1/2	1-3/8	1-7/64	53023	58027
5/32	0.1562	2-1/2	1-3/8	1-7/64	53110	58028
#22	0.1570	2-1/2	1-3/8	1-7/64	53022	58029
4,0 mm	0.1575	55,0	22,0	17,0	63004	68975
#21	0.1590	2-1/2	1-3/8	1-7/64	53021	58030
#20	0.1610	2-1/2	1-3/8	1-7/64	53020	58031
4,1 mm	0.1614	55,0	22,0	17,0	63050	68976
4,2 mm	0.1654	55,0	22,0	17,0	63005	68977
#19	0.1660	2-3/4	1-5/8	1-19/64	53019	58032
4,3 mm	0.1693	58,0	24,0	18,0	63051	68978
#18	0.1695	2-3/4	1-5/8	1-19/64	53018	58033
11/64	0.1719	2-3/4	1-5/8	1-19/64	53111	58034


continued on next page



103

FRACTIONAL & METRIC SERIES

TECH INFO 219-220

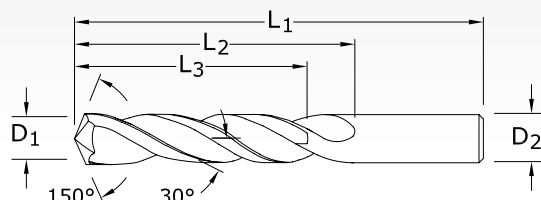

TOLERANCES (inch)


D₁ = +.0000/-0.0005

D₂ = h6

TOLERANCES (mm)

D₁ = +0.0000/-0.0127

D₂ = h6



CUTTING DIAMETER D ₁ / D ₂	DECIMAL EQUIV.	OVERALL LENGTH L ₁	FLUTE LENGTH L ₂	CLEARED LENGTH L ₃	EDP NO.	
					UNCOATED	Ti-NAMITE-A (AlTiN)
#17	0.1730	2-3/4	1-5/8	1-19/64	53017	58035
4,4 mm	0.1732	58,0	24,0	18,0	63052	68979
#16	0.1770	2-3/4	1-5/8	1-19/64	53016	58036
4,5 mm	0.1772	58,0	24,0	18,0	63006	68980
#15	0.1800	2-3/4	1-5/18	1-19/64	53015	58037
4,6 mm	0.1811	58,0	24,0	18,0	63053	68981
#14	0.1820	2-3/4	1-5/8	1-19/64	53014	58038
#13	0.1850	2-3/4	1-5/8	1-19/64	53013	58039
4,7 mm	0.1850	62,0	26,0	18,0	63054	68982
3/16	0.1875	2-3/4	1-5/8	1-19/64	53112	58040
#12	0.1890	2-3/4	1-5/8	1-19/64	53012	58041
4,8 mm	0.1890	62,0	26,0	20,0	63055	68983
#11	0.1910	2-3/4	1-5/8	1-19/64	53011	58042
4,9 mm	0.1929	62,0	26,0	20,0	63056	68984
#10	0.1935	2-3/4	1-5/8	1-19/64	53010	58043
#9	0.1960	3	1-3/4	1-13/32	53009	58044
5,0 mm	0.1969	62,0	26,0	20,0	63007	68985
#8	0.1990	3	1-3/4	1-13/32	53008	58045
5,1 mm	0.2008	62,0	26,0	20,0	63057	68986
#7	0.2010	3	1-3/4	1-13/32	53007	58046
13/64	0.2031	3	1-3/4	1-13/32	53113	58047
#6	0.2040	3	1-3/4	1-13/32	53006	58048
5,2 mm	0.2047	62,0	26,0	20,0	63008	68987
#5	0.2055	3	1-3/4	1-13/32	53005	58049
5,3 mm	0.2087	62,0	26,0	20,0	63058	68988
#4	0.2090	3	1-3/4	1-13/32	53004	58050
5,4 mm	0.2126	66,0	28,0	21,0	63059	68989
#3	0.2130	3	1-3/4	1-13/32	53003	58051
5,5 mm	0.2165	66,0	28,0	21,0	63009	68990
7/32	0.2188	3	1-3/4	1-13/32	53114	58052
5,6 mm	0.2205	66,0	28,0	21,0	63060	68991
#2	0.2210	3	1-3/4	1-13/32	53002	58053
5,7 mm	0.2244	66,0	28,0	21,0	63061	68992
#1	0.2280	3	1-3/4	1-13/32	53001	58054
5,8 mm	0.2283	66,0	28,0	21,0	63062	68993
5,9 mm	0.2323	66,0	28,0	21,0	63063	68994
A	0.2340	3-1/4	2	1-39/64	53201	58055
15/64	0.2344	3-1/4	2	1-39/64	53115	58056

continued on next page



**103**

FRACTIONAL & METRIC SERIES

CONTINUED

CUTTING DIAMETER D ₁ / D ₂	DECIMAL EQUIV.	OVERALL LENGTH L ₁	FLUTE LENGTH L ₂	CLEARED LENGTH L ₃	EDP NO.	
					UNCOATED	Ti-NAMITE-A (AlTiN)
6,0 mm	0.2362	66,0	28,0	21,0	63010	68995
B	0.2380	3-1/4	2	1-39/64	53202	58057
6,1 mm	0.2402	70,0	31,0	23,0	63064	68996
C	0.2420	3-1/4	2	1-39/64	53203	58058
6,2 mm	0.2441	70,0	31,0	23,0	63011	68997
D	0.2460	3-1/4	2	1-39/64	53204	58059
6,3 mm	0.2480	70,0	31,0	23,0	63065	68998
1/4	0.2500	3-1/4	2	1-39/64	53116	58061
6,4 mm	0.2520	70,0	31,0	23,0	63066	68999
6,5 mm	0.2559	70,0	31,0	23,0	63012	69000
F	0.2570	3-1/4	2	1-39/64	53206	58062
6,6 mm	0.2598	70,0	31,0	23,0	63067	69001
G	0.2610	3-1/2	2-1/8	1-45/64	53207	58063
6,7 mm	0.2638	70,0	31,0	23,0	63068	69002
17/64	0.2656	3-1/2	2-1/8	1-45/64	53117	58064
H	0.2660	3-1/2	2-1/8	1-45/64	53208	58065
6,8 mm	0.2677	74,0	34,0	25,0	63013	69003
6,9 mm	0.2717	74,0	34,0	25,0	63069	69004
I	0.2720	3-1/2	2-1/8	1-45/64	53209	58066
7,0 mm	0.2756	74,0	34,0	25,0	63014	69005
J	0.2770	3-1/2	2-1/8	1-45/64	53210	58067
7,1 mm	0.2795	74,0	34,0	25,0	63070	69006
K	0.2810	3-1/2	2-1/8	1-45/64	53211	58068
9/32	0.2812	3-1/2	2-1/8	1-45/64	53118	58069
7,2 mm	0.2835	74,0	34,0	25,0	63015	69007
7,3 mm	0.2874	74,0	34,0	25,0	63071	69008
L	0.2900	3-1/2	2-1/8	1-45/64	53212	58070
7,4 mm	0.2913	74,0	34,0	25,0	63072	69009
M	0.2950	3-3/4	2-3/8	1-29/32	53213	58071
7,5 mm	0.2953	74,0	34,0	25,0	63016	69010
19/64	0.2969	3-3/4	2-3/8	1-29/32	53119	58072
7,6 mm	0.2992	79,0	37,0	27,0	63073	69011
N	0.3020	2-3/8	2-3/8	1-29/32	53214	58073
7,7 mm	0.3031	79,0	37,0	27,0	63074	69012
7,8 mm	0.3071	79,0	37,0	27,0	63075	69013
7,9 mm	0.3110	79,0	37,0	27,0	63076	69014
5/16	0.3125	3-3/4	2-3/8	1-29/32	53120	58074
8,0 mm	0.3150	79,0	37,0	27,0	63017	69015
O	0.3160	3-3/4	2-3/8	1-29/32	53215	58075
8,1 mm	0.3189	79,0	37,0	27,0	63077	69016
8,2 mm	0.3228	79,0	37,0	27,0	63018	69017
P	0.3230	3-3/4	2-3/8	1-29/32	53216	58076
8,3 mm	0.3268	79,0	37,0	27,0	63078	69018
21/64	0.3281	4	2-1/2	2	53121	58077

continued on next page






103

FRACTIONAL & METRIC SERIES

TECH INFO 219-220

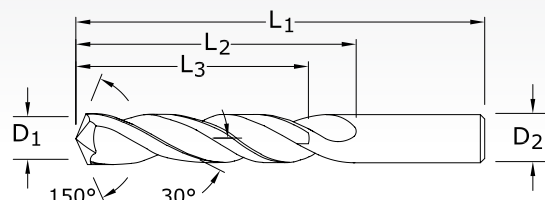

TOLERANCES (inch)

 $D_1 = +.0000/-0.0005$
 $D_2 = h6$

TOLERANCES (mm)

 $D_1 = +0.0000/-0.0127$
 $D_2 = h6$

STEELS
CAST IRON
NON-FERROUS

CUTTING DIAMETER D_1 / D_2	DECIMAL EQUIV.	OVERALL LENGTH L_1	FLUTE LENGTH L_2	CLEARED LENGTH L_3	EDP NO.	
					UNCOATED	Ti-NAMITE-A (AlTiN)
8,4 mm	0.3307	79,0	37,0	27,0	63019	69019
Q	0.3320	4	2-1/2	2	53217	58078
8,5 mm	0.3346	79,0	37,0	27,0	63020	69020
8,6 mm	0.3386	84,0	40,0	29,0	63021	69021
R	0.3390	4	2-1/2	2	53218	58079
8,7 mm	0.3425	89,0	40,0	29,0	63079	69022
11/32	0.3438	4	2-1/2	2	53122	58080
8,8 mm	0.3465	89,0	40,0	29,0	63022	69023
S	0.3480	4	2-1/2	2	53219	58081
8,9 mm	0.3504	84,0	40,0	29,0	63080	69024
9,0 mm	0.3543	84,0	40,0	29,0	63023	69025
T	0.3580	4-1/4	2-3/4	2-13/64	53220	58082
9,1 mm	0.3583	84,0	40,0	29,0	63081	69026
23/64	0.3594	4-1/4	2-3/4	2-13/64	53123	58083
9,2 mm	0.3622	84,0	40,0	29,0	63024	69027
9,3 mm	0.3661	84,0	40,0	29,0	63082	69028
U	0.3680	4-1/4	2-3/4	2-13/64	53221	58084
9,4 mm	0.3701	84,0	40,0	29,0	63083	69029
9,5 mm	0.3740	84,0	40,0	29,0	63025	69030
3/8	0.3750	4-1/4	2-3/4	2-13/64	53124	58085
V	0.3770	4-1/4	2-3/4	2-13/64	53222	58086
9,6 mm	0.3780	89,0	43,0	31,0	63084	69031
9,7 mm	0.3819	89,0	43,0	31,0	63085	69032
9,8 mm	0.3858	89,0	43,0	31,0	63086	69033
W	0.3860	4-1/2	2-7/8	2-19/64	53223	58087
9,9 mm	0.3898	89,0	43,0	31,0	63087	69034
25/64	0.3906	4-1/2	2-7/8	2-19/64	53125	58088
10,0 mm	0.3937	89,0	43,0	31,0	63026	69035
X	0.3970	4-1/2	2-7/8	2-19/64	53224	58089
10,1 mm	0.3976	89,0	43,0	31,0	63088	69036
10,2 mm	0.4016	89,0	43,0	31,0	63027	69037
Y	0.4040	4-1/2	2-7/8	2-19/64	53225	58090
13/32	0.4062	4-1/2	2-7/8	2-19/64	53126	58091
10,4 mm	0.4094	89,0	43,0	31,0	63028	69038
Z	0.4130	4-1/2	2-7/8	2-19/64	53226	58092
10,5 mm	0.4134	89,0	43,0	31,0	63029	69039
10,7 mm	0.4213	95,0	47,0	33,0	63030	69040
27/64	0.4219	4-1/2	2-7/8	2-19/64	53127	58093

continued on next page



**103**

FRACTIONAL & METRIC SERIES

CONTINUED

CUTTING DIAMETER D ₁ / D ₂	DECIMAL EQUIV.	OVERALL LENGTH L ₁	FLUTE LENGTH L ₂	CLEARED LENGTH L ₃	EDP NO.	
					UNCOATED	Ti-NAMITE-A (AlTiN)
10,8 mm	0.4252	95,0	47,0	33,0	63031	69041
11,0 mm	0.4331	95,0	47,0	33,0	63032	69042
7/16	0.4375	4-1/2	2-7/8	2-19/64	53128	58094
11,5 mm	0.4528	95,0	47,0	33,0	63033	69043
29/64	0.4531	4-3/4	3	2-13/32	53129	58095
15/32	0.4688	4-3/4	3	2-13/32	53130	58096
12,0 mm	0.5039	102,0	51,0	35,0	63034	69044
31/64	0.4844	4-3/4	3	2-13/32	53131	58097
12,5 mm	0.4921	102,0	51,0	35,0	63035	69045
1/2	0.5000	4-3/4	3	2-13/32	53132	58098
12,8 mm	0.5039	102,0	51,0	35,0	63036	69046
13,0 mm	0.5118	102,0	51,0	35,0	63089	69047
33/64	0.5156	4-3/4	3	2-13/32	53135	58099
13,1 mm	0.5157	102,0	51,0	35,0	63037	69048
13,5 mm	0.5315	107,0	54,0	37,0	63090	69049
14,0 mm	0.5512	107,0	54,0	37,0	63038	69050
9/16	0.5625	4-3/4	3	2-13/32	53136	58100
14,3 mm	0.5630	111,0	56,0	38,0	63039	69051
14,5 mm	0.5709	111,0	56,0	38,0	63040	69052
15,0 mm	0.5906	111,0	56,0	38,0	63091	69053
5/8	0.6250	5-3/4	3-1/2	2-51/64	53133	58101
11/16	0.6875	5-3/4	3-1/2	2-51/64	53137	58102
17,5 mm	0.6890	123,0	62,0	40,0	63041	69054
3/4	0.7500	5-3/4	4-1/4	3 13/32	53134	58103
19,5 mm	0.7677	131,0	66,0	42,0	63042	69055
20,0 mm	0.7874	131,0	66,0	42,0	63043	69056

Series 101 Fractional				Diameter (D ₁) (inch)							
Hardness BRINELL		Vc (SFM)		1/64	1/32	1/16	1/8	1/4	3/8	1/2	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536		265	RPM	64787	32394	16197	8098	4049	2699	2025
		≤ 200	(212-318)	Fr	0.0002	0.0004	0.0009	0.0017	0.0034	0.0050	0.0070
				Feed (IPM)	13.0	13.0	14.6	13.8	13.8	13.5	14.2
		> 200 ≤ 300	(100-150)	RPM	30560	15280	7640	3820	1910	1273	955
				Fr	0.0002	0.0004	0.0008	0.0016	0.0031	0.0045	0.0060
				Feed (IPM)	6.1	6.1	6.1	6.1	5.9	5.7	5.7
				RPM	20781	10390	5195	2598	1299	866	649
		> 300 ≤ 420	(68-102)	Fz	0.0001	0.0002	0.0005	0.0009	0.0018	0.0025	0.0035
				Feed (IPM)	2.1	2.1	2.6	2.3	2.3	2.2	2.3
P	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100		230	RPM	56230	28115	14058	7029	3514	2343	1757
		≤ 275	(184-276)	Fz	0.0002	0.0004	0.0008	0.0016	0.0031	0.0045	0.0060
				Feed (IPM)	11.2	11.2	11.2	11.2	10.9	10.5	10.5
		> 275 ≤ 375	(116-174)	RPM	35450	17725	8862	4431	2216	1477	1108
				Fr	0.0002	0.0004	0.0008	0.0015	0.0030	0.0045	0.0060
				Feed (IPM)	7.1	7.1	7.1	6.6	6.6	6.6	6.6
				RPM	14669	7334	3667	1834	917	611	458
		> 375 ≤ 450	(48-72)	Fr	0.0001	0.0002	0.0004	0.0007	0.0013	0.0020	0.0025
				Feed (IPM)	1.5	1.5	1.5	1.3	1.2	1.2	1.1
P	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2		85	RPM	20781	10390	5195	2598	1299	866	649
		≤ 250	(68-102)	Fr	0.0001	0.0002	0.0005	0.0009	0.0018	0.0025	0.0035
				Feed (IPM)	2.1	2.1	2.6	2.3	2.3	2.2	2.3
		> 250 ≤ 330	(44-66)	RPM	13446	6723	3362	1681	840	560	420
				Fr	0.00005	0.0001	0.0002	0.0004	0.0008	0.0010	0.0015
				Feed (IPM)	0.7	0.7	0.7	0.7	0.7	0.6	0.6
				RPM	9779	4890	2445	1222	611	407	306
		> 330 ≤ 450	(32-48)	Fr	0.00005	0.0001	0.0002	0.0004	0.0008	0.0010	0.0015
				Feed (IPM)	0.5	0.5	0.5	0.5	0.5	0.4	0.5
K	CAST IRONS Gray, Malleable, Ductile		280	RPM	68454	34227	17114	8557	4278	2852	2139
		≤ 200	(224-336)	Fr	0.00025	0.0005	0.0011	0.0021	0.0041	0.0060	0.0080
				Feed (IPM)	17.1	17.1	18.8	18.0	17.5	17.1	17.1
		> 200 ≤ 330	(200-300)	RPM	61120	30560	15280	7640	3820	2547	1910
				Fr	0.00025	0.0005	0.0011	0.0021	0.0041	0.0060	0.0080
				Feed (IPM)	15.3	15.3	16.8	16.0	15.7	15.3	15.3
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F		210	RPM	51341	25670	12835	6418	3209	2139	1604
		< 250	(168-252)	Fr	0.00015	0.0003	0.0006	0.0012	0.0024	0.0035	0.0050
				Feed (IPM)	7.7	7.7	7.7	7.7	7.7	7.5	8.0
		> 250 ≤ 330	(88-132)	RPM	26893	13446	6723	3362	1681	1121	840
				Fr	0.0001	0.0002	0.0004	0.0007	0.0014	0.0020	0.0030
				Feed (IPM)	2.7	2.7	2.7	2.4	2.4	2.2	2.5

continued on next page

Series 101 Fractional	Hardness BRINELL	Vc (SFM)	Diameter (D ₁) (inch)								
			1/64	1/32	1/16	1/8	1/4	3/8	1/2		
M	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	65	RPM	15891	7946	3973	1986	993	662	497	
		> 270 ≤ 370	(52-78)	Fr	0.0001	0.0002	0.0005	0.0009	0.0018	0.0025	0.0035
				Feed (IPM)	1.6	1.6	2.0	1.8	1.8	1.7	1.7
		> 270 ≤ 370	55	RPM	13446	6723	3362	1681	840	560	420
			(44-66)	Fr	0.0001	0.0002	0.0004	0.0008	0.0015	0.0025	0.0030
					Feed (IPM)	1.3	1.3	1.3	1.3	1.3	1.4
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoly 800, Monel 400, Rene, Waspaloy	≤ 220	40	RPM	9779	4890	2445	1222	611	407	306
			(32-48)	Fr	0.0001	0.0002	0.0005	0.0009	0.0018	0.0025	0.0035
					Feed (IPM)	1.0	1.0	1.2	1.1	1.1	1.0
		> 220 ≤ 330	25	RPM	6112	3056	1528	764	382	255	191
			(20-30)	Fr	0.0001	0.0002	0.0004	0.0008	0.0015	0.0025	0.0030
					Feed (IPM)	0.6	0.6	0.6	0.6	0.6	0.6
		> 330 ≤ 420	20	RPM	4890	2445	1222	611	306	204	153
			(16-24)	Fr	0.00005	0.0001	0.0002	0.0004	0.0008	0.0010	0.0015
					Feed (IPM)	0.2	0.2	0.2	0.2	0.2	0.2
S	TITANIUM ALLOYS (DIFFICULT) Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 280	85	RPM	20781	10390	5195	2598	1299	866	649
			(68-102)	Fr	0.0002	0.0004	0.0008	0.0016	0.0032	0.0050	0.0065
					Feed (IPM)	4.2	4.2	4.2	4.2	4.2	4.3
		> 280 ≤ 350	65	RPM	15891	7946	3973	1986	993	662	497
			(52-78)	Fr	0.0001	0.0002	0.0005	0.0009	0.0018	0.0025	0.0035
					Feed (IPM)	1.6	1.6	2.0	1.8	1.8	1.7
		> 350 ≤ 440	55	RPM	13446	6723	3362	1681	840	560	420
			(44-66)	Fr	0.0001	0.0002	0.0004	0.0008	0.0015	0.0025	0.0030
					Feed (IPM)	1.3	1.3	1.3	1.3	1.3	1.4
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80	540	RPM	132019	66010	33005	16502	8251	5501	4126
			(432-648)	Fr	0.0003	0.0006	0.0013	0.0025	0.0050	0.0075	0.0100
					Feed (IPM)	39.6	39.6	42.9	41.3	41.3	41.3
		> 80	455	RPM	111238	55619	27810	13905	6952	4635	3476
			(364-546)	Fr	0.0003	0.0006	0.0013	0.0025	0.0050	0.0075	0.0100
					Feed (IPM)	33.4	33.4	36.2	34.8	34.8	34.8
N	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 140	190	RPM	46451	23226	11613	5806	2903	1935	1452
			(152-228)	Fr	0.00015	0.0003	0.0006	0.0012	0.0024	0.0035	0.0050
					Feed (IPM)	7.0	7.0	7.0	7.0	7.0	6.8
		> 140	175	RPM	42784	21392	10696	5348	2674	1783	1337
			(140-210)	Fr	0.00015	0.0003	0.0006	0.0012	0.0024	0.0035	0.0050
					Feed (IPM)	6.4	6.4	6.4	6.4	6.4	6.2
	PLASTICS Polycarbonate, PVC	500	(400-600)	RPM	122240	61120	30560	15280	7640	5093	3820
				Fr	0.0003	0.0006	0.0013	0.0025	0.0050	0.0075	0.0100
				Feed (IPM)	36.7	36.7	39.7	38.2	38.2	38.2	38.2

rpm = sfm x 3.82 / D₁

ipm = (inch / revolution) x rpm

reduce speed and feed rates shown by 30 percent when using uncoated drills

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)



Series 101M, 108M Metric				Diameter (D ₁) (mm)							
				Hardness BRINELL	Vc (m/min)	1	3	6	8	10	12
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 200	81	RPM	25690	8563	4282	3211	2569	2141	1606
			(65-97)	Fr	0.015	0.040	0.080	0.110	0.135	0.170	0.230
				Feed (mm/min)	385	343	343	353	347	364	369
		> 200 ≤ 300	38	RPM	12118	4039	2020	1515	1212	1010	757
			(30-46)	Fr	0.015	0.035	0.075	0.095	0.120	0.145	0.190
				Feed (mm/min)	182	141	151	144	145	146	144
		> 300 ≤ 420	26	RPM	8240	2747	1373	1030	824	687	515
			(21-31)	Fz	0.005	0.020	0.045	0.055	0.065	0.085	0.115
				Feed (mm/min)	41	55	62	57	54	58	59
P	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 270	70	RPM	22297	7432	3716	2787	2230	1858	1394
			(56-84)	Fz	0.015	0.035	0.075	0.095	0.120	0.145	0.190
				Feed (mm/min)	334	260	279	265	268	269	265
		> 275 ≤ 375	44	RPM	14057	4686	2343	1757	1406	1171	879
			(35-53)	Fr	0.010	0.035	0.070	0.095	0.120	0.145	0.190
				Feed (mm/min)	141	164	164	167	169	170	167
		> 375 ≤ 450	18	RPM	5816	1939	969	727	582	485	364
			(15-22)	Fr	0.005	0.015	0.030	0.040	0.055	0.060	0.075
				Feed (mm/min)	29	29	29	29	32	29	27
P	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 250	26	RPM	8240	2747	1373	1030	824	687	515
			(21-31)	Fr	0.005	0.020	0.045	0.055	0.065	0.085	0.115
				Feed (mm/min)	41	55	62	57	54	58	59
		> 250 ≤ 330	17	RPM	5332	1777	889	666	533	444	333
			(13-20)	Fr	0.005	0.010	0.020	0.025	0.030	0.035	0.050
				Feed (mm/min)	27	18	18	17	16	16	17
		> 330 ≤ 450	12	RPM	3878	1293	646	485	388	323	242
			(10-15)	Fr	0.005	0.010	0.020	0.025	0.030	0.035	0.050
				Feed (mm/min)	19	13	13	12	12	11	12
K	CAST IRONS Gray, Malleable, Ductile	≤ 200	85	RPM	27144	9048	4524	3393	2714	2262	1696
			(68-102)	Fr	0.015	0.050	0.100	0.130	0.160	0.195	0.255
				Feed (mm/min)	407	452	452	441	434	441	433
		> 200 ≤ 330	76	RPM	24235	8078	4039	3029	2424	2020	1515
			(61-91)	Fr	0.015	0.050	0.100	0.130	0.160	0.195	0.255
				Feed (mm/min)	364	404	404	394	388	394	386
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	< 250	64	RPM	20358	6786	3393	2545	2036	1696	1272
			(51-77)	Fr	0.010	0.030	0.060	0.075	0.095	0.120	0.165
				Feed (mm/min)	204	204	204	191	193	204	210
		> 250 ≤ 330	34	RPM	10664	3555	1777	1333	1066	889	666
			(27-40)	Fr	0.050	0.015	0.035	0.045	0.055	0.070	0.105
				Feed (mm/min)	533	53	62	60	59	62	70

continued on next page

	Series 101M, 108M Metric	Hardness BRINELL	Vc (m/min)	Diameter (D ₁) (mm)							
				1	3	6	8	10	12	16	
M	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 270	20	RPM	6301	2100	1050	788	630	525	394
			(16-24)	Fr	0.005	0.020	0.045	0.055	0.065	0.085	0.115
				Feed (mm/min)	32	42	47	43	41	45	45
		> 270 ≤ 370	17	RPM	5332	1777	889	666	533	444	333
			(13-20)	Fr	0.005	0.020	0.035	0.050	0.065	0.070	0.105
				Feed (mm/min)	27	36	31	33	35	31	35
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoly 800, Monel 400, Rene, Waspaloy	≤ 220	12	RPM	3878	1293	646	485	388	323	242
			(10-15)	Fr	0.005	0.020	0.045	0.055	0.065	0.085	0.115
				Feed (mm/min)	19	26	29	27	25	27	28
		> 220 ≤ 330	8	RPM	2424	808	404	303	242	202	151
			(6-9)	Fr	0.005	0.020	0.035	0.050	0.065	0.070	0.105
				Feed (mm/min)	12	16	14	15	16	14	16
		> 330 ≤ 420	6	RPM	1939	646	323	242	194	162	121
			(5-7)	Fr	0.010	0.025	0.030	0.040	0.050	0.065	0.080
				Feed (mm/min)	19	16	10	10	10	11	10
S	TITANIUM ALLOYS (DIFFICULT) Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 280	26	RPM	8240	2747	1373	1030	824	687	515
			(21-31)	Fr	0.015	0.040	0.075	0.105	0.135	0.155	0.205
				Feed (mm/min)	124	110	103	108	111	106	106
		> 280 ≤ 350	20	RPM	6301	2100	1050	788	630	525	394
			(16-24)	Fr	0.005	0.020	0.045	0.055	0.065	0.085	0.115
				Feed (mm/min)	32	42	47	43	41	45	45
		> 350 ≤ 440	17	RPM	5332	1777	889	666	533	444	333
			(13-20)	Fr	0.005	0.020	0.035	0.050	0.065	0.070	0.105
				Feed (mm/min)	27	36	31	33	35	31	35
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80	165	RPM	52348	17449	8725	6544	5235	4362	3272
			(132-198)	Fr	0.020	0.060	0.120	0.160	0.200	0.240	0.320
				Feed (mm/min)	1047	1047	1047	1047	1047	1047	1047
		> 80	139	RPM	44108	14703	7351	5514	4411	3676	2757
			(111-166)	Fr	0.020	0.060	0.120	0.160	0.200	0.240	0.320
				Feed (mm/min)	882	882	882	882	882	882	882
N	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 140	58	RPM	18419	6140	3070	2302	1842	1535	1151
			(46-69)	Fr	0.010	0.030	0.060	0.075	0.095	0.120	0.165
				Feed (mm/min)	184	184	184	173	175	184	190
		> 140	53	RPM	16965	5655	2827	2121	1696	1414	1060
			(43-64)	Fr	0.010	0.030	0.060	0.075	0.095	0.120	0.165
				Feed (mm/min)	170	170	170	159	161	170	175
	PLASTICS Polycarbonate, PVC		152	RPM	48471	16157	8078	6059	4847	4039	3029
			(122-183)	Fr	0.020	0.060	0.120	0.160	0.200	0.240	0.320
				Feed (mm/min)	969	969	969	969	969	969	969

$$\text{rpm} = (1000 \times \text{m/min}) / (3.14 \times D_1)$$

$$\text{mm / min} = (\text{mm / revolution}) \times \text{rpm}$$

reduce speed and feed rates shown by 30 percent when using uncoated drills

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)

Series 106 Fractional	Hardness BRINELL	Vc (SFM)	Diameter (D ₁) (inch)							
			1/16	1/8	3/16	1/4	3/8	1/2		
P	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	> 420 ≤ 500	33	RPM	2017	1008	672	504	336	252
			(26-40)	Fz	0.0003	0.0006	0.0008	0.0012	0.0018	0.0024
				Feed (IPM)	0.6	0.6	0.5	0.6	0.6	0.6
		> 500 ≤ 615	33	RPM	2017	1008	672	504	336	252
			(26-40)	Fr	0.0002	0.0004	0.0005	0.0007	0.0010	0.0014
				Feed (IPM)	0.4	0.4	0.3	0.4	0.3	0.4
P	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	> 420 ≤ 500	34	RPM	2078	1039	693	520	346	260
			(27-41)	Fr	0.0003	0.0006	0.0008	0.0012	0.0018	0.0023
				Feed (IPM)	0.6	0.6	0.6	0.6	0.6	0.6
		> 500 ≤ 615	33	RPM	2017	1008	672	504	336	252
			(26-40)	Fr	0.0002	0.0003	0.0004	0.0006	0.0008	0.0014
				Feed (IPM)	0.4	0.3	0.3	0.3	0.3	0.4
K	CAST IRONS Gray, Malleable, Ductile	≤ 200	252	RPM	15402	7701	5134	3851	2567	1925
			(202-302)	Fr	0.001	0.0020	0.0030	0.0040	0.0060	0.0081
				Feed (IPM)	15.4	15.4	15.4	15.4	15.4	15.6
		> 200 ≤ 330	185	RPM	11307	5654	3769	2827	1885	1413
			(148-222)	Fr	0.001	0.0020	0.0030	0.0040	0.0060	0.0081
				Feed (IPM)	11.3	11.3	11.3	11.3	11.3	11.4

rpm = sfm x 3.82 / D₁

ipm = (inch / revolution) x rpm

reduce speed and feed rates shown by 30 percent when using uncoated drills

refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)

Series 106M Metric	Hardness BRINELL	Vc (m/min)	Diameter (D ₁) (mm)							
			1	3	6	8	10	12		
P	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	10	RPM	3199	1066	533	400	320	267	
		> 420 ≤ 500	(8-12)	Fz	0.006	0.017	0.034	0.045	0.057	0.068
			Feed (mm/min)	19	18	18	18	18	18	
		10	RPM	3199	1066	533	400	320	267	
		> 500 ≤ 615	(8-12)	Fr	0.003	0.009	0.018	0.024	0.030	0.036
			Feed (mm/min)	10	10	10	10	10	10	
P	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	10	RPM	3296	1099	549	412	330	275	
		> 420 ≤ 500	(8-12)	Fr	0.003	0.009	0.018	0.024	0.030	0.036
			Feed (mm/min)	10	10	10	10	10	10	
		10	RPM	3199	1066	533	400	320	267	
		> 500 ≤ 615	(8-12)	Fr	0.002	0.007	0.014	0.019	0.023	0.028
			Feed (mm/min)	6	7	7	8	7	7	
K	CAST IRONS Gray, Malleable, Ductile	77	RPM	24429	8143	4072	3054	2443	2036	
		≤ 200	(61-92)	Fr	0.016	0.048	0.096	0.128	0.160	0.192
			Feed (mm/min)	391	391	391	391	391	391	
		56	RPM	17934	5978	2989	2242	1793	1495	
		> 200 ≤ 330	(45-68)	Fr	0.016	0.048	0.096	0.128	0.160	0.192
			Feed (mm/min)	287	287	287	287	287	287	

rpm = sfm x 3.82 / D₁

ipm = (inch / revolution) x rpm

reduce speed and feed rates shown by 30 percent when using uncoated drills

refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)

Series 103 Fractional	Hardness BRINELL	Vc (SFM)	Diameter (D ₁) (inch)							
			1/8	1/4	3/8	1/2	5/8	3/4		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 200	265	RPM	8098	4049	2699	2025	1620	1350
			(212-318)	Fr	0.0002	0.0004	0.0009	0.0017	0.0034	0.0050
				Feed (IPM)	1.6	1.6	2.4	3.4	5.5	6.7
		> 200 ≤ 300	125	RPM	3820	1910	1273	955	764	637
			(100-150)	Fr	0.0002	0.0004	0.0008	0.0016	0.0031	0.0045
				Feed (IPM)	0.8	0.8	1.0	1.5	2.4	2.9
		> 300 ≤ 420	85	RPM	2598	1299	866	649	520	433
			(68-102)	Fz	0.0001	0.0002	0.0005	0.0009	0.0018	0.0025
				Feed (IPM)	0.3	0.3	0.4	0.6	0.9	1.1
P	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275	230	RPM	7029	3514	2343	1757	1406	1171
			(184-276)	Fz	0.0002	0.0004	0.0008	0.0016	0.0031	0.0045
				Feed (IPM)	1.4	1.4	1.9	2.8	4.4	5.3
		> 275 ≤ 375	145	RPM	4431	2216	1477	1108	886	739
			(116-174)	Fr	0.0002	0.0004	0.0008	0.0015	0.0030	0.0045
				Feed (IPM)	0.9	0.9	1.2	1.7	2.7	3.3
		> 375 ≤ 450	60	RPM	1834	917	611	458	367	306
			(48-72)	Fr	0.0001	0.0002	0.0004	0.0007	0.0013	0.0020
				Feed (IPM)	0.2	0.2	0.2	0.3	0.5	0.6
P	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 250	85	RPM	2598	1299	866	649	520	433
			(68-102)	Fr	0.0001	0.0002	0.0005	0.0009	0.0018	0.0025
				Feed (IPM)	0.3	0.3	0.4	0.6	0.9	1.1
		> 250 ≤ 330	55	RPM	1681	840	560	420	336	280
			(44-66)	Fr	0.00005	0.0001	0.0002	0.0004	0.0008	0.0010
				Feed (IPM)	0.1	0.1	0.1	0.2	0.3	0.3
		> 330 ≤ 450	40	RPM	1222	611	407	306	244	204
			(32-48)	Fr	0.00005	0.0001	0.0002	0.0004	0.0008	0.0010
				Feed (IPM)	0.1	0.1	0.1	0.1	0.2	0.2
K	CAST IRONS Gray, Malleable, Ductile	≤ 200	280	RPM	8557	4278	2852	2139	1711	1426
			(224-336)	Fr	0.00025	0.0005	0.0011	0.0021	0.0041	0.0060
				Feed (IPM)	2.1	2.1	3.1	4.5	7.0	8.6
		> 200 ≤ 330	250	RPM	7640	3820	2547	1910	1528	1273
			(200-300)	Fr	0.00025	0.0005	0.0011	0.0021	0.0041	0.0060
				Feed (IPM)	1.9	1.9	2.8	4.0	6.3	7.6
S	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 280	85	RPM	2598	1299	866	649	520	433
			(68-102)	Fr	0.0002	0.0004	0.0008	0.0016	0.0032	0.0050
				Feed (IPM)	0.5	0.5	0.7	1.0	1.7	2.2
		> 280 ≤ 350	65	RPM	1986	993	662	497	397	331
			(52-78)	Fr	0.0001	0.0002	0.0005	0.0009	0.0018	0.0025
				Feed (IPM)	0.2	0.2	0.3	0.4	0.7	0.8
		> 350 ≤ 440	55	RPM	1681	840	560	420	336	280
			(44-66)	Fr	0.0001	0.0002	0.0004	0.0008	0.0015	0.0025
				Feed (IPM)	0.2	0.2	0.2	0.3	0.5	0.7
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80	540	RPM	16502	8251	5501	4126	3300	2750
			(432-648)	Fr	0.0003	0.0006	0.0013	0.0025	0.0050	0.0075
				Feed (IPM)	5.0	5.0	7.2	10.3	16.5	20.6
		> 80	455	RPM	13905	6952	4635	3476	2781	2317
			(364-546)	Fr	0.0003	0.0006	0.0013	0.0025	0.0050	0.0075
				Feed (IPM)	4.2	4.2	6.0	8.7	13.9	17.4
N	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 140	190	RPM	5806	2903	1935	1452	1161	968
			(152-228)	Fr	0.00015	0.0003	0.0006	0.0012	0.0024	0.0035
				Feed (IPM)	0.9	0.9	1.2	1.7	2.8	3.4
		> 140	175	RPM	5348	2674	1783	1337	1070	891
			(140-210)	Fr	0.00015	0.0003	0.0006	0.0012	0.0024	0.0035
				Feed (IPM)	0.8	0.8	1.1	1.6	2.6	3.1

rpm = sfm x 3.82 / D₁

ipm = (inch / revolution) x rpm

reduce speed and feed rates shown by 30 percent when using uncoated drills

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)



Series 103M Metric	Hardness BRINELL	Vc (m/min)	Diameter (D ₁) (mm)							
			3	6	10	12	16	20		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 200	81	RPM	8563	4282	2569	2141	1606	1284
			(65-97)	Fr	0.053	0.108	0.176	0.216	0.264	0.352
				Feed (IPM)	454	462	452	462	424	452
		> 200 ≤ 300	38	RPM	4039	2020	1212	1010	757	606
			(30-46)	Fr	0.048	0.096	0.160	0.192	0.240	0.320
				Feed (IPM)	194	194	194	194	182	194
		> 300 ≤ 420	26	RPM	2747	1373	824	687	515	412
			(21-31)	Fz	0.031	0.062	0.104	0.125	0.156	0.208
				Feed (IPM)	85	85	86	86	80	86
		P	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 270	70	RPM	7432	3716	2230	1858
(56-84)	Fz				0.048	0.096	0.160	0.192	0.240	0.320
	Feed (IPM)				357	357	357	357	334	357
> 275 ≤ 375	44			RPM	4686	2343	1406	1171	879	703
	(35-53)			Fr	0.048	0.096	0.160	0.192	0.240	0.320
				Feed (IPM)	225	225	225	225	211	225
> 375 ≤ 450	18			RPM	1939	969	582	485	364	291
	(15-22)			Fr	0.031	0.062	0.104	0.125	0.156	0.208
				Feed (IPM)	60	60	60	61	57	60
P	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2			≤ 250	26	RPM	2747	1373	824	687
		(21-31)	Fr		0.031	0.062	0.104	0.125	0.156	0.208
			Feed (IPM)		85	85	86	86	80	86
		> 250 ≤ 330	17	RPM	1777	889	533	444	333	267
			(13-20)	Fr	0.017	0.036	0.056	0.074	0.084	0.112
				Feed (IPM)	30	32	30	33	28	30
		> 330 ≤ 450	12	RPM	1293	646	388	323	242	194
			(10-15)	Fr	0.012	0.024	0.040	0.046	0.060	0.080
				Feed (IPM)	16	16	16	15	15	16
		K	CAST IRONS Gray, Malleable, Ductile	≤ 200	85	RPM	9048	4524	2714	2262
(68-102)	Fr				0.060	0.125	0.200	0.247	0.300	0.400
	Feed (IPM)				543	565	543	559	509	543
> 200 ≤ 330	76			RPM	8078	4039	2424	2020	1515	1212
	(61-91)			Fr	0.060	0.125	0.200	0.247	0.300	0.400
				Feed (IPM)	485	505	485	499	454	485
S	TITANIUM ALLOYS Pure Ttanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 280	26	RPM	2747	1373	824	687	515	412
			(21-31)	Fr	0.048	0.096	0.160	0.192	0.240	0.320
				Feed (IPM)	132	132	132	132	124	132
		> 280 ≤ 350	20	RPM	2100	1050	630	525	394	315
			(16-24)	Fr	0.029	0.058	0.096	0.113	0.144	0.192
				Feed (IPM)	61	61	60	59	57	60
		> 350 ≤ 440	17	RPM	1777	889	533	444	333	267
			(13-20)	Fr	0.029	0.058	0.096	0.113	0.144	0.192
				Feed (IPM)	52	52	51	50	48	51
				Feed (IPM)	52	52	51	50	48	51
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80	165	RPM	17449	8725	5235	4362	3272	2617
			(132-198)	Fr	0.077	0.156	0.256	0.312	0.384	0.512
				Feed (IPM)	1344	1361	1340	1361	1256	1340
		> 80	139	RPM	14703	7351	4411	3676	2757	2205
			(111-166)	Fr	0.077	0.156	0.256	0.312	0.384	0.512
				Feed (IPM)	1132	1147	1129	1147	1059	1129
N	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 140	58	RPM	6140	3070	1842	1535	1151	921
			(46-69)	Fr	0.038	0.077	0.128	0.156	0.192	0.256
				Feed (IPM)	233	236	236	239	221	236
		> 140	53	RPM	5655	2827	1696	1414	1060	848
			(43-64)	Fr	0.038	0.077	0.128	0.156	0.192	0.256
				Feed (IPM)	215	218	217	221	204	217



rpm = (1000 x m/min) / (3.14 x D₁)

mm / min = (mm / revolution) x rpm

reduce speed and feed rates shown by 30 percent when using uncoated drills

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)

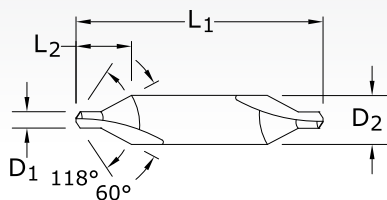**TOLERANCES (inch)** $D_1 = +.003/-0.000$ $D_2 = -.0001/-0.0005$ **301**
FRACTIONAL SERIES

TECH INFO 225

SIZE	inch			EDP NO.	
	BODY DIAMETER D_2	DRILL DIAMETER D_1	APPROX. OVERALL LENGTH L_1	UNCOATED	Ti-NAMITE-A (AlTiN)
00*	1/8	.025	1-1/2	57005	57015
0*	1/8	1/32	1-1/2	57006	57016
1*	1/8	3/64	1-1/2	57007	57017
2*	3/16	5/64	1-7/8	57008	57018
3*	1/4	7/64	2	57009	57019
4*	5/16	1/8	2-1/8	57010	57020
5*	7/16	3/16	2-3/4	57011	57021
6*	1/2	7/32	3	57012	57022
Series 301 Set	—	—	—	57075	—

*Included in Series 301 Set

STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS

TITANIUM


NON-FERROUS

PLASTICS/COMPOSITES

TOLERANCES (mm)**0,5–2,5 DIAMETER** $D_1 = +0,140/-0,000$ **>2,5–5 DIAMETER** $D_1 = +0,000/-0,012$ **TOLERANCES h_9 (mm)****0,5–3 DIAMETER** $D_2 = +0,000/-0,025$ **>3–5 DIAMETER** $D_2 = +0,000/-0,030$ **301M**
METRIC SERIES

TECH INFO 227

SIZE	mm		EDP NO.	
	BODY DIAMETER D_2	APPROX. OVERALL LENGTH L_1	UNCOATED	Ti-NAMITE-A (AlTiN)
0,5	3,15	20,0	67005	67035
0,8	3,15	20,0	67007	67037
1	3,15	31,5	67009	67039
1,25	3,15	31,5	67011	67041
1,6	4,0	35,5	67013	67043
2	5,0	40,0	67015	67045
2,5	6,3	45,0	67017	67047
3,15	8,0	50,0	67019	67049
4	10,0	56,0	67021	67051
5	12,5	63,0	67023	67053

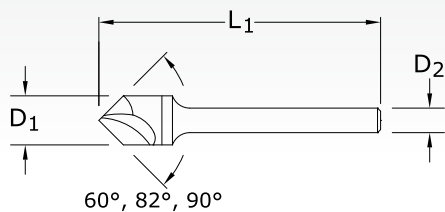**601**

FRACTIONAL SERIES

TECH INFO 229

STEELS
STAINLESS STEELS
CAST IRON
HIGH TEMP ALLOYS
TITANIUM
NON-FERROUS
PLASTICS/COMPOSITES


CUTTING DIAMETER D ₁	inch		EDP NO.		
	SHANK DIAMETER D ₂	OVERALL LENGTH L ₁	UNCOATED 60°	UNCOATED 82°	UNCOATED 90°
1/8	1/8	1-1/2	74001	74101	74201
3/16	3/16	2	74004	74104	74204
1/4	1/4	2	74007	74107	74207
3/8*	1/4	2-13/16	74010	74110	74210
1/2*	1/4	2-7/8	74013	74113	74213
5/8*	3/8	3	74016	74116	74216
3/4*	1/2	3	74019	74119	74219
1*	1/2	3-1/4	74022	74122	74222

*Steel Shank / Con mango de acero / Avec queue en acier

TOLERANCES (inch)**1/8-1/4 DIAMETER**D₁ = +.0000/-0.0005**3/8-1 DIAMETER**D₁ = +.003/-0.000

Included Angle +1°/-1°

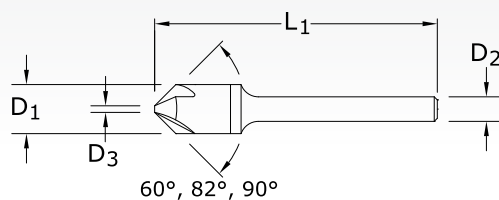

**TOLERANCES (inch)****1/8-1/4 DIAMETER** $D_1 = +.0000/-0.0005$ **3/8-1 DIAMETER** $D_1 = +.003/-0.000$ Included Angle $+1^\circ/-1^\circ$

603

FRACTIONAL SERIES

TECH INFO 231

inch			EDP NO.		
CUTTING DIAMETER D_1	SHANK DIAMETER D_2	OVERALL LENGTH L_1	UNCOATED 60°	UNCOATED 82°	UNCOATED 90°
1/8	1/8	1-1/2	74025	74125	74225
3/16	3/16	2	74028	74128	74228
1/4	1/4	2	74031	74131	74231
3/8*	1/4	2-13/16	74034	74134	74234
1/2*	1/4	2-7/8	74037	74137	74237
5/8*	3/8	3	74040	74140	74240
3/4*	1/2	3	74043	74143	74243
1*	1/2	3-1/4	74046	74146	74246

*Steel Shank / Con mango de acero / Avec queue en acier

NOTE: D_3 dimension varies based on angle. Contact SGS representative or consult Tool Wizard for dimension information.

STEELS

STAINLESS STEELS


CAST IRON

HIGH TEMP ALLOYS

TITANIUM

NON-FERROUS


PLASTICS/COMPOSITES

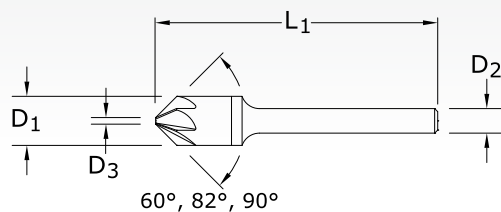

606

FRACTIONAL SERIES

TECH INFO 233



CUTTING DIAMETER D ₁	inch SHANK DIAMETER D ₂	OVERALL LENGTH L ₁	EDP NO.		
			UNCOATED 60°	UNCOATED 82°	UNCOATED 90°
1/8	1/8	1-1/2	74049	74149	74249
3/16	3/16	2	74052	74152	74252
1/4	1/4	2	74055	74155	74255
3/8*	1/4	2-13/16	74058	74158	74258
1/2*	1/4	2-7/8	74061	74161	74261
5/8*	3/8	3	74064	74164	74264
3/4*	1/2	3	74067	74167	74267
1*	1/2	3-1/4	74070	74170	74270

*Steel Shank / Con mango de acero / Avec queue en acier

NOTE: D3 dimension varies based on angle. Contact SGS representative or consult Tool Wizard for dimension information.

TOLERANCES (inch)

1/8-1/4 DIAMETER

D₁ = +.0000/- .0005

3/8-1 DIAMETER

D₁ = +.003/- .000

Included Angle +1°/-1°



Series 301 Fractional	Hardness BRINELL	Vc (SFM)	Diameter (D ₁) (inch)							
			1/32	3/64	5/64	1/8	3/16	7/32		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 200	275	RPM	33616	22411	13446	8404	5603	4802
			(220-330)	Fr	0.0003	0.0005	0.0007	0.0012	0.0018	0.0021
				Feed (IPM)	10.1	11.2	9.4	10.1	10.1	10.1
		≥ 200 ≤ 300	150	RPM	18336	12224	7334	4584	3056	2619
			(120-180)	Fr	0.0003	0.0004	0.0007	0.0011	0.0016	0.0019
				Feed (IPM)	5.5	4.9	5.1	5.0	4.9	5.0
		≥ 300 ≤ 420	105	RPM	12835	8557	5134	3209	2139	1834
			(84-126)	Fz	0.0002	0.0003	0.0005	0.0007	0.0011	0.0013
				Feed (IPM)	2.6	2.6	2.6	2.2	2.4	2.4
P	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275	230	RPM	28115	18743	11246	7029	4686	4016
			(184-276)	Fz	0.0003	0.0004	0.0006	0.0010	0.0015	0.0018
				Feed (IPM)	8.4	7.5	6.7	7.0	7.0	7.2
		≥ 275 ≤ 375	140	RPM	17114	11409	6845	4278	2852	2445
			(112-168)	Fr	0.0003	0.0004	0.0006	0.0010	0.0015	0.0018
				Feed (IPM)	5.1	4.6	4.1	4.3	4.3	4.4
		≥ 375 ≤ 450	90	RPM	11002	7334	4401	2750	1834	1572
			(72-108)	Fr	0.0002	0.0003	0.0004	0.0007	0.0010	0.0012
				Feed (IPM)	2.2	2.2	1.8	1.9	1.8	1.9
P	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 250	85	RPM	10390	6927	4156	2598	1732	1484
			(68-102)	Fr	0.0002	0.0003	0.0004	0.0007	0.0010	0.0012
				Feed (IPM)	2.1	2.1	1.7	1.8	1.7	1.8
		≥ 250 ≤ 330	50	RPM	6112	4075	2445	1528	1019	873
			(40-60)	Fr	0.0001	0.0002	0.0002	0.0004	0.0006	0.0007
				Feed (IPM)	0.6	0.8	0.5	0.6	0.6	0.6
		≥ 330 ≤ 450	40	RPM	4890	3260	1956	1222	815	699
			(32-48)	Fr	0.0001	0.0002	0.0002	0.0004	0.0006	0.0007
				Feed (IPM)	0.5	0.7	0.4	0.5	0.5	0.5
K	CAST IRONS Gray, Malleable, Ductile	≤ 200	250	RPM	30560	20373	12224	7640	5093	4366
			(200-300)	Fr	0.0004	0.0005	0.0009	0.0014	0.0021	0.0025
				Feed (IPM)	12.2	10.2	11.0	10.7	10.7	10.9
		≥ 200 ≤ 330	185	RPM	22614	15076	9046	5654	3769	3231
			(148-222)	Fr	0.0003	0.0005	0.0009	0.0014	0.0021	0.0024
				Feed (IPM)	6.8	7.5	8.1	7.9	7.9	7.8
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	< 250	155	RPM	18947	12631	7579	4737	3158	2707
			(124-186)	Fr	0.0002	0.0003	0.0004	0.0006	0.0009	0.0011
				Feed (IPM)	3.8	3.8	3.0	2.8	2.8	3.0
		≥ 250 ≤ 330	110	RPM	13446	8964	5379	3362	2241	1921
			(88-132)	Fr	0.0002	0.0003	0.0004	0.0006	0.0009	0.0011
				Feed (IPM)	2.7	2.7	2.2	2.0	2.0	2.1

continued on next page



Series 301 Fractional	Hardness BRINELL	Vc (SFM)	Diameter (D ₁) (inch)							
			1/32	3/64	5/64	1/8	3/16	7/32		
M	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	> 270 ≤ 370	70	RPM	8557	5705	3423	2139	1426	1222
			(56-84)	Fr	0.0002	0.0003	0.0004	0.0006	0.0009	0.0011
				Feed (IPM)	1.7	1.7	1.4	1.3	1.3	1.3
		> 270 ≤ 370	50	RPM	6112	4075	2445	1528	1019	873
			(40-60)	Fr	0.0001	0.0002	0.0003	0.0004	0.0006	0.0007
				Feed (IPM)	0.6	0.8	0.7	0.6	0.6	0.6
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoly 800, Monel 400, Rene, Waspaloy	≤ 220	25	RPM	3056	2037	1222	764	509	437
			(20-30)	Fr	0.0002	0.0003	0.0005	0.0007	0.0011	0.0013
				Feed (IPM)	0.6	0.6	0.6	0.5	0.6	0.6
		> 220 ≤ 330	20	RPM	2445	1630	978	611	407	349
			(16-24)	Fr	0.0001	0.0001	0.0002	0.0003	0.0005	0.0006
				Feed (IPM)	0.2	0.2	0.2	0.2	0.2	0.2
		> 330 ≤ 420	15	RPM	1834	1222	733	458	306	262
			(12-18)	Fr	0.0001	0.0001	0.0001	0.0002	0.0003	0.0004
				Feed (IPM)	0.2	0.1	0.1	0.1	0.1	0.1
S	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 280	85	RPM	10390	6927	4156	2598	1732	1484
			(68-102)	Fr	0.0003	0.0004	0.0007	0.0011	0.0017	0.0020
				Feed (IPM)	3.1	2.8	2.9	2.9	2.9	3.0
		> 280 ≤ 350	65	RPM	7946	5297	3178	1986	1324	1135
			(52-78)	Fr	0.0001	0.0002	0.0004	0.0006	0.0009	0.0010
				Feed (IPM)	0.8	1.1	1.3	1.2	1.2	1.1
		> 350 ≤ 440	50	RPM	6112	4075	2445	1528	1019	873
			(40-60)	Fr	0.0002	0.0004	0.0008	0.0015	0.0025	0.0030
				Feed (IPM)	1.2	1.6	2.0	2.3	2.5	2.6
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80	540	RPM	66010	44006	26404	16502	11002	9430
			(432-648)	Fr	0.0004	0.0007	0.0011	0.0018	0.0027	0.0031
				Feed (IPM)	26.4	30.8	29.0	29.7	29.7	29.2
		> 80	455	RPM	55619	37079	22248	13905	9270	7946
			(364-546)	Fr	0.0004	0.0007	0.0011	0.0018	0.0027	0.0031
				Feed (IPM)	22.2	26.0	24.5	25.0	25.0	24.6
N	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 140	230	RPM	28115	18743	11246	7029	4686	4016
			(184-276)	Fr	0.0002	0.0003	0.0005	0.0009	0.0013	0.0015
				Feed (IPM)	5.6	5.6	5.6	6.3	6.1	6.0
		> 140	175	RPM	21392	14261	8557	5348	3565	3056
			(140-210)	Fr	0.0002	0.0003	0.0005	0.0009	0.0013	0.0015
				Feed (IPM)	4.3	4.3	4.3	4.8	4.6	4.6

rpm = sfm x 3.82 / D₁

ipm = (inch / revolution) x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)

Series 301M Metric		Hardness BRINELL	Vc (m/min)	Diameter (D ₁) (mm)						
				0.5	1	1.6	2.5	4	5	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 200	84	RPM	53318	26659	16662	10664	6665	5332
			(67-101)	Fr	0.005	0.011	0.014	0.024	0.038	0.048
				Feed (mm/min)	267	293	233	256	253	256
		≥ 200 ≤ 300	46	RPM	29082	14541	9088	5816	3635	2908
			(37-55)	Fr	0.005	0.009	0.014	0.022	0.034	0.043
				Feed (mm/min)	145	131	127	128	124	125
		≥ 300 ≤ 420	32	RPM	20358	10179	6362	4072	2545	2036
			(26-38)	Fz	0.003	0.006	0.010	0.014	0.023	0.030
				Feed (mm/min)	61	61	64	57	59	61
P	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 270	70	RPM	44593	22297	13935	8919	5574	4459
			(56-84)	Fz	0.005	0.009	0.012	0.020	0.032	0.041
				Feed (mm/min)	223	201	167	178	178	183
		≥ 275 ≤ 375	43	RPM	27144	13572	8482	5429	3393	2714
			(34-51)	Fr	0.005	0.009	0.012	0.020	0.032	0.041
				Feed (mm/min)	136	122	102	109	109	111
		≥ 375 ≤ 450	27	RPM	17449	8725	5453	3490	2181	1745
			(22-33)	Fr	0.003	0.006	0.008	0.014	0.021	0.027
				Feed (mm/min)	52	52	44	49	46	47
P	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 250	26	RPM	16480	8240	5150	3296	2060	1648
			(21-31)	Fr	0.003	0.006	0.008	0.014	0.021	0.027
				Feed (mm/min)	49	49	41	46	43	44
		≥ 250 ≤ 330	15	RPM	9694	4847	3029	1939	1212	969
			(12-18)	Fr	0.002	0.005	0.007	0.010	0.017	0.021
				Feed (mm/min)	19	24	21	19	21	20
		≥ 330 ≤ 450	12	RPM	7755	3878	2424	1551	969	776
			(10-15)	Fr	0.002	0.004	0.006	0.008	0.013	0.016
				Feed (mm/min)	16	16	15	12	13	12
K	CAST IRONS Gray, Malleable, Ductile	≤ 200	76	RPM	48471	24235	15147	9694	6059	4847
			(61-91)	Fr	0.007	0.011	0.018	0.028	0.045	0.057
				Feed (mm/min)	339	267	273	271	273	276
		≥ 200 ≤ 330	56	RPM	35868	17934	11209	7174	4484	3587
			(45-68)	Fr	0.007	0.011	0.018	0.028	0.045	0.057
				Feed (mm/min)	251	197	202	201	202	204
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	< 250	47	RPM	30052	15026	9391	6010	3756	3005
			(38-57)	Fr	0.003	0.004	0.008	0.012	0.019	0.025
				Feed (mm/min)	90	60	75	72	71	75
		≥ 250 ≤ 330	34	RPM	21327	10664	6665	4265	2666	2133
			(27-40)	Fr	0.002	0.004	0.008	0.012	0.019	0.023
				Feed (mm/min)	43	43	53	51	51	49

continued on next page



Series 301M Metric	Hardness BRINELL	Vc (m/min)	Diameter (D ₁) (mm)									
			0.5	1	1.6	2.5	4	5				
M	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	21	RPM	13572	6786	4241	2714	1696	1357			
		> 270 ≤ 370	(17-26)	Fr	0.002	0.004	0.008	0.012	0.019	0.023		
			Feed (mm/min)	27	27	34	33	32	31			
		> 270 ≤ 370	15	RPM	9694	4847	3029	1939	1212	969		
			(12-18)	Fr	0.002	0.004	0.006	0.008	0.013	0.016		
				Feed (mm/min)	19	19	18	16	16	16		
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoly 800, Monel 400, Rene, Waspaloy	≤ 220	8	RPM	4847	2424	1515	969	606	485		
			(6-9)	Fr	0.003	0.006	0.010	0.014	0.023	0.030		
		> 220 ≤ 330	(5-7)	Fr	0.002	0.003	0.004	0.006	0.011	0.014		
				Feed (mm/min)	8	6	5	5	5	5		
			> 330 ≤ 420	5	RPM	2908	1454	909	582	364	291	
		(4-5)		Fr	0.002	0.002	0.002	0.004	0.006	0.009		
				Feed (mm/min)	6	3	2	2	2	3		
		S	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 280	26	RPM	16480	8240	5150	3296	2060	1648
					(21-31)	Fr	0.005	0.009	0.014	0.022	0.036	0.046
Feed (mm/min)	82					74	72	73	74	76		
> 280 ≤ 350	20			RPM	12602	6301	3938	2520	1575	1260		
	(16-24)			Fr	0.002	0.004	0.008	0.012	0.019	0.023		
				Feed (mm/min)	25	25	32	30	30	29		
> 350 ≤ 440	15			RPM	9694	4847	3029	1939	1212	969		
	(12-18)			Fr	0.002	0.004	0.004	0.008	0.013	0.016		
				Feed (mm/min)	19	19	12	16	16	16		
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80	165	RPM	104697	52348	32718	20939	13087	10470		
			(132-198)	Fr	0.007	0.015	0.023	0.036	0.057	0.071		
				Feed (mm/min)	733	785	753	754	746	743		
		> 80	139	RPM	88217	44108	27568	17643	11027	8822		
			(111-166)	Fr	0.007	0.015	0.023	0.036	0.057	0.071		
				Feed (mm/min)	618	662	634	635	629	626		
N	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 140	70	RPM	44593	22297	13935	8919	5574	4459		
			(56-84)	Fr	0.003	0.006	0.010	0.018	0.028	0.034		
				Feed (mm/min)	134	134	139	161	156	152		
		> 140	53	RPM	33930	16965	10603	6786	4241	3393		
			(43-64)	Fr	0.003	0.006	0.010	0.018	0.028	0.034		
				Feed (mm/min)	102	102	106	122	119	115		

 $\text{rpm} = (1000 \times \text{m/min}) / (3.14 \times D_1)$
 $\text{mm/min} = (\text{mm/revolution}) \times \text{rpm}$

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)

Series 601 Fractional	Hardness BRINELL	Vc (SFM)	Diameter (D ₁) (inch)										
			1/8	3/16	1/4	3/8	1/2	3/4	1				
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 200	125	RPM	3820	2547	1910	1273	955	637	478		
			(100-150)	Fr	0.0005	0.0008	0.0011	0.0016	0.0021	0.0032	0.0042		
				Feed (IPM)	1.9	2.0	2.1	2.0	2.0	2.0	2.0		
		> 200 ≤ 300	60	RPM	1834	1222	917	611	458	306	229		
			(48-72)	Fr	0.0005	0.0007	0.0010	0.0014	0.0019	0.0029	0.0038		
				Feed (IPM)	0.9	0.9	0.9	0.9	0.9	0.9	0.9		
		> 300 ≤ 420	45	RPM	1375	917	688	458	344	229	172		
			(36-54)	Fz	0.0003	0.0005	0.0006	0.0009	0.0012	0.0018	0.0024		
				Feed (IPM)	0.4	0.5	0.4	0.4	0.4	0.4	0.4		
		P	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275	95	RPM	2903	1935	1452	968	726	484	363
					(76-114)	Fz	0.0005	0.0007	0.0009	0.0014	0.0018	0.0027	0.0036
						Feed (IPM)	1.5	1.4	1.3	1.4	1.3	1.3	1.3
> 275 ≤ 375	60			RPM	1834	1222	917	611	458	306	229		
	(48-72)			Fr	0.0005	0.0007	0.0009	0.0014	0.0018	0.0027	0.0036		
				Feed (IPM)	0.9	0.9	0.8	0.9	0.8	0.8	0.8		
> 375 ≤ 450	35			RPM	1070	713	535	357	267	178	134		
	(28-42)			Fr	0.0003	0.0004	0.0006	0.0008	0.0011	0.0017	0.0022		
				Feed (IPM)	0.3	0.3	0.3	0.3	0.3	0.3	0.3		
P	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2			≤ 250	35	RPM	1070	713	535	357	267	178	134
					(28-42)	Fr	0.0003	0.0004	0.0006	0.0008	0.0011	0.0017	0.0022
						Feed (IPM)	0.3	0.3	0.3	0.3	0.3	0.3	0.3
		> 250 ≤ 330	25	RPM	764	509	382	255	191	127	96		
			(20-30)	Fr	0.0002	0.0002	0.0003	0.0005	0.0006	0.0009	0.0012		
				Feed (IPM)	0.2	0.1	0.1	0.1	0.1	0.1	0.1		
		> 330 ≤ 450	20	RPM	611	407	306	204	153	102	76		
			(16-24)	Fr	0.0002	0.0002	0.0003	0.0005	0.0006	0.0009	0.0012		
				Feed (IPM)	0.1	0.1	0.1	0.1	0.1	0.1	0.1		
		K	CAST IRONS Gray, Malleable, Ductile	≤ 200	105	RPM	3209	2139	1604	1070	802	535	401
					(84-126)	Fr	0.0006	0.0009	0.0012	0.0018	0.0024	0.0036	0.0048
						Feed (IPM)	1.9	1.9	1.9	1.9	1.9	1.9	1.9
> 200 ≤ 330	75			RPM	2292	1528	1146	764	573	382	287		
	(60-90)			Fr	0.0006	0.0009	0.0012	0.0018	0.0024	0.0036	0.0048		
				Feed (IPM)	1.4	1.4	1.4	1.4	1.4	1.4	1.4		
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F			< 250	53	RPM	1620	1080	810	540	405	270	202
					(42-64)	Fr	0.0003	0.0005	0.0006	0.0009	0.0012	0.0018	0.0024
						Feed (IPM)	0.5	0.5	0.5	0.5	0.5	0.5	0.5
				> 250 ≤ 330	46	RPM	1406	937	703	469	351	234	176
					(37-55)	Fr	0.0002	0.0003	0.0005	0.0007	0.0009	0.0014	0.0018
						Feed (IPM)	0.3	0.3	0.4	0.3	0.3	0.3	0.3

continued on next page

Series 601 Fractional	Hardness BRINELL	Vc (SFM)	Diameter (D ₁) (inch)									
			1/8	3/16	1/4	3/8	1/2	3/4	1			
M	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	28	RPM	856	570	428	285	214	143	107		
		> 270 (22-34)	Fr	0.0004	0.0005	0.0007	0.0011	0.0014	0.0021	0.0028		
			Feed (IPM)	0.3	0.3	0.3	0.3	0.3	0.3	0.3		
		21	RPM	642	428	321	214	160	107	80		
		> 270 ≤ 370 (17-25)	Fr	0.0002	0.0002	0.0003	0.0005	0.0006	0.0009	0.0012		
			Feed (IPM)	0.1	0.1	0.1	0.1	0.1	0.1	0.1		
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoly 800, Monel 400, Rene, Waspaloy	18	RPM	550	367	275	183	138	92	69		
		≤ 220 (14-22)	Fr	0.0002	0.0003	0.0005	0.0007	0.0009	0.0014	0.0018		
			Feed (IPM)	0.1	0.1	0.1	0.1	0.1	0.1	0.1		
		14	RPM	428	285	214	143	107	71	53		
		> 220 ≤ 330 (11-17)	Fr	0.0002	0.0003	0.0005	0.0007	0.0009	0.0014	0.0018		
			Feed (IPM)	0.1	0.1	0.1	0.1	0.1	0.1	0.1		
S	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	12	RPM	367	244	183	122	92	61	46		
		> 330 ≤ 420 (10-14)	Fr	0.0002	0.0003	0.0004	0.0006	0.0008	0.0012	0.0016		
			Feed (IPM)	0.1	0.1	0.1	0.1	0.1	0.1	0.1		
		S	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	36	RPM	1100	733	550	367	275	183	138
				≤ 280 (29-43)	Fr	0.0005	0.0007	0.0009	0.0014	0.0018	0.0027	0.0036
					Feed (IPM)	0.6	0.5	0.5	0.5	0.5	0.5	0.5
28	RPM			856	570	428	285	214	143	107		
> 280 ≤ 350 (22-34)	Fr			0.0004	0.0005	0.0007	0.0011	0.0014	0.0021	0.0028		
	Feed (IPM)			0.3	0.3	0.3	0.3	0.3	0.3	0.3		
S	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	21	RPM	642	428	321	214	160	107	80		
		> 350 ≤ 440 (17-25)	Fr	0.0002	0.0002	0.0003	0.0005	0.0006	0.0009	0.0012		
			Feed (IPM)	0.1	0.1	0.1	0.1	0.1	0.1	0.1		
		N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	225	RPM	6876	4584	3438	2292	1719	1146	860
				≤ 80 (180-270)	Fr	0.0008	0.0011	0.0015	0.0023	0.0030	0.0045	0.0060
					Feed (IPM)	5.5	5.0	5.2	5.3	5.2	5.2	5.2
190	RPM			5806	3871	2903	1935	1452	968	726		
> 80 (152-228)	Fr			0.0008	0.0011	0.0015	0.0023	0.0030	0.0045	0.0060		
	Feed (IPM)			4.6	4.3	4.4	4.5	4.4	4.4	4.4		
N	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	95	RPM	2903	1935	1452	968	726	484	363		
		≤ 140 (76-114)	Fr	0.0004	0.0006	0.0008	0.0011	0.0015	0.0023	0.0030		
			Feed (IPM)	1.2	1.2	1.2	1.1	1.1	1.1	1.1		
		80	RPM	2445	1630	1222	815	611	407	306		
		> 140 (64-96)	Fr	0.0004	0.0006	0.0008	0.0011	0.0015	0.0023	0.0030		
			Feed (IPM)	1.0	1.0	1.0	0.9	0.9	0.9	0.9		

 $rpm = sfm \times 3.82 / D_1$
 $ipm = (inch / revolution) \times rpm$

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)

Series 603 Fractional	Hardness BRINELL	Vc (SFM)	Diameter (D ₁) (inch)										
			1/8	3/16	1/4	3/8	1/2	3/4	1				
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	125	RPM	3820	2547	1910	1273	955	637	478			
		≤ 200	(100-150)	Fr	0.0008	0.0012	0.0016	0.0024	0.0032	0.0047	0.0063		
			Feed (IPM)	3.1	3.1	3.1	3.1	3.1	3.0	3.0			
		60	RPM	1834	1222	917	611	458	306	229			
			Fr	0.0007	0.0011	0.0014	0.0021	0.0029	0.0043	0.0057			
				Feed (IPM)	1.3	1.3	1.3	1.3	1.3	1.3	1.3		
		45	RPM	1375	917	688	458	344	229	172			
			Fz	0.0005	0.0007	0.0009	0.0014	0.0018	0.0027	0.0036			
				Feed (IPM)	0.7	0.6	0.6	0.6	0.6	0.6	0.6		
		P	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	95	RPM	2903	1935	1452	968	726	484	363	
				≤ 275	(76-114)	Fz	0.0007	0.0010	0.0014	0.0020	0.0027	0.0041	0.0054
					Feed (IPM)	2.0	1.9	2.0	1.9	2.0	2.0	2.0	2.0
60	RPM			1834	1222	917	611	458	306	229			
	Fr			0.0007	0.0010	0.0014	0.0020	0.0027	0.0041	0.0054			
				Feed (IPM)	1.3	1.2	1.3	1.2	1.2	1.3	1.2		
35	RPM			1070	713	535	357	267	178	134			
	Fr			0.0004	0.0006	0.0008	0.0012	0.0017	0.0025	0.0033			
				Feed (IPM)	0.4	0.4	0.4	0.4	0.5	0.4	0.4		
P	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2			35	RPM	1070	713	535	357	267	178	134	
				≤ 250	(28-42)	Fr	0.0004	0.0006	0.0008	0.0012	0.0017	0.0025	0.0033
					Feed (IPM)	0.4	0.4	0.4	0.4	0.5	0.4	0.4	
		25	RPM	764	509	382	255	191	127	96			
			Fr	0.0002	0.0003	0.0005	0.0007	0.0009	0.0014	0.0018			
				Feed (IPM)	0.2	0.2	0.2	0.2	0.2	0.2	0.2		
		20	RPM	611	407	306	204	153	102	76			
			Fr	0.0002	0.0003	0.0005	0.0007	0.0009	0.0014	0.0018			
				Feed (IPM)	0.1	0.1	0.2	0.1	0.1	0.1	0.1		
		K	CAST IRONS Gray, Malleable, Ductile	105	RPM	3209	2139	1604	1070	802	535	401	
				≤ 200	(84-126)	Fr	0.0009	0.0014	0.0018	0.0027	0.0036	0.0054	0.0072
					Feed (IPM)	2.9	3.0	2.9	2.9	2.9	2.9	2.9	
75	RPM			2292	1528	1146	764	573	382	287			
	Fr			0.0009	0.0014	0.0018	0.0027	0.0036	0.0054	0.0072			
				Feed (IPM)	2.1	2.1	2.1	2.1	2.1	2.1	2.1		
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	53	RPM	1620	1080	810	540	405	270	202			
		≤ 250	(42-64)	Fr	0.0005	0.0007	0.0009	0.0014	0.0018	0.0027	0.0036		
			Feed (IPM)	0.8	0.8	0.7	0.8	0.7	0.7	0.7			
		46	RPM	1406	937	703	469	351	234	176			
			Fr	0.0003	0.0005	0.0007	0.0010	0.0014	0.0020	0.0027			
				Feed (IPM)	0.4	0.5	0.5	0.5	0.5	0.5	0.5		

continued on next page

Series 603 Fractional	Hardness BRINELL	Vc (SFM)	Diameter (D ₁) (inch)								
			1/8	3/16	1/4	3/8	1/2	3/4	1		
M	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 270	28	RPM	856	570	428	285	214	143	107
			(22-34)	Fr	0.0005	0.0008	0.0011	0.0016	0.0021	0.0032	0.0042
				Feed (IPM)	0.4	0.5	0.5	0.5	0.4	0.5	0.4
		> 270 ≤ 370	21	RPM	642	428	321	214	160	107	80
			(17-25)	Fr	0.0002	0.0003	0.0005	0.0007	0.0009	0.0014	0.0018
				Feed (IPM)	0.1	0.1	0.2	0.1	0.1	0.1	0.1
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoly 800, Monel 400, Rene, Waspaloy	≤ 220	18	RPM	550	367	275	183	138	92	69
			(14-22)	Fr	0.0003	0.0005	0.0007	0.0010	0.0014	0.0020	0.0027
				Feed (IPM)	0.2	0.2	0.2	0.2	0.2	0.2	0.2
		> 220 ≤ 330	14	RPM	428	285	214	143	107	71	53
			(11-17)	Fr	0.0003	0.0005	0.0007	0.0010	0.0014	0.0020	0.0027
				Feed (IPM)	0.1	0.1	0.1	0.1	0.1	0.1	0.1
		> 330 ≤ 420	12	RPM	367	244	183	122	92	61	46
			(10-14)	Fr	0.0003	0.0005	0.0006	0.0009	0.0012	0.0018	0.0024
				Feed (IPM)	0.1	0.1	0.1	0.1	0.1	0.1	0.1
S	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 280	36	RPM	1100	733	550	367	275	183	138
			(29-43)	Fr	0.0007	0.0010	0.0014	0.0020	0.0027	0.0041	0.0054
				Feed (IPM)	0.8	0.7	0.8	0.7	0.7	0.8	0.7
		> 280 ≤ 350	28	RPM	856	570	428	285	214	143	107
			(22-34)	Fr	0.0005	0.0008	0.0011	0.0016	0.0021	0.0032	0.0042
				Feed (IPM)	0.4	0.5	0.5	0.5	0.4	0.5	0.4
		> 350 ≤ 440	21	RPM	642	428	321	214	160	107	80
			(17-25)	Fr	0.0002	0.0003	0.0005	0.0007	0.0009	0.0014	0.0018
				Feed (IPM)	0.1	0.1	0.2	0.1	0.1	0.1	0.1
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80	225	RPM	6876	4584	3438	2292	1719	1146	860
			(180-270)	Fr	0.0011	0.0017	0.0023	0.0034	0.0045	0.0068	0.0090
				Feed (IPM)	7.6	7.8	7.9	7.8	7.7	7.8	7.7
		> 80	190	RPM	5806	3871	2903	1935	1452	968	726
			(152-228)	Fr	0.0011	0.0017	0.0023	0.0034	0.0045	0.0068	0.0090
				Feed (IPM)	6.4	6.6	6.7	6.6	6.5	6.6	6.5
N	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 140	95	RPM	2903	1935	1452	968	726	484	363
			(76-114)	Fr	0.0006	0.0008	0.0011	0.0017	0.0023	0.0034	0.0045
				Feed (IPM)	1.7	1.5	1.6	1.6	1.7	1.6	1.6
		> 140	80	RPM	2445	1630	1222	815	611	407	306
			(64-96)	Fr	0.0006	0.0008	0.0011	0.0017	0.0023	0.0034	0.0045
				Feed (IPM)	1.5	1.3	1.3	1.4	1.4	1.4	1.4

rpm = sfm x 3.82 / D₁

ipm = (inch / revolution) x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)

Series 606 Fractional	Hardness BRINELL	Vc (SFM)	Diameter (D ₁) (inch)								
			1/8	3/16	1/4	3/8	1/2	3/4	1		
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 200	125	RPM	3820	2547	1910	1273	955	637	478
			(100-150)	Fr	0.0011	0.0016	0.0021	0.0032	0.0042	0.0063	0.0084
				Feed (IPM)	4.2	4.1	4.0	4.1	4.0	4.0	4.0
		> 200 ≤ 300	60	RPM	1834	1222	917	611	458	306	229
			(48-72)	Fr	0.0010	0.0014	0.0019	0.0029	0.0038	0.0057	0.0076
				Feed (IPM)	1.8	1.7	1.7	1.8	1.7	1.7	1.7
		> 300 ≤ 420	45	RPM	1375	917	688	458	344	229	172
			(36-54)	Fz	0.0006	0.0009	0.0012	0.0018	0.0024	0.0036	0.0048
				Feed (IPM)	0.8	0.8	0.8	0.8	0.8	0.8	0.8
P	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275	95	RPM	2903	1935	1452	968	726	484	363
			(76-114)	Fz	0.0009	0.0014	0.0018	0.0027	0.0036	0.0054	0.0072
				Feed (IPM)	2.6	2.7	2.6	2.6	2.6	2.6	2.6
		> 275 ≤ 375	60	RPM	1834	1222	917	611	458	306	229
			(48-72)	Fr	0.0009	0.0014	0.0018	0.0027	0.0036	0.0054	0.0072
				Feed (IPM)	1.7	1.7	1.7	1.7	1.7	1.7	1.7
		> 375 ≤ 450	35	RPM	1070	713	535	357	267	178	134
			(28-42)	Fr	0.0006	0.0008	0.0011	0.0017	0.0022	0.0033	0.0044
				Feed (IPM)	0.6	0.6	0.6	0.6	0.6	0.6	0.6
P	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 250	35	RPM	1070	713	535	357	267	178	134
			(28-42)	Fr	0.0006	0.0008	0.0011	0.0017	0.0022	0.0033	0.0044
				Feed (IPM)	0.6	0.6	0.6	0.6	0.6	0.6	0.6
		> 250 ≤ 330	25	RPM	764	509	382	255	191	127	96
			(20-30)	Fr	0.0003	0.0005	0.0006	0.0009	0.0012	0.0018	0.0024
				Feed (IPM)	0.2	0.3	0.2	0.2	0.2	0.2	0.2
		> 330 ≤ 450	20	RPM	611	407	306	204	153	102	76
			(16-24)	Fr	0.0003	0.0005	0.0006	0.0009	0.0012	0.0018	0.0024
				Feed (IPM)	0.2	0.2	0.2	0.2	0.2	0.2	0.2
K	CAST IRONS Gray, Malleable, Ductile	≤ 200	105	RPM	3209	2139	1604	1070	802	535	401
			(84-126)	Fr	0.0012	0.0018	0.0024	0.0036	0.0048	0.0072	0.0096
				Feed (IPM)	3.9	3.9	3.9	3.9	3.9	3.9	3.9
		> 200 ≤ 330	75	RPM	2292	1528	1146	764	573	382	287
			(60-90)	Fr	0.0012	0.0018	0.0024	0.0036	0.0048	0.0072	0.0096
				Feed (IPM)	2.8	2.8	2.8	2.8	2.8	2.8	2.8
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	≤ 250	53	RPM	1620	1080	810	540	405	270	202
			(42-64)	Fr	0.0006	0.0009	0.0012	0.0018	0.0024	0.0036	0.0048
				Feed (IPM)	1.0	1.0	1.0	1.0	1.0	1.0	1.0
		> 250 ≤ 330	46	RPM	1406	937	703	469	351	234	176
			(37-55)	Fr	0.0005	0.0007	0.0009	0.0014	0.0018	0.0027	0.0036
				Feed (IPM)	0.7	0.7	0.6	0.7	0.6	0.6	0.6

continued on next page


Series 606 Fractional	Hardness BRINELL	Vc (SFM)	Diameter (D ₁) (inch)								
			1/8	3/16	1/4	3/8	1/2	3/4	1		
M	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 270	28	RPM	856	570	428	285	214	143	107
			(22-34)	Fr	0.0007	0.0011	0.0014	0.0021	0.0028	0.0042	0.0056
				Feed (IPM)	0.6	0.6	0.6	0.6	0.6	0.6	0.6
		> 270 ≤ 370	21	RPM	642	428	321	214	160	107	80
			(17-25)	Fr	0.0003	0.0005	0.0006	0.0009	0.0012	0.0018	0.0024
				Feed (IPM)	0.2	0.2	0.2	0.2	0.2	0.2	0.2
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoly 800, Monel 400, Rene, Waspaloy	≤ 220	18	RPM	550	367	275	183	138	92	69
			(14-22)	Fr	0.0005	0.0007	0.0009	0.0014	0.0018	0.0027	0.0036
				Feed (IPM)	0.3	0.3	0.2	0.3	0.2	0.2	0.2
		> 220 ≤ 330	14	RPM	428	285	214	143	107	71	53
			(11-17)	Fr	0.0005	0.0007	0.0009	0.0014	0.0018	0.0027	0.0036
				Feed (IPM)	0.2	0.2	0.2	0.2	0.2	0.2	0.2
		> 330 ≤ 420	12	RPM	367	244	183	122	92	61	46
			(10-14)	Fr	0.0004	0.0006	0.0008	0.0012	0.0016	0.0024	0.0032
				Feed (IPM)	0.1	0.1	0.1	0.1	0.1	0.1	0.1
S	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 280	36	RPM	1100	733	550	367	275	183	138
			(29-43)	Fr	0.0009	0.0014	0.0018	0.0027	0.0036	0.0054	0.0072
				Feed (IPM)	1.0	1.0	1.0	1.0	1.0	1.0	1.0
		> 280 ≤ 350	28	RPM	856	570	428	285	214	143	107
			(22-34)	Fr	0.0007	0.0011	0.0014	0.0021	0.0028	0.0042	0.0056
				Feed (IPM)	0.6	0.6	0.6	0.6	0.6	0.6	0.6
		> 350 ≤ 440	21	RPM	642	428	321	214	160	107	80
			(17-25)	Fr	0.0003	0.0005	0.0006	0.0009	0.0012	0.0018	0.0024
				Feed (IPM)	0.2	0.2	0.2	0.2	0.2	0.2	0.2
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80	225	RPM	6876	4584	3438	2292	1719	1146	860
			(180-270)	Fr	0.0015	0.0023	0.0030	0.0045	0.0060	0.0090	0.0120
				Feed (IPM)	10.3	10.5	10.3	10.3	10.3	10.3	10.3
		> 80	190	RPM	5806	3871	2903	1935	1452	968	726
			(152-228)	Fr	0.0015	0.0023	0.0030	0.0045	0.0060	0.0090	0.0120
				Feed (IPM)	8.7	8.9	8.7	8.7	8.7	8.7	8.7
N	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 140	95	RPM	2903	1935	1452	968	726	484	363
			(76-114)	Fr	0.0008	0.0011	0.0015	0.0023	0.0030	0.0045	0.0060
				Feed (IPM)	2.3	2.1	2.2	2.2	2.2	2.2	2.2
		> 140	80	RPM	2445	1630	1222	815	611	407	306
			(64-96)	Fr	0.0008	0.0011	0.0015	0.0023	0.0030	0.0045	0.0060
				Feed (IPM)	2.0	1.8	1.8	1.9	1.8	1.8	1.8

rpm = sfm x 3.82 / D₁

ipm = (inch / revolution) x rpm

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)




TOLERANCES (mm)

1–6 DIAMETER

 $D_1 = +0,008/-0,000$

>6–10 DIAMETER

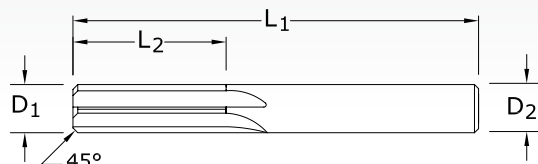 $D_1 = +0,011/-0,00$ 
201M
 METRIC SERIES

TECH INFO 240

mm					EDP NO. UNCOATED
CUTTING DIAMETER D_1	SHANK DIAMETER D_2	MAXIMUM REAM LENGTH L_2	OVERALL LENGTH L_1	NO. OF FLUTES	
1,0	1,0	6,0	32,0	4	81001
1,5	1,5	9,5	38,0	4	81003
2,0	2,0	12,7	44,0	4	81005
2,5	2,5	12,7	50,0	4	81007
3,0	3,0	16,0	57,0	4	81009
3,5	3,5	19,0	63,0	4	81011
4,0	4,0	19,0	63,0	4	81013
4,5	4,5	22,0	70,0	4	81015
5,0	5,0	25,0	75,0	4	81017
5,5	5,5	25,0	75,0	4	81019
6,0	6,0	25,0	75,0	4	81021
7,0	7,0	28,0	82,0	6	81023
8,0	8,0	28,0	82,0	6	81025
9,0	9,0	31,0	89,0	6	81027
10,0	10,0	31,0	89,0	6	81029

STEELS

STAINLESS STEELS

CAST IRON

HIGH TEMP ALLOYS

TITANIUM

NON-FERROUS


HARDENED STEELS



200

FRACTIONAL SERIES


TECH INFO 238

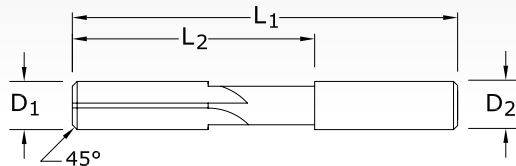

TOLERANCES (inch)



D₁ = +.0002/-.0000

D₂ = +.0002/-.0000



inch					EDP NO.
CUTTING DIAMETER D ₁	SHANK DIAMETER D ₂	MAXIMUM REAM LENGTH L ₂	OVERALL LENGTH L ₁	NO. OF FLUTES	UNCOATED
3/64	3/64	3/4	1-1/2	4	70003
1/16	1/16	3/4	1-1/2	4	70004
5/64	5/64	1	2	4	70005
3/32	3/32	1-1/4	2-1/4	4	70006
7/64	7/64	1-1/4	2-1/4	4	70007
1/8	1/8	1-1/4	2-1/4	4	70008
9/64	9/64	1-1/2	2-1/2	4	70009
5/32	5/32	1-1/2	2-1/2	4	70010
11/64	11/64	1-3/4	2-3/4	4	70011
3/16	3/16	1-3/4	2-3/4	4	70012
13/64	13/64	2	3	4	70013
7/32	7/32	2	3	4	70014
15/64	15/64	2	3	4	70015
1/4	1/4	2	3	4	70016
17/64	17/64	2-1/4	3-1/4	6	70017
9/32	9/32	2-1/4	3-1/4	6	70018
19/64	19/64	2-1/4	3-1/4	6	70019
5/16	5/16	2-1/4	3-1/4	6	70020
21/64	21/64	2-3/8	3-1/2	6	70021
11/32	11/32	2-3/8	3-1/2	6	70022
23/64	23/64	2-3/8	3-1/2	6	70023
3/8	3/8	2-3/8	3-1/2	6	70024
25/64	25/64	2-7/8	4	6	70025
13/32	13/32	2-7/8	4	6	70026
27/64	27/64	2-7/8	4	6	70027
7/16	7/16	2-7/8	4	6	70028
29/64	29/64	2-7/8	4	6	70029
15/32	15/32	2-7/8	4	6	70030
31/64	31/64	2-7/8	4	6	70031
1/2	1/2	2-7/8	4	6	70032

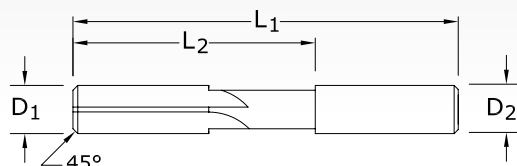

**TOLERANCES (inch)** $D_1 = +.0002/-0.0000$ $D_2 = +.0002/-0.0000$ **200**
FRACTIONAL SERIES

TECH INFO 238

inch				NO. OF FLUTES
CUTTING DIAMETER D_1	SHANK DIAMETER D_2	MAXIMUM REAM LENGTH L_2	OVERALL LENGTH L_1	
.0470 – .0625	1/16	3/4	1-1/2	4
.0626 – .0781	5/64	1	2	4
.0782 – .0938	3/32	1-1/4	2-1/4	4
.0939 – .1094	7/64	1-1/4	2-1/4	4
.1095 – .1250	1/8	1-1/4	2-1/4	4
.1251 – .1406	9/64	1-1/2	2-1/2	4
.1407 – .1563	5/32	1-1/2	2-1/2	4
.1564 – .1719	11/64	1-3/4	2-3/4	4
.1720 – .1875	3/16	1-3/4	2-3/4	4
.1876 – .2031	13/64	2	3	4
.2032 – .2188	7/32	2	3	4
.2189 – .2344	15/64	2	3	4
.2345 – .2500	1/4	2	3	4
.2501 – .2656	17/64	2-1/4	3-1/4	6
.2657 – .2813	9/32	2-1/4	3-1/4	6
.2814 – .2969	19/64	2-1/4	3-1/4	6
.2970 – .3125	5/16	2-1/4	3-1/4	6
.3126 – .3281	21/64	2-3/8	3-1/2	6
.3282 – .3438	11/32	2-3/8	3-1/2	6
.3439 – .3594	23/64	2-3/8	3-1/2	6
.3595 – .3750	3/8	2-3/8	3-1/2	6
.3751 – .3906	25/64	2-7/8	4	6
.3907 – .4063	13/32	2-7/8	4	6
.4064 – .4219	27/64	2-7/8	4	6
.4220 – .4375	7/16	2-7/8	4	6
.4376 – .4531	29/64	2-7/8	4	6
.4532 – .4688	15/32	2-7/8	4	6
.4689 – .4844	31/64	2-7/8	4	6
.4845 – .5000	1/2	2-7/8	4	6

Series 200 Fractional		Hardness BRINELL	Vc (SFM)	Diameter (D ₁) (inch)							
				1/16	1/8	3/16	1/4	1/3	3/8	1/2	
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 200	150	RPM	9168	4584	3056	2292	1834	1528	1146
			(120-180)	Fr	0.0018	0.0035	0.0053	0.0071	0.0088	0.0106	0.0141
				Feed (IPM)	16.5	16.0	16.2	16.3	16.1	16.2	16.2
		≥ 200 ≤ 300	75	RPM	4584	2292	1528	1146	917	764	573
			(60-90)	Fr	0.0016	0.0031	0.0047	0.0062	0.0078	0.0093	0.0124
				Feed (IPM)	7.3	7.1	7.2	7.1	7.2	7.1	7.1
		≥ 300 ≤ 420	55	RPM	3362	1681	1121	840	672	560	420
			(44-66)	Fz	0.0009	0.0019	0.0028	0.0037	0.0046	0.0056	0.0074
				Feed (IPM)	3.0	3.2	3.1	3.1	3.1	3.1	3.1
P	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 275	115	RPM	7029	3514	2343	1757	1406	1171	879
			(92-138)	Fz	0.0015	0.0030	0.0045	0.0060	0.0075	0.0090	0.0120
				Feed (IPM)	10.5	10.5	10.5	10.5	10.5	10.5	10.5
		≥ 275 ≤ 375	70	RPM	4278	2139	1426	1070	856	713	535
			(56-84)	Fr	0.0015	0.0030	0.0045	0.0060	0.0075	0.0090	0.0120
				Feed (IPM)	6.4	6.4	6.4	6.4	6.4	6.4	6.4
		≥ 375 ≤ 450	45	RPM	2750	1375	917	688	550	458	344
			(36-54)	Fr	0.0009	0.0019	0.0028	0.0037	0.0046	0.0056	0.0074
				Feed (IPM)	2.5	2.6	2.6	2.5	2.5	2.6	2.5
P	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2	≤ 250	40	RPM	2445	1222	815	611	489	407	306
			(32-48)	Fr	0.0010	0.0020	0.0029	0.0039	0.0049	0.0059	0.0078
				Feed (IPM)	2.4	2.4	2.4	2.4	2.4	2.4	2.4
		≥ 250 ≤ 330	25	RPM	1528	764	509	382	306	255	191
			(20-30)	Fr	0.0006	0.0013	0.0019	0.0025	0.0031	0.0038	0.0050
				Feed (IPM)	0.9	1.0	1.0	1.0	0.9	1.0	1.0
		≥ 330 ≤ 450	20	RPM	1222	611	407	306	244	204	153
			(16-24)	Fr	0.0004	0.0008	0.0012	0.0016	0.0019	0.0023	0.0031
				Feed (IPM)	0.5	0.5	0.5	0.5	0.5	0.5	0.5
K	CAST IRONS Gray, Malleable, Ductile	≤ 200	125	RPM	7640	3820	2547	1910	1528	1273	955
			(100-150)	Fr	0.0020	0.0040	0.0060	0.0081	0.0101	0.0121	0.0161
				Feed (IPM)	15.3	15.3	15.3	15.5	15.4	15.4	15.4
		≥ 200 ≤ 330	95	RPM	5806	2903	1935	1452	1161	968	726
			(76-114)	Fr	0.0020	0.0040	0.0060	0.0081	0.0101	0.0121	0.0161
				Feed (IPM)	11.6	11.6	11.6	11.8	11.7	11.7	11.7
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	≤ 250	75	RPM	4584	2292	1528	1146	917	764	573
			(60-90)	Fr	0.0010	0.0020	0.0029	0.0039	0.0049	0.0059	0.0078
				Feed (IPM)	4.6	4.6	4.4	4.5	4.5	4.5	4.5
		≥ 250 ≤ 330	55	RPM	3362	1681	1121	840	672	560	420
			(44-66)	Fr	0.0008	0.0015	0.0023	0.0030	0.0038	0.0045	0.0060
				Feed (IPM)	2.7	2.5	2.6	2.5	2.6	2.5	2.5

continued on next page

Series 200 Fractional	Hardness BRINELL	Vc (SFM)	Diameter (D ₁) (inch)								
			1/16	1/8	3/16	1/4	1/3	3/8	1/2		
M	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 270	35	RPM	2139	1070	713	535	428	357	267
			(28-42)	Fr	0.0010	0.0020	0.0029	0.0039	0.0049	0.0059	0.0078
				Feed (IPM)	2.1	2.1	2.1	2.1	2.1	2.1	2.1
		> 270 ≤ 370	25	RPM	1528	764	509	382	306	255	191
			(20-30)	Fr	0.0006	0.0013	0.0019	0.0025	0.0031	0.0038	0.0050
				Feed (IPM)	0.9	1.0	1.0	1.0	0.9	1.0	1.0
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoly 800, Monel 400, Rene, Waspaloy	≤ 220	20	RPM	1222	611	407	306	244	204	153
			(16-24)	Fr	0.0008	0.0015	0.0023	0.0030	0.0038	0.0045	0.0060
				Feed (IPM)	1.0	0.9	0.9	0.9	0.9	0.9	0.9
		> 220 ≤ 330	15	RPM	917	458	306	229	183	153	115
			(12-18)	Fr	0.0006	0.0013	0.0019	0.0025	0.0031	0.0038	0.0050
				Feed (IPM)	0.6	0.6	0.6	0.6	0.6	0.6	0.6
		> 330 ≤ 420	10	RPM	611	306	204	153	122	102	76
			(8-12)	Fr	0.0004	0.0007	0.0011	0.0015	0.0018	0.0022	0.0029
				Feed (IPM)	0.2	0.2	0.2	0.2	0.2	0.2	0.2
S	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 280	45	RPM	2750	1375	917	688	550	458	344
			(36-54)	Fr	0.0015	0.0030	0.0045	0.0060	0.0075	0.0090	0.0120
				Feed (IPM)	4.1	4.1	4.1	4.1	4.1	4.1	4.1
		> 280 ≤ 350	35	RPM	2139	1070	713	535	428	357	267
			(28-42)	Fr	0.0010	0.0020	0.0029	0.0039	0.0049	0.0059	0.0078
				Feed (IPM)	2.1	2.1	2.1	2.1	2.1	2.1	2.1
		> 350 ≤ 440	25	RPM	1528	764	509	382	306	255	191
			(20-30)	Fr	0.0006	0.0013	0.0019	0.0025	0.0031	0.0038	0.0050
Feed (IPM)	0.9			1.0	1.0	1.0	0.9	1.0	1.0		
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80	270	RPM	16502	8251	5501	4126	3300	2750	2063
			(216-324)	Fr	0.0025	0.0050	0.0075	0.0100	0.0125	0.0150	0.0200
				Feed (IPM)	41.3	41.3	41.3	41.3	41.3	41.3	41.3
		> 80	230	RPM	14058	7029	4686	3514	2812	2343	1757
			(184-276)	Fr	0.0025	0.0050	0.0075	0.0100	0.0125	0.0150	0.0200
				Feed (IPM)	35.1	35.1	35.1	35.1	35.1	35.1	35.1
N	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 140	115	RPM	7029	3514	2343	1757	1406	1171	879
			(92-138)	Fr	0.0013	0.0026	0.0038	0.0051	0.0064	0.0077	0.0102
				Feed (IPM)	9.1	9.1	8.9	9.0	9.0	9.0	9.0
		> 140	95	RPM	5806	2903	1935	1452	1161	968	726
			(76-114)	Fr	0.0013	0.0026	0.0038	0.0051	0.0064	0.0077	0.0102
				Feed (IPM)	7.5	7.5	7.4	7.4	7.4	7.5	7.4

rpm = sfm x 3.82 / D₁

ipm = (inch / revolution) x rpm

increase speed and feed rates shown by 30 percent when using coated reamers

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)

	Series 201M Metric	Hardness BRINELL	Vc (m/min)	Diameter (D ₁) (mm)									
				1	2	3	4	6	8	10			
P	CARBON STEELS 1018, 1040, 1080, 1090, 10L50, 1140, 1212, 12L15, 1525, 1536	≤ 200	46	RPM	14541	7271	4847	3635	2424	1818	1454		
			(37-55)	Fr	0.028	0.056	0.085	0.113	0.169	0.226	0.282		
				Feed (mm/min)	407	407	412	411	410	411	410		
		≥ 200 ≤ 300	23	RPM	7271	3635	2424	1818	1212	909	727		
			(18-27)	Fr	0.025	0.050	0.074	0.099	0.149	0.198	0.248		
				Feed (mm/min)	182	182	179	180	181	180	180		
		≥ 300 ≤ 420	17	RPM	5332	2666	1777	1333	889	666	533		
			(13-20)	Fz	0.015	0.030	0.044	0.059	0.089	0.118	0.148		
				Feed (mm/min)	80	80	78	79	79	79	79		
		P	ALLOY STEELS 4140, 4150, 4320, 5120, 5150, 8630, 86L20, 50100	≤ 270	35	RPM	11148	5574	3716	2787	1858	1394	1115
					(28-42)	Fz	0.024	0.048	0.072	0.096	0.144	0.192	0.240
						Feed (mm/min)	268	268	268	268	268	268	268
≥ 275 ≤ 375	21			RPM	6786	3393	2262	1696	1131	848	679		
	(17-26)			Fr	0.024	0.048	0.072	0.096	0.144	0.192	0.240		
				Feed (mm/min)	163	163	163	163	163	163	163		
≥ 375 ≤ 450	14			RPM	4362	2181	1454	1091	727	545	436		
	(11-16)			Fr	0.015	0.030	0.044	0.059	0.089	0.118	0.148		
				Feed (mm/min)	65	65	64	64	65	64	65		
P	TOOL STEELS A2, D2, H13, L2, M2, P20, S7, T15, W2			≤ 250	12	RPM	3878	1939	1293	969	646	485	388
					(10-15)	Fr	0.016	0.031	0.047	0.062	0.094	0.125	0.156
						Feed (mm/min)	62	60	61	60	61	61	60
		≥ 250 ≤ 330	8	RPM	2424	1212	808	606	404	303	242		
			(6-9)	Fr	0.010	0.020	0.030	0.040	0.060	0.080	0.100		
				Feed (mm/min)	24	24	24	24	24	24	24		
		≥ 330 ≤ 450	6	RPM	1939	969	646	485	323	242	194		
			(5-7)	Fr	0.006	0.012	0.019	0.025	0.037	0.050	0.062		
				Feed (mm/min)	12	12	12	12	12	12	12		
		K	CAST IRONS Gray, Malleable, Ductile	≤ 200	38	RPM	12118	6059	4039	3029	2020	1515	1212
					(30-46)	Fr	0.032	0.064	0.097	0.129	0.193	0.258	0.322
						Feed (mm/min)	388	388	392	391	390	391	390
≥ 200 ≤ 330	29			RPM	9209	4605	3070	2302	1535	1151	921		
	(23-35)			Fr	0.032	0.064	0.097	0.129	0.193	0.258	0.322		
				Feed (mm/min)	295	295	298	297	296	297	297		
M	STAINLESS STEELS (FREE MACHINING) 303, 416, 420F, 430F 440F	< 250	23	RPM	7271	3635	2424	1818	1212	909	727		
			(18-27)	Fr	0.015	0.030	0.044	0.059	0.089	0.118	0.148		
				Feed (mm/min)	109	109	107	107	108	107	108		
		≥ 250 ≤ 330	17	RPM	5332	2666	1777	1333	889	666	533		
			(13-20)	Fr	0.012	0.024	0.036	0.048	0.072	0.096	0.120		
				Feed (mm/min)	64	64	64	64	64	64	64		

continued on next page

Series 201M Metric	Hardness BRINELL	Vc (m/min)	Diameter (D ₁) (mm)								
			1	2	3	4	6	8	10		
M	STAINLESS STEELS (DIFFICULT) 304, 316, 321, 13-8 PH, 15-5PH, 17-4 PH, Custom 450	≤ 270	11	RPM	3393	1696	1131	848	565	424	339
			(9-13)	Fr	0.015	0.030	0.044	0.059	0.089	0.118	0.148
				Feed (mm/min)	51	51	50	50	50	50	50
		> 270 ≤ 370	8	RPM	2424	1212	808	606	404	303	242
			(6-9)	Fr	0.010	0.020	0.030	0.040	0.060	0.080	0.100
				Feed (mm/min)	24	24	24	24	24	24	24
S	SUPER ALLOYS (NICKEL, COBALT, IRON BASE) Inconel 601, 617, 625, Incoly 800, Monel 400, Rene, Waspaloy	≤ 220	6	RPM	1939	969	646	485	323	242	194
			(5-7)	Fr	0.012	0.024	0.036	0.048	0.072	0.096	0.120
				Feed (mm/min)	23	23	23	23	23	23	23
		> 220 ≤ 330	5	RPM	1454	727	485	364	242	182	145
			(4-5)	Fr	0.010	0.020	0.030	0.040	0.060	0.080	0.100
				Feed (mm/min)	15	15	15	15	15	15	15
		> 330 ≤ 420	3	RPM	969	485	323	242	162	121	97
			(2-4)	Fr	0.006	0.012	0.019	0.025	0.037	0.050	0.062
				Feed (mm/min)	6	6	6	6	6	6	6
S	TITANIUM ALLOYS Pure Titanium, Ti6Al4V, Ti6Al2Sn4Zr2Mo, Ti4Al4Mo2Sn0.5Si, Ti-6Al4V	≤ 280	14	RPM	4362	2181	1454	1091	727	545	436
			(11-16)	Fr	0.024	0.048	0.072	0.096	0.144	0.192	0.240
				Feed (mm/min)	105	105	105	105	105	105	105
		> 280 ≤ 350	11	RPM	3393	1696	1131	848	565	424	339
			(9-13)	Fr	0.015	0.030	0.044	0.059	0.089	0.118	0.148
				Feed (mm/min)	51	51	50	50	50	50	50
		> 350 ≤ 440	8	RPM	2424	1212	808	606	404	303	242
			(6-9)	Fr	0.010	0.020	0.030	0.040	0.060	0.080	0.100
				Feed (mm/min)	24	24	24	24	24	24	24
N	ALUMINUM ALLOYS 2017, 2024, 356, 6061, 7075	≤ 80	82	RPM	26174	13087	8725	6544	4362	3272	2617
			(66-99)	Fr	0.040	0.080	0.120	0.160	0.240	0.320	0.400
				Feed (mm/min)	1047	1047	1047	1047	1047	1047	1047
		> 80	70	RPM	22297	11148	7432	5574	3716	2787	2230
			(56-84)	Fr	0.040	0.080	0.120	0.160	0.240	0.320	0.400
				Feed (mm/min)	892	892	892	892	892	892	892
N	COPPER ALLOYS Alum Bronze, C110, Muntz Brass	≤ 140	35	RPM	11148	5574	3716	2787	1858	1394	1115
			(28-42)	Fr	0.020	0.041	0.061	0.082	0.122	0.163	0.204
				Feed (mm/min)	223	229	227	229	227	227	227
		> 140	29	RPM	9209	4605	3070	2302	1535	1151	921
			(23-35)	Fr	0.020	0.041	0.061	0.082	0.122	0.163	0.204
				Feed (mm/min)	184	189	187	189	187	188	188

$$\text{rpm} = (1000 \times \text{m/min}) / (3.14 \times D_1)$$

$$\text{mm/min} = (\text{mm/revolution}) \times \text{rpm}$$

increase speed and feed rates shown by 30 percent when using coated reamers

reduce speed and feed for materials harder than listed

refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)



ROUTERS



Routing

HIGH PERFORMANCE ROUTERS	SERIES	PAGE
Carbon Composite Routers	20-CCR, 20M-CCR	246
Coarse Cut Carbon Composite Routers	31-CCR, 31M-CCR	247
Compression Routers	25, 25-M	248
GENERAL PURPOSE ROUTERS	SERIES	PAGE
Up Cut Routers	21, 21M	249
Down Cut Routers	22, 22M	250
TECHNICAL INFORMATION		
Speed & Feed Recommendations		251

Ranurado

RANURADORES DE ALTO RENDIMIENTO	SERIE	PÁGINA
Ranuradores de compuesto de carbono	20-CCR, 20M-CCR	246
Ranuradores de compuesto de carbono de corte áspero	31-CCR, 31M-CCR	247
Ranuradores de compresión	25, 25-M	248
RANURADORES DE USO GENERAL	SERIE	PÁGINA
Ranuradores de corte ascendente	21, 21M	249
Ranuradores de corte descendente	22, 22M	250
INFORMACIÓN TÉCNICA		
Velocidades y avances recomendados		251

Détourage

FRAISES A DETOURER HAUTE PERFORMANCE	SERIES	PAGE
Fraises à détourer pour composite carbone	20-CCR, 20M-CCR	246
Fraises à détourer pour composite carbone coupe grossière	31-CCR, 31M-CCR	247
Fraises à détourer compression	25, 25-M	248
FRAISES À DÉTOURER UNIVERSELLES	SERIES	PAGE
Fraises à détourer up cut	21, 21M	249
Fraises à détourer down cut	22, 22M	250
INFORMATIONS TECHNIQUES		
Recommandations de vitesse et avance		251

Router Icon Legend

Leyenda del icono de los ranuradores

Légende des icônes de détourage

END CONFIGURATIONS CONFIGURACIONES DE LA PUNTA CONFIGURATIONS TERMINALES



Square
Plana
Carrée

SHANK TYPE TIPO DE VÁSTAGO TYPE DE TIGE



Straight
Recto
Droite

RAKE ANGLE ÁNGULO DE ATAQUE ANGLE DE PENTE



Positive
Positivo
Positif



Neutral
Neutro
Neutre



Negative
Negativo
Négatif



Variable
Variable
Variable

HELIX ANGLES ÁNGULOS HELICOIDALES ANGLES DE L'HÉLICE



Right Spiral
Espiral sentido derecho
Spirale droite



Left Spiral
Espiral sentido izquierdo
Spirale gauche

ADDITIONAL GEOMETRY CARACTERÍSTICAS GEOMÉTRICAS ADICIONALES GÉOMÉTRIE SUPPLÉMENTAIRE



Left Cut Direction
Fresado sentido izquierda
Coupe vers la gauche



Right Cut Direction
Fresado sentido derecha
Coupe vers la droite



Chip Breaker
Rompevirutas
Brise-copeaux


COATINGS REVESTIMIENTOS REVÊTEMENTS



Uncoated



Di-NAMITE
(Diamond)




20-CCR

FRACTIONAL SERIES

TECH INFO 251

PLASTICS/COMPOSITES

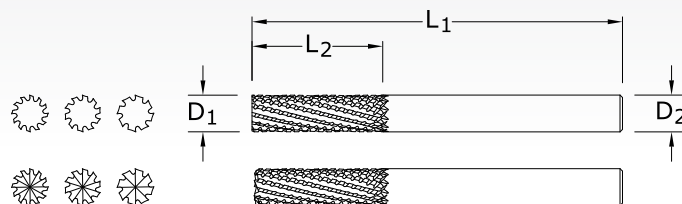

TOLERANCES (inch)

 $D_1 = +.000/-0.005$ $D_2 = h_6$

inch						EDP NO.	
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	NO. OF FLUTES	END STYLE	UNCOATED	Di-NAMITE (Diamond)
1/4	1	2-1/2	1/4	8	No End Cutting	72930	73013
1/4	1	2-1/2	1/4	8	End Cutting	72947	73012
5/16	1	2-1/2	5/16	10	No End Cutting	72948	73026
5/16	1	2-1/2	5/16	10	End Cutting	72949	73014
3/8	1-1/8	2-1/2	3/8	12	No End Cutting	72950	73028
3/8	1-1/8	2-1/2	3/8	12	End Cutting	72951	73027
1/2	1-1/2	3-1/2	1/2	12	No End Cutting	72952	73041
1/2	1-1/2	3-1/2	1/2	12	End Cutting	72953	73029

20M-CCR


METRIC SERIES

TECH INFO 252

mm						EDP NO.	
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	NO. OF FLUTES	END STYLE	UNCOATED	Di-NAMITE (Diamond)
6,0	25,0	63,0	6,0	8	No End Cutting	82966	83027
6,0	25,0	63,0	6,0	8	End Cutting	82967	83026
8,0	25,0	63,0	8,0	10	No End Cutting	82968	83029
8,0	25,0	63,0	8,0	10	End Cutting	82969	83028
10,0	28,0	63,0	10,0	12	No End Cutting	82970	83042
10,0	28,0	63,0	10,0	12	End Cutting	82971	83041
12,0	38,0	89,0	12,0	12	No End Cutting	82972	83044
12,0	38,0	89,0	12,0	12	End Cutting	82973	83043

TOLERANCES (mm)

 $D_1 = +0,00/-0,13$ $D_2 = h_6$

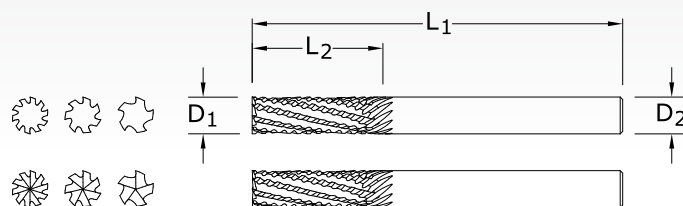
TOLERANCES (inch)
 $D_1 = +.000/-0.005$
 $D_2 = h_6$
31-CCR
FRACTIONAL SERIES

TECH INFO 251


inch						EDP NO.	
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	NO. OF FLUTES	END STYLE	UNCOATED	Di-NAMITE (Diamond)
1/4	1	2-1/2	1/4	5	End Cutting	72954	72955
1/4	1	2-1/2	1/4	5	No End Cutting	72956	72957
5/16	1	2-1/2	5/16	7	End Cutting	72958	72959
5/16	1	2-1/2	5/16	7	No End Cutting	72960	72961
3/8	1-1/8	2-1/2	3/8	8	End Cutting	72962	72963
3/8	1-1/8	2-1/2	3/8	8	No End Cutting	72964	72965
1/2	1-1/2	3-1/2	1/2	10	End Cutting	72966	72967
1/2	1-1/2	3-1/2	1/2	10	No End Cutting	72968	72969

PLASTICS/COMPOSITES

TOLERANCES (mm)
 $D_1 = +0,00/-0,13$
 $D_2 = h_6$
31M-CCR
METRIC SERIES

TECH INFO 252


mm						EDP NO.	
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	NO. OF FLUTES	END STYLE	UNCOATED	Di-NAMITE (Diamond)
6,0	18,0	63,0	6,0	5	End Cutting	82974	82982
6,0	18,0	63,0	6,0	5	No End Cutting	82975	82983
8,0	25,0	63,0	8,0	7	End Cutting	82976	82984
8,0	25,0	63,0	8,0	7	No End Cutting	82977	82985
10,0	30,0	63,0	10,0	8	End Cutting	82978	82986
10,0	30,0	63,0	10,0	8	No End Cutting	82979	82987
12,0	38,0	89,0	12,0	10	End Cutting	82980	82988
12,0	38,0	89,0	12,0	10	No End Cutting	82981	82989



25

FRACTIONAL SERIES

TECH INFO 253

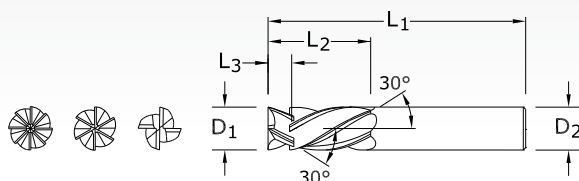

TOLERANCES (inch)

$D_1 = +.000/-0.003$

$D_2 = h_6$

PLASTICS/COMPOSITES

inch						EDP NO.	
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2		NO. OF FLUTES	UNCOATED	Di-NAMITE (Diamond)
1/4	1	2-1/2	1/4	11/64	4	72970	72971
5/16	1	2-1/2	5/16	7/32	4	72972	72973
3/8	1-1/8	2-1/2	3/8	17/64	6	72974	72975
1/2	1-1/2	3-1/2	1/2	23/64	8	72976	72977

25M

METRIC SERIES

TECH INFO 254

TOLERANCES (mm)

$D_1 = +0,00/-0,08$


$D_2 = h_6$

mm						EDP NO.	
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2		NO. OF FLUTES	UNCOATED	Di-NAMITE (Diamond)
6,0	25,0	63,0	6,0	4,10	4	82990	82991
8,0	25,0	63,0	8,0	5,58	4	82992	82993
10,0	28,0	63,0	10,0	7,05	6	82994	82995
12,0	38,0	89,0	12,0	8,60	8	82996	82997

**TOLERANCES (inch)**

$$D_1 = +.000/-0.003$$

$$D_2 = h_6$$

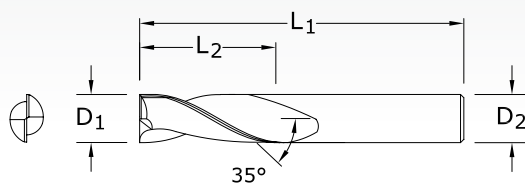**21****FRACTIONAL SERIES**

TECH INFO 255

inch				EDP NO.
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	UNCOATED
1/8	1/2	2	1/4	90001
5/32	5/8	2-1/2	1/4	90005
3/16	3/4	2-1/2	1/4	90009
1/4	3/4	2-1/2	1/4	90013
1/4	1	2-1/2	1/4	90017
5/16	1	2-1/2	5/16	90021
5/16	1	3	1/2	90025
3/8	1	2-1/2	3/8	90029
3/8	1-1/4	3	1/2	90033
1/2	1-1/4	3	1/2	90037
1/2	1-1/2	3-1/2	1/2	90041
1/2	2	4	1/2	90045
5/8	2	4-1/2	5/8	90049
3/4	2	4-1/2	3/4	90053

NON-FERROUS

PLASTICS/COMPOSITES

TOLERANCES (mm)

$$D_1 = +0.00/-0.08$$

$$D_2 = h_6$$

21M**METRIC SERIES**

TECH INFO 256


mm				EDP NO.
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	UNCOATED
3,0	13,0	50,0	6,0	90101
4,0	16,0	63,0	6,0	90107
5,0	19,0	63,0	6,0	90109
6,0	25,0	63,0	6,0	90113
8,0	25,0	63,0	8,0	90121
10,0	31,0	75,0	10,0	90129
12,0	31,0	75,0	12,0	90137



**22**

FRACTIONAL SERIES

TECH INFO 255

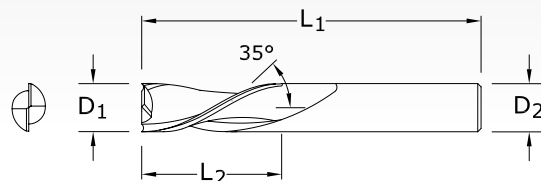

TOLERANCES (inch)

 $D_1 = +0.000/-0.003$ $D_2 = h_6$

NON-FERROUS

PLASTICS/COMPOSITES

inch				EDP NO.
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	UNCOATED
1/8	1/2	2	1/4	91001
5/32	5/8	2-1/2	1/4	91005
3/16	3/4	2-1/2	1/4	91009
1/4	3/4	2-1/2	1/4	91013
1/4	1	2-1/2	1/4	91017
5/16	1	2-1/2	5/16	91021
5/16	1	3	1/2	91025
3/8	1	2-1/2	3/8	91029
3/8	1-1/4	3	1/2	91033
1/2	1-1/4	3	1/2	91037
1/2	1-1/2	3-1/2	1/2	91041
1/2	2	4	1/2	91045
5/8	2	4-1/2	5/8	91049
3/4	2	4-1/2	3/4	91053

22M


METRIC SERIES

TECH INFO 256

mm				EDP NO.
CUTTING DIAMETER D_1	LENGTH OF CUT L_2	OVERALL LENGTH L_1	SHANK DIAMETER D_2	UNCOATED
3,0	13,0	50,0	6,0	91101
4,0	16,0	63,0	6,0	91107
5,0	19,0	63,0	6,0	91109
6,0	25,0	63,0	6,0	91113
8,0	25,0	63,0	8,0	91121
10,0	31,0	75,0	10,0	91129
12,0	31,0	75,0	12,0	91137

TOLERANCES (mm)


 $D_1 = +0,00/-0,08$ $D_2 = h_6$ 



Series 20, 31 Fractional					Vc (SFM)	Diameter (D ₁) (inch)			
	Ae x D ₁		Ap x D ₁			1/4	5/16	3/8	1/2
CFRP, AFRP (CARBON FIBER, ARAMID FIBER)		1	≤ 1	400	RPM	6112	4890	4075	3056
				(320-480)	Fz	0.0060	0.0075	0.0090	0.0120
					Feed (IPM)	36.7	36.7	36.7	36.7
		≤ 0.5	≤ 1.5	500	RPM	7640	6112	5093	3820
				(400-600)	Fz	0.0060	0.0075	0.0090	0.0120
					Feed (IPM)	45.8	45.8	45.8	45.8
		≤ 0.5	≤ 2	825	RPM	12606	10085	8404	6303
				(660-990)	Fz	0.0138	0.0173	0.0207	0.0276
					Feed (IPM)	174.0	174.0	174.0	174.0
GFRP (FIBERGLASS)		1	≤ 1	320	RPM	4890	3912	3260	2445
				(256-384)	Fz	0.0060	0.0075	0.0090	0.0120
					Feed (IPM)	29.3	29.3	29.3	29.3
		≤ 0.5	≤ 1.5	400	RPM	6112	4890	4075	3056
				(320-480)	Fz	0.0060	0.0075	0.0090	0.0120
					Feed (IPM)	36.7	36.7	36.7	36.7
		≤ 0.05	≤ 2	660	RPM	10085	8068	6723	5042
				(528-792)	Fz	0.0138	0.0172	0.0207	0.0276
					Feed (IPM)	139.0	139.0	139.0	139.0
CARBON, GRAPHITE		1	≤ 1	480	RPM	7334	5868	4890	3667
				(384-576)	Fz	0.0075	0.0094	0.0112	0.0150
					Feed (IPM)	55.0	55.0	55.0	55.0
		≤ 0.5	≤ 1.5	600	RPM	9168	7334	6112	4584
				(480-720)	Fz	0.0075	0.0094	0.0112	0.0150
					Feed (IPM)	68.7	68.7	68.7	68.7
		≤ 0.05	≤ 2	990	RPM	15127	12102	10085	7564
				(792-1188)	Fz	0.0172	0.0215	0.0258	0.0344
					Feed (IPM)	260.0	260.0	260.0	260.0
PLASTICS		1	≤ 1	800	RPM	12224	9779	8149	6112
				(640-690)	Fz	0.0075	0.0094	0.0113	0.0150
					Feed (IPM)	91.7	91.7	91.7	91.7
		≤ 0.5	≤ 1.5	1000	RPM	15280	12224	10187	7640
				(800-1200)	Fz	0.0075	0.0094	0.0113	0.0150
					Feed (IPM)	114.6	114.6	114.6	114.6
		≤ 0.05	≤ 2	1650	RPM	25212	20170	16808	12606
				(1320-1980)	Fz	0.0069	0.0086	0.0104	0.0138
					Feed (IPM)	174.0	174.0	174.0	174.0

rpm = sfm x 3.82 / D₁
 ipm = (inch / revolution) x rpm
 HSM (high speed machining)
 adjust parameters based on resin type and fiber structure
 reduce speed when overheating causes melting or damage to resin
 reduce feed if delamination or fraying occur

finish cuts typically required reduced feed and cutting depths
 rates shown are for use without coolant; rates may be increased with coolant
 dust collection is vital when machining dry
 diamond coating will increase tool life in graphite and composite materials
 refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)



Series 20, 31 Metric		Ae x D ₁	Ap x D ₁	Vc (m/min)		Diameter (D ₁) (mm)			
						6	8	10	12
CFRP, AFRP (CARBON FIBER, ARAMID FIBER)	Slot 	1	≤ 1	120	RPM	6361	4771	3817	3181
				(96-164)	Fz	0.152	0.203	0.254	0.305
					Feed (mm/min)	970	970	970	970
	Profile 	≤ 0.5	≤ 1.5	150	RPM	7951	5963	4771	3976
				(120-180)	Fz	0.153	0.203	0.254	0.305
					Feed (mm/min)	1213	1213	1213	1213
	HSM 	≤ 0.05	≤ 2	250	RPM	13252	9939	7951	6626
				(200-300)	Fz	0.350	0.467	0.583	0.700
					Feed (mm/min)	4638	4638	4638	4638
GFRP (FIBERGLASS)	Slot 	1	≤ 1	100	RPM	5301	3976	3181	2650
				(80-120)	Fz	0.152	0.203	0.254	0.305
					Feed (mm/min)	808	808	808	808
	Profile 	≤ 0.5	≤ 1.5	120	RPM	6361	4771	3817	3181
				(96-164)	Fz	0.152	0.203	0.254	0.305
					Feed (mm/min)	970	970	970	970
	HSM 	≤ 0.05	≤ 2	200	RPM	10602	7951	6361	5301
				(160-240)	Fz	0.350	0.467	0.583	0.700
					Feed (mm/min)	3711	3711	3711	3711
CARBON, GRAPHITE	Slot 	1	≤ 1	145	RPM	7686	5765	4612	3843
				(116-174)	Fz	0.190	0.253	0.317	0.380
					Feed (mm/min)	1460	1460	1460	1460
	Profile 	≤ 0.5	≤ 1.5	185	RPM	9807	7355	5884	4903
				(148-222)	Fz	0.190	0.253	0.317	0.380
					Feed (mm/min)	1863	1863	1863	1863
	HSM 	≤ 0.05	≤ 2	300	RPM	15903	11927	9542	7951
				(240-360)	Fz	0.437	0.583	0.729	0.875
					Feed (mm/min)	6957	6957	6957	6957
PLASTICS	Slot 	1	≤ 1	245	RPM	12987	9740	7792	6494
				(196-294)	Fz	0.075	0.100	0.125	0.150
					Feed (mm/min)	974	974	974	974
	Profile 	≤ 0.5	≤ 1.5	305	RPM	16168	12126	9701	8084
				(244-366)	Fz	0.075	0.100	0.125	0.150
					Feed (mm/min)	1213	1213	1213	1213
	HSM 	≤ 0.05	≤ 2	505	RPM	26769	20077	16062	13385
				(404-606)	Fz	0.175	0.233	0.292	0.350
					Feed (mm/min)	4685	4685	4685	4685

rpm = (1000 x m/min) / (3.14 x D₁)

mm / min = (mm / revolution) x rpm

HSM (high speed machining)

adjust parameters based on resin type and fiber structure

reduce speed when overheating causes melting or damage to resin

reduce feed if delamination or fraying occur


finish cuts typically required reduced feed and cutting depths

rates shown are for use without coolant; rates may be increased with coolant

dust collection is vital when machining dry

diamond coating will increase tool life in graphite and composite materials

refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)



Series 25 Fractional		Ae x D ₁	Ap x D ₁	Vc (SFM)		Diameter (D ₁) (inch)				
						1/4	5/16	3/8	1/2	3/4
CFRP, AFRP (CARBON FIBER, ARAMID FIBER)	Profile 	≤ 0.5	≤ 1.5	500	RPM	7640	6112	5093	3820	2547
				(400-600)	Fz	0.0016	0.0025	0.0030	0.0040	0.0048
					Feed (IPM)	48.9	61.1	91.7	122.2	97.8
	HSM 	≤ 0.05	≤ 2	825	RPM	12606	10085	8404	6303	4202
				(660-990)	Fz	0.0037	0.0057	0.0069	0.0092	0.0110
					Feed (IPM)	186.6	229.9	347.9	463.9	369.8
GFRP (FIBERGLASS)	Profile 	≤ 0.5	≤ 1.5	400	RPM	6112	4890	4075	3056	2037
				(320-480)	Fz	0.0016	0.0025	0.0030	0.0040	0.0048
					Feed (IPM)	39.1	48.9	73.3	97.8	78.2
	HSM 	≤ 0.05	≤ 2	660	RPM	10085	8068	6723	5042	3362
				(528-792)	Fz	0.0037	0.0057	0.0069	0.0092	0.0110
					Feed (IPM)	149.3	183.9	278.3	371.1	295.8
CARBON, GRAPHITE	Profile 	≤ 0.5	≤ 1.5	600	RPM	9168	7334	6112	4584	3056
				(480-720)	Fz	0.0020	0.0031	0.0038	0.0050	0.0050
					Feed (IPM)	73.3	90.9	139.4	183.4	122.2
	HSM 	≤ 0.05	≤ 2	990	RPM	15127	12102	10085	7564	5042
				(792-1188)	Fz	0.0046	0.0072	0.0086	0.0115	0.0138
					Feed (IPM)	278.3	348.5	520.4	695.9	556.7
PLASTICS	Profile 	≤ 0.5	≤ 1.5	1000	RPM	15280	12224	10187	7640	5093
				(800-1200)	Fz	0.0020	0.0031	0.0038	0.0050	0.0060
					Feed (IPM)	122.2	151.6	232.3	305.6	244.5
	HSM 	≤ 0.05	≤ 2	1650	RPM	25212	20170	16808	12606	8404
				(1320-1980)	Fz	0.0046	0.0072	0.0086	0.0115	0.0138
					Feed (IPM)	463.9	580.9	867.3	1159.8	927.8
MACHINABLE CERAMICS MACHINABLE GLASS	Profile 	≤ 0.5	≤ 1.5	50	RPM	764	611	509	382	255
				(40-60)	Fz	0.0008	0.0013	0.0015	0.0020	0.0024
					Feed (IPM)	2.4	3.2	4.6	6.1	4.9
	HSM 	≤ 0.05	≤ 2	85	RPM	1299	1039	866	649	433
				(68-102)	Fz	0.0018	0.0029	0.0034	0.0046	0.0055
					Feed (IPM)	9.4	12.1	17.7	23.9	190.5

$\text{rpm} = \text{sfm} \times 3.82 / D_1$

$\text{ipm} = (\text{inch / flute}) \times 4 \times \text{rpm}$

HSM (high speed machining)

adjust parameters based on resin type and fiber structure

reduce speed when overheating causes melting or damage to resin

reduce feed if delamination or fraying occur


finish cuts typically required reduced feed and cutting depths

rates shown are for use without coolant; rates may be increased with coolant

dust collection is vital when machining dry

diamond coating will increase tool life in graphite and composite materials

refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)



Series 25 Metric				Vc (m/min)	Diameter (D1) (mm)					
	Ae x D1	Ap x D1	6		8	10	12	16		
CFRP, AFRP (CARBON FIBER, ARAMID FIBER)	 Profile	≤ 0.5	≤ 1.5	150	RPM	7951	5963	4771	3976	2982
				(96-164)	Fz	0.040	0.065	0.075	0.100	0.120
					Feed (mm/min)	1272	1550	2147	3181	2862
	 HSM	≤ 0.05	≤ 2	250	RPM	13252	9939	7951	6626	4970
				(200-300)	Fz	0.095	0.145	0.175	0.235	0.280
					Feed (mm/min)	5036	5765	8349	12457	11132
GFRP (FIBERGLASS)	 Profile	≤ 0.5	≤ 1.5	120	RPM	6361	4771	3817	3181	2385
				(96-164)	Fz	0.040	0.065	0.075	0.100	0.120
					Feed (mm/min)	1018	1240	1717	2544	2290
	 HSM	≤ 0.05	≤ 2	200	RPM	10602	7951	6361	5301	3976
				(160-240)	Fz	0.095	0.145	0.175	0.235	0.280
					Feed (mm/min)	4029	4612	6679	9966	8905
CARBON, GRAPHITE	 Profile	≤ 0.5	≤ 1.5	185	RPM	9807	7355	5884	4903	3677
				(148-222)	Fz	0.050	0.080	0.095	0.125	0.150
					Feed (mm/min)	1961	2354	3354	4903	4413
	 HSM	≤ 0.05	≤ 2	300	RPM	15903	11927	9542	7951	5963
				(240-360)	Fz	0.115	0.185	0.220	0.290	0.350
					Feed (mm/min)	7315	8826	12595	18447	16698
PLASTICS	 Profile	≤ 0.5	≤ 1.5	305	RPM	16168	12126	9701	8084	6063
				(244-366)	Fz	0.050	0.080	0.095	0.125	0.150
					Feed (mm/min)	3234	3880	5529	8084	7275
	 HSM	≤ 0.05	≤ 2	505	RPM	26769	20077	16062	13385	10038
				(404-606)	Fz	0.115	0.185	0.220	0.290	0.350
					Feed (mm/min)	12314	14857	21201	31052	28108
MACHINABLE CERAMICS MACHINABLE GLASS	 Profile	≤ 0.5	≤ 1.5	15	RPM	795	596	477	398	298
				(12-18)	Fz	0.020	0.035	0.045	0.050	0.060
					Feed (mm/min)	64	83	129	159	143
	 HSM	≤ 0.05	≤ 2	25	RPM	1325	994	795	663	497
				(20-30)	Fz	0.045	0.075	0.085	0.115	0.140
					Feed (mm/min)	239	298	406	610	557

rpm = (1000 x m/min) / (3.14 x D₁)

mm / min = (mm / flute) x 4 x rpm

HSM (high speed machining)

adjust parameters based on resin type and fiber structure

reduce speed when overheating causes melting or damage to resin

reduce feed if delamination or fraying occur


finish cuts typically required reduced feed and cutting depths

rates shown are for use without coolant; rates may be increased with coolant

dust collection is vital when machining dry


diamond coating will increase tool life in graphite and composite materials

refer to the SGS Tool Wizard for complete technical information (www.sgstool.com)



Series 21, 22 Fractional				Vc (SFM)	Diameter (D ₁) (inch)				
		Ae x D ₁	Ap x D ₁		1/8	1/4	3/8	1/2	3/4
HARDWOODS	Slot	1	≤ 1	1550	RPM	47368	23684	15789	11842
				(1240-1860)	Fz	0.0008	0.0015	0.0025	0.0030
					Feed (IPM)	76	71	79	71
	Profile	≤ 0.5	≤ 1.5	1550	RPM	47368	23684	15789	11842
				(1240-1860)	Fz	0.0008	0.0015	0.0025	0.0030
					Feed (IPM)	76	71	79	71
SOFTWOODS	Slot	1	≤ 1	1950	RPM	59592	29796	19864	14898
				(1560-2340)	Fz	0.0010	0.0020	0.0030	0.0035
					Feed (IPM)	119	119	119	104
	Profile	≤ 0.5	≤ 1.5	1950	RPM	59592	29796	19864	14898
				(1560-2340)	Fz	0.0010	0.0020	0.0030	0.0035
					Feed (IPM)	119	119	119	104
PLYWOODS	Slot	1	≤ 1	1950	RPM	59592	29796	19864	14898
				(1560-2340)	Fz	0.0013	0.0025	0.0040	0.0050
					Feed (IPM)	155	149	159	149
	Profile	≤ 0.5	≤ 1.5	1950	RPM	59592	29796	19864	14898
				(1560-2340)	Fz	0.0013	0.0025	0.0040	0.0050
					Feed (IPM)	155	149	159	149
ALUMINUM ALLOYS	Slot	1	≤ 1	1150	RPM	35144	17572	11715	8786
				(920-1380)	Fz	0.0006	0.0015	0.0020	0.0025
					Feed (IPM)	42	53	47	44
	Profile	≤ 0.5	≤ 1.5	1150	RPM	35144	17572	11715	8786
				(920-1380)	Fz	0.0006	0.0015	0.0020	0.0025
					Feed (IPM)	42	53	47	44
PLASTICS	Slot	1	≤ 1	1950	RPM	59592	29796	19864	14898
				(1560-2340)	Fz	0.0008	0.0017	0.0025	0.0035
					Feed (IPM)	95	101	99	104
	Profile	≤ 0.5	≤ 1.5	1950	RPM	59592	29796	19864	14898
				(1560-2340)	Fz	0.0008	0.0017	0.0025	0.0035
					Feed (IPM)	95	101	99	104

rpm = sfm x 3.82 / D₁
 ipm = (inch / flute) x 2 x rpm



Series 21M, 22M Metric						Vc (m/min)	Diameter (D ₁) (mm)				
							3	6	10	12	20
HARDWOODS		1	≤ 1		470	RPM	49828	24914	14948	12457	7474
					(376-564)	Fz	0.020	0.040	0.065	0.075	0.115
						Feed (mm/min)	1993	1993	1943	1869	1719
		≤ 0.5	≤ 1.5		470	RPM	49828	24914	8155	4241	1509
					(376-564)	Fz	0.020	0.040	0.065	0.075	0.115
						Feed (mm/min)	1993	1993	1060	636	347
SOFTWOODS		1	≤ 1		600	RPM	63610	31805	19083	15903	9542
					(480-720)	Fz	0.025	0.050	0.075	0.090	0.140
						Feed (mm/min)	3181	3181	2862	2862	2672
		≤ 0.5	≤ 1.5		600	RPM	63610	31805	19083	15903	303467
					(480-720)	Fz	0.025	0.050	0.075	0.090	0.140
						Feed (mm/min)	3181	3181	2862	2862	84971
PLYWOODS		1	≤ 1		600	RPM	63610	31805	19083	15903	9542
					(480-720)	Fz	0.030	0.065	0.100	0.125	0.190
						Feed (mm/min)	3817	4135	3817	3976	3626
		≤ 0.5	≤ 1.5		600	RPM	63610	31805	19083	15903	303467
					(480-720)	Fz	0.030	0.065	0.100	0.125	0.190
						Feed (mm/min)	3817	4135	3817	3976	115318
N ALUMINUM ALLOYS		1	≤ 1		350	RPM	37106	18553	11132	9276	5566
					(289-420)	Fz	0.015	0.040	0.050	0.065	0.100
						Feed (mm/min)	1113	1484	1113	1206	1113
		≤ 0.5	≤ 1.5		350	RPM	37106	18553	11132	9276	177023
					(289-420)	Fz	0.015	0.040	0.050	0.065	0.100
						Feed (mm/min)	1113	1484	1113	1206	35405
PLASTICS		1	≤ 1		600	RPM	63610	31805	19083	15903	9542
					(480-720)	Fz	0.020	0.040	0.065	0.090	0.125
						Feed (mm/min)	2544	2544	2481	2862	2385
		≤ 0.5	≤ 1.5		600	RPM	63610	31805	19083	15903	9542
					(480-720)	Fz	0.020	0.040	0.065	0.090	0.125
						Feed (mm/min)	2544	2544	2481	2862	2385

rpm = (1000 x m/min) / (3.14 x D₁)
mm / min = (mm / flute) x 2 x rpm

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
30000.....	99	30065.....	105	30160.....	105	30326.....	120	30390.....	138	30495.....	121	30561.....	128
30001.....	99	30066.....	105	30161.....	100	30327.....	114	30397.....	114	30496.....	121	30562.....	130
30002.....	99	30067.....	105	30162.....	105	30328.....	120	30398.....	114	30497.....	121	30563.....	128
30003.....	99	30068.....	105	30163.....	100	30329.....	114	30399.....	114	30498.....	121	30564.....	130
30004.....	99	30069.....	104	30164.....	105	30330.....	120	30400.....	114	30499.....	121	30565.....	128
30005.....	99	30070.....	105	30165.....	100	30331.....	114	30435.....	114	30500.....	121	30566.....	130
30006.....	99	30070.....	138	30166.....	105	30332.....	120	30436.....	114	30501.....	128	30567.....	128
30007.....	99	30101.....	99	30167.....	100	30333.....	114	30437.....	114	30502.....	130	30568.....	130
30008.....	99	30102.....	104	30168.....	105	30334.....	120	30438.....	114	30503.....	128	30569.....	128
30009.....	99	30103.....	99	30169.....	100	30335.....	114	30439.....	114	30504.....	130	30570.....	130
30010.....	99	30104.....	104	30170.....	105	30336.....	120	30440.....	114	30505.....	128	30571.....	128
30011.....	99	30105.....	99	30171.....	100	30337.....	114	30441.....	114	30506.....	130	30572.....	130
30012.....	99	30106.....	104	30172.....	105	30338.....	120	30442.....	114	30507.....	128	30573.....	128
30013.....	99	30107.....	99	30173.....	100	30339.....	114	30443.....	114	30508.....	130	30574.....	130
30014.....	99	30108.....	104	30174.....	105	30340.....	120	30444.....	114	30509.....	128	30575.....	128
30015.....	99	30109.....	99	30175.....	100	30341.....	115	30445.....	114	30510.....	130	30576.....	130
30016.....	100	30110.....	104	30176.....	105	30342.....	121	30446.....	114	30511.....	128	30577.....	128
30017.....	100	30111.....	99	30177.....	99	30343.....	115	30447.....	114	30512.....	130	30578.....	130
30018.....	100	30112.....	104	30179.....	99	30344.....	121	30448.....	114	30513.....	128	30589.....	138
30019.....	100	30113.....	99	30180.....	100	30345.....	115	30449.....	114	30514.....	130	30590.....	130
30020.....	100	30114.....	104	30181.....	100	30346.....	121	30450.....	114	30515.....	128	30590.....	138
30021.....	100	30115.....	99	30182.....	100	30347.....	115	30451.....	115	30516.....	130	30591.....	121
30022.....	100	30116.....	104	30183.....	100	30348.....	121	30452.....	115	30517.....	128	30592.....	121
30023.....	100	30117.....	99	30184.....	105	30349.....	115	30453.....	115	30518.....	130	30593.....	121
30024.....	100	30118.....	104	30185.....	105	30350.....	121	30454.....	115	30519.....	128	30594.....	121
30025.....	100	30119.....	99	30186.....	105	30351.....	115	30455.....	115	30520.....	130	30595.....	121
30026.....	100	30120.....	104	30187.....	105	30352.....	121	30456.....	115	30521.....	128	30596.....	121
30027.....	100	30121.....	99	30188.....	105	30353.....	115	30457.....	115	30522.....	130	30597.....	121
30028.....	100	30122.....	104	30189.....	100	30354.....	121	30458.....	115	30523.....	128	30598.....	121
30029.....	99	30123.....	99	30189.....	138	30355.....	115	30459.....	115	30524.....	130	30599.....	120
30030.....	100	30124.....	104	30190.....	105	30356.....	121	30460.....	115	30525.....	128	30600.....	121
30030.....	138	30125.....	99	30190.....	138	30357.....	115	30461.....	115	30526.....	130	30600.....	138
30031.....	104	30126.....	104	30191.....	99	30358.....	121	30462.....	115	30527.....	128	30602.....	130
30032.....	104	30127.....	99	30192.....	99	30359.....	115	30463.....	115	30528.....	130	30604.....	130
30033.....	104	30128.....	104	30193.....	99	30360.....	121	30464.....	115	30529.....	128	30606.....	130
30034.....	104	30129.....	99	30194.....	99	30361.....	115	30465.....	115	30530.....	130	30608.....	130
30035.....	104	30130.....	104	30195.....	99	30362.....	121	30466.....	115	30531.....	128	30610.....	130
30036.....	104	30131.....	99	30196.....	99	30363.....	115	30467.....	115	30532.....	130	30612.....	130
30037.....	104	30132.....	104	30197.....	99	30364.....	121	30468.....	115	30533.....	128	30771.....	128
30038.....	104	30133.....	99	30198.....	99	30365.....	115	30469.....	114	30534.....	130	30772.....	128
30039.....	104	30134.....	104	30199.....	99	30366.....	121	30470.....	115	30535.....	128	30773.....	128
30040.....	104	30135.....	99	30301.....	114	30367.....	115	30470.....	138	30536.....	130	30774.....	128
30041.....	104	30136.....	104	30302.....	120	30368.....	121	30471.....	120	30537.....	128	30775.....	128
30042.....	104	30137.....	99	30303.....	114	30369.....	115	30472.....	120	30538.....	130	30776.....	128
30043.....	104	30138.....	104	30304.....	120	30370.....	121	30473.....	120	30539.....	128	30777.....	128
30044.....	104	30139.....	99	30305.....	114	30371.....	115	30474.....	120	30540.....	130	30778.....	128
30045.....	104	30140.....	104	30306.....	120	30372.....	121	30475.....	120	30541.....	128	30779.....	128
30046.....	104	30141.....	99	30307.....	114	30373.....	115	30476.....	120	30542.....	130	30780.....	128
30047.....	104	30142.....	105	30308.....	120	30374.....	121	30477.....	120	30543.....	128	30781.....	128
30048.....	104	30143.....	99	30309.....	114	30375.....	115	30478.....	120	30544.....	130	30782.....	128
30049.....	104	30144.....	105	30310.....	120	30376.....	121	30479.....	120	30545.....	128	30783.....	128
30050.....	104	30145.....	99	30311.....	114	30377.....	114	30480.....	120	30546.....	130	30784.....	128
30051.....	105	30146.....	105	30312.....	120	30378.....	120	30481.....	120	30547.....	128	30785.....	128
30052.....	105	30147.....	99	30313.....	114	30379.....	99	30482.....	120	30548.....	130	30786.....	128
30053.....	105	30148.....	105	30314.....	120	30380.....	100	30483.....	120	30549.....	128	30787.....	128
30054.....	105	30149.....	99	30315.....	114	30381.....	100	30484.....	120	30550.....	130	30788.....	128
30055.....	105	30150.....	105	30316.....	120	30382.....	100	30485.....	120	30551.....	128	30789.....	128
30056.....	105	30151.....	100	30317.....	114	30383.....	100	30486.....	120	30552.....	130	30790.....	128
30057.....	105	30152.....	105	30318.....	120	30384.....	105	30487.....	120	30553.....	128	30791.....	128
30058.....	105	30153.....	100	30319.....	114	30385.....	105	30488.....	120	30554.....	130	30792.....	128
30059.....	105	30154.....	105	30320.....	120	30386.....	105	30489.....	120	30555.....	128	30793.....	128
30060.....	105	30155.....	100	30321.....	114	30387.....	105	30490.....	120	30556.....	130	30794.....	128
30061.....	105	30156.....	105	30322.....	120	30388.....	105	30491.....	121	30557.....	128	30795.....	128
30062.....	105	30157.....	100	30323.....	114	30389.....	115	30492.....	121	30558.....	130	30796.....	128
30063.....	105	30158.....	105	30324.....	120	30389.....	138	30493.....	121	30559.....	128	30797.....	128
30064.....	105	30159.....	100	30325.....	114	30390.....	121	30494.....	121	30560.....	130	30798.....	128

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
30799.....	128	30865.....	130	31134.....	130	31224.....	107	31329.....	118	31423.....	102	31503.....	118
30800.....	128	30866.....	130	31135.....	130	31225.....	107	31330.....	118	31424.....	107	31504.....	124
30801.....	128	30867.....	130	31136.....	130	31226.....	107	31331.....	118	31425.....	102	31505.....	118
30802.....	128	30868.....	130	31137.....	130	31227.....	107	31332.....	118	31426.....	107	31506.....	124
30803.....	128	30869.....	130	31138.....	130	31228.....	107	31333.....	118	31427.....	102	31507.....	118
30804.....	128	30870.....	130	31139.....	130	31229.....	107	31334.....	118	31428.....	107	31508.....	124
30805.....	128	30871.....	130	31140.....	130	31230.....	107	31335.....	118	31429.....	102	31509.....	118
30806.....	128	30872.....	130	31141.....	130	31231.....	107	31336.....	118	31430.....	107	31510.....	124
30807.....	128	30873.....	130	31142.....	130	31232.....	107	31336.....	138	31431.....	102	31511.....	118
30808.....	128	30874.....	130	31143.....	130	31233.....	107	31337.....	124	31432.....	107	31512.....	124
30809.....	128	30875.....	130	31144.....	130	31234.....	107	31338.....	124	31433.....	102	31513.....	118
30810.....	138	30876.....	130	31145.....	130	31235.....	107	31339.....	124	31434.....	107	31514.....	124
30811.....	128	30877.....	130	31146.....	130	31236.....	107	31340.....	124	31435.....	102	31515.....	118
30812.....	128	30878.....	130	31147.....	130	31237.....	107	31341.....	124	31436.....	107	31516.....	124
30813.....	128	30879.....	130	31148.....	130	31238.....	98	31342.....	124	31437.....	102	31517.....	118
30814.....	128	30880.....	130	31149.....	130	31239.....	98	31343.....	124	31438.....	107	31518.....	124
30815.....	128	30881.....	130	31150.....	130	31240.....	98	31344.....	124	31439.....	102	31519.....	118
30816.....	128	30882.....	130	31151.....	130	31241.....	98	31345.....	124	31440.....	107	31520.....	124
30817.....	128	30883.....	130	31152.....	130	31242.....	98	31346.....	124	31441.....	102	31521.....	118
30818.....	128	30884.....	130	31153.....	130	31243.....	98	31347.....	124	31442.....	107	31522.....	124
30819.....	128	30885.....	130	31154.....	130	31244.....	98	31348.....	124	31443.....	102	31523.....	118
30820.....	128	30886.....	130	31155.....	130	31245.....	98	31349.....	124	31444.....	107	31524.....	124
30821.....	128	30887.....	130	31156.....	130	31246.....	98	31350.....	124	31445.....	102	31525.....	118
30822.....	128	30888.....	130	31157.....	130	31247.....	98	31351.....	124	31446.....	107	31526.....	124
30823.....	128	30889.....	130	31158.....	130	31248.....	98	31352.....	124	31447.....	102	31527.....	118
30824.....	128	30900.....	130	31159.....	130	31249.....	98	31353.....	124	31448.....	107	31528.....	124
30825.....	128	30900.....	138	31160.....	130	31250.....	98	31354.....	124	31449.....	102	31529.....	118
30826.....	128	30902.....	130	31161.....	130	31251.....	98	31355.....	124	31450.....	107	31530.....	124
30827.....	128	30904.....	130	31162.....	130	31252.....	98	31356.....	124	31451.....	102	31531.....	118
30828.....	128	30906.....	130	31163.....	130	31253.....	98	31357.....	124	31452.....	107	31532.....	124
30829.....	128	30908.....	130	31164.....	130	31254.....	98	31357.....	138	31453.....	102	31533.....	118
30830.....	128	30910.....	130	31165.....	130	31255.....	98	31358.....	113	31454.....	107	31534.....	124
30831.....	128	30912.....	130	31166.....	130	31256.....	98	31359.....	113	31455.....	102	31535.....	118
30832.....	128	30914.....	130	31167.....	130	31257.....	98	31360.....	113	31456.....	107	31536.....	124
30833.....	128	30916.....	130	31168.....	130	31258.....	98	31361.....	113	31457.....	102	31537.....	118
30834.....	128	30918.....	130	31169.....	130	31259.....	98	31362.....	113	31458.....	107	31538.....	124
30835.....	128	30920.....	130	31169.....	138	31260.....	98	31363.....	113	31459.....	102	31539.....	118
30836.....	128	30921.....	130	31170.....	102	31261.....	98	31364.....	113	31460.....	107	31540.....	124
30837.....	128	30922.....	130	31171.....	102	31262.....	98	31365.....	113	31461.....	102	31541.....	118
30838.....	128	30923.....	130	31172.....	102	31263.....	98	31366.....	113	31462.....	107	31542.....	124
30839.....	128	30924.....	130	31173.....	102	31303.....	113	31367.....	113	31463.....	102	31543.....	118
30840.....	128	30925.....	130	31174.....	102	31304.....	113	31368.....	113	31464.....	107	31544.....	124
30841.....	128	30926.....	130	31175.....	102	31305.....	113	31369.....	113	31465.....	102	31545.....	118
30842.....	128	30927.....	130	31176.....	102	31306.....	113	31370.....	113	31466.....	107	31546.....	124
30843.....	128	30928.....	130	31177.....	102	31307.....	113	31401.....	102	31467.....	102	31547.....	118
30844.....	128	30929.....	130	31178.....	102	31308.....	113	31402.....	107	31468.....	107	31548.....	124
30845.....	128	30930.....	130	31179.....	102	31309.....	113	31403.....	102	31469.....	102	31549.....	118
30846.....	128	30931.....	130	31180.....	102	31310.....	113	31404.....	107	31470.....	107	31550.....	124
30847.....	128	30932.....	130	31181.....	102	31311.....	113	31405.....	102	31471.....	102	31551.....	118
30848.....	128	30933.....	130	31182.....	102	31312.....	113	31406.....	107	31472.....	107	31552.....	124
30849.....	128	30934.....	130	31183.....	102	31313.....	113	31407.....	102	31473.....	102	31553.....	118
30850.....	138	30935.....	130	31184.....	102	31314.....	113	31408.....	107	31474.....	107	31554.....	124
30851.....	130	30936.....	130	31185.....	102	31315.....	113	31409.....	102	31475.....	102	31555.....	118
30852.....	130	30937.....	130	31186.....	102	31316.....	118	31410.....	107	31476.....	107	31556.....	124
30853.....	130	30938.....	130	31187.....	102	31317.....	118	31411.....	102	31477.....	102	31557.....	118
30854.....	130	30939.....	130	31188.....	102	31318.....	118	31412.....	107	31478.....	107	31558.....	124
30855.....	130	30940.....	130	31189.....	102	31319.....	118	31413.....	102	31479.....	102	31559.....	118
30856.....	130	30941.....	130	31190.....	138	31320.....	118	31414.....	107	31480.....	107	31560.....	124
30857.....	130	30942.....	130	31217.....	107	31321.....	118	31415.....	102	31481.....	138	31561.....	118
30858.....	130	30943.....	130	31217.....	138	31322.....	118	31416.....	107	31482.....	107	31562.....	124
30859.....	130	30944.....	130	31218.....	107	31323.....	118	31417.....	102	31482.....	138	31563.....	118
30860.....	130	30944.....	138	31219.....	107	31324.....	118	31418.....	107	31489.....	138	31564.....	124
30861.....	130	31130.....	130	31220.....	107	31325.....	118	31419.....	102	31490.....	107	31565.....	118
30862.....	130	31131.....	130	31221.....	107	31326.....	118	31420.....	107	31490.....	138	31566.....	124
30863.....	130	31132.....	130	31222.....	107	31327.....	118	31421.....	102	31501.....	118	31567.....	118
30864.....	130	31133.....	130	31223.....	107	31328.....	118	31422.....	107	31502.....	124	31568.....	124

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
31569.....	118	31734.....	100	31800.....	114	31876.....	100	31950.....	114	32054.....	44	32303.....	136
31570.....	124	31735.....	100	31802.....	114	31877.....	100	31951.....	115	32055.....	44	32304.....	136
31571.....	118	31736.....	100	31804.....	115	31878.....	100	31952.....	115	32056.....	44	32305.....	136
31572.....	124	31737.....	99	31806.....	115	31879.....	100	31953.....	115	32057.....	44	32306.....	136
31573.....	118	31738.....	99	31808.....	115	31880.....	99	31954.....	115	32058.....	44	32307.....	136
31574.....	124	31739.....	99	31810.....	114	31881.....	99	31955.....	115	32059.....	44	32308.....	136
31575.....	118	31740.....	99	31812.....	114	31882.....	99	31956.....	115	32060.....	44	32309.....	136
31576.....	124	31741.....	99	31814.....	115	31883.....	99	31957.....	115	32061.....	44	32310.....	136
31577.....	118	31742.....	100	31816.....	115	31884.....	99	31958.....	114	32062.....	44	32311.....	136
31578.....	124	31743.....	100	31817.....	115	31885.....	100	31959.....	114	32063.....	44	32312.....	136
31579.....	118	31744.....	100	31818.....	115	31886.....	100	31960.....	114	32064.....	44	32313.....	136
31580.....	124	31745.....	100	31819.....	115	31887.....	100	31961.....	115	32065.....	44	32314.....	136
31581.....	118	31746.....	100	31820.....	114	31888.....	100	31962.....	115	32066.....	44	32315.....	136
31581.....	138	31747.....	99	31821.....	114	31889.....	100	31963.....	115	32067.....	44	32316.....	136
31582.....	124	31748.....	99	31822.....	115	31890.....	120	31964.....	115	32068.....	44	32317.....	136
31582.....	138	31749.....	99	31823.....	115	31891.....	120	31965.....	115	32069.....	44	32318.....	136
31589.....	118	31750.....	113	31824.....	115	31892.....	120	31966.....	115	32200.....	123	32319.....	136
31589.....	138	31751.....	113	31825.....	114	31893.....	120	31967.....	115	32201.....	123	32320.....	136
31590.....	124	31752.....	113	31826.....	114	31894.....	121	31968.....	120	32202.....	123	32321.....	136
31590.....	138	31753.....	113	31827.....	115	31895.....	121	31969.....	120	32203.....	123	32322.....	136
31601.....	98	31754.....	113	31830.....	120	31896.....	121	31970.....	120	32204.....	123	32323.....	136
31603.....	98	31755.....	113	31831.....	120	31897.....	121	31971.....	121	32205.....	123	32324.....	136
31605.....	98	31756.....	113	31832.....	120	31898.....	121	31972.....	121	32206.....	123	32325.....	136
31607.....	98	31757.....	113	31833.....	120	31899.....	121	31973.....	121	32207.....	123	32326.....	136
31609.....	98	31758.....	113	31834.....	121	31900.....	104	31974.....	121	32210.....	123	32327.....	136
31611.....	98	31759.....	113	31835.....	121	31902.....	104	31975.....	121	32211.....	123	32328.....	136
31613.....	98	31760.....	113	31836.....	121	31904.....	104	31976.....	121	32212.....	123	32329.....	136
31615.....	98	31761.....	113	31837.....	121	31906.....	105	31977.....	121	32213.....	123	32330.....	136
31617.....	98	31762.....	113	31838.....	121	31908.....	105	31978.....	120	32214.....	123	32333.....	136
31619.....	98	31763.....	99	31839.....	121	31910.....	105	31979.....	120	32215.....	123	32334.....	136
31621.....	98	31764.....	99	31840.....	120	31912.....	105	31980.....	120	32216.....	123	32335.....	136
31623.....	98	31765.....	100	31841.....	120	31914.....	105	31981.....	121	32217.....	123	32336.....	136
31625.....	98	31766.....	100	31842.....	120	31916.....	105	31982.....	121	32260.....	117	32337.....	136
31650.....	98	31767.....	100	31843.....	120	31917.....	105	31983.....	121	32261.....	117	32339.....	136
31651.....	98	31768.....	100	31844.....	121	31918.....	104	31984.....	121	32262.....	117	32340.....	136
31652.....	98	31769.....	100	31845.....	121	31919.....	104	31985.....	121	32263.....	117	32341.....	136
31653.....	98	31770.....	104	31846.....	121	31920.....	104	31986.....	121	32264.....	117	32342.....	136
31654.....	98	31771.....	104	31847.....	121	31921.....	105	31987.....	121	32265.....	117	32345.....	136
31655.....	98	31772.....	104	31848.....	121	31922.....	105	31988.....	120	32266.....	117	32346.....	136
31656.....	98	31773.....	104	31849.....	121	31923.....	105	31989.....	120	32267.....	117	32347.....	136
31657.....	98	31774.....	105	31850.....	114	31924.....	105	31990.....	120	32270.....	117	32348.....	136
31658.....	98	31775.....	105	31851.....	114	31925.....	105	31991.....	121	32271.....	117	32349.....	136
31659.....	98	31776.....	105	31852.....	114	31926.....	105	31992.....	121	32272.....	117	32350.....	136
31660.....	98	31777.....	105	31853.....	114	31927.....	105	31993.....	121	32273.....	117	32351.....	136
31661.....	98	31778.....	105	31854.....	115	31928.....	104	31994.....	121	32274.....	117	32352.....	136
31662.....	98	31779.....	105	31855.....	115	31929.....	104	31995.....	121	32275.....	117	32353.....	136
31701.....	113	31780.....	104	31856.....	115	31930.....	104	31996.....	121	32276.....	117	32354.....	136
31703.....	113	31781.....	104	31857.....	115	31931.....	105	31997.....	121	32277.....	117	32355.....	136
31705.....	113	31782.....	104	31858.....	115	31932.....	105	32033.....	44	32280.....	117	32356.....	136
31707.....	113	31783.....	104	31859.....	115	31933.....	105	32034.....	44	32281.....	117	32357.....	136
31709.....	113	31784.....	105	31860.....	99	31934.....	105	32035.....	44	32282.....	117	32358.....	136
31711.....	113	31785.....	105	31861.....	99	31935.....	105	32036.....	44	32283.....	117	32359.....	136
31713.....	113	31786.....	105	31862.....	99	31936.....	105	32037.....	44	32284.....	117	32360.....	136
31715.....	113	31787.....	105	31863.....	99	31937.....	105	32038.....	44	32285.....	117	32361.....	136
31717.....	113	31788.....	105	31864.....	99	31938.....	114	32039.....	44	32286.....	117	32362.....	136
31719.....	113	31789.....	105	31865.....	100	31939.....	114	32040.....	44	32287.....	117	32363.....	136
31721.....	113	31790.....	104	31866.....	100	31940.....	114	32041.....	44	32290.....	123	32364.....	136
31723.....	113	31791.....	104	31867.....	100	31941.....	115	32042.....	44	32291.....	123	32370.....	136
31725.....	113	31792.....	104	31868.....	100	31942.....	115	32043.....	44	32292.....	123	32371.....	136
31727.....	99	31793.....	104	31869.....	100	31943.....	115	32044.....	44	32293.....	123	32372.....	136
31728.....	99	31794.....	105	31870.....	99	31944.....	115	32045.....	44	32294.....	123	32373.....	136
31729.....	99	31795.....	105	31871.....	99	31945.....	115	32046.....	44	32295.....	123	32374.....	136
31730.....	99	31796.....	105	31872.....	99	31946.....	115	32047.....	44	32296.....	123	32375.....	136
31731.....	99	31797.....	105	31873.....	99	31947.....	115	32048.....	44	32297.....	123	32376.....	136
31732.....	100	31798.....	105	31874.....	99	31948.....	114	32049.....	44	32301.....	136	32377.....	136
31733.....	100	31799.....	105	31875.....	100	31949.....	114	32053.....	44	32302.....	136	32378.....	136

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
32379.....	136	32459.....	137	32609.....	32	32715.....	52	32790.....	49	32860.....	49	33312.....	121
32380.....	136	32460.....	137	32610.....	32	32716.....	52	32791.....	49	32861.....	49	33313.....	115
32381.....	136	32461.....	137	32611.....	32	32717.....	52	32792.....	49	32862.....	49	33314.....	121
32382.....	136	32462.....	137	32612.....	32	32718.....	52	32793.....	49	32863.....	49	33315.....	115
32383.....	136	32463.....	137	32613.....	32	32719.....	52	32794.....	49	32864.....	49	33316.....	121
32384.....	136	32464.....	137	32614.....	32	32720.....	52	32795.....	49	32865.....	49	33317.....	115
32385.....	136	32470.....	137	32615.....	32	32725.....	52	32796.....	49	32866.....	49	33318.....	121
32386.....	136	32471.....	137	32616.....	32	32726.....	52	32797.....	49	32867.....	49	33321.....	114
32387.....	136	32472.....	137	32619.....	32	32727.....	52	32798.....	49	32868.....	49	33322.....	120
32388.....	136	32473.....	137	32620.....	32	32728.....	52	32799.....	49	32869.....	49	33323.....	114
32388.....	136	32474.....	137	32621.....	32	32729.....	52	32800.....	49	32870.....	49	33324.....	120
32389.....	136	32475.....	137	32625.....	32	32730.....	52	32801.....	49	32871.....	49	33325.....	115
32402.....	137	32476.....	137	32626.....	32	32731.....	52	32802.....	49	32872.....	49	33326.....	121
32403.....	137	32477.....	137	32627.....	32	32732.....	52	32803.....	49	32873.....	49	33327.....	115
32404.....	137	32478.....	137	32628.....	32	32733.....	52	32804.....	49	32874.....	49	33328.....	121
32405.....	137	32479.....	137	32632.....	33	32734.....	52	32805.....	49	33101.....	99	33329.....	115
32406.....	137	32480.....	137	32633.....	33	32735.....	52	32806.....	49	33102.....	104	33330.....	121
32407.....	137	32481.....	137	32655.....	30	32736.....	52	32807.....	49	33103.....	99	33331.....	115
32408.....	137	32482.....	137	32656.....	30	32737.....	52	32808.....	49	33104.....	104	33332.....	121
32409.....	137	32483.....	137	32657.....	30	32738.....	52	32809.....	49	33105.....	99	33333.....	115
32410.....	137	32484.....	137	32658.....	30	32739.....	52	32810.....	49	33106.....	104	33334.....	121
32411.....	137	32485.....	137	32659.....	30	32740.....	52	32815.....	48	33107.....	99	33335.....	115
32412.....	137	32486.....	137	32660.....	30	32741.....	52	32816.....	48	33108.....	105	33336.....	121
32413.....	137	32487.....	137	32661.....	30	32742.....	52	32817.....	48	33109.....	100	33337.....	115
32414.....	137	32488.....	137	32662.....	30	32743.....	52	32818.....	48	33110.....	105	33338.....	121
32415.....	137	32489.....	137	32663.....	30	32744.....	52	32819.....	48	33111.....	100	33341.....	114
32416.....	137	32569.....	32	32664.....	30	32745.....	52	32820.....	48	33112.....	105	33342.....	120
32417.....	137	32570.....	33	32665.....	30	32751.....	48	32821.....	48	33113.....	100	33343.....	114
32418.....	137	32571.....	33	32666.....	30	32752.....	48	32822.....	48	33114.....	105	33344.....	120
32419.....	137	32572.....	33	32667.....	30	32753.....	48	32823.....	48	33115.....	100	33345.....	42
32420.....	137	32573.....	32	32668.....	30	32754.....	48	32824.....	48	33116.....	105	33346.....	42
32421.....	137	32574.....	32	32669.....	30	32755.....	48	32825.....	46	33117.....	100	33347.....	42
32422.....	137	32575.....	33	32670.....	30	32756.....	48	32826.....	48	33118.....	105	33348.....	42
32423.....	137	32576.....	33	32671.....	30	32757.....	48	32827.....	48	33121.....	99	33349.....	42
32424.....	137	32577.....	33	32672.....	30	32758.....	48	32828.....	48	33122.....	104	33350.....	42
32425.....	137	32578.....	33	32673.....	30	32759.....	48	32829.....	48	33123.....	99	33351.....	42
32426.....	137	32579.....	33	32674.....	30	32760.....	48	32830.....	46	33124.....	104	33352.....	42
32427.....	137	32580.....	33	32675.....	30	32761.....	46	32831.....	48	33125.....	99	33353.....	42
32428.....	137	32581.....	33	32676.....	30	32762.....	48	32832.....	48	33126.....	105	33354.....	42
32429.....	137	32582.....	33	32677.....	30	32763.....	48	32833.....	48	33127.....	99	34300.....	53
32430.....	137	32583.....	33	32678.....	30	32764.....	48	32834.....	48	33128.....	105	34301.....	53
32431.....	137	32584.....	33	32679.....	30	32765.....	48	32835.....	48	33129.....	100	34302.....	53
32434.....	137	32585.....	33	32680.....	30	32766.....	46	32836.....	48	33130.....	105	34303.....	53
32435.....	137	32586.....	33	32681.....	30	32767.....	48	32837.....	48	33131.....	100	34304.....	53
32436.....	137	32587.....	33	32682.....	30	32768.....	48	32838.....	48	33132.....	105	34305.....	53
32437.....	137	32588.....	33	32683.....	30	32769.....	48	32839.....	48	33133.....	100	34306.....	53
32438.....	137	32589.....	33	32685.....	33	32770.....	48	32840.....	48	33134.....	105	34307.....	53
32439.....	137	32590.....	33	32686.....	33	32771.....	48	32841.....	48	33135.....	100	34308.....	53
32440.....	137	32591.....	32	32687.....	33	32772.....	48	32842.....	48	33136.....	105	34309.....	53
32441.....	137	32592.....	32	32688.....	33	32773.....	48	32843.....	49	33137.....	100	34501.....	44
32442.....	137	32593.....	32	32689.....	33	32774.....	48	32844.....	49	33138.....	105	34502.....	44
32443.....	137	32594.....	33	32700.....	52	32775.....	48	32845.....	49	33141.....	99	34503.....	44
32445.....	137	32595.....	33	32701.....	52	32776.....	48	32846.....	49	33142.....	104	34504.....	44
32446.....	137	32596.....	33	32702.....	52	32777.....	48	32847.....	49	33143.....	99	34505.....	44
32447.....	137	32597.....	33	32703.....	52	32778.....	48	32848.....	49	33144.....	104	34506.....	44
32448.....	137	32598.....	33	32704.....	52	32779.....	49	32849.....	49	33301.....	114	34507.....	44
32449.....	137	32599.....	33	32705.....	52	32780.....	49	32850.....	49	33302.....	120	34508.....	44
32450.....	137	32600.....	33	32706.....	52	32781.....	49	32851.....	49	33303.....	114	34509.....	44
32451.....	137	32601.....	33	32707.....	52	32782.....	49	32852.....	49	33304.....	120	34510.....	44
32452.....	137	32602.....	33	32708.....	52	32783.....	49	32853.....	49	33305.....	114	34511.....	44
32453.....	137	32603.....	33	32709.....	52	32784.....	49	32854.....	49	33306.....	120	34512.....	44
32454.....	137	32604.....	33	32710.....	52	32785.....	49	32855.....	49	33307.....	115	34513.....	44
32455.....	137	32605.....	33	32711.....	52	32786.....	49	32856.....	49	33308.....	121	34514.....	44
32456.....	137	32606.....	32	32712.....	52	32787.....	49	32857.....	49	33309.....	115	34515.....	44
32457.....	137	32607.....	32	32713.....	52	32788.....	49	32858.....	49	33310.....	121	34516.....	44
32458.....	137	32608.....	32	32714.....	52	32789.....	49	32859.....	49	33311.....	115	34517.....	44

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
34518.....	44	34675.....	55	34748.....	50	35115.....	36	35482.....	112	36225.....	133	36470.....	17
34519.....	44	34676.....	55	34749.....	50	35116.....	36	35483.....	112	36226.....	133	36472.....	17
34520.....	44	34677.....	55	34750.....	50	35117.....	36	35485.....	112	36228.....	133	36474.....	17
34521.....	44	34678.....	56	34751.....	50	35118.....	36	35487.....	112	36229.....	133	36480.....	18
34522.....	44	34679.....	56	34752.....	50	35119.....	36	35489.....	112	36230.....	133	36482.....	18
34523.....	44	34680.....	56	34753.....	50	35120.....	36	35491.....	112	36344.....	21	36486.....	18
34524.....	44	34681.....	56	34754.....	50	35121.....	36	35493.....	112	36345.....	21	36500.....	18
34525.....	44	34682.....	56	34771.....	46	35122.....	36	35495.....	112	36346.....	21	36502.....	18
34526.....	44	34683.....	56	34772.....	46	35123.....	36	35497.....	112	36347.....	21	36504.....	18
34527.....	44	34684.....	56	34773.....	46	35124.....	36	35500.....	112	36348.....	21	36505.....	23
34528.....	44	34685.....	56	34774.....	46	35125.....	36	35501.....	112	36349.....	21	36506.....	23
34529.....	44	34686.....	57	34775.....	46	35126.....	36	35502.....	112	36350.....	21	36507.....	23
34530.....	44	34687.....	57	34776.....	46	35127.....	37	35503.....	112	36351.....	21	36508.....	23
34531.....	44	34688.....	57	34777.....	46	35128.....	37	35504.....	112	36352.....	21	36509.....	23
34532.....	44	34689.....	57	34778.....	46	35129.....	37	35505.....	112	36353.....	21	36511.....	23
34533.....	44	34690.....	57	34779.....	46	35130.....	37	35506.....	112	36354.....	21	36513.....	23
34534.....	44	34691.....	57	34780.....	46	35131.....	37	35507.....	112	36355.....	21	36515.....	23
34620.....	54	34692.....	57	34781.....	46	35132.....	37	35508.....	112	36356.....	21	36517.....	23
34621.....	54	34693.....	57	34782.....	46	35133.....	37	35509.....	112	36357.....	21	36519.....	23
34622.....	54	34701.....	50	34783.....	46	35134.....	37	35510.....	112	36358.....	21	36520.....	23
34623.....	54	34702.....	50	34784.....	46	35135.....	37	35511.....	112	36359.....	21	36530.....	19
34624.....	54	34703.....	50	34785.....	46	35136.....	37	35512.....	112	36361.....	21	36531.....	19
34625.....	54	34704.....	50	34786.....	46	35137.....	37	35513.....	112	36370.....	14	36532.....	19
34626.....	54	34705.....	50	34787.....	46	35138.....	37	35514.....	112	36371.....	14	36533.....	19
34627.....	54	34706.....	50	34789.....	46	35139.....	37	35515.....	112	36372.....	14	36534.....	19
34628.....	54	34707.....	50	34790.....	46	35140.....	37	36106.....	132	36373.....	14	36535.....	19
34630.....	55	34708.....	50	34791.....	46	35141.....	37	36107.....	132	36374.....	14	36536.....	19
34631.....	55	34709.....	50	34793.....	46	35273.....	127	36108.....	132	36375.....	14	36537.....	19
34632.....	55	34710.....	50	34794.....	46	35275.....	127	36109.....	132	36376.....	14	36538.....	19
34633.....	55	34711.....	50	34795.....	46	35277.....	127	36110.....	132	36378.....	15	36539.....	21
34634.....	55	34712.....	50	34796.....	46	35278.....	127	36111.....	132	36380.....	15	36540.....	21
34635.....	55	34713.....	50	34797.....	46	35279.....	127	36112.....	132	36381.....	15	36541.....	21
34636.....	55	34714.....	50	34798.....	46	35280.....	127	36113.....	132	36383.....	15	36542.....	21
34637.....	55	34715.....	50	34799.....	46	35281.....	127	36114.....	132	36384.....	15	36543.....	21
34638.....	55	34716.....	50	34800.....	46	35282.....	127	36116.....	132	36385.....	15	36544.....	21
34640.....	56	34717.....	50	34801.....	46	35283.....	127	36117.....	132	36386.....	15	36545.....	21
34641.....	56	34718.....	50	34802.....	46	35285.....	127	36118.....	132	36387.....	15	36546.....	21
34642.....	56	34719.....	50	34803.....	46	35287.....	127	36120.....	132	36388.....	15	36547.....	21
34643.....	56	34720.....	50	34804.....	46	35289.....	127	36121.....	132	36389.....	15	36555.....	24
34644.....	56	34721.....	50	34805.....	46	35291.....	127	36124.....	132	36390.....	15	36556.....	24
34645.....	56	34722.....	50	34806.....	46	35293.....	127	36125.....	132	36391.....	15	36557.....	24
34646.....	56	34723.....	50	34807.....	46	35295.....	127	36126.....	132	36392.....	15	36558.....	24
34647.....	56	34724.....	50	34808.....	46	35297.....	127	36128.....	132	36393.....	15	36559.....	24
34650.....	57	34725.....	50	34809.....	46	35300.....	127	36129.....	132	36404.....	19	36560.....	24
34651.....	57	34726.....	50	34811.....	46	35301.....	127	36130.....	132	36406.....	19	36561.....	24
34652.....	57	34727.....	50	34812.....	46	35302.....	127	36140.....	41	36408.....	19	36570.....	24
34653.....	57	34728.....	50	34813.....	46	35303.....	127	36141.....	41	36410.....	19	36571.....	24
34654.....	57	34729.....	50	34815.....	46	35304.....	127	36142.....	41	36416.....	19	36572.....	24
34655.....	57	34730.....	50	34816.....	46	35305.....	127	36143.....	41	36418.....	19	36573.....	24
34656.....	57	34731.....	50	34817.....	46	35306.....	127	36206.....	133	36420.....	19	36574.....	24
34657.....	57	34732.....	50	34818.....	46	35307.....	127	36207.....	133	36422.....	19	36575.....	24
34660.....	54	34733.....	50	35100.....	34	35308.....	127	36208.....	133	36424.....	19	36576.....	24
34661.....	54	34734.....	50	35101.....	34	35309.....	127	36209.....	133	36426.....	19	36577.....	24
34662.....	54	34735.....	50	35102.....	34	35310.....	127	36210.....	133	36428.....	19	36578.....	24
34663.....	54	34736.....	50	35103.....	34	35311.....	127	36211.....	133	36430.....	19	36590.....	21
34664.....	54	34737.....	50	35104.....	34	35312.....	127	36212.....	133	36432.....	19	36591.....	21
34665.....	54	34738.....	50	35105.....	34	35313.....	127	36213.....	133	36436.....	19	36592.....	21
34666.....	54	34739.....	50	35106.....	35	35314.....	127	36214.....	133	36440.....	19	36596.....	19
34667.....	54	34740.....	50	35107.....	35	35315.....	127	36216.....	133	36442.....	19	36597.....	19
34668.....	54	34741.....	50	35108.....	35	35473.....	112	36217.....	133	36444.....	19	36598.....	19
34669.....	55	34742.....	50	35109.....	35	35475.....	112	36218.....	133	36450.....	17	36599.....	14
34670.....	55	34743.....	50	35110.....	35	35477.....	112	36220.....	133	36452.....	17	36600.....	14
34671.....	55	34744.....	50	35111.....	35	35478.....	112	36221.....	133	36456.....	17	36601.....	14
34672.....	55	34745.....	50	35112.....	36	35479.....	112	36222.....	132	36460.....	17	36602.....	15
34673.....	55	34746.....	50	35113.....	36	35480.....	112	36222.....	133	36462.....	17	36603.....	15
34674.....	55	34747.....	50	35114.....	36	35481.....	112	36224.....	133	36466.....	17	36604.....	15

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
36605.....	15	36785.....	25	38003.....	109	38099.....	110	38165.....	109	38251.....	126	38329.....	126
36610.....	15	36786.....	25	38004.....	109	38100.....	110	38166.....	109	38252.....	126	38330.....	126
36611.....	15	36787.....	25	38009.....	109	38101.....	110	38167.....	109	38259.....	126	38331.....	126
36612.....	15	36788.....	25	38010.....	109	38102.....	110	38168.....	109	38260.....	126	38332.....	126
36613.....	15	36789.....	25	38011.....	109	38103.....	110	38169.....	109	38261.....	126	38333.....	126
36614.....	15	36790.....	25	38012.....	109	38104.....	110	38170.....	109	38262.....	126	38334.....	126
36615.....	15	36791.....	25	38013.....	109	38105.....	110	38171.....	109	38263.....	126	38335.....	126
36616.....	24	36792.....	25	38014.....	109	38106.....	110	38172.....	109	38264.....	126	38336.....	126
36617.....	24	36793.....	25	38019.....	109	38107.....	110	38173.....	109	38265.....	126	38337.....	126
36618.....	24	36804.....	15	38020.....	109	38108.....	110	38174.....	109	38266.....	126	38338.....	126
36620.....	38	36805.....	15	38021.....	109	38109.....	110	38175.....	109	38267.....	126	38339.....	126
36621.....	38	36806.....	15	38022.....	109	38110.....	110	38176.....	109	38268.....	126	38340.....	126
36622.....	38	36807.....	15	38023.....	109	38111.....	110	38177.....	109	38273.....	126	38341.....	126
36623.....	38	36808.....	15	38024.....	109	38112.....	110	38178.....	109	38274.....	126	38342.....	126
36624.....	38	36809.....	15	38025.....	109	38113.....	110	38179.....	109	38275.....	126	38343.....	126
36625.....	38	36810.....	15	38026.....	109	38114.....	110	38180.....	109	38276.....	126	38344.....	126
36626.....	38	36811.....	15	38031.....	109	38115.....	109	38181.....	109	38277.....	126	38345.....	126
36627.....	39	36812.....	15	38032.....	109	38116.....	109	38182.....	109	38278.....	126	38346.....	126
36628.....	39	36813.....	15	38033.....	109	38117.....	109	38183.....	109	38279.....	126	38347.....	126
36629.....	39	36814.....	15	38034.....	109	38118.....	109	38184.....	109	38280.....	126	38348.....	126
36630.....	39	36815.....	15	38035.....	109	38119.....	109	38185.....	109	38281.....	126	38349.....	126
36631.....	39	36816.....	15	38036.....	109	38120.....	109	38186.....	109	38282.....	126	38350.....	126
36632.....	39	36817.....	15	38037.....	109	38121.....	109	38187.....	110	38283.....	126	38351.....	126
36633.....	39	36818.....	15	38038.....	109	38122.....	109	38188.....	110	38284.....	126	38352.....	126
36634.....	39	36819.....	15	38045.....	109	38123.....	109	38189.....	110	38287.....	126	38353.....	126
36635.....	39	36820.....	15	38046.....	109	38124.....	109	38190.....	110	38288.....	126	38354.....	126
36636.....	39	36821.....	15	38047.....	109	38125.....	109	38191.....	110	38289.....	126	38355.....	126
36637.....	39	36822.....	15	38048.....	109	38126.....	109	38192.....	110	38290.....	126	38356.....	126
36638.....	39	36823.....	15	38049.....	109	38127.....	109	38193.....	110	38291.....	126	38357.....	126
36639.....	39	36824.....	15	38050.....	109	38128.....	109	38194.....	110	38292.....	126	38358.....	126
36640.....	39	36825.....	15	38051.....	109	38129.....	109	38195.....	110	38293.....	126	38359.....	126
36641.....	39	36826.....	19	38052.....	109	38130.....	109	38196.....	110	38294.....	126	38360.....	126
36701.....	14	36827.....	19	38059.....	109	38131.....	109	38197.....	110	38295.....	126	38361.....	126
36702.....	14	36828.....	19	38060.....	109	38132.....	109	38198.....	110	38296.....	126	38362.....	126
36704.....	15	36829.....	19	38061.....	109	38133.....	109	38201.....	126	38297.....	126	38363.....	126
36706.....	15	36830.....	19	38062.....	109	38134.....	109	38202.....	126	38298.....	126	38364.....	126
36707.....	15	36846.....	21	38063.....	109	38135.....	109	38203.....	126	38299.....	126	38365.....	126
36709.....	15	36847.....	21	38064.....	109	38136.....	109	38204.....	126	38300.....	126	38366.....	126
36710.....	15	36848.....	21	38065.....	109	38137.....	109	38209.....	126	38301.....	126	38367.....	126
36711.....	15	36849.....	21	38066.....	109	38138.....	109	38210.....	126	38302.....	126	38368.....	126
36712.....	15	36850.....	21	38067.....	109	38139.....	109	38211.....	126	38303.....	126	38369.....	126
36713.....	15	36851.....	14	38068.....	109	38140.....	109	38212.....	126	38304.....	126	38370.....	126
36714.....	15	36852.....	14	38073.....	109	38141.....	109	38213.....	126	38305.....	126	38371.....	126
36715.....	15	36853.....	14	38074.....	109	38142.....	109	38214.....	126	38306.....	126	38372.....	126
36716.....	15	36854.....	14	38075.....	109	38143.....	109	38219.....	126	38307.....	126	38373.....	126
36717.....	15	36855.....	14	38076.....	109	38144.....	109	38220.....	126	38308.....	126	38374.....	126
36718.....	15	36856.....	14	38077.....	109	38145.....	110	38221.....	126	38309.....	126	38375.....	126
36719.....	15	36857.....	14	38078.....	109	38146.....	110	38222.....	126	38310.....	126	38376.....	126
36722.....	14	36858.....	15	38079.....	109	38147.....	110	38223.....	126	38311.....	126	38377.....	126
36723.....	14	36859.....	15	38080.....	109	38148.....	110	38224.....	126	38312.....	126	38378.....	126
36724.....	14	36860.....	15	38081.....	109	38149.....	110	38225.....	126	38313.....	126	38379.....	126
36725.....	14	36861.....	15	38082.....	109	38150.....	110	38226.....	126	38314.....	126	38380.....	126
36727.....	14	36862.....	15	38083.....	109	38151.....	110	38231.....	126	38315.....	126	38381.....	126
36729.....	15	36863.....	15	38084.....	109	38152.....	110	38232.....	126	38316.....	126	38382.....	126
36731.....	15	36864.....	14	38087.....	109	38153.....	110	38233.....	126	38317.....	126	38383.....	126
36733.....	15	36865.....	14	38088.....	109	38154.....	110	38234.....	126	38318.....	126	38384.....	126
36736.....	14	36866.....	15	38089.....	109	38155.....	110	38235.....	126	38319.....	126	38385.....	126
36738.....	14	36867.....	15	38090.....	109	38156.....	110	38236.....	126	38320.....	126	38386.....	126
36740.....	15	36868.....	15	38091.....	110	38157.....	109	38237.....	126	38321.....	126	38387.....	126
36742.....	15	36869.....	15	38092.....	110	38158.....	109	38238.....	126	38322.....	126	38388.....	126
36744.....	15	36870.....	15	38093.....	110	38159.....	109	38245.....	126	38323.....	126	38389.....	126
36780.....	25	36871.....	15	38094.....	110	38160.....	109	38246.....	126	38324.....	126	38390.....	126
36781.....	25	36872.....	14	38095.....	110	38161.....	109	38247.....	126	38325.....	126	38391.....	126
36782.....	25	36873.....	14	38096.....	110	38162.....	109	38248.....	126	38326.....	126	38392.....	126
36783.....	25	38001.....	109	38097.....	110	38163.....	109	38249.....	126	38327.....	126	38393.....	126
36784.....	25	38002.....	109	38098.....	110	38164.....	109	38250.....	126	38328.....	126	38394.....	126

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
38395.....	126	39060.....	105	39143.....	99	39221.....	135	39334.....	120	39518.....	120	39602.....	107
38396.....	126	39061.....	100	39144.....	105	39222.....	134	39335.....	114	39519.....	114	39603.....	102
38397.....	126	39062.....	105	39145.....	99	39222.....	135	39336.....	120	39520.....	120	39604.....	107
38398.....	126	39063.....	100	39146.....	105	39223.....	134	39337.....	114	39521.....	114	39605.....	102
38490.....	18	39064.....	105	39147.....	99	39223.....	135	39338.....	120	39522.....	120	39606.....	107
38492.....	18	39065.....	100	39148.....	105	39224.....	134	39339.....	114	39523.....	114	39607.....	102
38496.....	18	39066.....	105	39149.....	99	39224.....	135	39340.....	120	39524.....	120	39608.....	107
39001.....	99	39067.....	100	39150.....	105	39225.....	134	39341.....	115	39525.....	114	39609.....	102
39002.....	104	39068.....	105	39151.....	100	39225.....	135	39342.....	121	39526.....	120	39610.....	107
39003.....	99	39069.....	100	39152.....	105	39226.....	134	39343.....	115	39527.....	114	39611.....	102
39004.....	104	39070.....	105	39153.....	100	39226.....	135	39344.....	121	39528.....	120	39612.....	107
39005.....	99	39071.....	100	39154.....	105	39227.....	134	39345.....	115	39529.....	114	39613.....	102
39006.....	104	39072.....	105	39155.....	100	39227.....	135	39346.....	121	39530.....	120	39614.....	107
39007.....	99	39073.....	100	39156.....	105	39228.....	134	39347.....	115	39531.....	114	39615.....	102
39008.....	104	39074.....	105	39157.....	100	39228.....	135	39348.....	121	39532.....	120	39616.....	107
39009.....	99	39075.....	100	39158.....	105	39229.....	134	39349.....	115	39533.....	114	39617.....	102
39010.....	104	39076.....	105	39159.....	100	39229.....	135	39350.....	121	39534.....	120	39618.....	107
39011.....	99	39077.....	99	39160.....	105	39230.....	134	39351.....	115	39535.....	114	39619.....	102
39012.....	104	39078.....	104	39161.....	100	39230.....	135	39352.....	121	39536.....	120	39620.....	107
39013.....	99	39089.....	100	39162.....	105	39231.....	134	39353.....	115	39537.....	114	39621.....	102
39014.....	104	39089.....	138	39163.....	100	39231.....	135	39354.....	121	39538.....	120	39622.....	107
39015.....	99	39090.....	105	39164.....	105	39235.....	134	39355.....	115	39539.....	114	39623.....	102
39016.....	104	39090.....	138	39165.....	100	39235.....	135	39356.....	121	39540.....	120	39624.....	107
39017.....	99	39101.....	99	39166.....	105	39240.....	134	39357.....	115	39541.....	115	39625.....	102
39018.....	104	39102.....	104	39167.....	100	39240.....	135	39358.....	121	39542.....	121	39626.....	107
39019.....	99	39103.....	99	39168.....	105	39247.....	134	39359.....	115	39543.....	115	39627.....	102
39020.....	104	39104.....	104	39169.....	100	39247.....	135	39360.....	121	39544.....	121	39628.....	107
39021.....	99	39105.....	99	39170.....	105	39250.....	134	39361.....	115	39545.....	115	39629.....	102
39022.....	104	39106.....	104	39171.....	100	39250.....	135	39362.....	121	39546.....	121	39630.....	107
39023.....	99	39107.....	99	39172.....	105	39255.....	134	39363.....	115	39547.....	115	39631.....	102
39024.....	104	39108.....	104	39173.....	100	39255.....	135	39364.....	121	39548.....	121	39632.....	107
39025.....	99	39109.....	138	39174.....	105	39260.....	134	39365.....	115	39549.....	115	39633.....	102
39026.....	104	39109.....	99	39175.....	100	39260.....	135	39366.....	121	39550.....	121	39634.....	107
39027.....	99	39110.....	104	39176.....	105	39301.....	114	39367.....	115	39551.....	115	39635.....	102
39028.....	104	39111.....	99	39177.....	99	39302.....	120	39368.....	121	39552.....	121	39636.....	107
39029.....	99	39112.....	104	39178.....	104	39303.....	114	39369.....	115	39553.....	115	39637.....	102
39030.....	104	39113.....	99	39189.....	100	39304.....	120	39370.....	121	39554.....	121	39638.....	107
39031.....	99	39114.....	104	39189.....	138	39305.....	114	39371.....	115	39555.....	115	39639.....	102
39032.....	104	39115.....	99	39190.....	105	39306.....	120	39372.....	121	39556.....	121	39640.....	107
39033.....	99	39116.....	104	39208.....	134	39307.....	114	39373.....	115	39557.....	115	39641.....	138
39034.....	104	39117.....	99	39208.....	135	39308.....	120	39374.....	121	39558.....	121	39642.....	107
39035.....	99	39118.....	104	39209.....	134	39309.....	114	39375.....	115	39559.....	115	39642.....	138
39036.....	104	39119.....	99	39209.....	135	39310.....	120	39376.....	121	39560.....	121	39651.....	118
39037.....	99	39120.....	104	39210.....	134	39311.....	114	39377.....	114	39561.....	115	39652.....	124
39038.....	104	39121.....	99	39210.....	135	39312.....	120	39378.....	120	39562.....	121	39653.....	118
39039.....	99	39122.....	104	39211.....	134	39313.....	114	39389.....	115	39563.....	115	39654.....	124
39040.....	104	39123.....	99	39211.....	135	39314.....	120	39389.....	138	39564.....	121	39655.....	118
39041.....	99	39124.....	104	39212.....	134	39315.....	114	39390.....	121	39565.....	115	39656.....	124
39042.....	105	39125.....	99	39212.....	135	39316.....	120	39390.....	138	39566.....	121	39657.....	118
39043.....	99	39126.....	104	39213.....	134	39317.....	114	39501.....	114	39567.....	115	39658.....	124
39044.....	105	39127.....	99	39213.....	135	39318.....	120	39502.....	120	39568.....	121	39659.....	118
39045.....	99	39128.....	104	39214.....	134	39319.....	114	39503.....	114	39569.....	115	39660.....	124
39046.....	105	39129.....	99	39214.....	135	39320.....	120	39504.....	120	39570.....	121	39661.....	118
39047.....	99	39130.....	104	39215.....	134	39321.....	114	39505.....	114	39571.....	115	39662.....	124
39048.....	105	39131.....	99	39215.....	135	39322.....	120	39506.....	120	39572.....	121	39663.....	118
39049.....	99	39132.....	104	39216.....	134	39323.....	114	39507.....	114	39573.....	115	39664.....	124
39050.....	105	39133.....	99	39216.....	135	39324.....	120	39508.....	120	39574.....	121	39665.....	118
39051.....	100	39134.....	104	39217.....	134	39325.....	114	39509.....	114	39575.....	115	39666.....	124
39052.....	105	39135.....	99	39217.....	135	39326.....	120	39510.....	120	39576.....	121	39667.....	118
39053.....	100	39136.....	104	39218.....	134	39327.....	114	39511.....	114	39577.....	114	39668.....	124
39054.....	105	39137.....	99	39218.....	135	39328.....	120	39512.....	120	39578.....	120	39669.....	118
39055.....	100	39138.....	104	39219.....	134	39329.....	114	39513.....	114	39589.....	115	39671.....	118
39056.....	105	39139.....	99	39219.....	135	39330.....	120	39514.....	120	39589.....	138	39672.....	124
39057.....	100	39140.....	104	39220.....	134	39331.....	114	39515.....	114	39590.....	121	39673.....	118
39058.....	105	39141.....	99	39220.....	135	39332.....	120	39516.....	120	39590.....	138	39674.....	124
39059.....	100	39142.....	105	39221.....	134	39333.....	114	39517.....	114	39601.....	102	39675.....	118

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
39676.....	124	40009.....	111	40310.....	122	40558.....	131	41542.....	125	42722.....	16	43505.....	129
39677.....	118	40010.....	111	40313.....	116	40561.....	129	41545.....	119	43101.....	101	43506.....	131
39678.....	124	40011.....	111	40314.....	122	40562.....	131	41546.....	125	43102.....	106	43507.....	129
39679.....	118	40012.....	111	40317.....	116	40565.....	129	41549.....	119	43103.....	101	43508.....	131
39680.....	124	40015.....	111	40318.....	122	40566.....	131	41550.....	125	43104.....	106	43515.....	129
39681.....	118	40016.....	111	40321.....	116	40569.....	129	41553.....	119	43105.....	101	43516.....	131
39682.....	124	40017.....	111	40322.....	122	40570.....	131	41554.....	125	43106.....	106	43525.....	129
39683.....	118	40019.....	111	40325.....	116	40573.....	129	41557.....	119	43107.....	101	43526.....	131
39684.....	124	40020.....	111	40326.....	122	40574.....	131	41558.....	125	43108.....	106	43535.....	129
39685.....	118	40021.....	111	40329.....	116	40577.....	129	41561.....	119	43115.....	101	43536.....	131
39686.....	124	40023.....	111	40330.....	122	40578.....	131	41562.....	125	43116.....	106	43545.....	129
39687.....	118	40024.....	111	40333.....	116	40581.....	129	41565.....	119	43125.....	101	43546.....	131
39688.....	124	40025.....	111	40334.....	122	40582.....	131	41566.....	125	43126.....	106	43555.....	129
39689.....	118	40028.....	111	40337.....	116	40585.....	129	41605.....	98	43135.....	101	43556.....	131
39690.....	124	40030.....	111	40338.....	122	40586.....	131	41609.....	98	43136.....	106	43565.....	129
39691.....	118	40031.....	111	40341.....	116	41405.....	103	41613.....	98	43145.....	101	43566.....	131
39691.....	138	40032.....	111	40342.....	122	41406.....	108	41617.....	98	43146.....	106	43575.....	129
39692.....	124	40035.....	111	40345.....	116	41409.....	103	41621.....	98	43155.....	101	43576.....	131
39692.....	138	40037.....	111	40346.....	122	41410.....	108	41625.....	98	43156.....	106	43585.....	129
39701.....	128	40038.....	111	40349.....	116	41413.....	103	41629.....	98	43165.....	101	43586.....	131
39703.....	128	40039.....	111	40350.....	122	41414.....	108	41633.....	98	43166.....	106	43595.....	129
39705.....	128	40105.....	101	40353.....	116	41417.....	103	41637.....	98	43175.....	101	43596.....	131
39707.....	128	40106.....	106	40354.....	122	41418.....	108	41641.....	98	43176.....	106	43900.....	123
39709.....	128	40109.....	101	40357.....	116	41421.....	103	41645.....	98	43185.....	101	43901.....	123
39711.....	128	40110.....	106	40358.....	122	41422.....	108	41649.....	98	43186.....	106	43902.....	123
39713.....	128	40113.....	101	40361.....	116	41425.....	103	41653.....	98	43195.....	101	43903.....	123
39715.....	128	40114.....	106	40362.....	122	41426.....	108	41657.....	98	43196.....	106	43904.....	123
39717.....	128	40117.....	101	40365.....	116	41429.....	103	41661.....	98	43301.....	116	43905.....	123
39719.....	128	40118.....	106	40366.....	122	41430.....	108	41665.....	101	43302.....	122	43906.....	123
39721.....	128	40121.....	101	40369.....	116	41433.....	103	41705.....	113	43303.....	116	43907.....	123
39723.....	128	40122.....	106	40370.....	122	41434.....	108	41709.....	113	43304.....	122	43908.....	123
39725.....	128	40125.....	101	40373.....	116	41437.....	103	41713.....	113	43305.....	116	43909.....	123
39727.....	128	40126.....	106	40374.....	122	41438.....	108	41717.....	113	43306.....	122	43910.....	117
39729.....	128	40129.....	101	40377.....	116	41441.....	103	41721.....	113	43307.....	116	43911.....	117
39731.....	128	40130.....	106	40378.....	122	41442.....	108	41725.....	113	43308.....	122	43912.....	117
39733.....	128	40133.....	101	40381.....	116	41445.....	103	41729.....	113	43315.....	116	43913.....	117
39735.....	128	40134.....	106	40382.....	122	41446.....	108	41733.....	113	43316.....	122	43914.....	117
39737.....	128	40137.....	101	40385.....	116	41449.....	103	41737.....	113	43325.....	116	43915.....	117
39739.....	128	40138.....	106	40386.....	122	41450.....	108	41741.....	113	43326.....	122	43916.....	117
39741.....	128	40141.....	101	40505.....	129	41453.....	103	41745.....	113	43335.....	116	43917.....	117
39743.....	128	40142.....	106	40506.....	131	41454.....	108	41749.....	113	43336.....	122	43918.....	117
39745.....	128	40145.....	101	40509.....	129	41457.....	103	41753.....	113	43345.....	116	43919.....	117
39747.....	128	40146.....	106	40510.....	131	41458.....	108	41757.....	113	43346.....	122	43920.....	117
39749.....	128	40149.....	101	40513.....	129	41461.....	103	41761.....	113	43355.....	116	43921.....	117
39751.....	128	40150.....	106	40514.....	131	41462.....	108	41765.....	113	43356.....	122	43922.....	117
39753.....	128	40153.....	101	40517.....	129	41465.....	103	42606.....	31	43365.....	116	43923.....	117
39755.....	128	40154.....	106	40518.....	131	41466.....	108	42607.....	31	43366.....	122	43924.....	117
39757.....	128	40157.....	101	40521.....	129	41505.....	119	42608.....	31	43375.....	116	43925.....	117
39759.....	128	40158.....	106	40522.....	131	41506.....	125	42609.....	31	43376.....	122	43926.....	117
39760.....	124	40161.....	101	40525.....	129	41509.....	119	42610.....	31	43385.....	116	43927.....	117
39761.....	128	40162.....	106	40526.....	131	41510.....	125	42611.....	31	43386.....	122	43928.....	117
39763.....	128	40165.....	98	40529.....	129	41513.....	119	42612.....	31	43395.....	116	43929.....	117
39765.....	128	40166.....	106	40530.....	131	41514.....	125	42613.....	31	43396.....	122	43930.....	117
39767.....	128	40169.....	101	40533.....	129	41517.....	119	42614.....	31	43445.....	42	43931.....	117
39769.....	128	40170.....	106	40534.....	131	41518.....	125	42615.....	31	43446.....	42	43932.....	117
39771.....	128	40173.....	101	40537.....	129	41521.....	119	42616.....	31	43447.....	42	43933.....	117
39773.....	128	40174.....	106	40538.....	131	41522.....	125	42617.....	31	43448.....	42	43934.....	117
39775.....	128	40177.....	101	40541.....	129	41525.....	119	42618.....	31	43449.....	42	43935.....	117
39777.....	128	40178.....	106	40542.....	131	41526.....	125	42619.....	31	43450.....	42	43936.....	117
39789.....	138	40181.....	101	40545.....	129	41529.....	119	42620.....	31	43451.....	42	43937.....	117
40000.....	111	40182.....	106	40546.....	131	41530.....	125	42621.....	31	43452.....	42	43938.....	117
40001.....	111	40185.....	101	40549.....	129	41533.....	119	42622.....	31	43453.....	42	43939.....	117
40003.....	111	40186.....	106	40550.....	131	41534.....	125	42623.....	31	43501.....	129	43950.....	117
40004.....	111	40305.....	116	40553.....	129	41537.....	119	42624.....	31	43502.....	131	43951.....	117
40005.....	111	40306.....	122	40554.....	131	41538.....	125	42625.....	31	43503.....	129	43952.....	117
40007.....	111	40309.....	116	40557.....	129	41541.....	119	42718.....	16	43504.....	131	43953.....	117

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
43954.....	117	44581.....	57	44781.....	47	45138.....	37	46207.....	133	46472.....	24	46831.....	17
43955.....	117	44582.....	57	44782.....	47	45139.....	37	46208.....	133	46473.....	24	46832.....	17
43956.....	117	44583.....	57	44783.....	47	45140.....	37	46209.....	133	46474.....	24	46833.....	17
43957.....	117	44584.....	57	44784.....	47	45141.....	37	46210.....	133	46475.....	24	46834.....	17
43958.....	117	44585.....	57	44785.....	47	45277.....	127	46211.....	133	46476.....	24	46835.....	17
43959.....	117	44586.....	57	44786.....	47	45279.....	127	46212.....	133	46477.....	24	46836.....	17
44300.....	53	44587.....	54	44787.....	47	45281.....	127	46213.....	133	46478.....	24	46838.....	17
44301.....	53	44588.....	54	44788.....	47	45283.....	127	46214.....	133	46479.....	24	46839.....	17
44302.....	53	44589.....	54	44789.....	47	45285.....	127	46216.....	133	46480.....	24	46840.....	17
44303.....	53	44590.....	54	44790.....	47	45287.....	127	46217.....	133	46481.....	24	46841.....	17
44304.....	53	44591.....	54	44791.....	47	45289.....	127	46218.....	133	46494.....	16	46849.....	16
44305.....	53	44592.....	54	44792.....	47	45291.....	127	46220.....	133	46495.....	16	46850.....	16
44306.....	53	44593.....	54	44793.....	47	45293.....	127	46221.....	133	46497.....	16	46851.....	16
44307.....	53	44594.....	54	44794.....	47	45295.....	127	46222.....	133	46498.....	16	46852.....	16
44308.....	53	44595.....	54	44795.....	47	45297.....	127	46228.....	133	46506.....	20	46853.....	16
44309.....	53	44596.....	54	44796.....	47	45299.....	127	46229.....	133	46507.....	20	46854.....	16
44505.....	45	44597.....	54	44797.....	47	45477.....	112	46230.....	133	46508.....	20	46855.....	16
44506.....	45	44598.....	55	44798.....	47	45478.....	112	46231.....	133	46509.....	20	46856.....	16
44509.....	45	44599.....	55	44799.....	47	45479.....	112	46232.....	133	46510.....	20	46857.....	16
44510.....	45	44600.....	55	44800.....	47	45480.....	112	46233.....	133	46518.....	22	46858.....	16
44513.....	45	44601.....	55	44801.....	47	45481.....	112	46343.....	22	46519.....	22	46859.....	16
44514.....	45	44602.....	55	44802.....	47	45482.....	112	46344.....	22	46520.....	22	46860.....	16
44517.....	45	44603.....	55	44803.....	47	45483.....	112	46345.....	22	46521.....	22	46861.....	16
44518.....	45	44604.....	55	44804.....	47	45484.....	112	46346.....	22	46522.....	22	46862.....	16
44521.....	45	44605.....	55	44805.....	47	45485.....	112	46347.....	22	46560.....	25	46863.....	16
44522.....	45	44606.....	55	44806.....	47	45486.....	112	46348.....	22	46561.....	25	46864.....	16
44525.....	45	44607.....	55	44807.....	47	45487.....	112	46349.....	22	46562.....	25	46865.....	16
44526.....	45	44608.....	55	44808.....	47	45488.....	112	46350.....	22	46563.....	25	46866.....	16
44529.....	45	44609.....	56	45100.....	34	45489.....	112	46351.....	22	46564.....	25	46880.....	16
44530.....	45	44610.....	56	45101.....	34	45490.....	112	46354.....	22	46565.....	25	46881.....	16
44533.....	45	44611.....	56	45102.....	34	45491.....	112	46355.....	22	46566.....	25	46882.....	16
44534.....	45	44612.....	56	45103.....	34	45492.....	112	46356.....	22	46567.....	25	46884.....	16
44537.....	45	44613.....	56	45104.....	34	45493.....	112	46357.....	20	46568.....	25	46886.....	16
44538.....	45	44614.....	56	45105.....	34	45494.....	112	46358.....	20	46620.....	38	46887.....	16
44541.....	45	44615.....	57	45106.....	35	45495.....	112	46359.....	20	46621.....	38	46889.....	16
44542.....	45	44616.....	57	45107.....	35	45496.....	112	46360.....	20	46622.....	38	46890.....	16
44545.....	45	44617.....	57	45108.....	35	45497.....	112	46362.....	20	46623.....	38	46891.....	16
44546.....	45	44618.....	57	45109.....	35	45498.....	112	46364.....	20	46624.....	38	46893.....	16
44550.....	54	44619.....	57	45110.....	35	45499.....	112	46366.....	20	46625.....	38	46894.....	16
44551.....	54	44620.....	57	45111.....	35	45500.....	112	46368.....	20	46626.....	38	46895.....	16
44552.....	54	44701.....	51	45112.....	36	46106.....	132	46370.....	20	46627.....	39	46896.....	16
44553.....	54	44702.....	51	45113.....	36	46107.....	132	46372.....	20	46629.....	39	46898.....	16
44554.....	54	44703.....	51	45114.....	36	46108.....	132	46374.....	20	46632.....	39	46899.....	16
44555.....	54	44705.....	51	45115.....	36	46109.....	132	46376.....	20	46636.....	39	46900.....	16
44556.....	54	44708.....	51	45116.....	36	46110.....	132	46450.....	24	46638.....	39	46903.....	16
44557.....	54	44711.....	51	45117.....	36	46111.....	132	46451.....	24	46640.....	39	46904.....	16
44558.....	54	44714.....	51	45118.....	36	46112.....	132	46452.....	24	46641.....	39	46905.....	16
44559.....	54	44715.....	51	45119.....	36	46113.....	132	46453.....	24	46643.....	39	46909.....	16
44560.....	54	44716.....	51	45120.....	36	46114.....	132	46454.....	24	46645.....	39	46910.....	16
44561.....	56	44717.....	51	45121.....	36	46116.....	132	46455.....	24	46647.....	39	46911.....	16
44562.....	56	44719.....	51	45122.....	36	46117.....	132	46456.....	24	46649.....	39	46912.....	16
44563.....	56	44722.....	51	45123.....	36	46118.....	132	46457.....	24	46651.....	39	46913.....	16
44564.....	56	44725.....	51	45124.....	36	46120.....	132	46458.....	24	46654.....	39	46914.....	16
44565.....	56	44728.....	51	45125.....	36	46121.....	132	46459.....	24	46656.....	39	46915.....	16
44566.....	56	44769.....	47	45126.....	36	46122.....	132	46460.....	24	46658.....	39	46916.....	16
44570.....	55	44770.....	47	45127.....	37	46128.....	132	46461.....	24	46737.....	17	46917.....	16
44571.....	55	44771.....	47	45128.....	37	46129.....	132	46462.....	24	46821.....	17	46918.....	16
44572.....	55	44772.....	47	45129.....	37	46130.....	132	46463.....	24	46822.....	17	46919.....	16
44573.....	55	44773.....	47	45130.....	37	46131.....	132	46464.....	24	46823.....	17	46920.....	16
44574.....	55	44774.....	47	45131.....	37	46132.....	132	46465.....	24	46824.....	17	46921.....	16
44575.....	55	44775.....	47	45132.....	37	46133.....	132	46466.....	24	46825.....	17	46922.....	16
44576.....	55	44776.....	47	45133.....	37	46140.....	41	46467.....	24	46826.....	17	46923.....	16
44577.....	55	44777.....	47	45134.....	37	46141.....	41	46468.....	24	46827.....	17	46924.....	16
44578.....	55	44778.....	47	45135.....	37	46142.....	41	46469.....	24	46828.....	17	46925.....	16
44579.....	55	44779.....	47	45136.....	37	46143.....	41	46470.....	24	46829.....	17	46926.....	16
44580.....	55	44780.....	47	45137.....	37	46206.....	133	46471.....	24	46830.....	17	46927.....	16

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
48500.....	101	48567.....	106	48634.....	116	48701.....	122	48768.....	129	48835.....	131	48907.....	103
48501.....	101	48568.....	106	48635.....	116	48702.....	122	48769.....	129	48836.....	131	48908.....	103
48502.....	101	48569.....	106	48636.....	116	48703.....	122	48770.....	129	48837.....	131	48909.....	103
48503.....	101	48570.....	106	48637.....	116	48704.....	122	48771.....	129	48838.....	131	48910.....	103
48504.....	101	48571.....	106	48638.....	116	48705.....	122	48772.....	129	48839.....	131	48911.....	103
48505.....	101	48572.....	106	48639.....	116	48706.....	122	48773.....	129	48840.....	131	48912.....	103
48506.....	101	48573.....	106	48640.....	116	48707.....	122	48774.....	129	48842.....	131	48913.....	103
48507.....	101	48574.....	106	48641.....	116	48708.....	122	48775.....	129	48843.....	131	48914.....	103
48508.....	101	48575.....	106	48642.....	116	48709.....	122	48776.....	129	48844.....	131	48915.....	103
48509.....	101	48576.....	106	48643.....	116	48710.....	122	48778.....	129	48845.....	131	48916.....	103
48510.....	101	48577.....	106	48644.....	116	48711.....	122	48779.....	129	48846.....	131	48917.....	103
48511.....	101	48578.....	106	48645.....	116	48712.....	122	48780.....	129	48847.....	131	48918.....	103
48512.....	101	48579.....	106	48646.....	116	48714.....	122	48781.....	129	48848.....	131	48919.....	103
48513.....	101	48580.....	106	48647.....	116	48715.....	122	48782.....	129	48849.....	131	48920.....	103
48514.....	101	48581.....	106	48648.....	116	48716.....	122	48783.....	129	48850.....	131	48926.....	103
48515.....	101	48582.....	106	48650.....	116	48717.....	122	48784.....	129	48851.....	131	48927.....	103
48516.....	101	48583.....	106	48651.....	116	48718.....	122	48785.....	129	48852.....	131	48928.....	103
48517.....	101	48584.....	106	48652.....	116	48719.....	122	48786.....	129	48853.....	131	48929.....	103
48518.....	101	48586.....	106	48653.....	116	48720.....	122	48787.....	129	48854.....	131	48930.....	103
48519.....	101	48587.....	106	48654.....	116	48721.....	122	48788.....	129	48855.....	131	48931.....	103
48520.....	101	48588.....	106	48655.....	116	48722.....	122	48789.....	129	48856.....	131	48932.....	103
48522.....	101	48589.....	106	48656.....	116	48723.....	122	48790.....	129	48857.....	131	48933.....	103
48523.....	101	48590.....	106	48657.....	116	48724.....	122	48791.....	129	48858.....	131	48934.....	103
48524.....	101	48591.....	106	48658.....	116	48725.....	122	48792.....	129	48859.....	131	48935.....	103
48525.....	101	48592.....	106	48659.....	116	48726.....	122	48793.....	129	48860.....	131	48936.....	103
48526.....	101	48593.....	106	48660.....	116	48727.....	122	48794.....	129	48861.....	131	48937.....	103
48527.....	101	48594.....	106	48661.....	116	48728.....	122	48795.....	129	48862.....	131	48938.....	103
48528.....	101	48595.....	106	48662.....	116	48729.....	122	48796.....	129	48863.....	131	48939.....	103
48529.....	101	48596.....	106	48663.....	116	48730.....	122	48797.....	129	48864.....	131	48940.....	103
48530.....	101	48597.....	106	48664.....	116	48731.....	122	48798.....	129	48865.....	131	48941.....	103
48531.....	101	48598.....	106	48665.....	116	48732.....	122	48799.....	129	48866.....	131	48947.....	108
48532.....	101	48599.....	106	48666.....	116	48733.....	122	48800.....	129	48867.....	131	48948.....	108
48533.....	101	48600.....	106	48667.....	116	48734.....	122	48801.....	129	48868.....	131	48949.....	108
48534.....	101	48601.....	106	48668.....	116	48735.....	122	48802.....	129	48869.....	131	48950.....	108
48535.....	101	48602.....	106	48669.....	116	48736.....	122	48803.....	129	48870.....	131	48951.....	108
48536.....	101	48603.....	106	48670.....	116	48737.....	122	48804.....	129	48871.....	131	48952.....	108
48537.....	101	48604.....	106	48671.....	116	48738.....	122	48805.....	129	48872.....	131	48953.....	108
48538.....	101	48605.....	106	48672.....	116	48739.....	122	48806.....	129	48873.....	131	48954.....	108
48539.....	101	48606.....	106	48673.....	116	48740.....	122	48807.....	129	48874.....	131	48955.....	108
48540.....	101	48607.....	106	48674.....	116	48741.....	122	48808.....	129	48875.....	131	48956.....	108
48541.....	101	48608.....	106	48675.....	116	48742.....	122	48809.....	129	48876.....	131	48957.....	108
48542.....	101	48609.....	106	48676.....	116	48743.....	122	48810.....	129	48877.....	131	48958.....	108
48543.....	101	48610.....	106	48677.....	116	48744.....	122	48811.....	129	48878.....	131	48959.....	108
48544.....	101	48611.....	106	48678.....	116	48745.....	122	48812.....	129	48879.....	131	48960.....	108
48545.....	101	48612.....	106	48679.....	116	48746.....	122	48813.....	129	48880.....	131	48961.....	108
48546.....	101	48613.....	106	48680.....	116	48747.....	122	48814.....	129	48881.....	131	48962.....	108
48547.....	101	48614.....	106	48681.....	116	48748.....	122	48815.....	129	48882.....	131	48968.....	108
48548.....	101	48615.....	106	48682.....	116	48749.....	122	48816.....	129	48883.....	131	48969.....	108
48549.....	101	48616.....	106	48683.....	116	48750.....	122	48817.....	129	48884.....	103	48970.....	108
48550.....	101	48617.....	106	48684.....	116	48751.....	122	48818.....	129	48885.....	103	48971.....	108
48551.....	101	48618.....	106	48685.....	116	48752.....	122	48819.....	129	48886.....	103	48972.....	108
48552.....	101	48619.....	106	48686.....	116	48753.....	122	48820.....	131	48887.....	103	48973.....	108
48553.....	101	48620.....	106	48687.....	116	48754.....	122	48821.....	131	48888.....	103	48974.....	108
48554.....	101	48621.....	106	48688.....	116	48755.....	122	48822.....	131	48889.....	103	48975.....	108
48555.....	101	48622.....	106	48689.....	116	48756.....	129	48823.....	131	48890.....	103	48976.....	108
48556.....	101	48623.....	106	48690.....	116	48757.....	129	48824.....	131	48891.....	103	48977.....	108
48557.....	101	48624.....	106	48691.....	116	48758.....	129	48825.....	131	48892.....	103	48978.....	108
48558.....	101	48625.....	106	48692.....	122	48759.....	129	48826.....	131	48893.....	103	48979.....	108
48559.....	101	48626.....	106	48693.....	122	48760.....	129	48827.....	131	48894.....	103	48980.....	108
48560.....	101	48627.....	106	48694.....	122	48761.....	129	48828.....	131	48895.....	103	48981.....	108
48561.....	101	48628.....	116	48695.....	122	48762.....	129	48829.....	131	48896.....	103	48982.....	108
48562.....	101	48629.....	116	48696.....	122	48763.....	129	48830.....	131	48897.....	103	48983.....	108
48563.....	101	48630.....	116	48697.....	122	48764.....	129	48831.....	131	48898.....	103	48989.....	108
48564.....	106	48631.....	116	48698.....	122	48765.....	129	48832.....	131	48899.....	103	48990.....	108
48565.....	106	48632.....	116	48699.....	122	48766.....	129	48833.....	131	48905.....	103	48991.....	108
48566.....	106	48633.....	116	48700.....	122	48767.....	129	48834.....	131	48906.....	103	48992.....	108

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
48993.....	108	49079.....	125	49165.....	98	49314.....	113	49448.....	116	49514.....	106
48994.....	108	49080.....	125	49166.....	98	49315.....	113	49449.....	116	49515.....	106
48995.....	108	49081.....	125	49167.....	98	49316.....	113	49450.....	116	49516.....	106
48996.....	108	49082.....	125	49168.....	98	49317.....	113	49451.....	116	49517.....	106
48997.....	108	49083.....	125	49169.....	98	49318.....	113	49452.....	116	49518.....	106
48998.....	108	49084.....	125	49170.....	98	49319.....	113	49453.....	116	49519.....	106
48999.....	108	49085.....	125	49171.....	98	49388.....	101	49454.....	116	49520.....	106
49000.....	108	49086.....	125	49172.....	98	49389.....	101	49455.....	116	49521.....	106
49001.....	108	49087.....	125	49178.....	98	49390.....	101	49456.....	116	49522.....	106
49002.....	108	49088.....	125	49179.....	98	49391.....	101	49457.....	116	49523.....	106
49003.....	108	49094.....	125	49180.....	98	49392.....	101	49458.....	116	49524.....	106
49004.....	108	49095.....	125	49181.....	98	49393.....	101	49459.....	116	49525.....	106
49010.....	119	49096.....	125	49182.....	98	49394.....	101	49460.....	116	49526.....	106
49011.....	119	49097.....	125	49183.....	98	49395.....	101	49461.....	116	49527.....	106
49012.....	119	49098.....	125	49184.....	98	49396.....	101	49462.....	116	49528.....	106
49013.....	119	49099.....	125	49185.....	98	49397.....	101	49463.....	116	49529.....	106
49014.....	119	49100.....	125	49186.....	98	49398.....	101	49464.....	116	49530.....	106
49015.....	119	49101.....	125	49187.....	98	49399.....	101	49465.....	116	49531.....	106
49016.....	119	49102.....	125	49188.....	98	49400.....	101	49466.....	129	49532.....	106
49017.....	119	49103.....	125	49189.....	98	49401.....	101	49467.....	129	49533.....	106
49018.....	119	49104.....	125	49190.....	98	49402.....	101	49468.....	129	49534.....	106
49019.....	119	49105.....	125	49191.....	98	49403.....	101	49469.....	129	49535.....	106
49020.....	119	49106.....	125	49192.....	98	49404.....	101	49470.....	129	49536.....	106
49021.....	119	49107.....	125	49193.....	98	49405.....	101	49471.....	129	49537.....	106
49022.....	119	49108.....	125	49262.....	113	49406.....	101	49472.....	129	49538.....	106
49023.....	119	49109.....	125	49263.....	113	49407.....	101	49473.....	129	49539.....	106
49024.....	119	49115.....	125	49264.....	113	49408.....	101	49474.....	129	49540.....	106
49025.....	119	49116.....	125	49265.....	113	49409.....	101	49475.....	129	49541.....	106
49031.....	119	49117.....	125	49266.....	113	49410.....	101	49476.....	129	49542.....	106
49032.....	119	49118.....	125	49267.....	113	49411.....	101	49477.....	129	49543.....	106
49033.....	119	49119.....	125	49268.....	113	49412.....	101	49478.....	129	49544.....	122
49034.....	119	49120.....	125	49269.....	113	49413.....	101	49479.....	129	49545.....	122
49035.....	119	49121.....	125	49270.....	113	49414.....	101	49480.....	129	49546.....	122
49036.....	119	49122.....	125	49271.....	113	49415.....	101	49481.....	129	49547.....	122
49037.....	119	49123.....	125	49272.....	113	49416.....	101	49482.....	129	49548.....	122
49038.....	119	49124.....	125	49273.....	113	49417.....	101	49483.....	129	49549.....	122
49039.....	119	49125.....	125	49274.....	113	49418.....	101	49484.....	129	49550.....	122
49040.....	119	49126.....	125	49275.....	113	49419.....	101	49485.....	129	49551.....	122
49041.....	119	49127.....	125	49276.....	113	49420.....	101	49486.....	129	49552.....	122
49042.....	119	49128.....	125	49277.....	113	49421.....	101	49487.....	129	49553.....	122
49043.....	119	49129.....	125	49283.....	113	49422.....	101	49488.....	129	49554.....	122
49044.....	119	49130.....	125	49284.....	113	49423.....	101	49489.....	129	49555.....	122
49045.....	119	49136.....	98	49285.....	113	49424.....	101	49490.....	129	49556.....	122
49046.....	119	49137.....	98	49286.....	113	49425.....	101	49491.....	129	49557.....	122
49052.....	119	49138.....	98	49287.....	113	49426.....	101	49492.....	129	49558.....	122
49053.....	119	49139.....	98	49288.....	113	49427.....	116	49493.....	129	49559.....	122
49054.....	119	49140.....	98	49289.....	113	49428.....	116	49494.....	129	49560.....	122
49055.....	119	49141.....	98	49290.....	113	49429.....	116	49495.....	129	49561.....	122
49056.....	119	49142.....	98	49291.....	113	49430.....	116	49496.....	129	49562.....	122
49057.....	119	49143.....	98	49292.....	113	49431.....	116	49497.....	129	49563.....	122
49058.....	119	49144.....	98	49293.....	113	49432.....	116	49498.....	129	49564.....	122
49059.....	119	49145.....	98	49294.....	113	49433.....	116	49499.....	129	49565.....	122
49060.....	119	49146.....	98	49295.....	113	49434.....	116	49500.....	129	49566.....	122
49061.....	119	49147.....	98	49296.....	113	49435.....	116	49501.....	129	49567.....	122
49062.....	119	49148.....	98	49297.....	113	49436.....	116	49502.....	129	49568.....	122
49063.....	119	49149.....	98	49298.....	113	49437.....	116	49503.....	129	49569.....	122
49064.....	119	49150.....	98	49304.....	113	49438.....	116	49504.....	129	49570.....	122
49065.....	119	49151.....	98	49305.....	113	49439.....	116	49505.....	106	49571.....	122
49066.....	119	49157.....	98	49306.....	113	49440.....	116	49506.....	106	49572.....	122
49067.....	119	49158.....	98	49307.....	113	49441.....	116	49507.....	106	49573.....	122
49073.....	125	49159.....	98	49308.....	113	49442.....	116	49508.....	106	49574.....	122
49074.....	125	49160.....	98	49309.....	113	49443.....	116	49509.....	106	49575.....	122
49075.....	125	49161.....	98	49310.....	113	49444.....	116	49510.....	106	49576.....	122
49076.....	125	49162.....	98	49311.....	113	49445.....	116	49511.....	106	49577.....	122
49077.....	125	49163.....	98	49312.....	113	49446.....	116	49512.....	106	49578.....	122
49078.....	125	49164.....	98	49313.....	113	49447.....	116	49513.....	106	49579.....	122

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE		
49646.....	123	50026.....	178	51111.....	199	51338.....	164	51534.....	169	51768.....	164	51906.....	170
49647.....	123	50027.....	178	51112.....	199	51339.....	164	51535.....	169	51769.....	164	51907.....	170
49648.....	123	50028.....	178	51113.....	200	51340.....	164	51536.....	169	51770.....	164	51908.....	170
49649.....	123	50029.....	178	51114.....	200	51341.....	164	51537.....	169	51771.....	164	51910.....	170
49650.....	123	50030.....	178	51115.....	200	51342.....	164	51538.....	169	51772.....	164	51912.....	171
49651.....	123	50031.....	178	51117.....	201	51343.....	165	51539.....	169	51773.....	164	51913.....	171
49663.....	45	51001.....	200	51118.....	201	51344.....	165	51540.....	169	51774.....	164	51914.....	171
49664.....	45	51002.....	200	51119.....	201	51345.....	165	51541.....	169	51775.....	164	51915.....	171
49665.....	45	51003.....	200	51120.....	201	51346.....	165	51542.....	169	51776.....	164	51916.....	171
49666.....	45	51004.....	200	51121.....	201	51347.....	165	51543.....	169	51777.....	164	51918.....	171
49667.....	45	51005.....	200	51122.....	201	51348.....	165	51544.....	169	51778.....	164	51919.....	171
49668.....	45	51006.....	200	51123.....	202	51349.....	165	51545.....	169	51779.....	164	51920.....	171
49669.....	45	51007.....	200	51124.....	202	51350.....	165	51580.....	168	51780.....	164	51921.....	172
49670.....	45	51008.....	200	51125.....	202	51351.....	165	51581.....	168	51781.....	164	51922.....	172
49671.....	45	51009.....	200	51126.....	202	51352.....	166	51582.....	168	51782.....	164	51923.....	172
49672.....	45	51010.....	200	51127.....	202	51353.....	166	51583.....	168	51783.....	167	51924.....	172
49673.....	45	51011.....	200	51128.....	202	51354.....	166	51584.....	168	51784.....	167	51925.....	172
49674.....	45	51012.....	200	51129.....	202	51355.....	166	51585.....	168	51785.....	167	51926.....	172
49675.....	45	51013.....	199	51130.....	202	51356.....	166	51586.....	168	51786.....	167	51927.....	172
49676.....	45	51014.....	199	51131.....	202	51357.....	166	51587.....	168	51787.....	167	51928.....	172
49677.....	45	51015.....	199	51132.....	202	51358.....	166	51588.....	168	51788.....	167	51929.....	173
49678.....	45	51016.....	199	51201.....	200	51359.....	166	51589.....	168	51789.....	167	51930.....	173
49679.....	45	51017.....	199	51202.....	200	51360.....	167	51590.....	168	51790.....	167	51932.....	173
49680.....	45	51018.....	199	51203.....	200	51361.....	167	51591.....	168	51791.....	167	51933.....	173
49681.....	45	51019.....	199	51204.....	200	51362.....	167	51592.....	169	51792.....	167	51934.....	173
49682.....	45	51020.....	199	51205.....	200	51363.....	167	51593.....	169	51801.....	174	51935.....	173
49683.....	45	51021.....	199	51206.....	200	51364.....	167	51594.....	169	51802.....	174	51937.....	173
49684.....	45	51022.....	199	51207.....	201	51365.....	167	51595.....	169	51803.....	174	51938.....	173
49829.....	127	51023.....	199	51208.....	201	51366.....	167	51596.....	169	51804.....	174	51939.....	173
49830.....	127	51024.....	199	51209.....	201	51367.....	167	51601.....	164	51805.....	174	51940.....	173
49831.....	127	51025.....	199	51210.....	201	51368.....	167	51602.....	165	51806.....	174	51941.....	173
49832.....	127	51026.....	199	51211.....	201	51369.....	167	51603.....	165	51807.....	174	51942.....	173
49833.....	127	51027.....	199	51212.....	201	51370.....	167	51604.....	165	51808.....	174	53001.....	210
49834.....	127	51028.....	199	51213.....	201	51371.....	167	51606.....	165	51809.....	175	53002.....	210
49835.....	127	51029.....	199	51214.....	201	51372.....	167	51607.....	165	51810.....	175	53003.....	210
49836.....	127	51030.....	199	51215.....	201	51373.....	167	51608.....	165	51811.....	175	53004.....	210
49837.....	127	51031.....	199	51216.....	201	51374.....	167	51609.....	165	51812.....	175	53005.....	210
49838.....	127	51032.....	199	51217.....	201	51375.....	167	51610.....	165	51813.....	175	53006.....	210
49839.....	127	51033.....	198	51218.....	201	51506.....	168	51611.....	165	51814.....	175	53007.....	210
49840.....	127	51034.....	198	51219.....	201	51507.....	168	51612.....	165	51815.....	175	53008.....	210
50000.....	178	51035.....	198	51220.....	202	51508.....	168	51613.....	165	51816.....	175	53009.....	210
50001.....	178	51036.....	198	51221.....	202	51509.....	168	51614.....	165	51817.....	176	53010.....	210
50002.....	178	51037.....	198	51222.....	202	51510.....	168	51615.....	165	51818.....	176	53011.....	210
50003.....	178	51038.....	198	51223.....	202	51511.....	168	51616.....	166	51819.....	176	53012.....	210
50004.....	178	51039.....	198	51224.....	202	51512.....	168	51617.....	166	51820.....	176	53013.....	210
50005.....	178	51040.....	198	51225.....	202	51513.....	168	51618.....	166	51821.....	176	53014.....	210
50006.....	178	51041.....	198	51226.....	202	51514.....	168	51619.....	166	51822.....	176	53015.....	210
50007.....	178	51042.....	198	51269.....	163	51515.....	168	51620.....	166	51823.....	176	53016.....	210
50008.....	178	51043.....	198	51270.....	163	51516.....	168	51621.....	166	51824.....	176	53017.....	210
50009.....	178	51044.....	198	51271.....	163	51517.....	168	51622.....	166	51825.....	177	53018.....	209
50010.....	178	51045.....	198	51272.....	163	51518.....	168	51752.....	163	51826.....	177	53019.....	209
50011.....	178	51046.....	198	51273.....	163	51519.....	168	51753.....	163	51827.....	177	53020.....	209
50012.....	178	51047.....	198	51274.....	163	51520.....	168	51754.....	163	51828.....	177	53021.....	209
50013.....	178	51048.....	198	51275.....	163	51521.....	168	51755.....	163	51829.....	177	53022.....	209
50014.....	178	51049.....	198	51276.....	163	51522.....	168	51756.....	163	51830.....	177	53023.....	209
50015.....	178	51050.....	198	51277.....	163	51523.....	168	51757.....	163	51831.....	177	53024.....	209
50016.....	178	51051.....	198	51278.....	163	51524.....	169	51758.....	163	51832.....	177	53025.....	209
50017.....	178	51052.....	198	51279.....	163	51525.....	169	51759.....	163	51833.....	177	53026.....	209
50018.....	178	51053.....	198	51330.....	163	51526.....	169	51760.....	163	51834.....	177	53027.....	209
50019.....	178	51104.....	198	51331.....	163	51527.....	169	51761.....	163	51835.....	177	53028.....	209
50020.....	178	51105.....	198	51332.....	163	51528.....	169	51762.....	163	51836.....	177	53029.....	209
50021.....	178	51106.....	198	51333.....	163	51529.....	169	51763.....	163	51901.....	170	53030.....	209
50022.....	178	51107.....	198	51334.....	163	51530.....	169	51764.....	163	51902.....	170	53031.....	209
50023.....	178	51108.....	199	51335.....	163	51531.....	169	51765.....	163	51903.....	170	53032.....	209
50024.....	178	51109.....	199	51336.....	164	51532.....	169	51766.....	164	51904.....	170	53033.....	209
50025.....	178	51110.....	199	51337.....	164	51533.....	169	51767.....	164	51905.....	170	53034.....	209

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
53035.....	209	56009.....	207	56117.....	208	56230.....	207	57085.....	197	57151.....	199
53036.....	209	56010.....	207	56118.....	208	56231.....	207	57086.....	197	57152.....	199
53107.....	209	56011.....	207	56119.....	208	56232.....	207	57087.....	197	57153.....	199
53108.....	209	56012.....	207	56120.....	208	56233.....	207	57088.....	197	57154.....	199
53109.....	209	56013.....	207	56121.....	208	56234.....	207	57089.....	197	57155.....	199
53110.....	209	56014.....	207	56122.....	208	56235.....	207	57090.....	197	57156.....	200
53111.....	209	56015.....	207	56123.....	208	56236.....	207	57091.....	197	57157.....	200
53112.....	210	56016.....	207	56124.....	208	56237.....	207	57092.....	197	57158.....	200
53113.....	210	56017.....	207	56125.....	208	56238.....	207	57093.....	197	57159.....	200
53114.....	210	56018.....	207	56126.....	208	56239.....	207	57094.....	197	57160.....	200
53115.....	210	56019.....	207	56127.....	208	56240.....	207	57095.....	197	57161.....	200
53116.....	211	56020.....	207	56128.....	208	56241.....	206	57096.....	197	57162.....	200
53117.....	211	56021.....	207	56129.....	208	56242.....	206	57097.....	197	57163.....	200
53118.....	211	56022.....	207	56130.....	208	56243.....	206	57098.....	197	57164.....	200
53119.....	211	56023.....	207	56131.....	208	56244.....	206	57099.....	197	57165.....	200
53120.....	211	56024.....	207	56132.....	208	56245.....	206	57100.....	197	57166.....	200
53121.....	211	56025.....	207	56135.....	206	56246.....	206	57101.....	197	57167.....	200
53122.....	212	56026.....	207	56136.....	206	56247.....	206	57102.....	197	57168.....	200
53123.....	212	56027.....	207	56137.....	206	56248.....	206	57103.....	197	57169.....	200
53124.....	212	56028.....	207	56138.....	206	56249.....	206	57104.....	197	57170.....	200
53125.....	212	56029.....	207	56139.....	206	56250.....	206	57105.....	197	57171.....	200
53126.....	212	56030.....	207	56140.....	207	56251.....	206	57106.....	198	57172.....	200
53127.....	212	56031.....	207	56141.....	207	56252.....	206	57107.....	198	57173.....	200
53128.....	213	56032.....	206	56142.....	207	56253.....	206	57108.....	198	57174.....	200
53129.....	213	56033.....	206	56143.....	207	56254.....	206	57109.....	198	57176.....	200
53130.....	213	56034.....	206	56144.....	207	56255.....	206	57110.....	198	57177.....	200
53131.....	213	56035.....	206	56145.....	207	56256.....	206	57111.....	198	57178.....	201
53132.....	213	56036.....	206	56146.....	207	56257.....	206	57112.....	198	57179.....	201
53133.....	213	56037.....	206	56147.....	207	56258.....	206	57113.....	198	57180.....	201
53134.....	213	56038.....	206	56148.....	208	56259.....	206	57114.....	198	57181.....	201
53135.....	213	56039.....	206	56149.....	208	56260.....	206	57115.....	198	57182.....	201
53136.....	213	56040.....	206	56150.....	208	56261.....	206	57116.....	198	57183.....	201
53137.....	213	56041.....	206	56151.....	208	56262.....	206	57117.....	198	57184.....	201
53201.....	210	56042.....	206	56152.....	208	56263.....	206	57118.....	198	57185.....	20

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
58081.....	212	61078.....	199	62037.....	203	62154.....	205	63054.....	210	63183.....	165
58082.....	212	61079.....	199	62039.....	203	62155.....	205	63055.....	210	63184.....	166
58083.....	212	61080.....	199	62041.....	203	62156.....	205	63056.....	210	63185.....	166
58084.....	212	61081.....	199	62043.....	203	62157.....	205	63057.....	210	63186.....	166
58085.....	212	61082.....	199	62045.....	203	62158.....	205	63058.....	210	63187.....	166
58086.....	212	61083.....	200	62047.....	203	62159.....	205	63059.....	210	63188.....	166
58087.....	212	61084.....	200	62049.....	203	62164.....	205	63060.....	210	63189.....	166
58088.....	212	61085.....	200	62051.....	203	62166.....	205	63061.....	210	63190.....	166
58089.....	212	61086.....	200	62053.....	203	62167.....	205	63062.....	210	63191.....	166
58090.....	212	61087.....	200	62055.....	203	62168.....	205	63063.....	210	63192.....	166
58091.....	212	61088.....	200	62057.....	203	62170.....	205	63064.....	211	63193.....	166
58092.....	212	61089.....	200	62059.....	203	62171.....	205	63065.....	211	63194.....	167
58093.....	212	61090.....	200	62061.....	203	63000.....	209	63066.....	211	63195.....	167
58094.....	213	61091.....	200	62063.....	203	63001.....	209	63067.....	211	63196.....	167
58095.....	213	61092.....	200	62065.....	203	63002.....	209	63068.....	211	63197.....	167
58096.....	213	61093.....	200	62066.....	205	63003.....	209	63069.....	211	63198.....	167
58097.....	213	61094.....	200	62067.....	203	63004.....	209	63070.....	211	63199.....	167
58098.....	213	61095.....	200	62069.....	203	63005.....	209	63071.....	211	63200.....	167
58099.....	213	61096.....	201	62071.....	203	63006.....	210	63072.....	211	63201.....	167
58100.....	213	61097.....	201	62073.....	203	63007.....	210	63073.....	211	63202.....	167
58101.....	213	61098.....	201	62075.....	203	63008.....	210	63074.....	211	63203.....	167
58102.....	213	61099.....	201	62077.....	204	63009.....	210	63075.....	211	63204.....	167
58103.....	213	61100.....	201	62079.....	204	63010.....	211	63076.....	211	63205.....	167
61011.....	198	61101.....	201	62081.....	204	63011.....	211	63077.....	211	63206.....	167
61013.....	198	61102.....	201	62083.....	204	63012.....	211	63078.....	211	63207.....	167
61015.....	199	61103.....	201	62084.....	205	63013.....	211	63079.....	212	63208.....	167
61017.....	199	61104.....	201	62085.....	204	63014.....	211	63080.....	212	63209.....	167
61019.....	199	61105.....	201	62087.....	204	63015.....	211	63081.....	212	63210.....	167
61021.....	199	61106.....	201	62089.....	204	63016.....	211	63082.....	212	63211.....	167
61023.....	200	61107.....	201	62091.....	204	63017.....	211	63083.....	212	63212.....	167
61025.....	200	61108.....	201	62093.....	204	63018.....	211	63084.....	212	63213.....	165
61027.....	200	61109.....	201	62095.....	204	63019.....	212	63085.....	212	63575.....	174
61029.....	200	61110.....	201	62097.....	204	63020.....	212	63086.....	212	63576.....	174
61031.....	201	61111.....	201	62099.....	204	63021.....	212	63087.....	212	63577.....	17

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
63676.....	177	63910.....	170	63976.....	173	66041.....	208	68308.....	198	68612.....	205
63677.....	177	63911.....	170	63977.....	173	66042.....	208	68309.....	198	68613.....	205
63741.....	163	63912.....	170	63978.....	173	66043.....	208	68310.....	199	68614.....	205
63742.....	163	63913.....	170	63979.....	173	66044.....	208	68311.....	199	68616.....	205
63743.....	163	63914.....	170	63980.....	173	66045.....	207	68312.....	199	68643.....	203
63744.....	163	63915.....	170	63981.....	173	66046.....	208	68313.....	199	68644.....	203
63745.....	164	63916.....	170	63982.....	173	67005.....	221	68314.....	199	68645.....	203
63746.....	164	63917.....	170	63983.....	173	67007.....	221	68315.....	199	68646.....	203
63747.....	164	63918.....	170	63984.....	173	67009.....	221	68316.....	199	68647.....	203
63748.....	164	63919.....	170	63985.....	173	67011.....	221	68317.....	199	68648.....	203
63749.....	164	63920.....	170	63986.....	173	67013.....	221	68318.....	199	68649.....	203
63750.....	164	63921.....	170	63987.....	173	67015.....	221	68319.....	199	68650.....	203
63751.....	164	63922.....	170	63988.....	173	67017.....	221	68320.....	199	68651.....	203
63752.....	164	63923.....	171	63989.....	173	67019.....	221	68321.....	199	68652.....	203
63753.....	164	63924.....	171	63990.....	173	67021.....	221	68322.....	199	68653.....	203
63754.....	165	63925.....	171	63991.....	173	67023.....	221	68323.....	199	68654.....	203
63755.....	165	63926.....	171	63992.....	173	67035.....	221	68324.....	199	68655.....	203
63756.....	165	63927.....	171	63993.....	173	67037.....	221	68325.....	200	68656.....	203
63757.....	165	63928,0.....	171	63994.....	173	67039.....	221	68326.....	200	68657.....	203
63758.....	165	63929.....	171	63995.....	173	67041.....	221	68327.....	200	68658.....	203
63759.....	165	63930.....	171	63996.....	173	67043.....	221	68328.....	200	68659.....	203
63760.....	165	63931.....	171	63997.....	173	67045.....	221	68329.....	200	68660.....	203
63761.....	165	63932.....	171	63998.....	171	67047.....	221	68330.....	200	68661.....	203
63762.....	165	63933.....	171	63999.....	171	67049.....	221	68331.....	200	68662.....	203
63763.....	165	63934.....	171	64000.....	173	67051.....	221	68332.....	200	68663.....	203
63764.....	165	63935.....	171	64001.....	173	67053.....	221	68333.....	200	68664.....	203
63765.....	165	63936.....	171	66001.....	206	68268.....	197	68334.....	200	68665.....	203
63766.....	165	63937.....	171	66002.....	206	68269.....	197	68335.....	200	68666.....	203
63767.....	165	63938.....	171	66003.....	206	68270.....	197	68336.....	200	68667.....	203
63768.....	165	63939.....	171	66004.....	206	68271.....	197	68337.....	200	68668.....	203
63769.....	165	63940.....	171	66005.....	206	68272.....	197	68338.....	201	68669.....	203
63770.....	165	63941.....	171	66006.....	206	68273.....	198	68339.....	201	68670.....	203
63771.....	166	63942.....	171	66007.....	206	68274.....	198	68340.....	201	68671.....	203
63772.....	166	63943.....	171	66008.....	206	68275.....	199	68341.....	201	68672.....	

EDP Number Index

EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE	EDP NO.	PAGE
69008.....	211	70018.....	236	70544.....	29	73041.....	246	74246.....	223	83056.....	59	91247.....	43
69009.....	211	70019.....	236	70546.....	29	74001.....	222	74249.....	224	83057.....	59	91248.....	43
69010.....	211	70020.....	236	70548.....	29	74004.....	222	74252.....	224	83058.....	59	91250.....	43
69011.....	211	70021.....	236	70550.....	29	74007.....	222	74255.....	224	83059.....	59	91251.....	43
69012.....	211	70022.....	236	70551.....	27	74010.....	222	74258.....	224	83060.....	59	91252.....	43
69013.....	211	70023.....	236	70552.....	27	74013.....	222	74261.....	224	83061.....	59	91253.....	43
69014.....	211	70024.....	236	70553.....	27	74016.....	222	74264.....	224	83062.....	59	91254.....	43
69015.....	211	70025.....	236	70554.....	27	74019.....	222	74267.....	224	83063.....	59	91255.....	43
69016.....	211	70026.....	236	70555.....	27	74022.....	222	74270.....	224	83064.....	59	91256.....	43
69017.....	211	70027.....	236	70556.....	27	74025.....	223	81001.....	235	83065.....	59	91257.....	43
69018.....	211	70028.....	236	70557.....	27	74028.....	223	81003.....	235	90001.....	249	91258.....	43
69019.....	212	70029.....	236	70558.....	27	74031.....	223	81005.....	235	90005.....	249	91259.....	43
69020.....	212	70030.....	236	70559.....	27	74034.....	223	81007.....	235	90009.....	249	91260.....	43
69021.....	212	70031.....	236	70560.....	27	74037.....	223	81009.....	235	90013.....	249	91261.....	43
69022.....	212	70032.....	236	70561.....	27	74040.....	223	81011.....	235	90017.....	249	91262.....	43
69023.....	212	70441.....	28	70562.....	27	74043.....	223	81013.....	235	90021.....	249	91263.....	43
69024.....	212	70442.....	28	70563.....	27	74046.....	223	81015.....	235	90025.....	249	91266.....	114
69025.....	212	70444.....	28	72930.....	246	74049.....	224	81017.....	235	90029.....	249	91268.....	99
69026.....	212	70445.....	28	72947.....	246	74052.....	224	81019.....	235	90033.....	249	91269.....	104
69027.....	212	70447.....	28	72948.....	246	74055.....	224	81021.....	235	90037.....	249	91270.....	114
69028.....	212	70448.....	28	72949.....	246	74058.....	224	81023.....	235	90041.....	249	91272.....	99
69029.....	212	70450.....	28	72950.....	246	74061.....	224	81025.....	235	90045.....	249	91273.....	104
69030.....	212	70451.....	28	72951.....	246	74064.....	224	81027.....	235	90049.....	249	91274.....	114
69031.....	212	70453.....	28	72952.....	246	74067.....	224	81029.....	235	90053.....	249	91276.....	99
69032.....	212	70454.....	28	72953.....	246	74070.....	224	82966.....	246	90101.....	249	91277.....	104
69033.....	212	70456.....	28	72954.....	247	74101.....	222	82967.....	246	90107.....	249	91278.....	114
69034.....	212	70457.....	28	72955.....	247	74104.....	222	82968.....	246	90109.....	249	91280.....	99
69035.....	212	70459.....	28	72956.....	247	74107.....	222	82969.....	246	90113.....	249	91281.....	104
69036.....	212	70460.....	28	72957.....	247	74110.....	222	82970.....	246	90121.....	249	91282.....	114
69037.....	212	70462.....	28	72958.....	247	74113.....	222	82971.....	246	90129.....	249	91284.....	99
69038.....	212	70463.....	28	72959.....	247	74116.....	222	82972.....	246	90137.....	249	91285.....	104
69039.....	212	70465.....	28	72960.....	247	74119.....	222	82973.....	246	91001.....	250	91286.....	115
69040.....	212	70466.....	28	72961.....	247	74122.....	222	82974.....	247	91005.....	250	91288.....	99
69041.....	213	70468.....	28	72962.....	247	74125.....	223	82975.....	247	91009.....	250	91289.....	105
69042.....	213	70469.....	28	72963.....	247	74128.....	223	82976.....	247	91013.....	250	91290.....	115
69043.....	213	70470.....	26	72964.....	247	74131.....	223	82977.....	247	91017.....	250	91292.....	100
69044.....	213	70471.....	26	72965.....	247	74134.....	223	82978.....	247	91021.....	250	91293.....	105
69045.....	213	70472.....	26	72966.....	247	74137.....	223	82979.....	247	91025.....	250	91349.....	40
69046.....	213	70473.....	26	72967.....	247	74140.....	223	82980.....	247	91029.....	250	91350.....	40
69047.....	213	70474.....	26	72968.....	247	74143.....	223	82981.....	247	91033.....	250	91351.....	40
69048.....	213	70475.....	26	72969.....	247	74146.....	223	82982.....	247	91037.....	250	91352.....	40
69049.....	213	70476.....	26	72970.....	248	74149.....	224	82983.....	247	91041.....	250	91353.....	40
69050.....	213	70477.....	26	72971.....	248	74152.....	224	82984.....	247	91045.....	250	91354.....	40
69051.....	213	70478.....	26	72972.....	248	74155.....	224	82985.....	247	91049.....	250	91355.....	40
69052.....	213	70479.....	26	72973.....	248	74158.....	224	82986.....	247	91053.....	250	91356.....	40
69053.....	213	70480.....	26	72974.....	248	74161.....	224	82987.....	247	91101.....	250	91357.....	40
69054.....	213	70481.....	26	72975.....	248	74164.....	224	82988.....	247	91107.....	250	91358.....	40
69055.....	213	70482.....	26	72976.....	248	74167.....	224	82989.....	247	91109.....	250	91359.....	40
69056.....	213	70483.....	26	72977.....	248	74170.....	224	82990.....	248	91113.....	250	91360.....	40
70003.....	236	70484.....	26	72978.....	58	74201.....	222	82991.....	248	91121.....	250	91361.....	40
70004.....	236	70485.....	26	72979.....	58	74204.....	222	82992.....	248	91129.....	250	93272.....	40
70005.....	236	70486.....	26	72980.....	58	74207.....	222	82993.....	248	91137.....	250	93273.....	40
70006.....	236	70487.....	26	72981.....	58	74210.....	222	82994.....	248	91235.....	43	93274.....	40
70007.....	236	70488.....	26	72982.....	58	74213.....	222	82995.....	248	91236.....	43	93275.....	40
70008.....	236	70489.....	26	72983.....	58	74216.....	222	82996.....	248	91237.....	43	93276.....	40
70009.....	236	70527.....	29	72984.....	58	74219.....	222	82997.....	248	91238.....	43	93277.....	40
70010.....	236	70529.....	29	72985.....	58	74222.....	222	83026.....	246	91239.....	43	93278.....	40
70011.....	236	70531.....	29	73012.....	246	74225.....	223	83027.....	246	91240.....	43	93279.....	40
70012.....	236	70533.....	29	73013.....	246	74228.....	223	83028.....	246	91241.....	43	93280.....	40
70013.....	236	70535.....	29	73014.....	246	74231.....	223	83029.....	246	91242.....	43	93281.....	40
70014.....	236	70537.....	29	73026.....	246	74234.....	223	83041.....	246	91243.....	43	93282.....	40
70015.....	236	70539.....	29	73027.....	246	74237.....	223	83042.....	246	91244.....	43		
70016.....	236	70540.....	29	73028.....	246	74240.....	223	83043.....	246	91245.....	43		
70017.....	236	70542.....	29	73029.....	246	74243.....	223	83044.....	246	91246.....	43		

SGS Reference Information

ISO H6 SPECIFICATIONS					
DIAMETER	+	-	DIAMETER	+	-
≥ 1/8 - 3/16	0.00000	-0.00032	≤ 3	0,000	0,006
> 3/16 - 7/16	0.00000	-0.00035	> 3 - 6	0,000	0,008
> 7/16 - 5/8	0.00000	-0.00043	> 6 - 10	0,000	0,009
> 5/8 - 1	0.00000	-0.00051	> 10 - 18	0,000	0,011
> 1 - 1-1/4	0.00000	-0.00063	> 18 - 25	0,000	0,013

MACHINING FORMULAS	
INCH FORMULAS	METRIC FORMULAS
sfm = rpm x .262 x cutting diameter	m/min = (3.14 x cutting diameter x rpm) / 1000
rpm = sfm x 3.82 / cutting diameter	rpm = (1000 x m / min) / (3.14 x cutting diameter)
feed (inches per tooth) = ipm / (number of teeth x rpm)	feed (mm per tooth) = millimeters per minute / (number of teeth x rpm)
feed (inches / minute) = inches per tooth x number of teeth x rpm	feed (mm/minute) = feed per tooth x number of teeth x rpm
feed (inches / minute) = ipr x rpm	feed (mm/minute) = mmr x rpm
feed (inches / revolution) = ipm / rpm	feed (mm per revolution) = mmr / rpm
cuspl height* = (tool diameter / 2) - $\sqrt{(\text{tool diameter}^2 - \text{pitch}^2) / 4}$	cuspl height* = (tool diameter / 2) - $\sqrt{(\text{tool diameter}^2 - \text{pitch}^2) / 4}$
pitch = $\sqrt{4 \times (\text{cuspl height} \times \text{tool diameter}) - 4 \times (\text{cuspl height}^2)}$	pitch = $\sqrt{4 \times (\text{cuspl height} \times \text{tool diameter}) - 4 \times (\text{cuspl height}^2)}$
mrr – milling – (in ³ /min) = width of cut x depth of cut x ipm	mrr – milling – (cm ³ /min) = (width of cut x depth of cut x mm/min) / 1000
cutting time – drilling – (minutes) = length / ipm	cutting time – drilling – (minutes) = length / mm/min

sfm	surface feet per minute
rpm	revolutions per minute
ipm	feed rate in inches per minutes
ipr	inches per revolution
mmr	millimeters per revolution
mm/min	feed rate in millimeters per minute
mrr	material removal rate
*	on flat surface

GENERAL FORMULAS	
coolant pressure: 1 Bar = 14.5 Pounds per Square Inch (PSI)	
calculation of coolant pressure: Pounds Per Square Inch (PSI) = (Horsepower of Pump x 1.460) / Gallons per Minute (GPM)	
1 Liter = 0.254 Gallons	
inch = millimeters / 25.4	millimeters = inch x 25.4
inch tap drill sizes = major diameter – ((1.299 x % of thread) / threads per inch)	
metric tap drill sizes = major diameter – (1.082 x pitch x % of thread)	
inch thread forming drill size: maximum diameter = basic major diameter – (3/8 x number of threads per inch)	
inch thread forming drill size: minimum diameter = basic major diameter – (1/2 x number of threads per inch)	
metric thread forming drill size: maximum diameter = basic major diameter – (.375 x pitch)	
metric thread forming drill size: minimum diameter = basic major diameter – (.500 x pitch)	

Decimal Equivalents

Fraction • Number • Letter • Metric Sizes

INCH	METRIC	DECIMAL EQUIVALENT	INCH	METRIC	DECIMAL EQUIVALENT	INCH	METRIC	DECIMAL EQUIVALENT	INCH	METRIC	DECIMAL EQUIVALENT	INCH	METRIC	DECIMAL EQUIVALENT	INCH	METRIC	DECIMAL EQUIVALENT
—	0,10	0.0039	—	1,60	0.0630	9/64	3,57	0.1406	#1	5,79	0.2280	R	8,61	0.3390	—	13,00	0.5118
—	0,20	0.0079	#52	1,61	0.0635	—	3,60	0.1417	—	5,80	0.2283	—	8,70	0.3425	33/64	13,10	0.5156
—	0,25	0.0098	—	1,65	0.0650	#27	3,66	0.1440	—	5,90	0.2323	11/32	8,73	0.3438	17/32	13,49	0.5312
—	0,30	0.0118	#51	1,70	0.0669	—	3,70	0.1457	A	5,94	0.2340	—	8,75	0.3445	—	13,50	0.5315
#80	0,34	0.0135	—	1,75	0.0689	#26	3,73	0.1470	15/64	5,95	0.2344	—	8,80	0.3465	35/64	13,89	0.5469
—	0,35	0.0138	#50	1,78	0.0700	—	3,75	0.1476	—	6,00	0.2362	S	8,84	0.3480	—	14,00	0.5512
#79	0,37	0.0145	—	1,80	0.0709	#25	3,80	0.1495	B	6,05	0.2380	—	8,90	0.3504	9/16	14,29	0.5625
1/64	0,40	0.0156	#49	1,85	0.0728	—	3,80	0.1496	—	6,10	0.2402	—	9,00	0.3543	—	14,50	0.5709
#78	0,41	0.0160	—	1,90	0.0748	#24	3,86	0.1520	C	6,15	0.2420	T	9,09	0.3580	37/64	14,68	0.5781
—	0,45	0.0177	#48	1,93	0.0760	—	3,90	0.1535	—	6,20	0.2441	—	9,10	0.3583	—	15,00	0.5906
#77	0,46	0.0180	—	1,95	0.0768	#23	3,91	0.1540	D	6,25	0.2461	23/64	9,13	0.3594	19/32	15,08	0.5938
—	0,50	0.0197	5/64	1,98	0.0781	5/32	3,97	0.1562	—	6,30	0.2480	—	9,20	0.3622	39/64	15,48	0.6094
#76	0,51	0.0200	#47	1,99	0.0785	#22	3,99	0.1570	E	6,35	0.2500	—	9,25	0.3642	—	15,50	0.6102
#75	0,53	0.0210	—	2,00	0.0787	—	4,00	0.1575	1/4	6,35	0.2500	—	9,30	0.3661	5/8	15,88	0.6250
—	0,55	0.0217	—	2,05	0.0807	#21	4,04	0.1590	—	6,40	0.2520	U	9,35	0.3680	—	16,00	0.6299
#74	0,57	0.0225	#46	2,06	0.0810	#20	4,09	0.1610	—	6,50	0.2559	—	9,40	0.3701	41/64	16,27	0.6406
—	0,60	0.0236	#45	2,08	0.0820	—	4,10	0.1614	F	6,53	0.2570	—	9,50	0.3740	—	16,50	0.6496
#73	0,61	0.0240	—	2,10	0.0827	—	4,20	0.1654	—	6,60	0.2598	3/8	9,53	0.3750	21/32	16,67	0.6562
#72	0,64	0.0250	—	2,15	0.0846	#19	4,22	0.1660	G	6,63	0.2610	V	9,56	0.3770	—	17,00	0.6693
—	0,65	0.0256	#44	2,18	0.0860	—	4,25	0.1673	—	6,70	0.2638	—	9,60	0.3780	43/64	17,07	0.6719
#71	0,66	0.0260	—	2,20	0.0866	—	4,30	0.1693	17/64	6,75	0.2656	—	9,70	0.3819	11/16	17,46	0.6875
—	0,70	0.0276	—	2,25	0.0886	#18	4,31	0.1695	H	6,76	0.2660	—	9,75	0.3839	—	17,50	0.6890
#70	0,71	0.0280	#43	2,26	0.0890	11/64	4,37	0.1719	—	6,80	0.2677	W	9,80	0.3858	45/64	17,86	0.7031
#69	0,74	0.0292	—	2,30	0.0906	#17	4,39	0.1730	—	6,90	0.2717	—	9,90	0.3898	—	18,00	0.7087
—	0,75	0.0295	—	2,35	0.0925	—	4,40	0.1732	I	6,91	0.2720	25/64	9,92	0.3906	23/32	18,26	0.7188
#68	0,79	0.0310	#42	2,37	0.0935	#16	4,50	0.1770	—	7,00	0.2756	—	10,00	0.3937	—	18,50	0.7283
1/32	0,79	0.0313	3/32	2,38	0.0938	—	4,50	0.1772	J	7,04	0.2770	X	10,08	0.3970	47/64	18,65	0.7344
—	0,80	0.0315	—	2,40	0.0945	#15	4,57	0.1800	—	7,10	0.2795	—	10,10	0.3976	—	19,00	0.7480
#67	0,81	0.0320	#41	2,44	0.0960	—	4,60	0.1811	K	7,14	0.2810	—	10,20	0.4016	3/4	19,05	0.7500
#66	0,84	0.0330	—	2,45	0.0965	#14	4,62	0.1820	9/32	7,14	0.2812	Y	10,26	0.4040	49/64	19,45	0.7656
—	0,85	0.0335	#40	2,50	0.0984	#13	4,70	0.1850	—	7,20	0.2835	—	10,30	0.4055	—	19,50	0.7677
#65	0,89	0.0350	#39	2,53	0.0995	—	4,75	0.1870	—	7,25	0.2854	13/32	10,32	0.4062	25/32	19,84	0.7812
—	0,90	0.0354	#38	2,58	0.1015	3/16	4,76	0.1875	—	7,30	0.2874	—	10,40	0.4094	—	20,00	0.7874
#64	0,91	0.0360	—	2,60	0.1024	#12	4,80	0.1890	L	7,37	0.2900	Z	10,49	0.4130	51/64	20,24	0.7969
#63	0,94	0.0370	#37	2,64	0.1040	#11	4,85	0.1910	—	7,40	0.2913	—	10,50	0.4134	—	20,50	0.8071
—	0,95	0.0374	—	2,70	0.1063	—	4,90	0.1929	M	7,49	0.2950	—	10,60	0.4173	13/16	20,64	0.8125
#62	0,97	0.0380	#36	2,71	0.1065	#10	4,91	0.1935	—	7,50	0.2953	—	10,70	0.4213	—	21,00	0.8268
#61	0,99	0.0390	—	2,75	0.1083	#9	4,98	0.1960	19/64	7,54	0.2969	27/64	10,72	0.4219	53/64	21,03	0.8281
—	1,00	0.0394	7/64	2,78	0.1094	—	5,00	0.1969	—	7,60	0.2992	—	10,80	0.4252	27/32	21,43	0.8438
#60	1,02	0.0400	#35	2,79	0.1100	#8	5,05	0.1990	N	7,67	0.3020	—	10,90	0.4291	—	21,50	0.8465
#59	1,04	0.0410	—	2,80	0.1102	—	5,10	0.2008	—	7,70	0.3031	—	11,00	0.4331	55/64	21,84	0.8594
—	1,05	0.0413	#34	2,82	0.1110	#7	5,11	0.2010	—	7,75	0.3051	—	11,10	0.4370	—	22,00	0.8661
#58	1,07	0.0420	#33	2,87	0.1130	13/64	5,16	0.2031	—	7,80	0.3071	7/16	11,11	0.4375	7/8	22,23	0.8750
#57	1,09	0.0430	—	2,90	0.1142	#6	5,18	0.2040	—	7,90	0.3110	—	11,20	0.4409	—	22,50	0.8858
—	1,10	0.0433	#32	2,95	0.1160	—	5,20	0.2047	5/16	7,94	0.3125	—	11,30	0.4449	57/64	22,62	0.8906
—	1,15	0.0453	—	3,00	0.1181	#5	5,22	0.2055	—	8,00	0.3150	—	11,40	0.4488	—	23,00	0.9055
#56	1,18	0.0465	#31	3,05	0.1200	—	5,25	0.2067	O	8,03	0.3160	—	11,50	0.4528	29/32	23,02	0.9062
3/64	1,19	0.0469	—	3,10	0.1220	—	5,3	0.2087	—	8,10	0.3189	29/64	11,51	0.4531	59/64	23,42	0.9219
—	1,20	0.0472	1/8	3,18	0.1250	#4	5,31	0.2090	—	8,20	0.3228	—	11,60	0.4567	—	23,50	0.9252
—	1,25	0.0492	—	3,20	0.1260	—	5,40	0.2126	P	8,20	0.3230	—	11,70	0.4606	15/16	23,81	0.9375
—	1,30	0.0512	—	3,25	0.1280	#3	5,41	0.2130	—	8,25	0.3248	—	11,80	0.4646	—	24,00	0.9449
#55	1,32	0.0520	#30	3,26	0.1285	—	5,50	0.2165	—	8,30	0.3268	—	11,90	0.4685	61/64	24,21	0.9531
—	1,35	0.0531	—	3,30	0.1299	7/32	5,56	0.2188	21/64	8,33	0.3281	15/32	11,91	0.4688	—	24,50	0.9646
#54	1,40	0.0550	—	3,40	0.1339	—	5,60	0.2205	—	8,40	0.3307	—	12,00	0.4724	31/32	24,61	0.9688
#53	1,51	0.0595	#29	3,45	0.1360	#2	5,61	0.2210	Q	8,43	0.3320	31/64	12,30	0.4844	—	25,00	0.9843
—	1,55	0.0610	—	3,50	0.1378	—	5,70	0.2244	—	8,50	0.3346	—	12,50	0.4921	63/64	25,00	0.9844
1/16	1,59	0.0625	#28	3,57	0.1405	—	5,75	0.2264	—	8,60	0.3386	1/2	12,70	0.5000	1	25,40	1.0000

Hardness Conversion Chart

ROCKWELL HARDNESS (HRb)	ROCKWELL HARDNESS (HRc)	BRINELL HARDNESS (HB)	VICKERS HARDNESS (HV)	TENSILE STRENGTH (N/mm2)	PSI (1000lb/in2)
67	—	121	122	401	58
70	—	126	127	432	63
73	—	132	132	448	65
75	—	136	137	455	66
77	—	140	143	463	67
80	—	147	150	479	69
82	—	153	156	494	72
84	—	159	163	525	76
86	—	165	171	540	78
89	—	177	178	556	81
91	—	186	188	602	88
93	—	197	196	632	92
96	—	216	212	664	97
97	—	223	218	695	101
98	21	230	234	756	110
—	22	236	241	772	112
—	23	242	247	787	114
—	24	248	255	818	118
—	25	254	261	849	123
—	27	266	269	865	125
—	28	272	275	895	130
—	29	278	284	911	132
—	30	284	292	942	136
—	31	293	300	973	141
—	32	302	308	988	143
—	33	310	318	1019	147
—	34	319	327	1050	152
—	35	328	337	1096	159
—	37	345	349	1127	163
—	38	353	359	1158	168
—	39	362	370	1189	172
—	40	370	381	1235	179
—	41	381	395	1266	183
—	42	391	408	1312	190
—	44	411	422	1359	197
—	45	422	437	1420	206
—	46	433	452	1467	212
—	48	455	470	1513	219
—	50	479	497	1559	226
—	51	485	517	1621	235
—	52	497	532	1668	241
—	54	—	573	1729	250
—	56	—	609	1807	262
—	57	—	630	1884	273
—	59	—	670	1961	284
—	60	—	698	2039	295
—	61	—	725	—	—
—	62	—	740	—	—
—	63	—	780	—	—
—	64	—	812	—	—
—	65	—	847	—	—
—	66	—	885	—	—
—	67	—	926	—	—
—	68	—	971	—	—

Conversions from each scale are approximate



Performance by Design

Solutions Around The Globe

SGSTool Company is a privately-held, ISO-certified leader of round solid carbide cutting tool technology for the aerospace, metalworking, and automotive industries with manufacturing sites in the United States and United Kingdom. Our global network of Sales Representatives, Industrial Distributors, and Agents blanket the world selling into more than 60 countries.

Leaders in Solid Carbide Tool Technology

Brand names such as Z-Carb, S-Carb, V-Carb, Hi-PerCarb, Multi-Carb have become synonymous with high performance tooling in the machining and metalworking industry.

We're proud to have pioneered some of the world's most advanced cutting technology right here in our Northeast Ohio manufacturing campus. SGS high performance end mills, drills and routers are increasing productivity and reducing cost around the world.

Exceeding Customer Expectations

In addition to our substantial R&D facilities, we offer a portfolio of products and services that have an unparalleled track record in manufacture, supply and value at the spindle.

- Incredible batch-to-batch consistency
- Metallurgical lab dedicated to testing and rigorous quality control
- ISO-certified quality procedures
- Patented geometries that extend tool life, reduce chatter, cut cycle times, and improve part quality—even at extreme parameters
- Specialists in extreme and demanding product applications
- Experienced Field Sales Engineers who work to optimize a tool for your particular application
- Dedicated multi-lingual customer service representatives

SGS Products are distributed by:

UNITED STATES OF AMERICA

SGS TOOL COMPANY

World Headquarters
P.O. Box 187
55 South Main Street
Munroe Falls, Ohio 44262 U.S.A.
phone: (330) 688-6667
customer service -

US and Canada: (330) 686-5700
fax - US & Canada: (800) 447-4017
international fax: (330) 686-2146
e-mail: webmaster@sgstool.com

UNITED KINGDOM

SGS CARBIDE TOOL (UK) LTD.

10 Ashville Way
Wokingham, Berkshire
RG41 2PL England
phone: (44) 1189-795-200
fax: (44) 1189-795-295
e-mail: sales@sgstool.co.uk

FRANCE

SGS FRANCE

Business Parc SILIC

20 Rue Saarinen
Case Postale 10248
94568 RUNGIS CEDEX
France
phone: +33 (0) 1 49 79 76 90
fax: +33 (0) 1 49 79 76 94
e-mail: sgsfrance@sgstool.fr

sgstool.com

GERMANY

SGS TOOL GmbH

Hitdorfer Strasse 10C
Langenfeld D40764
phone: (49) 2173-9100-91
fax: (49) 2173-9100-99
e-mail: info@sgs-tool.de

CANADA

SGS TOOL CANADA

171 Northport Road, Unit #3
Port Perry, ON L9L 1B2
phone: 905/982-0888
fax: 905/982-0488
e-mail: sgstool@powergate.ca

EASTERN EUROPE

SINTCOM

phone: (359) 283-64421
fax: (359) 286-52493
e-mail: sintcom@cablebg.net

RUSSIA

HALTEC

phone: (7) 842-231-0738
fax: (7) 842-231-0601
e-mail: info@halte.ru
web: www.halte.ru

CHINA

SGS TOOL DIVISION

phone: (86) 21-50589822
fax: (86) 21-50817160
e-mail: china@sgstool.com
web: www.sgstool.com/china