




# Air Tools



- Twin hammering structure, molding by hot forging, which makes sure strong torque output.
- Twin hammerblock and principal axis are made of Chrome Molybdenum Manganese and processed by three times hot forging, making sure strong and durable.

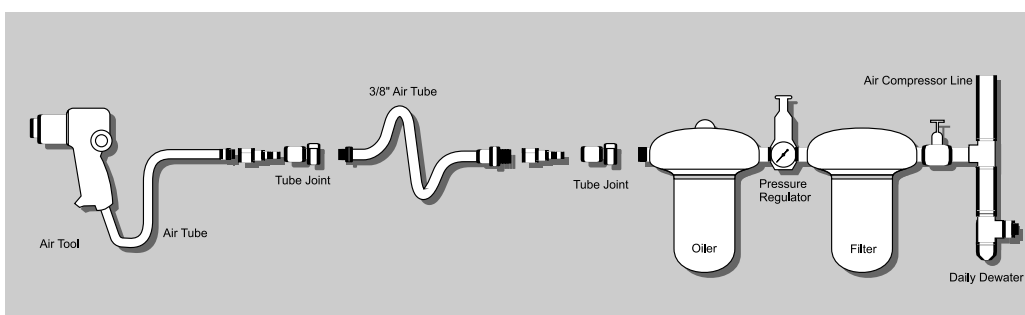

Principal axis and hammering part are made of Chrome Molybdenum Nickel alloy steel, processed by special hot forging, which makes this product suitable for using in production line.

## Composite Pneumatic Impact Wrench

6 Months Warranty

NEW

- Twin hammering structure, molding by hot forging, which makes sure strong torque output.
- Handle is made of composite material, high torque but light, only 1.3kg, 30% lighter than the products with same torque.
- Super short body, only 160mm total length, which is convenience in narrow space.
- Reversible three gears adjustment, easy to operate.
- Air output from bottom, which makes sure the output air will not blow to working object and operator



10pcs(1x10box)

Code	Model No.	Model name	Kg	mm
200001	AMW-3/8-608	3/8"Composite Pneumatic Impact Wrench		1105x535x1100
Specification	Drive axle size: 3/8"		Bolt capacity: 16MM	
	Free speed: 11000RPM		Air Consumption: 4.5CFM	
	Working torque: 540N.M		Air inlet: 1/4"	
	Max torque: 608N.M		N.W.: 1.3KG	
	Working pressure: 6.3KGF/CM <sup>2</sup>			

6 Months Warranty

NEW

- Twin hammering structure, molding by hot forging, which makes sure strong torque output.
- Handle is made of composite material, high torque but light, only 1.4kg, 30% lighter than the products with same torque.
- Super short body, only 160mm total length, which is convenience in narrow space.
- Reversible three gears adjustment, easy to operate
- Air output from bottom, which makes sure the output air will not blow to working object and operator



10pcs(1x10box)

Code	Model No.	Model name	Kg	mm
200002	AMW-1/2-680	1/2"Composite Pneumatic Impact Wrench		1105x535x1100
Specification	Drive axle size: 1/2"		Bolt capacity: 18MM	
	Free speed: 11000RPM		Air Consumption: 4.5CFM	
	Working torque: 608N.M		Air inlet: 1/4"	
	Max torque: 678N.M		N.W.: 1.4KG	
	Working pressure: 6.3KGF/CM <sup>2</sup>			

6 Months Warranty

NEW

- Twin hammering structure, molding by hot forging, which makes sure strong torque output.
- Handle is made of composite material, high torque but light, only 2.3kg, 30% lighter than the products with same torque.
- Super short body, only 200mm total length, which is convenience in narrow space.
- Reversible three gears adjustment, easy to operator.
- Air output from bottom, which makes sure the output air will not blow to working object and operator



10pcs(1x10box)

Code	Model No.	Model name	Kg	mm
200003	AMW-3/4-1154	3/4"Composite Pneumatic Impact Wrench		1105x535x1100
Specification	Drive axle size: 3/4"		Bolt capacity: 25MM	
	Free speed: 8500RPM		Air Consumption: 4.9CFM	
	Working torque: 878N.M		Air inlet: 1/4"	
	Max torque: 1154N.M		N.W.: 2.3KG	
	Working pressure: 6.3KGF/CM <sup>2</sup>			

## Pneumatic Impact Wrench

6 Months Warranty

NEW

- Twin hammering structure, molding by hot forging, which makes sure strong torque output.
- Design by Ergonomics, 100% aluminium polished handle, easy and comfortable for holding, also easy for cleaning.
- Air output from bottom, which makes sure the output air will not blow to working object and operator.
- Suitable for car repair and basic assembling.
- Use in production line is not suggested.



Code	Model No.	Model name	PCS	Kg	mm
200007	AMW-1/2-678	1/2" Pneumatic Impact Wrench	8(1x8box)		1105x535x1100
Specification	Drive axle size: 1/2"		Bolt capacity: 18MM		
	Free speed: 7000RPM		Air Consumption: 4.2CFM		
	Working torque: 40-504N.M		Air inlet: 1/4"		
	Max torque: 678N.M		N.W.: 2.9KG		
	Working pressure: 6.3KGF/CM <sup>2</sup>				

6 Months Warranty

NEW

- 1"DR , 9"extension bar.
- Professional product for Auto repair and assembling and disassembling of heavy duty machinical bolt.
- Made from Chrome Molybdenum Nickel alloy steel, processed by special hot forging, light and durable.
- Single hammer clutch without inserted pin, high power, and long life usage.
- The body is well protected by rubber cover.
- 45° air inlet joint design, with reversible switch, easy to operator.



Code	Model No.	Model name	PCS	Kg	mm
200010	AMW-1-3200	1" Pneumatic Impact Wrench	1(1x1box)	16.1	
Specification	Main axle size: 1"		Main axle length: 9"		
	Working torque: 1500-3000 N.m		Free speed: 3200RPM		
	Air inlet: 1/2"				

6 Months Warranty

NEW

- Twin hammering structure, molding by hot forging, which makes sure strong torque output.
- Super light and short, only 145mm, and net weight only 1.5kg.
- Best torque among same grade impact wrench, reach 351N.M.
- 3 parts structure, easy for assembling and repairing.
- Hanger is attached, convenience for hanging whenever.
- Air output from bottom, which makes sure the output air will not blow to working object and operator.



Code	Model No.	Model name	PCS	Kg	mm
200004	AMW-3/8-400	3/8" Pneumatic Impact Wrench	10(1x10box)		1105x535x1100
Specification	Drive axle size: 3/8"		Bolt capacity: 14MM		
	Free speed: 12500RPM		Air Consumption: 8.0CFM		
	Working torque: 120-351N.M		Air inlet: 1/4"		
	Max torque: 400N.M		N.W.: 1.5KG		
	Working pressure: 6.3KGF/CM <sup>2</sup>				

## High Torque Pneumatic Impact Wrench

- Twin hammering structure, molding by hot forging, which makes sure strong torque output.
- Twin hammerblock and principal axis are made of Chrome Molybdenum Manganese and processed by three times hot forging, making sure strong and durable.
- High torque output, reach 1054N.M.
- 3 parts structure, easy for assembling and repairing.
- Hanger is attached, convenience for hanging whenever.
- Air output from bottom, which makes sure the output air will not blow to working object and operator.



Code	Model No.	Model name	PCS	Kg	mm
200005	AMW-1/2-105A	1/2" High torque Pneumatic Impact Wrench	8pcs(1x8box)		1105x535x1100

Specification	Drive axle size: 1/2"	Bolt capacity: 22MM
	Free speed: 9000RPM	Air Consumption: 5.4CFM
	Working torque: 68-810N.M	Air inlet: 1/4"
	Max torque: 1054N.M	N.W.: 2.6KG
	Working pressure: 6.3KGF/CM <sup>2</sup>	

- Twin hammering structure, molding by hot forging, which makes sure strong torque output.
- Twin hammerblock and principal axis are made of Chrome Molybdenum Manganese and processed by three times hot forging, making sure strong and durable.
- High torque output, reach 1761N.M.
- 3 parts structure, easy for assembling and repairing.
- Hanger is attached, convenience for hanging whenever.
- Air output from bottom, which makes sure the output air will not blow to working object and operator.



Code	Model No.	Model name	PCS	Kg	mm
200006	AMW-3/4-1761	3/4" High torque Pneumatic Impact Wrench	4pcs(1x4box)		1105x535x1100

Specification	Drive axle size: 3/4"	Bolt capacity: 25MM
	Free speed: 5500RPM	Air Consumption: 4.6CFM
	Working torque: 271-1220N.M	Air inlet: 3/8"
	Max torque: 1761N.M	N.W.: 4.6KG
	Working pressure: 6.3KGF/CM <sup>2</sup>	

## Pneumatic Ratchet Wrench & Gun type Pneumatic Screwdriver

- The Gear Part is made of well casted Chrome Molybdenum, precise process and special hot forging make the size precision and the product durable.
- Precision planetary gear working in nitriding steel inner gear canal, steady and enduring.
- Exhaust hood is 360° revolvable, for safety air outlet, no influence to operator.



Code	Model No.	Model name	PCS	Kg	mm
200031	AMR-1/2-81	1/2" Pneumatic Ratchet Wrench	10(1x10box)		1105x535x1100

Specification	Drive axle size: 1/2"	Bolt capacity: 10MM
	Free speed: 160RPM	Air Consumption: 4CFM
	Working torque: 14-76N.M	Air inlet: 1/4"
	Max torque: 81N.M	N.W.: 1.13KG
	Working pressure: 6.3KGF/CM <sup>2</sup>	

- Principal axis and hammering part are made of Chrome
- Molybdenum Nickel alloy steel, processed by special hot forging.
- Handle is made of composite material, only 0.9kg.
- Whole sealing reversible switch, well dustproof. CVT trigger, easy for initial position when starting operation.



Code	Model No.	Model name	PCS	Kg	mm
200021	AMS-1/4-12	1/4" Pistol Grip Pneumatic Screwdriver	10(1x10box)		1105x535x1100

Specification	Chuck size: 1/4"	Screw capacity: M5-M12
	Free speed: 10000RPM	Air Consumption: 13.7CFM
	Working torque: 14-88N.M	Air inlet: 1/4"
	Max torque: 95N.M	N.W.: 0.96KG
	Working pressure: 6.3KGF/CM <sup>2</sup>	

- Principal axis and hammering part are made of Chrome Molybdenum Nickel alloy steel, processed by special hot forging.
- Hammering part are made of hot forging alloy steel, solid and durable.
- Well casted cast steel cylinder, solid and wear-resistant.
- Exhaust hood is 360° revolvable, for safety air outlet.



Code	Model No.	Model name	PCS	Kg	mm
200020	AMS-1/4-6	1/4" Straight Handle Pneumatic Screwdriver	10(1x10box)		1105x535x1100

Specification	Chuck size: 1/4"	Screw capacity: M4-M6
	Free speed: 10000RPM	Air Consumption: 7CFM
	Working torque: 28N.M	Air inlet: 1/4"
	Max torque: 40N.M	N.W.: 0.85KG
	Working pressure: 6.3KGF/CM <sup>2</sup>	

## Pneumatic Drill

- Super powerful industrial grade Pneumatic Drill, suitable for precision drilling, grinding, reaming, fraising etc...
- Well casted cast steel cylinder, solid and wear-resistant.
- Cage planetary gear set, provides well transmission and steady support to main axle.
- CVT trigger, easy for initial position when starting operation.



Code	Model No.	Model name	PCS	Kg	mm
200033	AMD-3/8-5	3/8" Reversible Pneumatic Drill	10(1x10box)		1105x535x1100

Specification	Drill chuck size: 3/8"	Air Consumption: 25CFM
	Free speed: 1800RPM	N.W.: 1.1KG
	Rated power: 450W	Working pressure: 6.3KGF/CM <sup>2</sup>



INDEX

## Pneumatic Drill



- 3/8" drill chuck, professional and durable.
- Composite handle cover, low noise, light weight, only 0.97kg.
- Whole sealing reversible switch, well dustproof.
- CVT trigger, easy for initial position when starting operation.
- Suitable for precision drilling, grinding, reaming, fraising ect...various usage.



NEW

10pcs(1x10box)

Code	Model No.	Model name	Kg	mm
200032	AMD-3/8-3	3/8" Composite Reversible Pneumatic Drill		1105x535x1100
<b>Specification</b>				
Drill Chuck size: 3/8"			Air Consumption: 1.92CFM	
Free speed: 1800RPM			Air inlet: 1/4"	
Rated Power: 260W			N.W.: 0.97KG	
Working pressure: 6.3KGF/CM <sup>2</sup>				

## Angle Grinder



- Industrial grade grinder design and production, available for light production line and regular repairing use.
- Well casted special cast steel cylinder, wear-resistant and long life use.
- Precision processed flexible clamp, which makes it running steady, little runout and little shake.



NEW

Code	Model No.	Model name	PCS	Kg	mm
200034	AMG-S-6	6" Pneumatic Grinder	20(1x20box)		1105x535x1100
<b>Specification</b>					
Drill chuck size: 6MM			Air Consumption: 3CFM		
Free speed: 20000RPM			Air inlet: 1/4"		
N.W.: 0.6KG			Working pressure: 6.3KGF/CM <sup>2</sup>		



- Industrial grinder design and production, available for 4", 4.5" and 5" grinding wheel. Scroll bevel gear made of Chrome
- Molybdenum Nickel alloy steel, processed by special hot forging, running powerful but steady and durable.
- Motor coaxial centrifugal speed control device, which can control motor speed exactly, avoid grinding wheel broken to hurt people.
- Exhaust hood is 360° revolvable, for safety air outlet, no influence to operator.



NEW

10pcs(1x10box)

Code	Model No.	Model name	PCS	Kg	mm
200035	AMG-A-5	5" Pneumatic	10(1x10box)		1105x535x1100
<b>Specification</b>					
Suitable for grinding wheel size: 4" 4.5" 5"			Air Consumption: 5CFM		
Main axle: M10 x 1.5			Air inlet: 1/4"		
Free speed: 11000RPM			N.W.: 1.8KG		
Working pressure: 6.3KGF/CM <sup>2</sup>					

## Grinder



- Aluminium alloy base, strong construction.
- Strong grinding force, very stable, low vibration.
- Low vibration design, drop the centre of gravity, make the surface be smooth and without the vortex.
- 75mm soft grip, it obtains the soft and comfortable gripping while operating.
- Nylon buckles plate, direction abrasive paper sticking.



NEW

Code	Model No.	Model name	PCS	Kg	mm
200037	AMS-NV-5	5" Pneumatic Grinder	12(1x12box)		1105x535x1100
<b>Specification</b>					
Grinding wheel size: 5" sticky buckle style			Eccentricity: 5mm		
Air inlet: 1/4"			Working pressure: 6.3KGF/CM <sup>2</sup>		
Free speed: 12000RPM			Air consumption: 16.9CFM		



- It's convenient to connect with the vacuum dust absorption system, collect the impurity and dust after polishing.
- Aluminium alloy base, strong construction
- Strong grinding force, very stable, low vibration.
- Low vibration design, drop the centre of gravity, make the surface be smooth and without the vortex.
- 75mm soft grip, it obtains the soft and comfortable gripping while operating.
- Nylon buckles plate, direction abrasive paper sticking.



NEW

12pcs(1x12box)

Code	Model No.	Model name	PCS	Kg	mm
200036	AMS-CV-5	5" Central Vacuum Pneumatic Grinder			1105x535x1100
<b>Specification</b>					
Grinding wheel size: 5" sticky buckle style			Eccentricity: 5mm		
Air inlet: 1/4"			Working pressure: 6.3KGF/CM <sup>2</sup>		
Free speed: 12000RPM			Air consumption: 16.9CFM		