






Çap	±0,5	±3	±6	±30	±120	±1000	±2000
Yatay	<±3	<±6	<±30	<±120	<±1000	<±2000	<±4000
Tolerans	±0,1	±0,2	±0,3	±0,5	±0,8	±1,2	±2

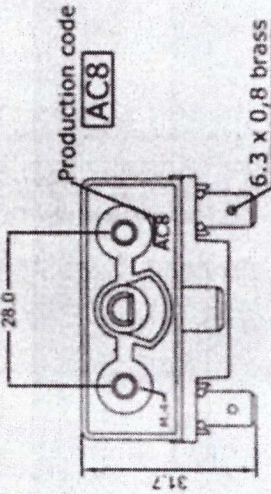

Technical data

- 1 - Material of plastics : PA 6.6 GF25 V-0
 - 2 - Shaft materials : Metalpin
 - 3 - Terminals : 6.3x0.8 Brass
 - 4 - Contacts : 3x0.8 Ag Ni %90 - %10
 - 5 - Rated voltage : AC 250V-AC 400V
- Rated Current : 16A - 10A
T 150 30 E 3

SHAFT SHOWN IN POSITION

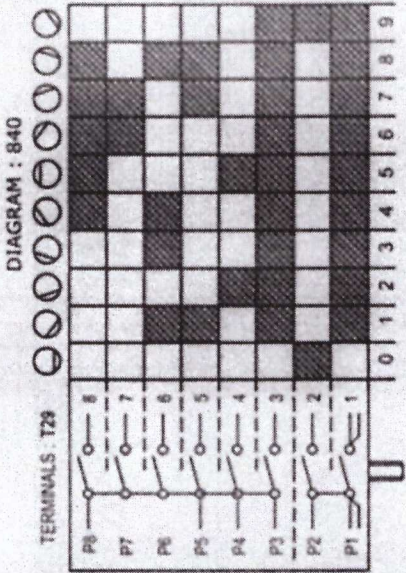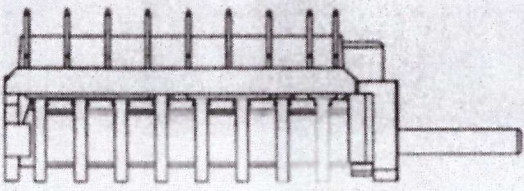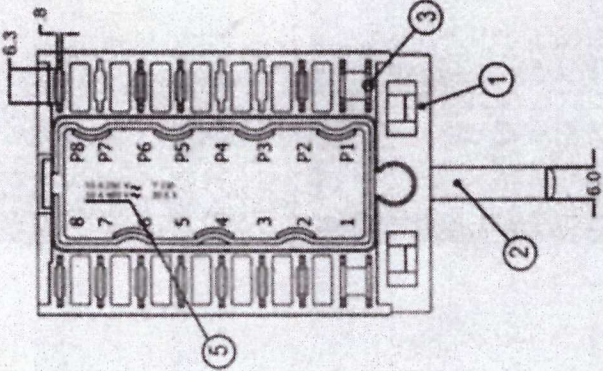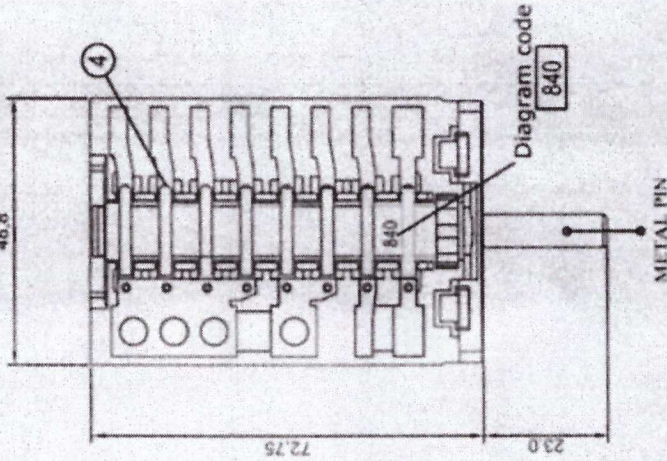

Changemet Date

Signature

Total tolerance
DIN 7168-f

Surface Quality
ISO 1302

Scale: 1:1



Client	Client Code	7LA 80081	Date	27.06.2014	Name	V.COŞKUN	Signature:
	Code	C840A29A1M230	Drawing	27.06.2014	Checking	27.06.2014	S.GÜNÇİKİŞ
			Approbation...				

Items /Group Name : ROTARY SWITCHES 8 POLES 0+9 POSITIONS