
# EuroCave

TCT: 60055			(6 bottles)	<b>l glass door</b> Vine service area (11 bottles) SERVW / ACMSERVI Half shelf (5 bottles) ACMSI-DEMI	
CONFIGURATIONS		GENERAL FEATURES			
Premium Pack	Service Pack	Access Pack		Integrated glass	
bottle capacity <sup>1</sup>	bottle capacity <sup>1</sup>	bottle capacity <sup>1</sup>	Gross weight packaged (kg)	97,8	
89	88	89	Empty net weight (kg) <sup>2</sup>	86,8	
14 sliding shelves	12 sliding shelves 1 half shelf	3 sliding shelves 3 storage shelves	Dimensions H x W x D (mm)	1820-1890 x 594 <sup>3</sup> x 597	
(+grid)	1 Wine service area	(+grid)	Dimensions packaged H x W x D (mm)	1980 x 645 x 630	
Т	ECHNICAL FEATUR	ES	EQUIPMENT & ACCES	SORIES	
REGULATION			EQUIPEMENT	EQUIPEMENT	
<ul> <li>On/Off/Standby of the display button</li> <li>Electronic regulation</li> <li>Temperature setting range between 5°C and 20°C</li> <li>Electronic external display and settings</li> <li>LED screen</li> <li>Backlit capacitive keys</li> <li>Visual and/or sound alarms in case of: <ul> <li>Temperature dysfunction (sound and visual)</li> <li>Hygrometry dysfunction (visual)</li> <li>Sensor fault (sound and visual)</li> <li>Hygrometry limit (visual)</li> <li>Open door (sound and visual)</li> <li>Need to replace charcoal filter (visual)</li> </ul> </li> <li>Automatic defrost</li> <li>Frost protection thermostat (double protection)</li> </ul>			<ul> <li>Reversible Integrated glass door with soft close and door stop</li> <li>Max thickness of the door panel: 20 mm</li> <li>Max weight of the door panel: 12 kg</li> <li>Inner lighting : light strip and 2 LED (3 options: permanent, open door, disabled)</li> <li>Charcoal filter</li> <li>4 adjustable feet</li> <li>Humidity cartridge</li> </ul> ACCESSORIES <ul> <li>Sliding shelves with Mains du Sommelier, open / close locking notch, setting of the Main du Sommelier, at the front of the shelf <ul> <li>6 removable bottles identifiers per sliding shelf</li> <li>1 erasable felt-tip marker</li> <li>1 microfiber cloth</li> <li>1 EuroCave key ring</li> </ul></li></ul>		
Cold production: • Ventilated • Compressor R600a		ENERGY EFFICIENCY & CONSUMPTION			
Cords:	• Compresso • CE/UK/A		Cords	230V-50Hz (R600a)	
Heat production:	• Heating ele	ement	Type of door	Integrated glass	
Heat release: Inner material:	• Automatic • Stucco alui	, adjustable threshold	Energy efficiency class	А	
			Annual energy consumption AEc <sup>4</sup> (Kwh/ye	ear) 165	
Exterior coating ma	terial: • HDF (High melamine-fa	n Density Fiber) ced panels	Useful volume (liters)	285	
Insulation type:		lyurethane foam	Sound emission (dB(A))	38	
51	(59mm)				


## EUROCAVE

### Dimensions of the decoration panel

### Storage layouts

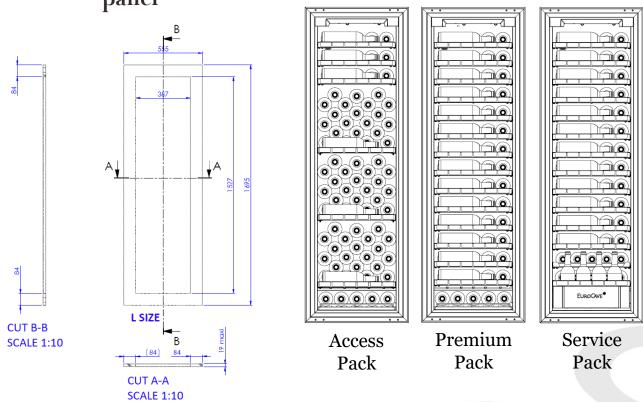

#### Installation diagrams

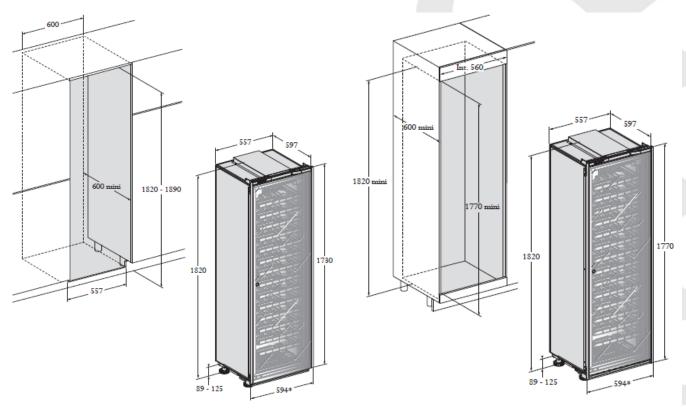

Flush-fitted