



# EASTON

®

**2018**  
BOWHUNTING

**ARMED AND DEADLY**





4MM FULL METAL JACKET™

## 4MM FULL METAL JACKET™

Full metal jacketed carbon-core construction extracts more energy from bow limbs and delivers it downrange to kill quicker with heavier bloodtrails. The 4MM Ultra-micro diameter FMJ minimizes friction for maximum penetration and decreases wind drift. The stainless steel inserts are 64% stronger and use an internal design that eliminates the need for outserts.

- 4mm ultra-micro diameter carbon core with 7075 alloy metal jacket
- Pre-installed 4mm (G) Deep Six™ nocks
- 4mm Deep Six™ threaded steel HIT inserts
- Easy target pull
- Straightness  $\pm .002"$

For use with Deep Six™ broadheads and field points

DEEP  
SIX™

### INCLUDED



4mm (G) Deep Six™ Steel HIT Insert  
(20 grains)



4mm (G) Deep Six™ Nock  
(6 grains)

### SOLD SEPARATELY



Deep Six™ Steel Field Points  
(100-125 grains)

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	DEEP SIX FIELD POINT	O.D
	GPI	Deflection in Inches	Inches	100/125 Grains	Inches
460	9.0	0.460	31	DP6-4	0.228
400	9.8	0.400	31.5	DP6-4	0.234
330	11.0	0.330	32	DP6-5	0.240
280	12.0	0.280	32.5	DP6-5	0.243



5MM FULL METAL JACKET™

Kill quicker with heavier bloodtrails—5MM micro diameter FMJ minimizes friction for deeper penetration and flies with less drag for higher velocity at impact and less wind drifting.

- 5mm micro-diameter carbon core with 7075 metal jacket
- Pre-installed 5mm (X) nocks
- 5mm (X) HIT 8-32 inserts included
- Easy target pull
- Straightness  $\pm .002$ "
- Available in Lost® Camo and Dangerous Game

INCLUDED



5mm (X) HIT® Insert  
(16 grains)



5mm (X) Nock™  
(9 grains)

SOLD SEPARATELY



8-32 Multi Point  
(75, 85, 100, & 125 grains)



8-32 RPS Point  
(50, 60, 70, 80, 90, 100, 110, & 125 grains)



Deep Six™ Steel Field Points  
(100-125 grains)



5mm (X) Deep Six™ Steel RPS Insert  
(25 grains)



5mm Brass X HIT® Break-Off 8-32 Insert  
(Adjustable to 75-50 grains)

*NEW FMJ Camo Hunter and Match Grade  $\pm .001$  straightness now available.*

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	RPS POINT	BROADHEAD ADAPTER RING	O.D.
	GPI	Deflection in Inches	Inches	O.D. Inches	Size (5 grains)	Inches
500	9.1	0.500	31	17/64	BAR3	0.256
400	10.2	0.400	31.5	17/64	BAR3	0.263
340	11.3	0.340	32	9/32	BAR5	0.269
300	12.0	0.300	32.5	9/32	BAR5	0.205
300*	16.0	0.300	32	17/64	BAR6	0.280
250*	17.7	0.250	32.5	5/16	BAR7	0.290

\* Dangerous Game

6MM FULL METAL JACKET™

Full metal jacketed carbon extracts more energy from bow limbs to hit harder at the target. 6MM reduced diameter lowers friction for enhanced penetration and less wind resistance for higher velocity at impact.

- 6MM reduced-diameter carbon core with 7075 alloy metal jacket
- Pre-installed 6MM (H) nocks
- 6MM (H) ST RPS 8-32 inserts
- Easy target pull
- Straightness:  $\pm .003$ "

INCLUDED



6MM (H) RPS™ Insert  
(18 grains)



6MM (H) Nock™  
(9 grains)

SOLD SEPARATELY



8-32 Multi Point  
(75, 85, 100, & 125 grains)



8-32 RPS Point  
(50, 60, 70, 80, 90, 100, 110, & 125 grains)

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	RPS POINT	BROADHEAD ADAPTER RING	O.D.
	GPI	Deflection in Inches	Inches	O.D. Inches	Size (5 grains)	Inches
470	8.8	0.470	31	9/32	BAR6	0.277
390	9.7	0.390	31.5	9/32	BAR7	0.281
320	10.6	0.320	32	9/32	BAR7	0.287







## 4MM CARBON INJEXION™

Carbon Injexion brings the bone-splitting power of Easton's Made in USA, proprietary C2 carbon arrow processes to the unstoppable penetration capabilities of 4MM micro diameter.

- 4MM ultra-micro diameter carbon fiber construction
- Pre-installed 4MM (G) Deep Six nocks
- 4MM (G) Deep Six™ threaded HIT steel inserts
- Straightness:  $\pm .003$ "

For use with Deep Six™ broadheads & field points

### INCLUDED



4MM (G) Deep Six™ Steel HIT Insert  
(20 grains)



4MM (G) Deep Six™ Nock  
(9 grains)

### SOLD SEPARATELY



Deep Six™ Steel Field Points  
(100-125 grains)

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	DEEP SIX FIELD POINT	O.D.
	GPI	Deflection in Inches	Inches	100/125 grains	Inches
480	8.3	0.480	31.25	DP-4	0.231
400	8.9	0.500	31.75	DP-5	0.236
330	10.2	0.330	32.25	DP-5	0.244

### NEW SIZE

280	11.2	0.280	32.5	DP-6	0.252
-----	------	-------	------	------	-------





5MM AXIS™

Heart-stopping penetration.  
The hands-down proven micro-diameter  
all-carbon arrow.

- 5mm micro-diameter carbon-composite fibers
- Pre-installed 5mm (X) nocks
- 5mm (X) HIT 8-32 inserts
- Straightness ±.003"

INCLUDED



5mm (X) HIT® Insert  
(16 grains)



5mm (X) Nock™  
(9 grains)

SOLD SEPARATELY



8-32 Multi Point  
(75, 85, 100, & 125 grains)



8-32 RPS Point  
(50, 60, 70, 80, 90, 100, 110, & 125 grains)



Deep Six™ Steel Field Points  
(100-125 grains)



5mm (X) Deep Six™ Steel RPS Insert  
(25 grains)



5mm Brass X HIT® Break-Off 8-32 Insert  
(Adjustable to 75-50 grains)

*NEW* Axis Match Grade  
±.001 straightness  
now available.

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	RPS POINT	BROADHEAD ADAPTER RING	O.D.
	GPI	Deflection in Inches	Inches	O.D. Inches	Size (5 grains)	Inches
700	6.1	0.700	31.5	17/64	BAR3	0.245
600	7.2	0.600	30.5	17/64	BAR3	0.253
500	8.1	0.500	31	17/64	BAR3	0.258
400	9.0	0.400	31.5	17/64	BAR4	0.264
340	9.5	0.340	32	9/32	BAR5	0.267
300	10.7	0.300	32.5	9/32	BAR6	0.275
260	11.5	0.260	34*	9/32	BAR6	0.280

*\*Fletched six-pack arrows are 32" max stock length.*

5MM AXIS TRADITIONAL™

Axis Traditional has the appeal of the original  
1922 Doug Easton wood shafting. Get the look of  
natural cedar wood grain.

- 5mm micro-diameter carbon-composite fibers
- Pre-installed 5mm (X) nocks
- 5mm (X) HIT 8-32 inserts
- Straightness ±.003"
- Wood graphic finish

INCLUDED



5mm (X) HIT® Insert  
(16 grains)



5mm (X) Nock™  
(9 grains)

SOLD SEPARATELY



8-32 Multi Point  
(75, 85, 100, & 125 grains)



8-32 RPS Point  
(50, 60, 70, 80, 90, 100, 110, & 125 grains)



5mm Brass X HIT® Break-Off 8-32 Insert  
(Adjustable to 75-50 grains)

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	RPS POINT	BROADHEAD ADAPTER RING	O.D.
	GPI	Deflection in Inches	Inches	O.D. Inches	Size (5 grains)	Inches
600	7.9	0.600	30.5	17/64	BAR3	0.253
500	8.9	0.500	31	17/64	BAR3	0.261
400	9.8	0.400	31.5	9/32	BAR4	0.267
340	10.3	0.340	32	9/32	BAR5	0.270
300	11.4	0.300	32.5	9/32	BAR5	0.278







# CARBON AXIS™ UNDER ARMOUR®

## 6MM AXIS™ UNDER ARMOUR™


A favorite choice for serious bowhunters looking for deep-penetrating big game performance.

- 6MM reduced-diameter high-strength carbon fibers
- Pre-installed 6MM (H) nocks
- 6MM (H) ST RPS 8-32 inserts
- Straightness:  $\pm .003"$

### INCLUDED



6MM (H) ST RPS™ Insert  
(18 grains)



6MM (H) Nock™  
(9 grains)

### SOLD SEPARATELY



8-32 Multi Point  
(75, 85, 100, & 125 grains)



8-32 RPS Point  
(50, 60, 70, 80, 90, 100, 110, & 125 grains)



6MM Brass H Break-Off 8-32 Insert  
(Adjustable to 75-50 grains)

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	RPS POINT	BROADHEAD ADAPTER RING	O.D.
	GPI	Deflection in Inches	Inches	O.D. Inches	Size (5 grains)	Inches
500	7.3	0.500	30.75	9/32	BAR6	0.276
400	8.8	0.400	31.25	9/32	BAR7	0.283
340	9.6	0.340	31.75	9/32	BAR7	0.287
300	10.2	0.300	32.25	9/32	BAR7	0.291

UNDER ARMOUR is a trademark of Under Armour, Inc.



6MM BLOODLINE™

Vital-driving penetration and lethal-velocity.

- 6MM reduced-diameter lightweight high-strength carbon
- 6MM (H) ST RPS 8-32 inserts
- Pre-installed 6MM (H) nocks
- Straightness: ± .003"

INCLUDED



6MM (H) ST RPS™ 8-32 Insert  
(18 grains)



6MM (H) Nock™  
(9 grains)

SOLD SEPARATELY



8-32 Multi Point  
(75, 85, 100, & 125 grains)



8-32 RPS Point  
(50, 60, 70, 80, 90, 100, 110, & 125 grains)



6MM Brass H Break-Off 8-32 Insert  
(Adjustable to 75-50 grains)

NEW



Bloodline F.O.C. comes in sizes: 240, 330, and 400 with brass inserts included.

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	RPS POINT	BROADHEAD ADAPTER RING	O.D.
	GPI	Deflection in Inches	Inches	O.D. Inches	Size (5 grains)	Inches
480	6.8	0.480	29.5	9/32	BAR7	0.275
400	7.7	0.400	31	9/32	BAR7	0.280
330	8.7	0.330	31.5	9/32	BAR7	0.285
240	9.4	0.240	32	9/32	BAR7	0.287

6MM HEXX™

Flat-shooting carbon.

- 6MM reduced-diameter ultra lightweight high-strength carbon
- Pre-installed 6MM (H) nocks
- MicroLite™ 6MM (H) 8-32 inserts
- Straightness: ± .001

The Da' Torch model is available in 2018 while supplies last.

INCLUDED



6MM (H) MICROLITE™ 8-32 Insert  
(9 grains)



6MM (H) Nock™  
(9 grains)

SOLD SEPARATELY



HP™ Point



8-32 Multi Point  
(75, 85, 100, & 125 grains)



8-32 RPS Point  
(50, 60, 70, 80, 90, 100, 110, & 125 grains)



6MM Brass H Break-Off 8-32 Insert  
(Adjustable to 75 - 50 grains)



6MM (H) ST RPS™ 8-32 Insert  
(18 grains)

NEW



Hexx F.O.C. comes in sizes: 260, 330, and 400 with brass inserts included.

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	RPS POINT	BROADHEAD ADAPTER RING	O.D.
	GPI	Deflection in Inches	Inches	O.D. Inches	Size (5 grains)	Inches
480	6.3	0.480	29.5	9/32	BAR5	0.271
400	7.2	0.400	31	9/32	BAR6	0.276
330	7.9	0.330	31.5	9/32	BAR6	0.280
260	9.3	0.260	32	9/32	BAR 7	0.288





6MM ION™

Hard-hitting Carbon ION delivers serious performance for a shorter draw shooter.

- 6MM reduced-diameter high-strength carbon fibers
- Pre-installed 6MM (H) nocks
- 6MM (H) ST RPS 8-32 inserts
- Straightness: ± .003"

INCLUDED



6MM (H) ST RPS™ 8-32 Insert  
(18 grains)



6MM (H) Nock™  
(9 grains)

SOLD SEPARATELY



HP™ Point  
(80-100 grains)



8-32 Multi Point  
(75, 85, 100, & 125 grains)



8-32 RPS Point  
(50, 60, 70, 80, 90, 100, 110, & 125 grains)

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	RPS POINT	BROADHEAD ADAPTER RING	O.D.
	GPI	Deflection in Inches	Inches	O.D. Inches	Size (5 grains)	Inches
600	6.4	0.600	30.5	9/32	BAR7	0.269
500	7.3	0.500	30.75	9/32	BAR7	0.276

6MM AFTERMATH™

Small diameter penetration.  
Carbon fiber durability.

- 6MM reduced-diameter high-strength carbon fibers
- Pre-installed 6MM (H) nocks
- 6MM (H) ST RPS 8-32 inserts
- Straightness: ± .005"

INCLUDED



6MM (H) ST RPS™ 8-32 Insert  
(18 grains)



6MM (H) Nock™  
(9 grains)

SOLD SEPARATELY



8-32 Multi Point  
(75, 85, 100, & 125 grains)



8-32 RPS Point  
(50, 60, 70, 80, 90, 100, 110, & 125 grains)

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	RPS POINT	BROADHEAD ADAPTER RING	O.D.
	GPI	Deflection in Inches	Inches	O.D. Inches	Size (5 grains)	Inches
500	7.3	0.500	30.75	9/32	BAR6	0.285
400	8.8	0.400	31.25	9/32	BAR7	0.246
340	9.6	0.340	31.75	9/32	BAR7	0.295
300	10.2	0.300	32.25	9/32	BAR7	0.291





## 6.5MM BOWFIRE™

Killer looks. Killer performance.

- 6.5MM standard-diameter
- Pre-installed 6.5MM (S) nock
- CB 8-32 inserts
- Detailed graphics— bright white finish
- Straightness: ±.003

### INCLUDED



CB 8-32 Insert  
(21 grains)



6.5 MM Super Nock™  
(13 grains)

### SOLD SEPARATELY



8-32 Multi Point  
(75, 85, 100, & 125 grains)



8-32 RPS Point  
(50, 60, 70, 80, 90, 100, 110, & 125 grains)

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	RPS POINT	BROADHEAD ADAPTER RING	O.D.
	GPI	Deflection in Inches	Inches	O.D. Inches	Size (5 grains)	Inches
480	7.5	0.480	29.5	9/32	BAR7	0.290
400	8.5	0.400	31	9/32	BAR8	0.295
330	9.6	0.330	31.5	9/32	BAR8	0.301

## 6.5MM FLATLINE™

FlatLine arrows are the clear choice for the bowhunter that needs a flat-shooting setup without sacrificing tight groups.

- 6.5MM standard-diameter multi-layer wrapped carbon fibers
- Pre-installed 6.5MM MicroLite™ Super nock
- MicroLite™ 8-32 inserts
- Straightness: ± .003"

### INCLUDED



MicroLite™ 8-32 Insert  
(9 grains)




6.5 MM MicroLite™ Super Nock  
(8 grains)

### SOLD SEPARATELY



8-32 Multi Point  
(75, 85, 100, & 125 grains)



8-32 RPS Point  
(50, 60, 70, 80, 90, 100, 110, & 125 grains)



6.5 MM (S) Nock™  
(13 grains)

SIZE	SHAFT WEIGHT	SPINE @ 28" SPAN	STOCK LENGTH	RPS POINT	BROADHEAD ADAPTER RING	O.D.
	GPI	Deflection in Inches	Inches	O.D. Inches	Size (5 grains)	Inches
500	6.5	0.500	31.5	9/32	BAR7	0.295
400	7.4	0.400	32	9/32	BAR7	0.293
340	8.2	0.340	32.5	9/32	BAR7	0.295





XX75 LEGACY™

Accuracy, easy tuning, and downrange energy with the traditional appeal of woodgrain.

- 7075-T9 alloy
- Conventional nocks
- Full-diameter taper nock swage
- RPS inserts included (fletched arrows come with both nocks and inserts included)
- Guaranteed straightness: ± .002"
- Tensile strength (psi): 96,000

INCLUDED



Conventional Nock



RPS™ Insert  
(See chart page 55)

SOLD SEPARATELY



8-32 Multi Point  
(75, 85, 100, & 125 grains)



8-32 RPS Point  
(50, 60, 70, 80, 90, 100, 110, & 125 grains)

SIZES	1916, 2016, 2018, 2117, 2216, 2219
Strength (PSI)	96,000
Nock System	Conventional

For full specifications, see page 55.

XX75 CAMO HUNTER™

A bowhunting classic for more than 40 years.

- Pre-installed UNI bushings
- Pre-installed Super nocks or X nock
- RPS inserts included
- Tensile strength (psi): 96,000
- 7075-T9 alloy
- Guaranteed straightness: ± .002"

INCLUDED WITH ALL SIZES EXCEPT 1816-1916



RPS Insert  
(See chart page 55)



Super UNI Bushing®  
(See chart page 55)



6.5 MM Super Nock®  
(13 grains)

INCLUDED WITH 1816 & 1916 ONLY



5 MM (X) Nock™  
(9 grains)



X UNI Bushing®  
(See chart page 55)

SOLD SEPARATELY



8-32 Multi Point  
(75, 85, 100, & 125 grains)



8-32 RPS Point  
(50, 60, 70, 80, 90, 100, 110, & 125 grains)

SIZES	1816, 1916, 2013, 2016, 2018, 2114, 2117, 2213, 2215, 2216, 2219, 2314, 2315, 2317, 2413
Strength (PSI)	96,000
Nock System	Super UNI and X nock

For full specifications, see page 55.



# XX75 GAMEGETTER™

## XX75 GAMEGETTER™

A proven tough performer.

- Pre-installed super nocks
- RPS inserts included
- 7075-T9 alloy
- Straightness: ± .003"
- Tensile strength (psi): 96,000

### INCLUDED



RPS™ Insert  
(See chart page 55)



6.5 MM Super Nock™  
(13 grains)



Composite Super UNI Bushing®  
(See chart page 55)

### SOLD SEPARATELY



8-32 Multi Point  
(75, 85, 100, & 125 grains)



8-32 RPS Point  
(50, 60, 70, 80, 90, 100, 110, & 125 grains)

SIZES	500, 400, 340, 300
Alloy Strength (PSI)	96,000
Nock System	Super UNI

For full specifications, see page 55.

# FMJ CROSSBOW™

## FMJ CROSSBOW™

Pure, devastating knockdown power.

- RPS inserts
- Brass bolt inserts available
- High-strength carbon core with 7075 alloy metal jacket
- Easy target pull
- Straightness: ± .003"
- Factory installed insert and nocks

### COMPONENTS



FMJ Brass Bolt Insert  
(120 Grains)



FMJ Bolt HP Insert  
(40 Grains)



11-32 Multi Point  
(85, 100, 125 grains)



Flatback Nock  
(9 Grains)



Halfmoon Nock  
(11 Grains)

LENGTH (inches)	SHAFT WEIGHT (GPI)	VANE WEIGHT	O.D.
20	13.7	10 grains/inch	0.344
22	13.7	10 grains/inch	0.344



**BOLT BLOODLINE CROSSBOW™**

Devastatingly effective. Absolutely deadly.

- High-strength carbon composite construction
- Inserts & nocks sold separately
- Lengths: 20 and 22 inches
- Factory installed insert and nocks

NEW LIGHTED TALON AND  
LIGHTED HALFMOON AVAILABLE

**NOCKOUT.**



**COMPONENTS**



HP Brass Bolt Insert  
100 grain



HP Bolt Insert  
(42 Grains)



Flatback Nock  
(9 Grains)



Halfmoon Nock  
(11 Grains)



Talon™ Nock  
(12 Grains)



11-32 Multi Point  
(85, 100, 125 grains)

LENGTH (inches)	SHAFT WEIGHT (GPI)	VANE WEIGHT	O.D.
20	10.5	10 grains/inch	0.344
22	10.5	10 grains/inch	0.344

**BOLT MAGNUM CROSSBOW™**

Accuracy and knockdown power to maximize  
your success.

- Hard-anodized finish
- Inserts & nocks sold separately
- 2219 size
- 7075-T9 aluminum alloy
- Lengths: 20 and 22 inches
- Tensile strength (psi): 96,000
- Factory installed insert and nocks

**INCLUDED**



RPS™ Insert  
(See chart page 55)



Halfmoon Nock  
(11 Grains)



Flatback Nock  
(9 Grains)

**COMPONENTS**



RPS Insert  
(See chart page 55)



Flatback Nock  
(9 Grains)



Halfmoon Nock  
(11 Grains)



Talon™ Nock  
(12 Grains)



11-32 Multi Point  
(85, 100, 125 grains)

LENGTH (inches)	BOLT SIZE	SHAFT WEIGHT (GPI)	VANE WEIGHT
20	2219	13.8	8 grains/inch
22	2219	13.8	8 grains/inch







**FMJ BOWFISHING™**

Highly advanced dual-material construction.

- Mayhem™ double-barbed steel point with patent-pending heat-treated Cyclone® tip
- Dual material construction—full metal jacketed fiberglass
- Shaft-rotate barb release

*Mayhem is a registered trademark of AMS, LLC*

**INCLUDED**



AMS Mayhem™ Point with Cyclone Tip



Conventional Nock

LENGTH (shaft only)	32 inches
Weight (shaft only)	27.3 grains-per-inch
Total assembled weight	1340 grains


**H<sub>2</sub>O BUBBA BUOY™**

High strength white fiberglass.

- High-visibility bright white fiberglass shaft
- AMS Safety Slide® installed
- Chaos® double-barbed steel point
- Tip-release barbs
- Patent-pending heat-treated Cyclone® tip

*Cyclone & Chaos AMS Safety Slide are registered trademarks of AMS, LLC*

**INCLUDED**

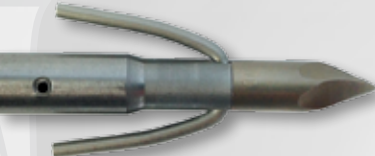

AMS Chaos® point with Cyclone tip



Conventional Nock

LENGTH (shaft only)	32 inches
Weight (shaft only)	37.9 grains-per-inch
Total assembled weight	1540 grains



HUNTING STABILIZERS

**CONTOUR™ HUNTER** Proven Tri-Mod carbon technology to tame vibration while balancing the bow for better aim and shot execution. The go-to choice for both bowhunters and bowhunter limited class competitors, Contour Hunter is the most advanced stabilizer we've ever developed for the modern bowhunter. Available in Black, Realtree® Max 1, and Realtree® Xtra. Weights included.

*Realtree Max1 and Realtree Xtra are trademarks of Jordan Outdoor Enterprises, Ltd.*



CONTOUR HUNTER		
Size	8 in-21 cm	11 in-28 cm
Ounces	2.3	2.7
Grams	65	76

**BUCKSHOT™ SERIES** The all-new Easton Buckshot series hunting stabilizers provide a powerful advantage for bowhunters. Packed with Easton's vibration-and noise-killing Deadblow™ technology, Buckshot™ features the correct stud length to engage accessories like bow slings and are Easton Quick-Detatch system compatible and come in a variety of solid and camo options.



Buckshot XL

- 8-inch Buckshot XL—greatest vibration damping and stabilizer action for longer distance shots or heavier bows. Features two full stages of Deadblow damping system elements • Colors: Black, Real Tree Xtra, coyote brown


*Realtree Xtra is a trademark of Jordan Outdoor Enterprises, Ltd.*



Buckshot Standard

- 5.5-inch Buckshot standard provides a lighter mass option for all-around performance. A single-stage Deadblow system provides great feel and high performance • Colors: Black, Real Tree Xtra, coyote brown

*Realtree Xtra is a trademark of Jordan Outdoor Enterprises, Ltd.*



All Buckshot models feature Easton's Deadblow™ noise-killing technology.




Buckshot Micro

- 4-inch Buckshot Micro provides Easton's unmatched vibration killing Deadblow technology in a small but powerful unibody package • Colors: Black, RealTree Xtra

*Realtree Xtra is a trademark of Jordan Outdoor Enterprises, Ltd.*

BUCKSHOT Series			
Size	8 in - 20 cm	5.5 in - 14 cm	4.5 in - 11.5 cm
Ounces	7.1	4.7	4.5
Grams	210	133	128



COMPONENTS

MOUNTS

**FIXED V-BAR™ WITH BOLT**

- Works with all Easton stabilizer systems
- Black hard-anodize finish
- 35° flat and 35° X 17° down-angle models
- 5/16" stainless-steel connector bolt— included



**ADJUSTABLE V-BAR™ WITH BOLT**

- Infinite adjustability
- Machined gears in joint for solid lock-down
- Suitable for compound or recurve bows
- Stainless steel eye bolt included




**ADJUSTABLE SIDE ROD ADAPTER**

- Infinite adjustability
- Machined gears in joint for solid lock-down
- Stainless steel eye bolt included



**CONTOUR AND Z-FLEX™ V-BAR CONNECTOR BOLT**

- Cleanly interfaces V-bars to extenders or bows
- Flush, nested fit for Contour or Z-Flex rods
- Lightweight aluminum alloy, hard anodized finish
- Thru-hole for wrench lock-down

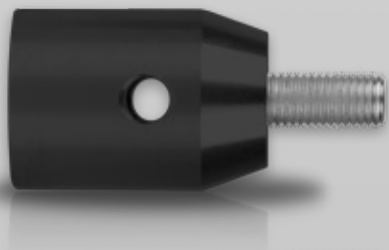


**QUICK DISCONNECT MOUNT**

- Stainless steel
- 7075 alloy
- Precision design
- Zero and 10 degree drop models available




VARI-WEIGHTS



ORIGINAL VARI-WEIGHTS 1/4-20 THREAD

	Ounces	Grams
Module	1.5	43
1/2 Module	0.75	21
Cap	1.5	43

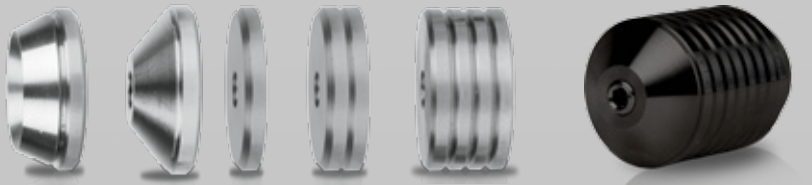

FLAT VARI-WEIGHTS 5/16-24 THREAD

	Ounces	Grams
Contour Base	2.0	57
Z Flex Base	2.0	57
1 Oz.	1.0	28.5
2 Oz.	2.0	57
4 Oz.	4.0	114

\*available in black



# TOOLS & SUPPLIES

## QUICKBOND™ INSERT ADHESIVE

- Easy to identify orange color
- Impact resistant
- Ready to shoot in 15-30 minutes
- Sizes: 0.5 FL oz. and 1.0 FL oz.
- HIT approved



## QUICKBOND™ VANE ADHESIVE

- Ultimate strength
- Bonds in seconds
- Primer Pen compatible
- Sizes: 0.5 FL oz. and 1.0 FL oz.



## FASTSET™ VANE GEL

- Sizes: 3 gram and 9 gram



## 24-HOUR INSERT EPOXY SYRINGE

- Provides a permanent bond
- Flexible, non-brittle formula



## UNIVERSAL ARCHERY ADHESIVE

- Provides a permanent bond
- Flexible, non-brittle formula
- For vanes, nocks, and inserts
- Enough for 1 dozen arrows
- Not HIT approved



## 3-STEP BOWSTRING MAINTENANCE KIT

- String Cleaner—removes dirt, wax & contaminants from bowstring
- Bowstring Revitalizer—restores color & penetrates to the core of the string for reduced friction and maximum shot life
- Full Synthetic Bowstring Wax—protects longer & better than conventional waxes



## CONVENTIONAL BOWSTRING WAX

- Protects bowstring from wind and weather
- Specially formulated for modern bowstring materials



## HOT MELT ADHESIVE

- Low temperature
- 3" x 1/2" stick
- Available in 10" shop stick



## VC-3® THREAD LOCKER

- Unique reusable formula.
- Apply to broadheads, practice points, & bow accessories for solid mounting and reduced vibration

VC-3 is a registered trademark of ND Industries, Inc.



## QUICKBOND™ VANE PRIMER PEN

- Compatible with all vane adhesives
- Improves bond strength & reduces drying time
- Improves adhesion for hard-to-stick vanes



## FLETCH-TITE® PLATINUM

- Size: 22-gram tube

Fletch-Tite® is a registered trademark of Bohning Company LTD



## FULL-SYNTHETIC ARROW LUBE

- Full-synthetic formula makes for easy arrow extraction
- Scent free, easy to apply
- Suitable for all types of arrows
- Most advanced arrow lube ever created
- Quiver-mount neoprene sleeve included



## WEDGE ARROW PULLER

- Proprietary compound for maximum arrow grip
- Internal-molded sides for improved wet-weather pulling
- Ergonomic wedge shape for comfortable fit



## PUCK ARROW PULLER

- Proprietary high-grip compound for maximum arrow grip
- Flat puck design for maximum grip leverage
- Best for tight single spot groups



## PRO HEX FOLD UP SET - STANDARD

- Standard Sizes: 3/16, 5/32, 9/64, 1/8, 7/64, 3/32, 5/64, 1/16, .050



## PRO HEX FOLD UP SET - XL

- XL Sizes: 1/4, 7/32, 3/16, 5/32, 9/64, 1/8, 7/64, 3/32, 5/64



## PRO HEX FOLD UP SET METRIC/STANDARD COMBO

- Sizes: 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16
- Metric: 1.5, 2.5, 3.0, and 1/8" flat blade screwdriver



## PRO HEX STUBBY 10 PIECE "L" WRENCH SET - XL

- Short arm design for reaching into tight fitting screws
- Perfect for working around sights & rests
- XL Sizes: 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, 1/4



## PRO HEX LIMB MASTER ALLEN WRENCHES

- Long arm hex wrench installed in comfortable molded rubber handle
- Perfect for adjusting limb bolts
- Sold individually in sizes: 7/32, 3/16, 1/4





# TOOLS & SUPPLIES

## PRO ARCHERY NEEDLE-NOSE PLIERS

- A must have for any serious bow mechanic
- Rubber-coated handle
- Needle-nose plier design with archery specific features for D-loop stretching and hot-melt point installation



## ELITE NOCK AND D-LOOP PLIERS

- Convenient and versatile archery tool
- Patented dual-jaw design
- Maximizes mechanical advantage for tightest possible D-loops
- Six tools in one



## UNIVERSAL NOCK TOOL

- Handy design allows for installation and removal of all nock sizes
- Includes a threaded shank for easy removal of broken nocks



## BROADHEAD WRENCH

- For safe installation & removal of broadheads from arrows

## BCY® #24 D-LOOP ROPE

- The professionals' choice and #1 choice of archers worldwide
- Stiff-braided POLY fibers
- Good, consistent burn
- Available in 1m lengths and 50ft spools



## BCY NOCK & PEEP SERVING

- .020" nylon thread perfect for tying nock sets and peep-sights
- Includes 1m red thread & 1m black thread



## BCY POLYGRIP CENTER SERVING THREAD

- .020" polyester thread perfect for center serving
- 75-yard spool



## ANGEL MAJESTY SERVING

- Two sizes .018 and .021.
- Highest quality serving available
- Greatest dimensional stability
- Extremely long wearing
- Made in Japan
- .018 –100 meters/109 yds. per spool
- .021 –80 meters/87 yds. per spool



ASB Majesty is a trademark of Angel Co., Ltd.

## L BOWSQUARE (COMPOUND) T BOWSQUARE (RECURVE)

- Lightweight, strong aluminum
- Precision laser-etched rule
- Critical for precise bow tuning & set up



## BOW STRINGER

- Molded rubber-cupped stringer recommended for stringing target recurve bows.
- Makes strining safe and easy



## 9-PIECE ARROW PREP TOOL KIT

- Innovative kit cleans and abrades the interior shaft surface for proper point adhesion and maximum bond strength
- 9-piece kit fits all sizes of arrow shafts from 4MM to max 27/64" diameters



## ARCHERY ESSENTIALS™ 12-PIECE PRO SHOP TOOL KIT, 8-PIECE VALUE PACK, AND 6-PIECE CROSSBOW ESSENTIALS KIT

- Kit items save 30% versus items sold separately.
- Both kits include a zippered Case Cube that comes with peel-off hook and loop panel to attach to bow cases with fleece-lined interiors.

### 12 and 8 Piece Kits Include:

- Extra Large Folding Allen Wrench Set
- Nock Installation & Removal Tool
- Wedge Arrow Puller
- Zippered Case Cube
- Bowstring Wax
- Serving Thread
- D-Loop Rope
- Broadhead Wrench

### 12-Piece Kit Adds:

- D-Loop Pliers
- Bow Square- L Model
- Small Folding Allen Wrench Set
- Arrow Prep Tool Kit

### 6-Piece Crossbow Kit includes:

- Small Folding Allen Wrench Set
- Zippered Cube Case
- Rail Lube Wax
- Wedge Arrow Puller
- Broadhead Wrench
- Scope Lens Cleaner Cloth

12-Piece Pro



8-Piece Value



6-Piece Crossbow



\* BCY is a trademark of BCY Bowstring.



VANES & FEATHERS

BTV™ CROSSBOW VANES

- Height and profile designed specifically for high-powered crossbows
- Stiffening ridge cuts flutter at high speeds
- Increases accuracy and tightens broadhead groups



Size	Length (in)	Height (in)	Weight (grain)	Colors	Packaging
300	3.00	.500	10	<div><div>Bright Green</div><div>Fire Orange</div><div>White</div><div>Yellow</div><div>Red</div></div>	Clamshell or 100-count bag

All weights are within ±0.5 grain.

DIAMOND VANES®



Size	Length (in)	Height (in)	Weight (grain)	Colors	Packaging
175	1.750	.375	3	<div><div>Bright Green</div><div>Fire Orange</div><div>White</div><div>Sunset Gold</div><div>Yellow</div></div>	Clamshell or 100-count bag
235	2.375	.375	4	<div><div>Black</div><div>Hot Pink</div></div>	
280	2.875	.500	6		
380	3.875	.500	8		

All weights are within ±0.5 grain.

XPV™ VANES *High performance for broadhead use*



Size	Length (in)	Height (in)	Weight (grain)	Colors	Packaging
200	2.00	.568	6	<div><div>Fire Orange</div><div>Hot Pink</div><div>Bright Green</div><div>Blue</div><div>Red</div><div>Yellow</div><div>White</div><div>Indigo</div></div>	100-count bag 500-count box

All weights are within ±0.5 grain.


TITE FLIGHT™ VANES *Special rib adds stiffness to cut in-flight flutter and noise*



Size	Length (in)	Height (in)	Weight (grains)	Colors	Packaging
175	1.750	.375	3	<div><div>Hot Pink</div><div>Black</div></div>	100-count bag
200	2.000	.330	4	<div><div>White</div><div>Fire Orange</div><div>Bright Green</div><div>Yellow</div></div>	

All weights are within ±0.5 grain.

FEATHERS



Size	Length (in)	Height (in)	Weight (grain)	Colors	Packaging
3.0 R	3.000	.400	1.3	<div><div>Yellow FL</div><div>Brown</div></div>	Clamshell or 100-count bag
4.0 R	4.000	.550	2.8	<div><div>Chartreuse</div><div>Yellow</div><div>White</div></div>	
5.0 R	5.000	.600	4.5	<div><div>Red</div><div>Gray</div><div>Black</div><div>Blue</div><div>Green</div><div>Orange</div></div>	

All weights are within ±0.5 grain.

SPIN WING VANES™



Colors ● Black ○ White ● Blue ● Red ● Yellow

1.75-inch vanes available in right or left • Packaging - 50-count bag


Spin Wing Vane is a trademark of Range-O-Matic Archery Company.

EZ FLETCH™ FLETCHING TOOL



**(A) SMALL DIAMETER MULTI-KIT**

- Includes 2" Mini Helical tool and extra set of straight offset arms
- For all arrow materials and diameters smaller than 20/64"




**(B) SMALL DIAMETER 2" MINI HELICAL TOOL**

- Includes 2" Mini Helical tool
- For all arrow materials and diameters smaller than 20/64"



**(C) LARGE DIAMETER MULTI-KIT**

- Includes 5" Straight-Offset Jig and extra set of 2" Mini-Helical arms
- For all arrow materials and diameters larger than 20/64"



**(D) LARGE DIAMETER 5" STRAIGHT OFF-SET TOOL**

- Includes 5" Straight-Offset Jig
- For all arrow materials and diameters larger than 20/64"

EZ Fletch is a trademark of Rim Country, Inc.



# COMPETITION QUIVERS

## ELITE FIELD QUIVER

- European-inspired luxurious design
- Technical sport-fabric construction
- Infinitely adjustable, yet sturdy, air-lite quiver belt with quick-release style buckle for secure operation and positive engagement
- Semi-rigid rear-facing compression-molded arrow body eliminates need for separate arrow tubes
- Fleece-lined interior and removable arrow dividers for quiet and customized arrow management
- Integrated bow-square slot and dual accessory attachment rings
- Matching quiver belt included—release pouch sold separately
- Colors: Red, Blue, Grey, Carbon Black, and White



## ELITE QUIVER BELT

- Sizes: One size fits most
- Innovative hook-and-loop adjustment
- Quick-release style buckle
- Included with Elite quivers—also sold separately
- Colors: Red, Blue, Grey, Carbon Black, and White




## ELITE RELEASE POUCH

- Sizes: One size fits most



## ELITE HIP QUIVER\*\*

- European-inspired luxurious design
- Technical sport-fabric construction
- Infinitely adjustable, yet sturdy, air-lite quiver belt with quick-release style buckle for secure operation and positive engagement
- Semi-rigid front-facing compression-molded arrow body eliminates need for separate arrow tubes
- Fleece-lined interior and removable arrow dividers for quiet and customized arrow management
- Directional locking snap removable oversized upper magnetic-closure pocket or accessory clip
- Integrated bow-square slot and dual accessory attachment rings
- Matching quiver belt included- release pouch sold separately
- Colors: Red, Blue, Grey, Carbon Black, and White



Accessory Clip (included)



Removable Pocket (included)



Release Pouch (sold separately)

## DELUXE FIELD QUIVER

- High-denier woven fabric construction
- Semi-rigid rear-facing compression-molded arrow body eliminates the need for separate arrow tubes
- Fleece-lined interior and removable arrow dividers for quiet and customized arrow management
- Integrated bow-square slot and dual accessory attachment rings
- Release pouch and belt sold separately
- Colors: NEW Flo-Green, NEW Teal, Silver, Green, Red, Blue, Purple, and Pink



## DELUXE QUIVER BELT

- Sizes: One size fits most
- Innovative hook-and-loop adjustment
- Easy On/Off T-Buckle connection



## DELUXE RELEASE POUCH

- Sizes: One size fits most



## DELUXE HIP QUIVER

- High-denier woven fabric construction
- Semi-rigid front-facing compression-molded arrow body eliminates the need for separate arrow tubes
- Fleece-lined interior and removable arrow dividers for quiet and customized arrow management
- Attached upper magnetic-closure pocket
- Integrated bow-square slot and dual accessory attachment rings
- Release pouch and belt sold separately
- Colors: NEW Flo-Green, NEW Teal, Silver, Green, Red, Blue, Purple, and Pink





# RECREATIONAL QUIVERS

## FLIPSIDE™ 4-TUBE HIP QUIVER

- Innovative design fits both right and left-hand shooters
- Includes one-size-fits-most adjustable quiver belt
- Rugged high-denier POLY construction
- Reversible hook-and-loop upper and lower pockets for wear on right or left side
- Durable injection-molded arrow separator tubes
- Integrated T-square and pen/pencil slots
- Multiple accessory attachment rings
- Colors: Flo-Green, Teal, Lost Camo XD, Black, Red, Blue, Pink, Purple, Realtree Edge® and Realtree Xtra®



Lost Camo XD is a registered trademark of MCP IP LLC.  
Realtree Edge and Realtree Xtra are trademarks of Jordan Outdoor Enterprises, Ltd.



## FLIPSIDE™ 3-TUBE HIP QUIVER

- Innovative design fits both right and left-hand shooters
- Reversible hook-and-loop pocket for right/left side wear
- Rugged high-denier POLY construction
- Stainless steel belt clip attachment
- Integrated accessory attachment grommet
- Durable injection-molded arrow separator tubes
- Integrated T-square slot
- Colors: NEW Realtree Edge®, Flo-Green, Teal, Black, Red, Blue, Pink, Purple, Lost Camo XD, and Realtree Xtra®



Lost Camo XD is a registered trademark of MCP IP LLC.  
Realtree Edge and Realtree Xtra are trademarks of Jordan Outdoor Enterprises, Ltd.



## FLIPSIDE™ 2-TUBE HIP QUIVER

- Innovative design fits both right and left-hand shooters
- Rugged high-denier POLY construction
- Stainless steel belt clip attachment
- Durable injection-molded arrow separator tubes
- Colors: NEW Realtree Edge®, Flo-Green, Teal, Black, Red, Blue, Pink, Purple, Lost Camo XD and Realtree Xtra®



Lost Camo XD is a registered trademark of MCP IP LLC.  
Realtree Edge and Realtree Xtra are trademarks of Jordan Outdoor Enterprises, Ltd.



## REPLACEMENT FLIPSIDE ARROW TUBE



## REPLACEMENT BELT CLIP



## RANGELITE™ PINK HIP QUIVER

- Lightweight design
- Molded shank and arrow separator
- Easy-access pockets
- Top pocket for releases, pens or smart phones
- Available in right or left hand configurations
- Internal pocket dividers





# BOW CASES

## ELITE™ 4717 DOUBLE BOW CASE

- Two full-size target bow compatible
- Inside dimensions 46"x16"
- Case-cube compatible double-fleece main compartments
- Double or single bow with opposite side clothing storage
- Dense EVA foam 360° exterior padding
- Re-positionable hook-and-loop bow anchor system
- Six interior and exterior accessory pockets
- Compatible with Easton arrow tote
- The best YKK® reverse coil double zipper pulls
- Shoulder strap included
- Available in Pro Tour Black/Grey/Orange



## WORLD CUP™ 4517

- Accommodates one bow up to 45" in overall length
- Overall dimensions 45" long x 17" high
- 9 interior and exterior accessory pockets with dedicated compartments for stabilizers and arrow storage
- Case-cube compatible fleece main compartment
- Compatible with Easton arrow totes and Deluxe 33" and 36" arrow boxes
- Colors coordinate with the Easton Deluxe Hip and Field quivers
- Dense 360 degree exterior padding and corner cam padding
- Re-positionable hook-and-loop bow anchor system
- Padded carry handle
- Shoulder strap included
- Colors: Flo-Green, Teal, Red, Black, and Blue



## WORKHORSE™ 4118

- Accommodates one bow up to 41" in overall length
- Overall dimensions 41" long x 18" high
- Extra-wide 5" side depth to accommodate bow-mounted quivers; maximum inside storage
- 8 interior and exterior accessory pockets with dedicated arrow box compartments
- Case-cube compatible fleece main compartment
- Compatible with Easton arrow totes and Deluxe 33" and 36" arrow boxes
- Re-positionable hook-and-loop bow anchor system
- Dense 360° exterior padding
- Shoulder strap included
- Colors: Teal/Grey, Realtree® Xtra, Realtree® Edge, Olive/Grey, and Lost® Camo XD



**NEW**



Lost Camo XD is a registered trademark of MCP IP LLC.  
Realtree Edge and Realtree Xtra are trademarks of Jordan Outdoor Enterprises, Ltd.

## DELUXE 4517 LADIES BOWCASE

- Seven generously sized interior and exterior pockets for complete storage of bows, arrows, accessories, and range gear
- Compatible with all Easton arrow tote and arrow case models
- Premium oversized #10 zippers with easy-grab pulls
- Cavernous 3.5" case-cube compatible fleece-lined padded interior (case cubes sold separately)
- Fits most bows – interior dimensions 44" x 16"
- Movable bow-anchoring straps for rock-solid bow security
- 360° padding for complete bow protection
- Elastic arm band with adjustable cord locks
- Colors: Realtree® Max-1/Lavender



Realtree Max1 is a trademark of  
Jordan Outdoor Enterprises, Ltd.



## BOW-GO™ 4118

- Accommodates one bow up to 41" in overall length
- Overall dimensions 41" long x 18" high
- Extra-wide 5" side depth to accommodate bow mounted quivers and maximum inside storage
- 4 interior and exterior pockets with a dedicated arrow box compartment
- Compatible with Easton arrow totes and Deluxe 33" and 36" arrow boxes
- Colors: Olive/Grey, Lost® Camo XD, Flo Green/grey, Teal/Grey, Realtree® Xtra, Realtree Edge®



**NEW**



Lost Camo XD is a registered trademark of MCP IP LLC.  
Realtree Edge and Realtree Xtra are trademarks of Jordan Outdoor Enterprises, Ltd.



# CASES AND BACKPACKS

## GENESIS™ 4014

- Custom tailored for the Genesis compound bow
- Rugged high-denier POLY construction with thick interior padding
- Premium zippers with easy-grab pulls
- Integrated Easton arrow-tote attachment straps
- Exterior mesh accessory pocket
- Colors: Red, Blue, Lost® Camo, Pink, and Black



LOSTCAMO  
Lost Camo is a registered trademark of MCP IP LLC.

## MICRO FLATLINE™ 3618

- Accommodates one bow up to 36" in overall length
- Overall dimensions 36" long x 18" high
- Dedicated outer snap-lock mesh accessory pocket
- Premium zippers with easy-grab molded pulls
- Multi-colored front printing design
- Colors: Flo Green/Blue, Pink/Yellow, Black/Grey, Grey/Red, Realtree Xtra®, Realtree Edge® and Lost® Camo XD

REALTREE LOSTCAMO|XD

NEW

Lost Camo XD is a registered trademark of MCP IP LLC.  
Realtree Edge and Realtree Xtra are trademarks of Jordan Outdoor Enterprises, Ltd.



## CROSS-GO™ 4126 CROSSBOW CASE

- Modern designed crossbow case for maximum protection and gear storage needs
- Overall dimensions 41" long x 26" wide
- 360° padded soft sided case with 3 interior and exterior pockets with a dedicated arrow box compartment
- Compatible with Easton crossbow arrow case
- Colors: Olive/Grey



## ELITE 4716 & 4416 DOUBLE ROLLER BOW CASE

- Two full-size target bow compatible
- Three field-replaceable roller bearing wheels
- Available in two sizes (47"Lx16"Wx10"H) and (44"Lx16"Wx10"H) outside dimensions
- Double-walled protection - composite armor shield + foam 360° exterior padding
- Case-cube compatible double fleece main compartment
- Double seatbelt system to securely anchor bows
- Padded internal divider blanket for layered storage
- Five interior accessory pockets, adjustable padded walls
- Three expanding outside luggage compartments
- Four exterior accessory pockets
- The best YKK® reverse coil double zipper pulls
- Compatible with Easton arrow tote
- Airline Travel cover recommended (sold separately)
- Available in Pro Tour Black/Grey/Orange



## DELUXE 3915 & 3615 COMPOUND/RECURVE ROLLER BOW CASE

- Advanced wheeled compact travel case for compound/recurve bows
- Triple field-replaceable roller bearing wheels
- Double seatbelt system to securely anchor bows
- Three internal accessory pockets
- Available in two sizes (36"Lx15"Wx9"H) and (39"Lx15"Wx9"H)
- Compatible with the Easton Deluxe 33" & 36" arrow cases
- Case-cube compatible interior fleece hook-and-loop lining with seatbelt strap bow retention system
- Hybrid hard/soft shell 360° perimeter protection for maximum contents protection
- Airline travel cover recommended (sold separately)
- Color: Black/Orange



## DELUXE 4126 CROSSBOW CASE

- Modern designed crossbow case for maximum protection and gear storage needs
- Compatible with the Easton Deluxe molded crossbow arrow case
- Case-cube compatible interior fleece hook and loop lining with adjustable bow attachment straps
- Hybrid hard/soft shell 360° perimeter protection for maximum contents protection
- Compatible with both standard and reverse limb crossbows
- Includes one corner case cube pocket
- Inside dimensions 41" x 26"
- Color: Black/Orange





# CASES AND BACKPACKS

## CLUB XT™ RECURVE BACKPACK

- Affordable recurve backpack with a modern sophisticated design
- High-denier ballistic POLY fabric construction and fully adjustable shoulder harness
- Fits up to 25" recurve handles and long limbs
- Arrow tote included
- Colors: Teal, Flo-Green, Grey, Blue, Red, and Black



## DELUXE RECURVE BACKPACK

- Convertible design for either backpack or shoulder carry (shoulder strap included)
- Internal storage compartments for sight, stabilizers, arrows, limbs, tools and other accessories
- External side mesh pockets for tripod or water bottle storage
- Front-side zipper pocket for clothing or other items
- Front-side privacy mesh ID slot for business cards
- High-denier woven fabric construction
- Fits up to 27" recurve handles and long limbs
- Arrow tote included
- Compatible with universal rain cover (sold separately)



## UNIVERSAL RAIN COVER

- Compatible with Deluxe & Club XT recurve backpacks

NEW

## BOWSLICKER™

- Easy, secure carry with patented limb loops design
- Quick and quiet removal
- Keep cams and strings protected from brush
- Fits all compound bows, including parallel limbs, up to 36" axl-to-axle
- Color: Olive green



Officially Licensed Product  
Protected by US Patents:  
9,038,878 & 9,310,158



NEW

## CROSSBOW SLICKER™

- Fits crossbows from 15" to 30" axle-to-axle
- Rugged, weatherproof fabric
- Ultra-light—weighs less than 8 oz
- Color: Olive green



Officially Licensed Product  
Protected by US Patents:  
9,038,878 & 9,310,158



## TECH TRAVELER™ BACKPACK

- Durable 1680D ballistic nylon
- Heavy-duty construction for daily use—extreme travel rated
- TSA-friendly laptop storage allows for easy security checks
- Fleece-lined key, glasses, and passport storage pockets
- Nine internal pockets
- Four huge exterior pockets
- Perfect for the traveler and student
- Headphone/charging and cord port
- Color: Grey





# BOWCASE ACCESSORIES

## CASE CUBES BOW CASE ACCESSORY POCKETS

- Most efficient bow case accessory storage system ever created
- Durable 2.5" deep fabric construction with padded surrounds and clear mesh zippered closure
- Maximize your space by organizing gear in and around your bow inside your case
- Hook-and-loop attachment for customized fit and easy in-and out accessory storage



## ROLLER BOWCASE TRAVEL COVERS

- Custom tailored for specific roller bowcase models
- A must for airline-travel bowcase protection
- Compression-molded semi-rigid bottom
- Premium #10 zippers for maximum strength
- Double wide buckled straps for extra security
- ID card slot
- Water resistant



## BOW SLEEVE

- Durable 600D fleece-lined sleeve to protect bow from other gear
- Adjustable for up to 47" bows
- Fits inside all bowcases



## STABILIZER SYSTEM SLEEVE

- Durable 600D fleece-lined sleeve and pocket bag to store entire stabilizer system: main rods, side rods, V-bars, weights
- Length adjustable, protects other equipment in the same bow case
- Fits inside all Easton bowcases



## DELUXE MOLDED ARROW CASES

- Includes foam arrow dividers
- Holds arrows securely (with or without points)
- Four sizes:
  - Deluxe 36" (24-arrow) - outside dimensions (36" x 6.5" x 3")
  - Deluxe 33" (18-arrow) - outside dimensions (33" x 5" x 3")
  - Deluxe Crossbow (12-arrow) - outside dimensions (24" x 6.5" x 3")
  - Round Arrow Tate (12-arrow) - adjustable length



# SHOOTING ACCESSORIES

## STAY SHARP™ BROADHEAD CASE

- Patent-pending design ensures broadhead sharpness by supporting ferrules without contacting blades
- Hold six mechanical or fixed-blade broadheads
- Durable ABS body with snap-fit locking Polycarbonate end caps
- Compatible with most Deep-Six and standard 8-32 broadheads
- Dimensions: Approximately 5"W x 4"H x 2"D



## DELUXE ARM GUARDS

- Progressive designs molded from durable poly-carbonate material
- Durable elastic straps ensure a snug fit
- Available in oval and "dog" bone shapes
- Colors: Blue, Red, Yellow, and Smoke




## COMFORT FLEX ARM GUARD

- Elastic arm band with adjustable cord locks
- Flexible molded composite material
- One size fits all
- Colors: Black



## STIFF SLING

- Clean design
- Vibration reducing molded mount
- Stiff sling material holds its shape for quick access
- Colors: Black, Camo, Green, Pink, Blue, Red, and Orange

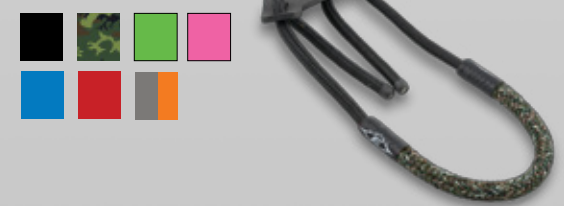

## CHEST PROTECTOR

- Unique comfort-fit design
- Breathable air-mesh construction
- Easy-adjust shoulder
- Sizes: Right and left-handed models: XS, S, M, L, XL and XXL
- Color: Black/White



NEW

## NEOPRENE WRIST SLING

- Durable, lightweight neoprene construction
- Easy-adjust strap





# BEGINNER ARCHERY


# TEES AND HATS

### BEGINNER BOW

The Easton beginner bow is the perfect set up to get you started shooting archery. Smooth shooting polymer platform and easy-to-handle draw length-to-draw-weight ratio, the 52" bow is ideal for beginners seeking correct form development and accuracy.

- Ambidextrous for right or left-handed archers
- Integrated sight channel
- Custom Dacron string
- Ambidextrous arrow rest and sight pin included
- High-strength glass/polymer limbs and advanced polymer riser
- Ideal beginner draw weight range 10-20 pounds
- Max 26" draw
- Made in USA
- Includes: bow, quiver, three arrows, sight, finger protector, and armguard

Kit colors: Black, Pink, and Realtree™ Xtra



### SCOUT 2™

- Durable fiberglass construction
- Over Nock – installed
- Sleeve Point – installed
- 26" or 28"



### VECTOR™ CARBON ARROWS

- Ideal for beginners looking for higher performance
- Durable wrapped carbon construction
- Nocks and 65-grain points installed—ready to shoot
- Shield-feather fletch
- Available in 1000 and 1400 spine sizes
- Available in 4-pack or 72-count case
- 28" length



### XX75™

- 7075 aerospace alloy
- Guaranteed straightness: ±.005
- Weight tolerance: ±2.5%
- Strength (psi): 90,000
- Size 1816
- Uses one-piece point and conventional nock
- Pre-cut to 28" with point installed



### BEGINNER FINGER TAB

- For right handed archers



### ARCHERY COMBO PACK

- High quality 600D fabric hip quiver
- Holds up to 12 arrows
- Integrated belt clip
- Three XX75® size 1816 high-strength 28" arrows
- Finger tab
- Polymer arm guard
- Fits right or left-handed archers
- Colors: Black and Pink



Introductory line of easy-to-use beginner archery products for the aspiring archer.




# POINTS, NOCKS, AND INSERTS



Deep Six is the field proven thread standard for ultra-micro diameter (4MM & 5MM) arrows. Low-friction, high kinetic energy density Deep Six provides the **DEEPEST PENETRATION** ever seen with any arrow/broadhead system.



**Deep Six™ Field Points**  
Fits G (4MM) & X (5MM) arrows with Deep Six thread inserts  
100 & 125 Grains / Dozen Pack



**Deep Six™ Steel G (4MM) HIT Insert**  
Fits G (4MM) diameter Carbon, A/C & FMJ Injexion arrows  
Uses Deep Six thread points  
20 Grains / Dozen Pack



**Deep Six™ Steel X (5MM) RPS® Insert**  
Fits X (5MM) diameter FMJ, AXIS & Deep Six XD arrows  
Uses Deep Six thread points  
25 Grains / Dozen Pack



**Deep Six™ (4MM) Nock**  
Fits G (4MM) diameter Carbon, A/C & FMJ Injexion arrows  
Dozen Pack / 100 ct bulk

## POINTS



**HP™ (6MM) Point**  
Fits H (6MM) diameter arrows  
Point Weight – 80 & 100 Grains  
Dozen Pack



**CB™ (6.5MM) Point**  
Fits S (6.5MM) diameter arrows  
Point Weight – 80 & 100 Grains  
Dozen Pack

## THREADED POINTS



**RPS™ Screw-in Point — Nickel-plated Hardened Steel**  
17/64" – 50, 60, 70, 80, 90, 100, 110 grains  
9/32" – 50, 60, 70, 80, 90, 100, 110 grains  
Dozen Clamshell



**Multi Point™**  
17/64" – 75, 85, 100 grains  
9/32" – 75, 85, 100 grains  
5/16" – 85, 100, 125 grains  
11/32" – 85, 100, 125 grains  
Dozen Clamshell  
1000-count Box

## UNI BUSHINGS



**G-UNI (4MM) Bushings°**  
Dozen Pack



**X-UNI™ (5MM)**  
Dozen Pack



**Super UNI Bushings°**  
Dozen Pack

## INSERTS



**RPS™ Insert**  
Dozen Pack and 100-count Bulk



**Brass X (5MM) HIT® Break-Off Insert**  
75 – 50 Grains



**X (5MM) HIT® Insert**  
16 grains  
Dozen Pack and 100 count Bulk



**ST™ (6MM) RPS Insert**  
18 grains  
Dozen Pack and 100-count Bulk



**H (6MM) Brass Insert**  
75 – 50 grains



**MicroLite™ H (6MM) Insert**  
9 Grains  
Dozen Pack



**CB™ (6.5MM) Insert**  
21 grains  
Dozen Pack and 100-count Bulk



**MicroLite™ S (6.5MM) Insert**  
9 grains  
Dozen Pack

## BOLT INSERTS



**Aluminum Bolt Insert**  
43 Grains  
Dozen Pack and 100 count Bulk



**Brass Bolt Insert**  
100 Grains  
Dozen Pack and 100 count Bulk

## INDEXABLE NOCKS



**G Nock™ (4MM) Precision-molded, Press-fit**  
Colors: black, white, green, orange, deep red, red  
Dozen Pack and 100-count Bulk  
(6 grains)



**H Nock™ (6MM)**  
Colors: black, white, blue, yellow, green, orange, deep red, pink  
Dozen Pack and 100-count Bulk  
(9 grains)



**MicroLite™ Super Nock® (6.5MM)**  
Colors: blaze, emerald, yellow, red, smoke  
Dozen Pack and 100-count Bulk  
(8 grains)



**Deep Six™ G (4MM) Nock**  
Colors: deep red and blue  
Dozen Pack and 100-count Bulk  
(6 grains)



**Super Nock® & S Nock™ (6.5MM)**  
Colors: orange, green, yellow  
Dozen Pack and 100-count Bulk  
(13 grains)




**X (5MM) Nock™**  
Colors: black, white, yellow, green, orange, blue, smoke  
Dozen Pack and 100-count Bulk  
(9 grains)



**3D Super Nock®, (6.5MM)**  
Colors: black, green, orange, white, crystal, lemon-lime, purple, red, and smoke  
Dozen Pack and 100-count Bulk  
(13 grains)

## CONVENTIONAL NOCKS



**Conventional Nock—Swaged Shafts**  
Colors: black, green, orange, white, blue, red  
Dozen Pack and 100-count Bulk

## CROSSBOW NOCKS



**Talon™ Crossbow Bolt Nocks**  
Colors: red  
Six Pack  
(12 grains)



**Halfmoon & Flatback Crossbow Bolt Nocks**  
Colors: red, orange, green, red  
Dozen Pack and 100-count Bulk  
Flatback (9 grains) Half Moon (11 grains)

## BROADHEAD ADAPTER RING (BAR)



(See arrow model pages for fitment) Use the BAR when required by broadhead design — fixed broadheads that utilize the face of the insert to support or hold the blades in place and mechanical broadheads that use the insert as a stop for the blades after opening require BAR's.  
Dozen Clamshell Pack

### FEATURES

For use with carbon and A/C arrows  
Excellent for micro diameter arrows  
Provides superior broadhead alignment  
Protects shafts from hard impacts and blade expansion

## V3™ Expandable Varmint Point

### FEATURES

Expandable action	Helps prevent lost arrows
Flies exactly like field points	Replaceable blades
Conventional thread or Deep Six	100 grains
	Patent pending



V3 – 8-32 Thread



V3 – Deep Six Thread



FMJ™ AND CARBON ARROW SELECTION CHART

COMPOUND BOW <small>BOW RATING TO 301-340 FPS</small>	YOUR ARROW LENGTH										RECURVE	Longbow
	23"	24"	25"	26"	27"	28"	29"	30"	31"	32"	BOW POUNDAGE	
BOW POUNDAGE												
22-26				700, 600	700, 600	600	600	600	500, 480, 460, 470	500, 480, 470, 460		38-43
27-31			700, 600	700, 600	600	600	600	500, 480, 460, 470	500, 480, 470, 460	400, 390		44-49
32-36		700, 600	700, 600	600	600	600	500, 480, 460, 470	500, 480, 470, 460	400, 390	400, 390	32-36	50-55
37-41	700, 600	700, 600	600	600	600	500, 480, 460, 470	500, 480, 470, 460	400, 390	400, 390	400, 390	37-41	56-61
42-46	700, 600	600	600	600	500, 480, 460, 470	500, 480, 470, 460	400, 390	400, 390	400, 390	340, 330, 320	42-46	62-67
47-51	600	600	600	500, 480, 460, 470	500, 480, 470, 460	400, 390	400, 390	400, 390	340, 330, 320	340, 330, 320, 300	47-51	68-73
52-56	600	600	500, 480, 460, 470	500, 480, 470, 460	400, 390	400, 390	400, 390	340, 330, 320	340, 330, 320, 300	330, 320, 300	52-56	74-79
57-61	600	500, 480, 460, 470	500, 480, 470, 460	400, 390	400, 390	400, 390	340, 330, 320	340, 330, 320, 300	330, 320, 300	300, 280, 260, 250, 240	57-61	80-85
62-66	500, 480, 460, 470	500, 480, 470, 460	400, 390	400, 390	400, 390	340, 330, 320	340, 330, 320, 300	330, 320, 300	300, 280, 260, 250, 240	260, 250, 240	62-66	
67-72	500, 480, 470, 460	400, 390	400, 390	400, 390	340, 330, 320	340, 330, 320, 300	330, 320, 300	300, 280, 260, 250, 240	260, 250, 240		67-72	
73-78	400, 390	400, 390	400, 390	340, 330, 320	340, 330, 320, 300	330, 320, 300	300, 280, 260, 250, 240	260, 250, 240			73-78	
79-84	400, 390	400, 390	340, 330, 320	340, 330, 320, 300	330, 320, 300	300, 280, 260, 250, 240	260, 250, 240					
Note: For fractional arrow lengths, round up or down to the closest column. Examples, if arrow length is 28.25" round down to the 28" column. If arrow length is 28.5" round up to the 29" column.												

ADJUSTING THE CHART TO YOUR BOW SET-UP

The Hunting Chart is based on a Bow Speed Rating of 301-340 FPS and 100-grain points. If your set-up is different, make the following adjustments to your bow weight.

Bow Speed Ratings:	
Up to 300 FPS	subtract 5 lbs of bow weight
301-340 FPS	no adjustment
341-350	add 5 lbs of bow weight
351 FPS or Higher	add 10 lbs of bow weight

Point Weights:	
75 grains	subtract 3 lbs of bow weight
100 grains	no adjustment
125 grains	add 3 lbs of bow weight
150 grains	add 6 lbs of bow weight

HUNTING ARROW SELECTION

COMPOUND BOW

- Determine your correct arrow length per diagram on next page.
- Determine correct peak bow weight (not holding weight) and draw length with the assistance of a qualified archery pro shop.
- Determine the ATA (Archery Trade Association) rating velocity of your bow.
- Factor variables to the “standard compound setup” to determine CALCULATED bow weight. For compounds the “standard setup” includes use of a release aid and a brace height greater than 6.5”. Deviations for the standard compound setup require factoring in EACH VARIABLE as follows:

A. Brace height lower than 6.5” - add 5 lbs to CALCULATED bow weight.

B. Finger release- add 5 lbs to CALCULATED bow weight.

Add the total of actual PEAK bow weight and all CALCULATED bow weight adjustments to determine final calculated weight. For example, with a 60 lb peak bow with a 6” brace height, calculated bow weight will be 60+5 for a calculated 65 lb bow weight. Now, in the “Calculated Peak Bow Weight” chart, select the column under the



ATA range for your specific bow and your point weight. Follow the column down to your CALCULATED bow weight. Then, follow the chart to the right until you reach the column with your correct arrow length, and note the group letter (A-M). This letter will represent the suggested arrow group for your selection.

RECURVE OR Longbow (Finger Release)

It is critical that the correct bow weight be used when determining the weight column to be used on the chart. Actual peak bow weight should be measured at your correct draw length. Easton recommends the use of a dedicated bow scale or the assistance of a qualified pro shop for this purpose. Use the Recurve or Longbow ACTUAL weight chart on the right side of the chart to select the column corresponding to your bow type and point weight. Follow the column down to your bow weight and then follow the row to the left to find your suggested arrow group.

The Shaft Size listing below each group letter represents your suggested arrow shaft size. Note that providing incorrect weight or length information, or incorrect variable calculation, may result in an incorrect shaft size selection.

DETERMINING ARROW LENGTH

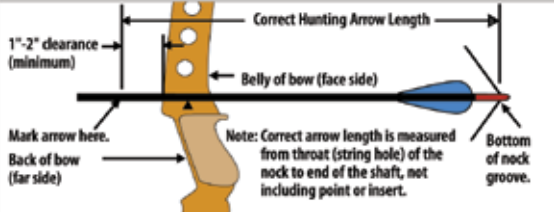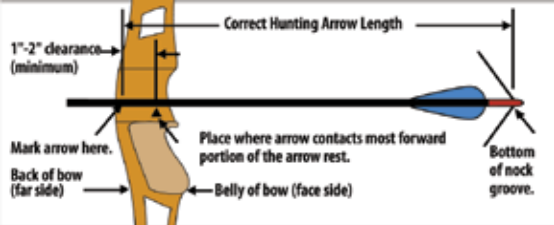

Every effort has been made to ensure the accuracy of this catalog. Graphics and images are for illustration purposes only. Due to our effort to improve our products, Easton reserves the right to make changes without notice. 2017 products available for sale on or after December 1, 2016.

SIZES BY MODEL

FULL METAL JACKET	700	600	500	480	470	460	400	390	340	330	320	300	280	260	250	240
4MM FMJ DEEP SIX™						●	●			●			●			
5MM FMJ™			●				●		●			●				
6MM FMJ™					●			●			●					
5MM FMJ DANGEROUS GAME™												●			●	
ALL CARBON	700	600	500	480	470	460	400	390	340	330	320	300	280	260	250	240
4MM CARBON INJEXION™				●			●			●						
5MM AXIS®	●	●	●				●		●			●		●		
5MM AXIS® TRADITIONAL		●	●				●		●							
6MM BLOODLINE™				●			●			●						●
6MM UNDER ARMOUR™			●				●		●			●				
6MM DA'TORCH™				●			●			●						
6MM HEXX™				●			●			●						
6MM AFTERMATH™			●				●		●							
6MM ION™		●	●													
6.5MM FLATLINE™			●				●		●							
6.5MM BOW FIRE™				●			●			●						

For complete interactive arrow selection visit eastonarchery.com or visit a qualified pro shop to assist in bow tuning and correct arrow size selection.

Easton's selection charts are regularly updated to reflect the latest in bow performance. We continue to make adjustments to size recommendations based on increased bow efficiencies and more aggressive cam profile developments. Please read over the chart and all guidelines before selecting arrow shafts based on prior experience.



# ALUMINUM ARROW SIZE SELECTION

COMPOUND BOW BOW RATING TO 301-340 FPS	YOUR ARROW LENGTH										RECURVE	Longbow
	23"	24"	25"	26"	27"	28"	29"	30"	31"	32"		
BOW POUNDAGE											BOW POUNDAGE	
22-26				1816	1816, 1916	1916, 2013	1916, 2013	500, 2013, 2016	500, 2016	2018, 2114		38-43
27-31			1816	1816, 1916	1916, 2013	1916, 2013	500, 2013, 2016	500, 2016	2018, 2114	400, 2117, 2213		44-49
32-36		1816	1816, 1916	1916, 2013	1916, 2013	500, 2013, 2016	500, 2016	2018, 2114	400, 2117, 2213	400, 2117, 2215, 2216, 2314	32-36	50-55
37-41	1816	1816, 1916	1916, 2013	1916, 2013	500, 2013, 2016	500, 2016	2018, 2114	400, 2117, 2213	400, 2117, 2215, 2216, 2314	2216, 2219, 2314	37-41	56-61
42-46	1816, 1916	1916, 2013	1916, 2013	500, 2013, 2016	500, 2016	2018, 2114	400, 2117, 2213	400, 2117, 2215, 2216, 2314	2216, 2219, 2314	340, 2219, 2315, 2413	42-46	62-67
47-51	1916, 2013	1916, 2013	500, 2013, 2016	500, 2016	2018, 2114	400, 2117, 2213	400, 2117, 2215, 2216, 2314	2216, 2219, 2314	340, 2219, 2315, 2413	340, 2219, 2315, 2413	47-51	68-73
52-56	1916, 2013	500, 2013, 2016	500, 2016	2018, 2114	400, 2117, 2213	400, 2117, 2215, 2216, 2314	2216, 2219, 2314	340, 2219, 2315, 2413	340, 2219, 2315, 2413	300, 2317	52-56	74-79
57-61	500, 2013, 2016	500, 2016	2018, 2114,	400, 2117, 2213	400, 2117, 2215, 2216, 2314	2216, 2219, 2314	340, 2219, 2315, 2413	340, 2219, 2315, 2413	300, 2317		57-61	80-85
62-66	500, 2016	2018, 2114	400, 2117, 2213	400, 2117, 2215, 2216, 2314	2216, 2219, 2314	340, 2219, 2315, 2413	340, 2219, 2315, 2413	300, 2317			62-66	85-91
67-72	2018, 2114	400, 2117, 2213	400, 2117, 2215, 2216, 2314	2216, 2219, 2314	340, 2219, 2315, 2413	340, 2219, 2315, 2413	300, 2317				67-72	92-97
73-78	400, 2117, 2213	400, 2117, 2215, 2216, 2314	2216, 2219, 2314	340, 2219, 2315, 2413	340, 2219, 2315, 2413	300, 2317					73-78	98-103
79-84	400, 2117, 2215, 2216, 2314	2119, 2216, 2314	340, 2219, 2315, 2413	340, 2219, 2315, 2413	300, 2317							
Note: For fractional arrow lengths, round up or down to the closest column. Examples, if arrow length is 28.25" round down to the 28" column. If arrow length is 28.5" round up to the 29" column.												

Every effort has been made to ensure the accuracy of this catalog.  
Graphics and images are for illustration purposes only.  
Due to our continual effort to improve our products, Easton reserves the right to make changes without notice.

## ADJUSTING THE CHART TO YOUR BOW SET UP

The Hunting Chart is based on a Bow Speed Rating of 301-340 FPS and 100-grain points. If your set-up is different, make the following adjustments to your bow weight.

Bow Speed Ratings:		Point Weights:	
Up to 300 FPS	subtract 5 lbs of bow weight	75 grains	subtract 3 lbs of bow weight
341-350 FPS	add 5 lbs of bow weight.	125 grains	add 3 lbs of bow weight
351 FPS or higher	add 10 lbs of bow weight	150 grains	add 6 lbs of bow weight

## SIZES BY MODEL

ALUMINUM	300	340	400	500	1816	1916	2013	2016	2018	2114	2117	2213	2215	2216	2219	2314	2315	2317	2413
GAMEGETTER™	●	●	●	●															
LEGACY™						●		●	●		●			●	●				
CAMO HUNTER™					●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

For complete interactive arrow selection visit [eastonarchery.com](http://eastonarchery.com) or visit a qualified pro shop to assist in bow tuning and correct arrow size selection.



# SHAFT MODELS

FULL METAL JACKET	Materials/Construction		Inserts	Points	Nock System	Nock Type	Weight Tolerance <sup>4</sup>	Straightness <sup>1</sup>	Color/Finish	Sizes
4MM FMJ INJEXION™	Precision 7075 alloy jacket bonded to a carbon core		Deep Six HIT® Insert	Deep Six	Internal-fit	4MM Deep Six™	±2 grains	±.002"	Black Carbon, Diamond Pattern	460, 400, 330,280
5MM FMJ™	Precision 7075 alloy jacket bonded to a carbon core		HIT® Insert or Deep Six RPS	RPS or Deep Six	Internal-fit	5MM X™	±2 grains	±.002"	Black, Diamond Pattern	500, 400, 340, 300
6MM FMJ™	Precision 7075 alloy jacket bonded to a carbon core		ST RPS Insert	RPS	Internal-fit	6MM H™	±2 grains	±.003"	Two-Tone Gunmetal/Silver	470, 390, 320
5MM FMJ DANGEROUS GAME™	Precision 7075 alloy jacket bonded to a carbon core		Brass HIT® Insert or Deep Six RPS	RPS or Deep Six	Internal-fit	5MM X™	±5 grains	±.002" g	Black, Diamond Pattern	300, 250
ALL CARBON	Materials/Construction		Inserts	Points	Nock System	Nock Type	Weight Tolerance <sup>4</sup>	Straightness <sup>1</sup>	Color/Finish	Sizes
4MM CARBON INJEXION™	High-strength carbon construction fibers		Deep Six HIT® Insert	Deep Six Point	Internal-fit	4MM Deep Six™	±0.5 grain	±.003"	Black, Micro-smooth	480, 400, 330, 280
5MM AXIS™	High-strength carbon-composite fibers		HIT® Insert	RPS or Deep Six	Internal-fit	5MM X™	±2 grains	±.003"	Black, Micro-smooth	700,600,500,400,340,300,260
5MM AXIS® TRADITIONAL	High-strength carbon-composite fibers		HIT® Insert or Brass HIT® Insert	RPS or Deep Six	Internal-fit	5MM X™	±2 grains	±.003"	Woodgrain Graphic	600, 500, 400, 340
6MM BLOODLINE™	High-strength carbon-composite fibers		HP Insert	HP or RPS	Internal-fit	6MM H™	±2 grains	±.003"	Black, Micro-smooth	480, 400, 330, 240
6MM AXIS™ UNDER ARMOUR™	High-strength carbon-composite fibers		ST RPS Insert	HP or RPS	Internal-fit	6MM H™	±2 grains	±.003"	Black, Micro-smooth	500, 400, 340, 300
6MM DA'TORCH™	UltraLite carbon composite fibers		HP Insert	HP or RPS	X-Uni System	5MM X™	±1 grain	±.001"	Detailed Graphic Overlay	480, 400, 330
6MM HEXX™	UltraLite carbon composite fibers		MicroLite H Insert	HP or RPS	Internal-fit	6MM H™	±1 grain	±.001"	Black, Micro-smooth	480, 400, 330, 260
6MM AFTERMATH™	High-strength carbon-composite fibers		ST RPS Insert	HP or RPS	Internal-fit	6MM H™	±2 grains	±.005"	Black, Micro-smooth	500, 400, 340, 300
6MM ION™	High-strength carbon-composite fibers		HP Insert	RPS	Internal-fit	6MM H™	±2 grains	±.003"	Black, Micro-smooth	600, 500
6.5MM FLATLINE™	SuperLite Carbon multi-layer wrapped fibers		MicroLite Insert	CB or RPS	Internal-fit	6.5MM MicroLite Super	±2 grains	±.003"	Black, Matte	500, 400, 340
6.5MM BOW FIRE™	UltraLite carbon composite fibers		CB Insert	CB or RPS	Internal-fit	6.5MM Super	±1 grain	±.003"	Detailed Graphic Overlay	480, 400, 330
ALLOY	Alloy	Strength <sup>3</sup> (psi)	Inserts	Points	Nock System	Nock Type	Weight Tolerance <sup>4</sup>	Straightness <sup>1</sup>	Color/Finish	Sizes
CAMO HUNTER™	7075-T9	96,000	RPS Insert	One-piece Bullet	Super UNI System or X UNI System	Super, 3D Super, X or MicroLite™	±1%	±.002"	4-Tone Black, Brown, Dark Green, & Light Green Dye Camo	1816, 1916, 2013, 2016, 2018, 2114, 2117, 2213, 2215, 2216, 2219, 2314, 2315, 2317, 2413
LEGACY™	7075-T9	95,000	RPS Insert	One-piece Bullet	Full-diameter Taper Swage	Conventional	±1%	±.002"	Cedar-Grain, PermaGraphic	1916, 2016, 2018, 2117, 2216, 2219
GAMEGETTER™	7075-T9	96,000	RPS Insert	One-piece Bullet	Super UNI System Composite Bushing	Super or 3D Super	±1¼%	±.003"	Black, Hard-anodized	500, 400, 340, 300
FIBERGLASS	Alloy	Strength <sup>3</sup> (psi)	Inserts	Points	Nock System	Nock Type	Weight Tolerance <sup>4</sup>	Straightness <sup>1</sup>	Color/Finish	Sizes
SCOUT 2™	Fiberglass	Not Available	Not Available	Steel Sleeve	Open-ended slip-on	Over Nock	N/A	N/A	Orange	17/64"

Some of the products on this page are covered by one or more of these patents: 7,004,859 - 7,077,770 - 7,115,055 - 7,115,055

## CROSSBOW

FULL METAL JACKET	Materials/Construction		Inserts	Points	Nock System	Nock Type	Weight	Tolerance <sup>4</sup>	Straightness <sup>1</sup>	Color/Finish	Sizes
FMJ™ CROSSBOW	Precision 7075 alloy jacket bonded to a carbon core		HP Bolt Insert	RPS Point	Internal-fit	Halfmoon Flatback	±.2 grains		±.003"	Black, Diamond Pattern	20, 22
CARBON	Materials/Construction		Inserts	Points	Nock System	Nock Type	Weight	Tolerance <sup>4</sup>	Straightness <sup>2</sup>	Color/Finish	Sizes
BLOODLINE™	SuperLite Carbon multi-layer wrapped fibers		HP Bolt Insert	RPS Point	Internal-fit	Talon™ Halfmoon Flatback	±.2 grains		±.003"	Black, Micro-smooth	20, 22
ALLOY	Alloy	Strength <sup>3</sup> (psi)	Inserts	Points	Nock System	Nock Type	Weight	Tolerance	Straightness <sup>1</sup>	Color/Finish	Sizes
MAGNUM XX75™	7075-T9	96,000	RPS Insert	RPS Point	Internal-fit	Talon™ Halfmoon Flatback	±.2 grains		±.003"	Gray Anodize	20, 22
1 Guaranteed straight to more stringent standards than ATA/ ASTM methods. 2 Guaranteed to meet or exceed similar carbon-industry straightness specifications.					3 Tensile strength value may vary ±3%. 4 Grains-per-shafts in a dozen bundle. ®/™ Registered trademark/trademark of Easton.				Lost® Camo is a registered trademark of MCP IP LLC. Realtree™ is a registered trademark of Jordan Outdoors. Under Armour® is a registered trademark.		

## ALLOY SHAFT AND COMPONENT SPECIFICATIONS

Size <sup>1,10</sup>	Shaft Weight XX75 <sup>1</sup>	Spine @28" Span	Stock Length XX75 <sup>1</sup>	Conventional Nock Size <sup>3</sup>	UNI System <sup>5</sup>			One-piece Bullet Point	RPS <sup>6</sup> Insert Alum.	RPS <sup>6</sup> Point Size
					UNI Bushing <sup>2</sup>	X Nock Bushing	Super UNI Bushing <sup>8</sup>			
	Grains per Inch	Deflection in Inches	Inches	Inches	Grains	Grains	Grains	Grains <sup>1</sup>	Grains <sup>1</sup>	Inches
1816 1916 2013	9.3 10.0 9.0	0.756 0.623 0.610	30 31 32	⅜ ⅜ ⅜	8 9 —	4 7 —	— — 5	74 82 —	12 16 21	⅜ ⅜ ⅜
2016 (500) 2018	10.6 12.3	0.531 0.464	32 30 ½	⅜ ⅜	— —	— —	4 <sup>9,10</sup> 4	90 —	20 19	⅜ ⅜
2114 2117 (400)	9.9 12.0	0.510 0.407	31 31 ½	— ⅜	(11) —	— —	7 7 <sup>9,10</sup>	100 100	25 25	⅜ ⅜
2213 2215	9.8 10.7	0.458 0.419	31 31 ½	— —	(13) —	— —	9 9	100 100	30 30	1⅜ 1⅜
2216 2219	12.0 13.8	0.376 0.337	32 32	1⅜ 1⅜	— —	— —	9 8	100 —	29 26	1⅜ 1⅜
2314 2315 (340) 2317 (300)	10.7 11.7 13.3	0.391 0.342 0.297	32 32 32	— — —	(14) — —	— — —	10 11 <sup>9,10</sup> 11 <sup>9,10</sup>	100 100 100	34 37 37	1⅜ 1⅜ 1⅜
2413	10.4	0.365	32	—	(17)	—	12	100	40	1⅜
— Indicates not available 1 XX75 Camo Hunter, GameGetter, Legacy 2 Length is approximate stock shaft length for each size. 3 Nock size for conventional swaged nock taper. 4 UNI—Universal Nock Installation System.					5 Parentheses indicate smaller G Nock UNI Bushing size is available as an optional accessory. 6 RPS = Replaceable Point System with 8-32 ATA Standard thread. 7 All components are ±1 grain. 8 Super UNI Bushing accepts Super Nock, 3D Nock, “S” Nock and Microlite Super Nock.			9 GameGetter composite bushing weight: 300 & 340=9 grains, 400=5 grains, 500=3 grains. 10 GameGetter shaft sizes indicated in parentheses.  Notes: Shaft size 1816 use BAR6; size 1916 uses BAR8 Broadhead Adapter Rings.		



**WARNING!** FOLLOW THESE INSTRUCTIONS TO AVOID PERSONAL INJURY. SEE WARNINGS AND USE @ [www.bsaf.ws](http://www.bsaf.ws) or 877-INFO-ETP (877-463-6387).

### BOW INSPECTION

Before shooting any Easton arrow, it is critical to inspect your bow, including all components, to be sure that it is properly adjusted and in good working order. Easton arrows should only be used with bows that have a correct pull weight and draw length (see arrow selection chart at [www.eastonarchery.com/shaft-selector/](http://www.eastonarchery.com/shaft-selector/)). Selecting the correct arrow and arrow length for the bow is the responsibility of the shooter, and failure to do so could result in personal injury and/or equipment damage. **WARNING! NEVER SHOOT AN ARROW WITH AN IMPROPERLY ADJUSTED OR DAMAGED BOW.**

### ARROW BREAKAGE

Any arrow can become damaged. A damaged arrow could break upon release and injure you or a bystander. Damage to an arrow shaft, or any of its components, may occur from: improper transport, handling, or use; impacts with hard objects or other arrows; or, after being shot into a game animal. No list can cover all possible conditions and situations that may cause damage. Use good judgment and common sense, as well as follow the warnings and instructions below, to determine if your arrow has been damaged in any way. **WARNING! NEVER SHOOT A DAMAGED ARROW.**

### ARROW USE PRECAUTIONS

Before each shot (including the first shot of a new arrow) carefully inspect each arrow shaft and all arrow components to see that they have not been damaged. Before shooting, place the arrow between your thumb and fingers, and using your other hand to slowly rotate the shaft, run your fingertips along the entire arrow length, feeling and looking closely for nicks, cracks, splits, dents, or other marks that could indicate the shaft has been damaged (see arrow inspection video at [www.eastonarchery.com/warning-use/](http://www.eastonarchery.com/warning-use/)). If your arrow is crested, inspect for damage on the crest surface and for any soft spots under the crest wrap. You may need to remove the cresting to make a thorough inspection. If damage is present, **DISCARD THE ARROW. WARNING! NEVER SHOOT A DAMAGED ARROW.**

Before each shot, inspect the nock for damage and check that it is fully seated, and fits tightly in the shaft. Apply twisting pressure to see if the nock turns easily. If the nock has backed out of the arrow or turns easily, inspect for cracks in the arrow shaft. If there are cracks in the arrow shaft, or if the nock is loose, **DISCARD THE ARROW. WARNING! NEVER SHOOT A DAMAGED ARROW. If the nock is damaged, REPLACE THE NOCK. WARNING! NEVER SHOOT AN ARROW WITH A DAMAGED NOCK.**

### LIMITED WARRANTY

The Easton arrow shaft limited warranty covers any defects in material and/or workmanship for one year from the original owner's date of purchase. Arrow shafts that are defective will be replaced by your local Easton dealer with proof of purchase. Damage caused by impact from other arrows, impact with hard objects, improper cleaning or fletching, or from normal wear and tear is not covered by Easton's limited warranty. The limited warranty also does not cover damage resulting from your failure to follow Easton's written instructions. For written instructions and warranty details see [www.eastonhunting.com](http://www.eastonhunting.com).

### ADDITIONAL TESTS FOR CARBON ARROWS

When checking carbon arrows, perform the following additional tests:

1. Grasp the shaft just above the point and below the nock, then flex the arrow in an arc (bending it away from you and others) with a deflection of 1 to 2 inches (2.5 to 5 cm), and feel and listen for cracking (*Figure 1*). Perform this test 4 to 6 times, rotating the arrow slightly between each flex until you have gone around the entire arrow. If you hear or feel cracking, the carbon has been damaged. **DISCARD THE ARROW. WARNING! NEVER SHOOT A DAMAGED ARROW.**

2. While still holding the point and fletching ends of the arrow, twist the shaft in opposite directions (*Figure 2*). If the arrow “relaxes” or twists easily, the carbon has been damaged. **DISCARD THE ARROW. WARNING! NEVER SHOOT A DAMAGED ARROW.**

A damaged arrow could break upon release and injure you or a bystander. If you have any reason to believe that an arrow has been damaged, **DISCARD THE ARROW. WARNING! NEVER SHOOT A DAMAGED ARROW.**

### CARBON ARROW CUTTING

Only cut a carbon arrow using a high-speed arrow cut-off saw. Using any other saw or cutting device may cause damage to the arrow. If an arrow has been cut without using a high-speed arrow cut-off saw, **DISCARD THE ARROW. WARNING! NEVER SHOOT A DAMAGED ARROW.**

To reduce your risk of serious injury or death, you must read and understand all safety warnings and instructions. If you do not understand these instructions, or cannot adequately perform the above tests, STOP and seek appropriate assistance before shooting any arrow.




Figure 1



Figure 2





EASTON BOWHUNTING



ADVANCING ARCHERY'S LEGACY SINCE 1922