


Таблица соответствия потери при выдвигении и длины направляющей



L	270	350	400	450	500
AV	84	84	84	94	103
X	268	348	398	448	498

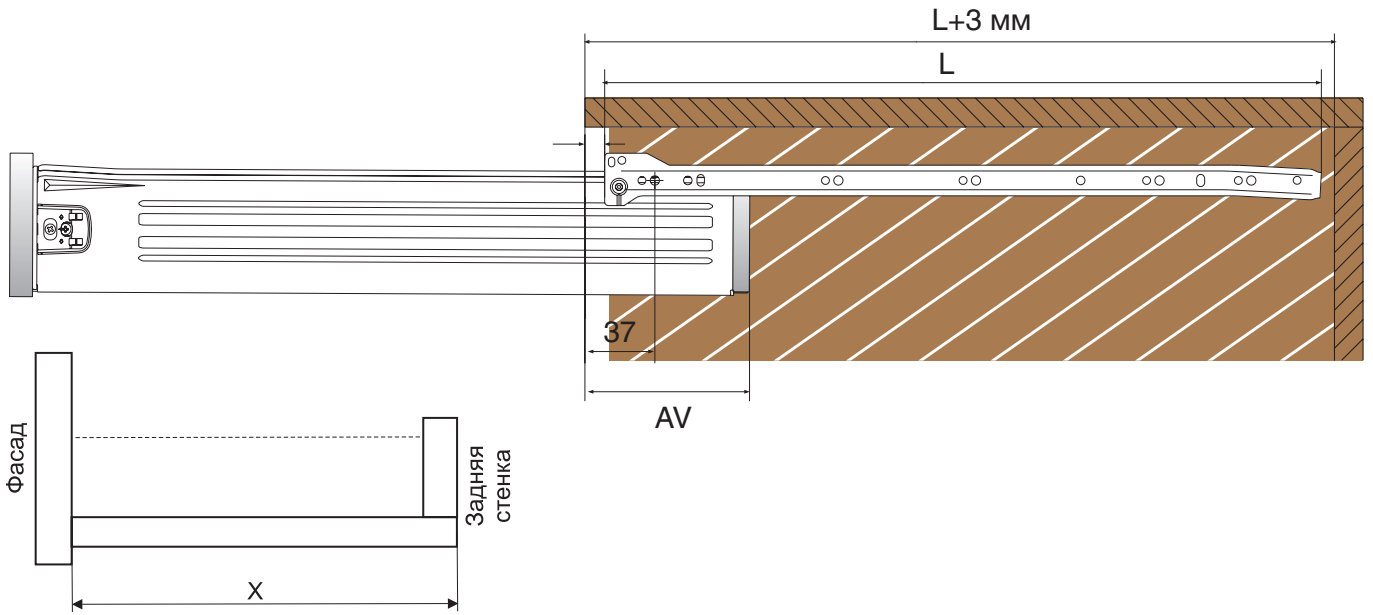