



EverExceed[®] Patented Robust AGM Technology

ST-12120

VALVE REGULATED

LEAD ACID BATTERY

FOR TELECOM / ELECTRIC

UTILITY APPLICATIONS

12V 120 AH @ 10 HR to 1.80VPC

12V 137 AH @ 20 HR to 1.75VPC

LONG DURATION

HIGH PERFORMANCE



Innovative Features



- ☑ Thick positive plate design for maximum service float life 12 years design life @ 20°C(68°F).
- ☑ UL Recognized component.
- ☑ Valve regulated lead acid battery (VRLA).
- ☑ High-Compression Absorbed Glass Mat technology (AGM) for greater than 99% recombination efficiency.
- ☑ Proprietary Fixed Orifice Plate Pasting technology applying active materials on both sides of the grid for consistent cell-to-cell performance, higher capacity and uniform grid protection.
- ☑ Operates at a low internal pressure.
- ☑ Heavy duty insert copper alloy terminals for ease of assembly, reduced maintenance and increased safety.
- ☑ Advanced lead tin calcium alloy, reduces grid corrosion and promotes long battery life.
- ☑ Over-sized, through the partition inter-cell welds provide low resistance connections, with minimal power loss.
- ☑ Flame arresting, low pressure safety release venting system for individual cells, recognized per U.L. 924.
- ☑ Multicell design for ease of installation and maintenance
- ☑ Horizontal or vertical operation.
- ☑ **Standard:**
Reinforced ABS (UL 94HB) container and cover
- ☑ **Optional:**
Flame-retardant reinforced ABS container and cover compliant with U.L.94 V-0 with an Oxygen limiting Index of greater than 28%.

12 VOLTS - 120 AMPERE HOUR @ 10 HOUR RATE

AH Capacity to 1.80VPC @ 68°F (20°C)


End Point Volts/Cell	1.5hr	2hr	3hr	4hr	5hr	8hr	10hr	12hr	20hr	24hr
1.80	86.7	91.8	97.8	102	107	115	120	133	135	136

For Telecom / Electric Utility Applications



Standard Range VRLA

EverExceed[®]
power your applications

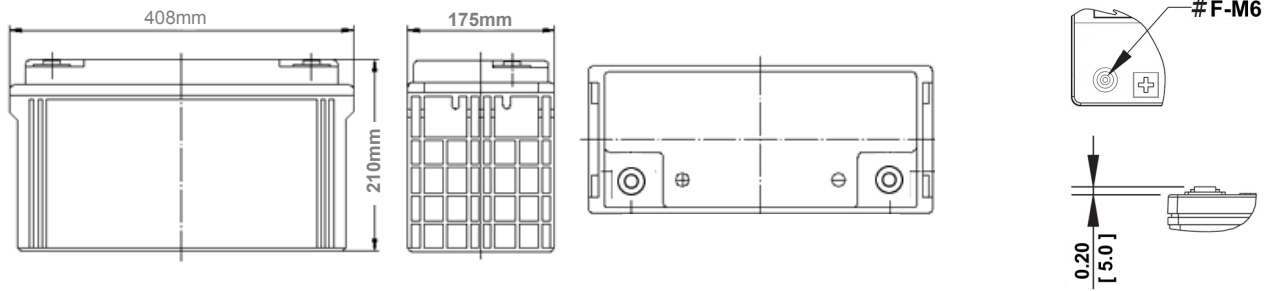

Length: 408mm Width: 175mm Height: 210mm

Electrical Specifications						
Cells Per Unit	Voltage Per Unit	Weight	Electrolyte	Maximum Discharge Current	Short Circuit Current	Ohms Imped 60 Hz(Ω)
6	12.84	77.2lbs 35.0kg	SG = 1.300	762 Amps	3300 Amps	0.0031

Capacity	137 Ah @ 20 hr. rate to 1.75 volts per cell @ 68°F (20°C). 120 Ah @ 10 hr. rate to 1.80 volts per cell @ 68°F (20°C).
Applicable Operating Temperature Range	-40°F (-40°C) to +158°F (70°C).
Ideal Operating Temperature Range	+68°F (+20°C) to +82.4°F (28°C).
Floating Charging Voltage	13.5 to 13.8 VDC/unit Average at 68°F~77°F (20°C~25°C).
Recommended Maximum Charging Current Limit	0.25C20 amperes (34.4 amperes @ 100% depth of discharge) @ 20 hr. rate.
Equalization and Cycle Service Charging Voltage	14.4 to 14.8 VDC/unit Average at 68°F~77°F (20°C~25°C).
Maximum AC Ripple (Charger)	0.5% RMS or 1.5% P-P of float charge voltage recommended for best results. Maximum voltage allowed = 1.4% RMS (4% P-P). Maximum current allowed = 6.87 amperes RMS (C/20).
Self Discharge	EverExceed Standard Range batteries may be stored for up to 12 months at 68°F~77°F (20°C~25°C) and then a freshening charge is required. For higher temperatures the time interval will be shorter.
Accessories	Inter unit connectors racks and cabinet systems are available.
Terminal: Inserted	Threaded copper alloy insert terminal
Terminal Hardware Initial Torque: Inserted Terminal	9 N-m

Constant Power Discharging Ratings - Watts Per Cell @ 20°C (68°F)										
End Point Volts/Cell	1.5hr	2hr	3hr	4hr	5hr	8hr	10hr	12hr	20hr	24hr
1.85	106	83.9	60.1	48.0	40.5	27.7	23.2	20.8	13.1	10.6
1.80	110	88.0	63.4	50.1	41.6	28.7	23.7	22.3	13.4	11.3
1.75	113	90.2	64.6	50.9	42.5	29.1	24.3	22.6	13.6	11.5

Constant Current Discharging Ratings - Amperes Per Cell @ 20°C (68°F)										
End Point Volts/Cell	1.5hr	2hr	3hr	4hr	5hr	8hr	10hr	12hr	20hr	24hr
1.85	53.9	43.3	30.8	24.4	20.4	14.0	11.6	10.4	6.45	5.44
1.80	57.8	45.9	32.6	25.6	21.3	14.4	12.0	11.1	6.76	5.68
1.75	59.7	47.1	33.5	26.4	22.0	14.9	12.3	11.3	6.87	5.81

Note: Batteries to be mounted with 0.5 in (1.25 cm) spacing minimum and free air ventilation.
Specifications subject to change without notification.

