



WE START WHERE THE ROAD ENDS

**CONSTRUCTION
TIRES & TRACKS
DATABOOK 2016**

GENERAL REFERENCE DATA

LOAD INDEX EQUIVALENCES in kg and lb																	
LI	kg	lb	LI	kg	lb	LI	kg	lb	LI	kg	lb	LI	kg	lb	LI	kg	lb
100	800	1,764	121	1,450	3,200	142	2,650	5,840	160	4,500	9,920	181	8,250	18,190	202	15,000	33,070
101	825	1,819	122	1,500	3,310	143	2,725	6,010	161	4,625	10,200	182	8,500	18,740	203	15,500	34,180
102	850	1,874	123	1,550	3,420	144	2,800	6,170	162	4,750	10,470	183	8,750	19,290	204	16,000	35,280
103	875	1,929	124	1,600	3,530	145	2,900	6,390	163	4,875	10,750	184	9,000	19,840	205	16,500	36,380
104	900	1,985	125	1,650	3,640	146	3,000	6,610	164	5,000	11,020	185	9,250	20,390	206	17,000	37,480
105	925	2,040	126	1,700	3,750	147	3,075	6,780	165	5,150	11,350	186	9,500	20,940	207	17,500	38,590
106	950	2,095	127	1,750	3,860	148	3,150	6,950	166	5,300	11,690	187	9,750	21,500	208	18,000	39,690
110	1,060	2,337	128	1,800	3,970	149	3,250	7,170	170	6,000	13,230	188	10,000	22,050	209	18,500	40,790
111	1,090	2,403	129	1,850	4,080	150	3,350	7,390	171	6,150	13,560	189	10,300	22,710	210	19,000	41,890
112	1,120	2,470	130	1,900	4,190	151	3,450	7,610	172	6,300	13,890	190	10,600	23,370	211	19,500	43,000
113	1,150	2,536	131	1,950	4,300	152	3,550	7,830	173	6,500	14,330	191	10,900	24,030	212	20,000	44,100
114	1,180	2,602	132	2,000	4,410	153	3,650	8,050	174	6,700	14,770	192	11,200	24,690	213	20,600	45,420
115	1,215	2,679	133	2,060	4,540	154	3,750	8,270	175	6,900	15,210	193	11,500	25,360	214	21,200	46,750
116	1,250	2,756	134	2,120	4,670	155	3,875	8,540	176	7,100	15,650	194	11,800	26,020	215	21,800	48,070
117	1,285	2,833	135	2,180	4,810	156	4,000	8,820	177	7,300	16,090	195	12,150	26,790	216	22,400	49,390
118	1,320	2,911	136	2,240	4,940	157	4,125	9,090	178	7,500	16,530	196	12,500	27,560	217	23,000	50,700
119	1,360	2,999	140	2,500	5,510	158	4,250	9,370	179	7,750	17,090	200	14,000	30,870	218	23,600	52,040
120	1,400	3,090	141	2,575	5,680	159	4,375	9,650	180	8,000	17,640	201	14,500	31,970	219	24,300	53,580

INFLATION UNITS			
Kpa	Bar	Psi	kg/cm²
100	1	14.5	1.0
150	1.5	22	1.5
200	2	29	2
250	2.5	36	2.6
300	3	44	3.1
350	3.5	51	3.6
400	4	58	4.1
450	4.5	65	4.6
500	5	73	5.1
550	5.5	80	5.6
600	6	87	6.1
650	6.5	94	6.6
700	7	102	7.1
750	7.5	109	7.7
800	8	116	8.2
850	8.5	123	8.7
900	9	131	9.2
950	9.5	138	9.7
1000	10	145	10.2
1050	10.5	152	10.7

SPEED INDEX	
Speed km/h	Speed index
5	A1
10	A2
15	A3
20	A4
25	A5
40	A8
50	B

TABLE OF CONTENTS

SKID STEER LOADERS

CAMSO SKS 775	4
CAMSO SKS 732	5
CAMSO SKS 793S	6
CAMSO HAULER SKZ	7
CAMSO SKS 792S <i>formerly Solideal SolidAir SKS</i>	8
CAMSO SKS 796S <i>formerly Solideal SolidAir SM</i>	9
CAMSO HAULER SKS	10
CAMSO XTRA WALL	12
CAMSO SKS 774 <i>formerly Solideal Hauler XD44</i>	14
CAMSO SKS 332 <i>formerly Solideal Gripper</i>	15
CAMSO SKS 782S <i>formerly Solideal Safetymaster SKS</i>	16
CAMSO SKS 786S <i>formerly Solideal Safetymaster SM</i>	17

BACKHOE LOADERS

CAMSO BHL 753 <i>formerly Solideal BHZ</i>	18
CAMSO SL R4	19
CAMSO BHL 532 <i>formerly Solideal SLA R4</i>	21
CAMSO 4L R1	22
CAMSO BHL 530 <i>formerly Solideal MR F3</i>	24

TELEHANDLERS

CAMSO TLH 792S <i>formerly Solideal SolidAir TLH</i>	25
CAMSO SL G3	26
CAMSO SL G2	28
CAMSO TLH 532 <i>formerly Solideal TH2</i>	30
CAMSO TM R4	32
CAMSO 4L I3	33

WHEEL LOADERS | ARTICULATED DUMP TRUCKS MOTOR GRADERS

CAMSO WHL 753R <i>formerly Solideal SRGP</i>	34
CAMSO WHL 775R <i>formerly Solideal SRLD</i>	36
CAMSO WHL 776R <i>formerly Solideal SRLS</i>	38
CAMSO ADT 753R <i>formerly Solideal SRAT</i>	40
CAMSO WHL 775	42
CAMSO LM L3	44
CAMSO LM L2	48
CAMSO WHL 773 <i>formerly Solideal RM L3</i>	52
CAMSO SKZ	54

WHEEL EXCAVATORS

CAMSO WL	56
CAMSO WEX 552 <i>formerly Solideal WEX</i>	58

COMPACTION EQUIPMENT

CAMSO CMP 533	60
CAMSO CMP 576 <i>formerly Solideal SM C1</i>	61

TRUCK MOUNTED FORKLIFTS

CAMSO SKS 511 <i>formerly Solideal SKS R1</i>	62
---	----

MINI-EXCAVATORS

CAMSO MEX HXD	64
CAMSO MEX SD	66

COMPACT TRACK LOADERS

CAMSO CTL HXD	68
CAMSO CTL SD	69

MULTI-TERRAIN LOADERS

CAMSO MTL HXD	70
---------------	----

OTT FOR SKID STEER LOADERS

CAMSO OTT HXD	71
---------------	----

PAVERS

CAMSO HXD SMOOTH	72
CAMSO HXD CHEVRON	73

CARRIERS

CAMSO CARRIER HXD	74
-------------------	----

COMPLETE LINE OVERVIEW	76
------------------------	----




CAMSO SKS 775

THE VERSATILE HEAVY-DUTY CHOICE

- FEATURES

 - Massive 50/32 tread depth with high lug-to-void ratio
 - Innovative tread pattern
 - New impact guard sidewall design
 - Hauler stepped shoulder lugs
- BENEFITS

 - Maximizes tire life and tread impact resistance
 - Optimizes traction and versatility for mixed and hard surface applications
 - Deflects debris to better protect sidewalls and reduce stress cracking
 - Provides lower cost per hour and quicker installation

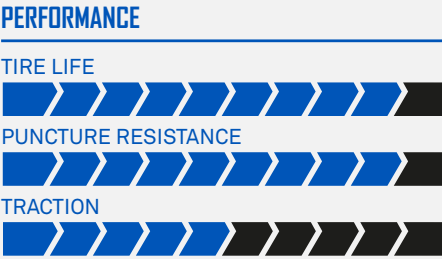

TIRE SIZE	PR	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] [inches]						TT/ TBLS	LOAD INDEX	SPEED SYMBOL	TRA CODE	INFLATION PRESSURE [bar] [PSI]	MAXIMUM TIRE LOAD [kg] [lb]			
		Recommended	Alternative	O.D.	O.W.	O.T.D. [mm] [32nd]	M.D.S.	S.L.R.	R.C.						Static	Creep	8 km/h	16 km/h
10-16.5 (265/70-16.5)	10	8.25	-	778	269	40.0	-	-	-	TBLS	134	A2	L-5	5.25	3380	2460	2140	1690
				30.6	10.6	50	-	-	-					75	7450	5450	4700	3750
12-16.5 (305/70-16.5)	12	9.75	-	833	307	40.0	-	-	-	TBLS	145	A2	L-5	5.60	4550	3310	2880	2280
				32.8	12.1	50	-	-	-					80	10050	7300	6350	5050




CAMSO SKS 732

THE ULTIMATE OFF-ROAD SKID STEER TIRE SOLUTION

- FEATURES

 - Massive tread depth with optimized lug-to-void ratio
 - New impact guard sidewall design
 - New wraparound hauler steps
 - Innovative curved and tapered tread lugs
- BENEFITS

 - Maximizes off-road durability and traction
 - Deflects debris to better protect sidewalls and reduce stress cracking
 - Maximizes tread cleanout for best off-road traction
 - Enhances traction and ensures even wearing

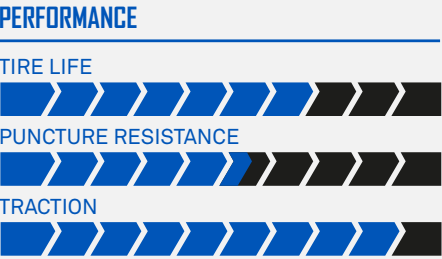

TIRE SIZE	PR	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] [inches]						TT/ TBLS	LOAD INDEX	SPEED SYMBOL	TRA CODE	INFLATION PRESSURE [bar] [PSI]	MAXIMUM TIRE LOAD [kg] [lb]			
		Recommended	Alternative	O.D.	O.W.	O.T.D. [mm] [32nd]	M.D.S.	S.L.R.	R.C.						Static	Creep	8 km/h	16 km/h
10-16.5 (265/70-16.5)	8	8.25	-	777	265	23.0	-	-	-	TBLS	129	A2	R-4	4.20	2960	2160	1875	1480
				30.6	10.4	29	-	-	-					60	6550	4750	4150	3250
10-16.5 (265/70-16.5)	10	8.25	-	777	265	23.0	-	-	-	TBLS	134	A2	R-4	5.25	3380	2460	2140	1690
				30.6	10.4	29	-	-	-					75	7450	5450	4700	3750
12-16.5 (305/70-16.5)	10	9.75	-	836	330	25.0	357	585	2520	TBLS	140	A2	R-4	4.50	4020	2930	2545	2010
				32.9	13.0	31	14.0	23.0	99.2					64	8850	6450	5600	4450
12-16.5 (305/70-16.5)	12	9.75	-	833	325	27	358	381	2516	TBLS	145	A2	R-4	5.60	4550	3310	2880	2280
				32.5	12.6	23	14.1	15.0	99.1					80	10050	7300	6350	5050
14-17.5 (355/70-17.5)	14	10.50	-	930	370	32.0	-	-	-	TBLS	155	A2	R-4	5.60	6120	4460	3875	3060
				36.6	14.6	40	-	-	-					80	13500	9850	8550	6750




CAMSO SKS 793S

SEVERE-DUTY AND FLAT-FREE

- FEATURES

 - Innovative non-directional tread pattern
 - New elongated aperture design
 - Massive tread depth
 - Reusable wheel
- BENEFITS

 - Provides greater durability and versatility for mixed and hard surface applications
 - Provides excellent ride quality and reduces cracking
 - Improves durability for longer service life
 - Provides lower cost per hour and quicker installation

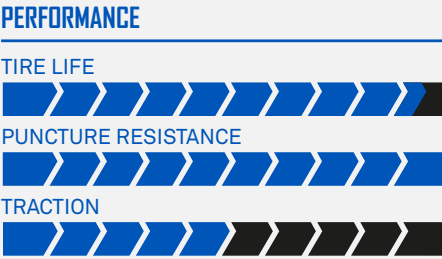

TIRE SIZE	RIM SIZE	ACTUAL TIRE DIMENSIONS [mm] [inches]						HEEL		LOAD CAPACITY [kg] [lb]						
										COUNTERBALANCED LIFT TRUCKS			OTHER VEHICLES			STATIC
		O.D.	O.W.	O.T.D. [mm] [32nd]	M.D.S.	S.L.R.	R.C.	NORMAL	QUICK	15 km/h 9 mph	25 km/h 16 mph	25 km/h 16 mph	6 km/h 4 mph	10 km/h 6 mph	25 km/h 16 mph	0 km/h 0 mph
31x10-20 (10-16.5)	7.50	780	233	39	253	372	2451	-	■	-	4030	3100	4030	3660	3100	4680
		30.7	9.2	49	10.0	14.6	96.5			-	8885	6835	8900	8100	6850	10350
33x12-20 (12-16.5)	7.50	830	285	39	310	391	2503	-	■	-	5200	4000	5200	4720	4000	6040
		32.7	11.2	50	12.2	15.4	98.5			-	11465	8820	11500	10400	8850	13350
36x14-20 (14-17.5)	7.50	910	322	52	359	424	2858	-	■	-	6175	4750	6175	5605	4750	7175
		35.8	12.7	66	14.1	16.7	112.5			-	13650	10500	13650	12350	10500	15850




CAMSO HAULER SKZ

OFF-ROAD TRACTION AND DURABILITY

- FEATURES

 - Non-directional extra deep tread
 - Large footprint with massive lug-to-void ratio
 - Versatile tread pattern
 - Wide sidewall
- BENEFITS

 - Improves tread life and resistance to punctures
 - Provides excellent durability and even tread wearing
 - Optimizes traction and handling on mixed and hard surfaces
 - Provides superior side impact resistance

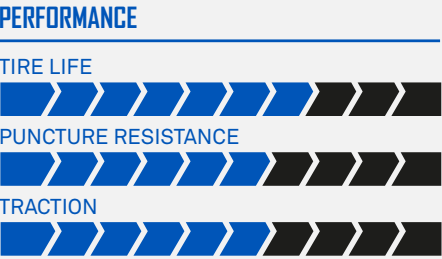

TIRE SIZE	PR	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] [inches]						TT / TBLS	LOAD INDEX	SPEED SYMBOL	TRA CODE	INFLATION PRESSURE [bar] [PSI]	MAXIMUM TIRE LOAD [kg] [lb]			
		Recommended	Alternative	O.D.	O.W.	O.T.D. [mm] [32nd]	M.D.S.	S.L.R.	R.C.						Static	Creep	8 km/h	16 km/h
10-16.5	10	8.25	-	786	275	31.0	295	364	2335	TBLS	134	A2	L-4	5.25	3380	2460	2140	1690
				30.9	10.8	39	11.6	14.3	91.9					75	7450	5450	4700	3750
12-16.5	12	9.75	-	831	321	35.0	344	384	2483	TBLS	145	A2	L-4	5.60	4550	3310	2880	2280
				32.7	12.6	44	13.5	15.1	97.8					80	10050	7300	6350	5050
14-17.5	14	10.50	-	932	352	45.0	382	426	2733	TBLS	155	A2	L-4	5.60	6120	4460	3875	3060
				36.7	13.9	57	15.0	16.8	107.6					80	13500	9850	8550	6750
31x15.5-15	8	13.00	13LB	777	384	24.0	24.0	24.0	2304	TBLS	126	A2	L-4	3.10	2670	1940	1690	1340
				30.6	15.1	30	0.9	0.9	90.7					44	5900	4300	3750	2950
33x15.5-16.5	14	12.00	-	836	380	35.0	414	384	2446	TBLS	148	A2	L-4	4.90	4980	3620	3150	2490
				32.9	15.0	44	16.3	15.1	96.3					70	11000	8000	6950	5500



CAMSO SKS 792S

Formerly Solideal SolidAir SKS

FLAT-PROOF DURABILITY MEETS OFF-ROAD TRACTION

FEATURES

- FEA-validated aperture design
- Hauler stepped tread design
- Reusable wheel

BENEFITS

- Improves ride quality and reduces cracking
- Provides excellent cleanout for improved off-road traction
- Provides lower cost per hour and quicker installation

PERFORMANCE



TIRE SIZE	RIM SIZE	ACTUAL TIRE DIMENSIONS [mm] [inches]						HEEL		LOAD CAPACITY [kg] [lb]						
										COUNTERBALANCED LIFT TRUCKS			OTHER VEHICLES			STATIC
		O.D.	O.W.	O.T.D. [mm] [32nd]	M.D.S.	S.L.R.	R.C.	NORMAL	QUICK	15 km/h 9 mph	25 km/h 16 mph	25 km/h 16 mph	6 km/h 4 mph	10 km/h 6 mph	25 km/h 16 mph	0 km/h 0 mph
31x10-20 (10-16.5)	7.50	781	237	33	260	372	2522	-	■	-	4030	3100	4030	3660	3100	4680
		30.7	9.3	42	10.2	14.6	99.3			-	8885	6835	8900	8100	6850	10350
33x12-20 (12-16.5)	7.50	831	287	40	326	388	2669	-	■	-	5200	4000	5200	4720	4000	6040
		32.7	11.3	50	12.8	15.3	105.1			-	11465	8820	11500	10400	8850	13350
36x14-20 (14-17.5)	7.50	910	320	43	345	426	2860	-	■	-	6175	4750	6175	5605	4750	7175
		35.8	12.6	54	13.6	16.8	112.6			-	13650	10500	13650	12350	10500	15850



CAMSO SKS 796S

Formerly Solideal SolidAir SM

HARD SURFACE SOLID TIRE SOLUTION

FEATURES

- FEA-validated aperture design
- Full-width footprint
- Reusable wheel

BENEFITS

- Improves ride quality and reduces cracking
- Provides excellent stability and tread life
- Provides lower cost per hour and quicker installation

PERFORMANCE



TIRE SIZE	RIM SIZE	ACTUAL TIRE DIMENSIONS [mm] [inches]						HEEL		LOAD CAPACITY [kg] [lb]						
										COUNTERBALANCED LIFT TRUCKS			OTHER VEHICLES			STATIC
		O.D.	O.W.	O.T.D. [mm] [32nd]	M.D.S.	S.L.R.	R.C.	NORMAL	QUICK	15 km/h 9 mph	25 km/h 16 mph	25 km/h 16 mph	6 km/h 4 mph	10 km/h 6 mph	25 km/h 16 mph	0 km/h 0 mph
31x10-20 (10-16.5)	7.50	781	237	33	260	372	2522	-	■	-	4030	3100	4030	3660	3100	4680
		30.7	9.3	42	10.2	14.6	99.3			-	8885	6835	8900	8100	6850	10350
33x12-20 (12-16.5)	7.50	831	287	40	326	388	2669	-	■	-	5200	4000	5200	4720	4000	6040
		32.7	11.3	50	12.8	15.3	105.1			-	11465	8820	11500	10400	8850	13350
36x14-20 (14-17.5)	7.50	909	326	43	360	425	2873	-	■	-	6175	4750	6175	5605	4750	7175
		35.8	12.8	54	14.2	16.7	113.1			-	13650	10500	13650	12350	10500	15850



CAMSO HAULER SKS

VERSATILE DURABILITY ON MIXED SURFACES

FEATURES

- Extra-wide, deep lug design
- Hauler stepped tread design
- Reinforced sidewall
- Undertread protection

BENEFITS

- Provides excellent durability and traction in off-road conditions
- Provides excellent cleanout for improved traction
- Provides improved side impact resistance
- Improves tread impact resistance for fewer flat tires

PERFORMANCE

TIRE LIFE



PUNCTURE RESISTANCE



TRACTION



TIRE SIZE	PR	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] [inches]						TT / TBLS	LOAD INDEX	SPEED SYMBOL	TRA CODE	INFLATION PRESSURE [bar] [PSI]	MAXIMUM TIRE LOAD [kg] [lb]			
		Recommended	Alternative	O.D.	O.W.	O.T.D. [mm] [32nd]	M.D.S.	S.L.R.	R.C.						Static	Creep	8 km/h	16 km/h
5.70-12	6	4.50I	5JA	585	157	12.0	-	275	1746	TBLS	93	A2	R4	4.20	1040	760	660	520
				23.0	6.2	15	0.0	10.8	68.7					60	2300	1700	1450	1150
23x8.5-12	6	7.00I	7JA	578	210	12.5	-	261	1725	TBLS	101	A2	R4	3.50	1300	950	825	650
				22.8	8.3	16	0.0	10.3	67.9					50	2850	2100	1800	1450
23x8.5-12	12	7.00I	7JA	578	218	12.5	233	286	1725	TBLS	115	A2	R4	7.00	1950	1420	1235	980
				22.8	8.6	16	9.2	11.3	67.9					100	4300	3150	2750	2150
27x8.5-15 (215/70-15)	6	7JA	6.5K/7J	680	210	13.0	-	316	2029	TBLS	112	A2	R4	3.10	1780	1290	1125	890
				26.8	8.3	16	0.0	12.4	79.9					44	3950	2850	2500	1950
27x10.5-15	8	8.50	8LB/8W	700	252	19.5	269	333	2120	TBLS	120	A2	R4	4.10	2200	1600	1390	1100
				27.6	9.9	25	10.6	13.1	83.5					59	4850	3550	3050	2450
31x15.5-15	8	13.00	13LB	782	385	24.0	405	366	2334	TBLS	126	A2	R4	3.10	2670	1940	1690	1340
				30.8	15.2	30	15.9	14.4	91.9					44	5900	4300	3750	2950
31x15.5-15	12	13.00	13LB	780	384	24.0	403	362	2353	TBLS	136	A2	R4	5.25	3520	2560	2230	1760
				30.7	15.1	30	15.9	14.3	92.6					75	7750	5650	4900	3900
10-16.5	8	8.25	-	784	275	16.5	293	361	2340	TBLS	129	A2	R4	4.20	2960	2160	1875	1480
				30.9	10.8	21	11.5	14.2	92.1					60	6550	4750	4150	3250
10-16.5 (265/70-16.5)	10	8.25	-	790	275	16.5	297	364	2358	TBLS	134	A2	R4	5.25	3380	2460	2140	1690
				31.1	10.8	21	11.7	14.3	92.8					75	7450	5450	4700	3750
31.5x13-16.5	10	9.75	-	787	311	18.0	333	361	2364	TBLS	139	A2	R4	4.90	3850	2800	2435	1920
				31.0	12.2	23	13.1	14.2	93.1					70	8500	6200	5400	4250
12-16.5 (305/70-16.5)	10	9.75	-	830	325	20.3	359	385	2511	TBLS	140	A2	R4	4.50	4020	2930	2545	2010
				32.7	12.8	26	14.1	15.2	98.9					64	8850	6450	5600	4450
33x15.5-16.5	12	12.00	-	829	386	20.0	381	2485	2364	TBLS	145	A2	R4	4.10	4580	3340	2900	2290
				32.6	15.2	25	15.0	97.8	93.1					59	10100	7350	6400	5050
14-17.5	14	10.50	-	932	352	27.0	427	2802	2511	TBLS	155	A2	R4	5.60	6120	4460	3875	3060
				36.7	13.9	34	16.8	110.3	98.9					80	13500	9850	8550	6750



CAMSO HAULER SKS (cont.)

TIRE SIZE	PR	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] [inches]						TT / TBLS	LOAD INDEX	SPEED SYMBOL	TRA CODE	INFLATION PRESSURE [bar] [PSI]	MAXIMUM TIRE LOAD [kg] [lb]			
		Recommended	Alternative	O.D.	O.W.	O.T.D. [mm] [32nd]	M.D.S.	S.L.R.	R.C.						Static	Creep	8 km/h	16 km/h
15-19.5	14	11.75	12.25	1020	398	28.0	460	3044	1746	TBLS	164	A2	R4	5.60	8010	5830	5070	4010
				40.2	15.7	35	18.1	119.8	68.7					80	17700	12850	11200	8850
385/65-22.5	12	11.75	12.25	1100	374	28.0	498	3265	1725	TBLS	-	A2	R4	5.00	9090	6610	5750	4540
				43.3	14.7	35	19.6	128.5	67.9					71	20050	14600	12700	10000
385/65-22.5	16	11.75	12.25	1092	382	28.0	495	3591	1725	TBLS	175	A2	R4	7.00	11120	8100	7040	5560
				43.0	15.0	35	19.5	141.4	67.9					100	24550	17900	15550	12250
385/45-28	16	W13x28	-	1086	370	25.5	495	3301	2029	TBLS	176	A2	R4	6.50	11120	8100	7040	5560
				42.8	14.6	32	19.5	130.0	79.9					93	24550	17900	15550	12250
385/45-28	18	W13x28	-	1092	382	25.5	494	3327	2120	TBLS	179	A2	R4	7.50	12140	8840	7685	6070
				43.0	15.0	32	19.4	131.0	83.5					107	26800	19500	16950	13400



CAMSO XTRA WALL

BUILT FOR TOUGH OFF-ROAD APPLICATIONS

FEATURES

- Wide, deep lug design
- Hauler stepped tread design
- Reinforced sidewall
- Rim protector

BENEFITS

- Provides enhanced durability and traction in off-road conditions
- Provides enhanced cleanout for improved traction
- Provides improved side impact resistance
- Protects wheel from impact damage

PERFORMANCE

TIRE LIFE



PUNCTURE RESISTANCE



TRACTION



TIRE SIZE	PR	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] [inches]						TT/ TBLS	LOAD INDEX	SPEED SYMBOL	TRA CODE	INFLATION PRESSURE [bar] [PSI]	MAXIMUM TIRE LOAD [kg] [lb]			
		Recommended	Alternative	O.D.	O.W.	O.T.D. [mm] [32nd]	M.D.S.	S.L.R.	R.C.						Static	Creep	8 km/h	16 km/h
5.70-12	6	4.50I	5JA	566	152	13.0	162	266	1689	TBLS	93	A2	R4	4.20	1040	760	660	520
				22.3	6.0	16	6.4	10.5	66.5					60	2300	1700	1450	1150
23x8.5-12	6	7.00I	7JA	572	213	14.5	228	256	1723	TBLS	101	A2	R4	3.50	1300	950	825	650
				22.5	8.4	18	9.0	10.1	67.8					50	2850	2100	1800	1450
23x8.5-12	12	7.00I	7JA	586	231	14.5	-	275	1749	TBLS	115	A2	R4	7.00	1950	1420	1235	980
				23.1	9.1	18	-	10.8	68.9					100	4300	3150	2750	2150
26x12-12	10	10.50	8.50/8.50JA	655	297	21.5	-	297	1955	TBLS	124	A2	R-4	4.50	2580	1870	1630	1290
				25.8	11.7	27	-	11.7	77.0					64	5700	4150	3600	2850
27x10-12	14	8.00G	-	700	265	19.0	288	316	2111	TT	132	A2	R-4	7.00	4640	4080	3545	2800
				27.6	10.4	24	11.3	12.4	83.1					100	10250	9000	7850	6200
7.00-15	6	5.50	6LB	775	222	16.0	246	361	2359	TBLS	121	A2	R-4	4.10	2280	1660	1440	1140
				30.5	8.7	20	9.7	14.2	92.9					59	5050	3650	3200	2500
27x8.5-15	6	7JA	6.5K/7J	679	213	15.0	245	309	2026	TBLS	112	A2	R-4	3.10	1780	1290	1125	890
				26.7	8.4	19	9.6	12.2	79.8					44	3950	2850	2500	1950
31x15.5-15	8	13.00	13LB	788	384	24.0	401	365	2352	TBLS	126	A2	R-4	3.10	2670	1940	1690	1340
				31.0	15.1	30	15.8	14.4	92.6					44	5900	4300	3750	2950
26x12-16.5 (300/40-16.5)	10	9.75	-	663	283	23.5	295	303	1986	TBLS	124	A2	R-4	4.00	2580	1870	1630	1290
				26.1	11.1	30	11.6	11.9	78.2					57	5700	4150	3600	2850
10-16.5	6	8.25	-	763	275	17.5	296	349	2277	TBLS	124	A2	R-4	3.15	2510	1830	1590	1260
				30.0	10.8	22	11.7	13.7	89.6					45	5550	4050	3500	2800
10-16.5	8	8.25	-	763	275	17.5	293	349	2277	TBLS	129	A2	R-4	4.20	2960	2160	1875	1480
				30.0	10.8	22	11.5	13.7	89.6					60	6550	4750	4150	3250
10-16.5	10	8.25	-	765	276	17.5	-	348	2306	TBLS	134	A2	R-4	5.25	3380	2460	2140	1690
				30.1	10.9	22	-	13.7	90.8					75	7450	5450	4700	3750
12-16.5	8	9.75	-	826	319	18.0	355	372	2465	TBLS	135	A2	R-4	3.50	3440	2510	2180	1720
				32.5	12.6	23	14.0	14.6	97.0					50	7600	5550	4800	3800



CAMSO XTRA WALL (cont.)

TIRE SIZE	PR	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] [inches]						TT/ TBLS	LOAD INDEX	SPEED SYMBOL	TRA CODE	INFLATION PRESSURE [bar] [PSI]	MAXIMUM TIRE LOAD [kg] [lb]			
		Recommended	Alternative	O.D.	O.W.	O.T.D. [mm] [32nd]	M.D.S.	S.L.R.	R.C.						Static	Creep	8 km/h	16 km/h
12-16.5	10	9.75	-	820	318	18.0	349	369	2479	TBLS	140	A2	R-4	4.50	4020	2930	2545	2010
				32.3	12.5	23	13.7	14.5	97.6					64	8850	6450	5600	4450
12-16.5	12	9.75	-	824	321	18.0	358	372	2459	TBLS	145	A2	R-4	5.60	4550	3310	2880	2280
				32.4	12.6	23	14.1	14.6	96.8					80	10050	7300	6350	5050
14-17.5	12	10.50	-	912	351	31.0	397	417	2746	TBLS	152	A2	R-4	4.80	5610	4080	3550	2800
				35.9	13.8	39	15.6	16.4	108.1					69	12400	9000	7850	6200



CAMSO SKS 774

Formerly Solideal Hauler XD44

A TOUGH L5 HARD SURFACES TIRE

FEATURES

- Extra-deep L5 tread
- 80% lug-to-void ratio
- Reinforced sidewall

BENEFITS

- Provides excellent tire life and tread impact resistance
- Provides excellent durability protection against tread impacts
- Provides improved side impact resistance

PERFORMANCE



TIRE SIZE	PR	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] [inches]						TT/ TBLS	LOAD INDEX	SPEED SYMBOL	TRA CODE	INFLATION PRESSURE [bar] [PSI]	MAXIMUM TIRE LOAD [kg] [lb]			
		Recommended	Alternative	O.D.	O.W.	O.T.D. [mm] [32nd]	M.D.S.	S.L.R.	R.C.						Static	Creep	8 km/h	16 km/h
10-16.5	10	8.25	-	786	272	35.0	299	366	2393	TBLS	134	A2	L-5	5.25	3380	2460	2140	1690
				30.9	10.7	44	11.8	14.4	94.2					75	7450	5450	4700	3750
12-16.5	12	9.75	-	833	323	35.0	392	392	2542	TBLS	145	A2	L-5	5.60	4550	3310	2880	2280
				32.8	12.7	44	15.4	15.4	100.1					80	10050	7300	6350	5050



CAMSO SKS 332

Formerly Solideal Gripper

RELIABLE PERFORMANCE AND QUALITY

FEATURES

- Deep lug design
- Lower lug-to-void ratio
- Premium rubber compounds

BENEFITS

- Provides good durability and traction in light-duty conditions
- Provides good traction in off-road conditions
- Provides good chunk and tear resistance

PERFORMANCE



TIRE SIZE	PR	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] [inches]						TT/ TBLS	LOAD INDEX	SPEED SYMBOL	TRA CODE	INFLATION PRESSURE [bar] [PSI]	MAXIMUM TIRE LOAD [kg] [lb]			
		Recommended	Alternative	O.D.	O.W.	O.T.D. [mm] [32nd]	M.D.S.	S.L.R.	R.C.						Static	Creep	8 km/h	16 km/h
10-16.5	8	8.25	-	764	275	15.0	304	346	2313	TBLS	129	A2	R-4	4.20	2960	2160	1875	1480
				30.1	10.8	19	12.0	13.6	91.1					60	6550	4750	4150	3250
12-16.5	10	9.75	-	819	318	18.0	348	370	2521	TBLS	140	A2	R-4	4.50	4020	2930	2545	2010
				32.2	12.5	23	13.7	14.6	99.3					64	8850	6450	5600	4450



CAMSO SKS 782S

Formerly Solideal Safetymaster SKS

SOLID OFF-ROAD TRACTION

FEATURES

- Full solid construction
- Hauler stepped tread design
- Reusable wheel

BENEFITS

- Provides excellent durability and flat-free operation
- Provides excellent cleanout for improved off-road traction
- Provides lower cost per hour and quicker installation

PERFORMANCE

TIRE LIFE



PUNCTURE RESISTANCE



TRACTION



TIRE SIZE	RIM SIZE	ACTUAL TIRE DIMENSIONS [mm] [inches]						HEEL		LOAD CAPACITY [kg] [lb]						
										COUNTERBALANCED LIFT TRUCKS			OTHER VEHICLES			STATIC
		O.D.	O.W.	O.T.D. [mm] [32nd]	M.D.S.	S.L.R.	R.C.	NORMAL	QUICK	15 km/h 9 mph	25 km/h 16 mph	25 km/h 16 mph	6 km/h 4 mph	10 km/h 6 mph	25 km/h 16 mph	0 km/h 0 mph
31x10-20	7.50	781	237	33	260	372	2522	-	■	-	4030	3100	4030	3660	3100	4680
		30.7	9.3	42	10.2	14.6	99.3			-	8885	6835	8900	8100	6850	10350
33x12-20	7.50	831	287	40	326	396	2677	-	■	-	5200	4000	5200	4720	4000	6040
		32.7	11.3	50	12.8	15.6	105.4			-	11465	8820	11500	10400	8850	13350
36x14-20	7.50	910	320	43	345	426	2860	-	■	-	6175	4750	6175	5605	4750	7175
		35.8	12.6	54	13.6	16.8	112.6			-	13650	10500	13650	12350	10500	15850



CAMSO SKS 786S

Formerly Solideal Safetymaster SM

SOLID HARD SURFACE DURABILITY

FEATURES

- Full solid construction
- Full-width footprint
- Reusable wheel

BENEFITS

- Provides excellent durability and flat-free operation
- Provides excellent stability and tread life
- Provides lower cost per hour and quicker installation

PERFORMANCE

TIRE LIFE



PUNCTURE RESISTANCE



TRACTION



TIRE SIZE	RIM SIZE	ACTUAL TIRE DIMENSIONS [mm] [inches]						HEEL		LOAD CAPACITY [kg] [lb]						
										COUNTERBALANCED LIFT TRUCKS			OTHER VEHICLES			STATIC
		O.D.	O.W.	O.T.D. [mm] [32nd]	M.D.S.	S.L.R.	R.C.	NORMAL	QUICK	15 km/h 9 mph	25 km/h 16 mph	25 km/h 16 mph	6 km/h 4 mph	10 km/h 6 mph	25 km/h 16 mph	0 km/h 0 mph
31x10-20	7.50	781	237	33	260	372	2522	-	■	-	4030	3100	4030	3660	3100	4680
		30.7	9.3	42	10.2	14.6	99.3			-	8885	6835	8900	8100	6850	10350
33x12-20	7.50	831	287	40	326	396	2677	-	■	-	5200	4000	5200	4720	4000	6040
		32.7	11.3	50	12.8	15.6	105.4			-	11465	8820	11500	10400	8850	13350
36x14-20	7.50	909	326	43	360	429	2905	-	■	-	6175	4750	6175	5605	4750	7175
		35.8	12.8	54	14.2	16.9	114.4			-	13650	10500	13650	12350	10500	15850



CAMSO BHL 753


Formerly Solideal BHZ

DURABILITY MEETS RIDE QUALITY

- FEATURES

 - Non-directional tread pattern with high lug-to-void ratio
 - Optimized, continuous-contact tread pattern
 - Non-directional tread pattern with high lug-to-void ratio
 - Tapered tread lugs
- BENEFITS

 - Ensures even tread wearing for greater durability
 - Significantly reduces vibration for improved ride quality
 - Protects against tread impacts and punctures
 - Improves lug stability for even wearing

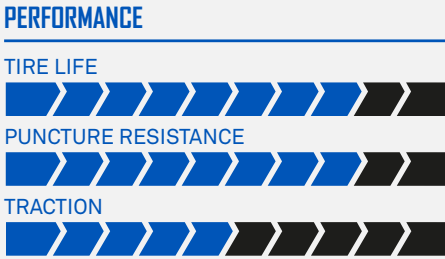

TIRE SIZE	PR	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] [inches]						TT / TBLS	LOAD INDEX	SPEED SYMBOL	TRA CODE	INFLATION PRESSURE [bar] [PSI]	MAXIMUM TIRE LOAD [kg] [lb]					
		Recommended	Alternative	O.D.	O.W.	O.T.D. [mm] [32nd]	M.D.S.	S.L.R.	R.C.						Static	Creep	8 km/h	16 km/h		
12-16.5	12	9.75	-	826	319	18	339	378	2489	TBLS	145	A2	R-4	5.60	4550	3310	2880	2280		
				32.5	12.6	23	13.4	14.9	98.0					80	10050	7300	6350	5050		
12.5/80-18 (320/80-18)	12	W9x18	11x18	984*	310*	24*	343	-	-	TBLS	129	A6	R-4	3.70	4375	-	2410	2240		
				38.7	12.2	30	13.5	-	-					53	9650	-	5300	4950		
				984*	310*	24*	343	-	-	TBLS	142			3.70	4375	-	3450	3205		
				38.7	12.2	30	13.5	-	-					53	9650	-	7600	7100		
19.5L-24 (500/70-24)	12	DW16Ax24	W16x24	1316*	503*	25*	-	-	TBLS	151	A8	R-4	2.30	7935	-	5240	4625			
				51.8	19.8	31	-	-					-	33	17500	-	11550	10200		
				1316*	503*	25*	-	-	TBLS	151			2.30	7935	-	4450	3900			
				51.8	19.8	31	-	-					-	33	17500	-	9800	8600		
18.4-26 (480/80-26)	12	W16Lx26	DW16A. W15Lx26	1418*	482*	26*	-	-	TBLS/ TT	156	A8	R-4	2.50	9200	-	5840	5360			
				55.8	19.0	33	0.0	-					-	36	20300	-	12900	11850		
				1418*	482*	26*	-	-	TBLS/ TT	156			2.50	9200	-	4830	4520			
				55.8	19.0	33	0.0	-					-	36	20300	-	10650	10000		
16.9-28 (440/80-28)	12	W15Lx28	W14Lx28	1404*	445*	28*	547	-	-	TBLS/ TT	152	A8	R-4	2.60	8165	-	5180	3800		
				55.3	17.5	35	21.5	-	-					37	18000	-	11450	8400		
				1404*	445*	28*	547	-	-	TBLS/ TT	152			2.60	8165	-	4290	3690		
				55.3	17.5	35	21.5	-	-					37	18000	-	9450	8150		




CAMSO SL R4

HEAVY-DUTY DURABILITY AND TRACTION

- FEATURES

 - Heavy-duty carcass
 - Optimized lug-to-void ratio with extra-deep tread
 - Hauler stepped tread design
- BENEFITS

 - Improves stability and side impact resistance
 - Increases tread life and off-road traction
 - Improves self-cleaning and stone ejection for excellent traction

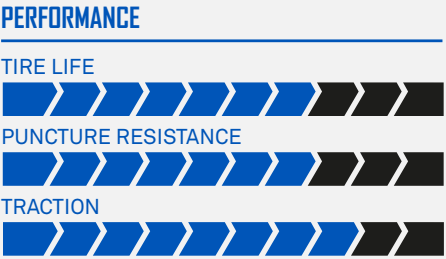

TIRE SIZE	PR	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] [inches]						TT / TBLS	LOAD INDEX	SPEED SYMBOL	TRA CODE	INFLATION PRESSURE [bar] [PSI]	MAXIMUM TIRE LOAD [kg] [lb]			
		Recommended	Alternative	O.D.	O.W.	O.T.D. [mm] [32nd]	M.D.S.	S.L.R.	R.C.						Static	Creep	8 km/h	16 km/h
10.5/80-18	10	W9x18	W8x18. 9x18	873.0	282.0	22	283.0	401.0	2550.0	TBLS	119	A6	R-4	4	3220	-	1770	1645
				34.4	11.1	28	11.1	15.8	100.4					53	7100	-	3900	3650
				873.0	282.0	22	283.0	401.0	2550.0	TBLS	131			4	3220	-	2540	2360
				34.4	11.1	28	11.1	15.8	100.4					53	7100	-	5600	5200
12.5/80-18	12	W9x18	11x18	958.0	292.0	27	344.0	423.0	2836.0	TBLS	129	A6	R-4	4	4375	-	2410	2240
				37.7	11.5	34	13.5	16.7	111.7					53	9650	-	5300	4950
				958.0	292.0	27	344.0	423.0	2836.0	TBLS	142			4	4375	-	3450	3205
				37.7	11.5	34	13.5	16.7	111.7					53	9650	-	7600	7100
12.5/80-18	14	W9x18	11x18	950.0	292.0	27	318.0	442.0	2823.0	TBLS	134	A6	R-4	4	4980	-	2760	2565
				37.4	11.5	34	12.5	17.4	111.1					61	11000	-	6100	5650
				950.0	292.0	27	318.0	442.0	2823.0	TBLS	146			4	4980	-	3900	3630
				37.4	11.5	34	12.5	17.4	111.1					61	11000	-	8600	8000
14.9-24	12	W13x24	W11x24. W12x24	1238.0	403.0	30	451.0	555.0	3694.0	TBLS	145	A8	R-4	3	6670	-	4230	3885
				48.7	15.9	38	17.8	21.9	145.4					41	14700	-	9350	8600
				1238.0	403.0	30	451.0	555.0	3694.0	TBLS	145			3	6670	-	3500	3275
				48.7	15.9	38	17.8	21.9	145.4					41	14700	-	7750	7250
16.9-24	12	W15Lx24	W14Lx24	1300.0	444.0	27	495.0	581.0	3846.0	TBLS	149	A8	R-4	2.6	7475	-	4745	4355
				51.2	17.5	34	19.5	22.9	151.4					38	16500	-	10450	9600
				1300.0	444.0	27	495.0	581.0	3846.0	TBLS	149			2.6	7475	-	3930	3675
				51.2	17.5	34	19.5	22.9	151.4					38	16500	-	8700	8100
17.5L-24	10	W15Lx24	W14Lx24	1258.0	445.0	30	502.0	567.0	3716.0	TBLS	144	A8	R-4	2	6440	-	4090	3750
				49.5	17.5	38	19.8	22.3	146.3					31	14200	-	9050	8300
				1258.0	445.0	30	502.0	567.0	3716.0	TBLS	144			2	6440	-	3380	3165
				49.5	17.5	38	19.8	22.3	146.3					31	14200	-	7450	7000
17.5L-24	12	W15Lx24	W14Lx24	1243.0	448.0	28	-	559.0	3728.0	TBLS	149	A8	R-4	3	7475	-	4750	4355
				48.9	17.6	35	-	22.0	146.8					37	16500	-	10500	9600



CAMSO SL R4 (cont.)

TIRE SIZE	PR	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] [inches]						TT/ TBLS	LOAD INDEX	SPEED SYMBOL	TRA CODE	INFLATION PRESSURE [bar] [PSI]	MAXIMUM TIRE LOAD [kg] [lb]			
		Recommended	Alternative	O.D.	O.W.	O.T.D. [mm] [32nd]	M.D.S.	S.L.R.	R.C.						Static	Creep	8 km/h	16 km/h
17.5L-24	12	W15Lx24	W14Lx24	1243.0	448.0	28	-	559.0	3728.0	TBLS	149	A8	R-4	3	7475	-	3930	3675
				48.9	17.6	35	-	22.0	146.8					37	16500	-	8700	8100
19.5L-24	12	DW16Ax24	W16x24	1312.0	485.0	28	536.0	568.0	3895.0	TBLS	151	A8	R-4	2	7935	-	5240	4625
				51.7	19.1	35	21.1	22.4	153.3					33	17500	-	11550	10200
				1312.0	485.0	28	536.0	568.0	3895.0					2	7935	-	4450	3900
				51.7	19.1	35	21.1	22.4	153.3					33	17500	-	9800	8600
19.5L-24	14	DW16Ax24	W16x24	1322.0	505.0	28	-	576.0	3932.0	TBLS	155	A8	R-4	3	8915	-	5890	5195
				52.0	19.9	35	-	22.7	154.8					37	19700	-	13000	11450
				1322.0	505.0	28	-	576.0	3932.0					3	8915	-	5000	4380
				52.0	19.9	35	-	22.7	154.8					37	19700	-	11050	9650
21L-24	12	DW18Ax24	W18Lx24	1390.0	534.0	38	521.0	614.0	4072.0	TBLS	155	A8	R-4	2	8915	-	5660	5195
				54.7	21.0	48	20.5	24.2	160.3					31	19700	-	12500	11450
				1390.0	534.0	38	521.0	614.0	4072.0					2	8915	-	4680	4380
				54.7	21.0	48	20.5	24.2	160.3					31	19700	-	10350	9650
18.4-26	12	W16Lx26	DW16A. W15Lx26	1430.0	494.0	28	541.0	635.0	4270.0	TBLS	156	A8	R-4	3	9200	-	5840	5360
				56.3	19.4	35	21.3	25.0	168.1					36	20300	-	12900	11850
				1430.0	494.0	28	541.0	635.0	4270.0					3	9200	-	4830	4520
				56.3	19.4	35	21.3	25.0	168.1					36	20300	-	10650	10000
16.9-28	12	W15Lx28	W14Lx28	1427.0	455.0	33	647.0	647.0	4285.0	TBLS/ TT	152	A8	R-4	3	8165	-	5180	3800
				56.2	17.9	42	25.5	25.5	168.7					37	18000	-	11450	8400
				1427.0	455.0	33	647.0	647.0	4285.0					3	8165	-	4290	3690
				56.2	17.9	42	25.5	25.5	168.7					37	18000	-	9450	8150
18.4-28	12	W16Lx28	W15Lx28	1500.0	504.0	39	-	663.0	4414.0	TBLS/ TT	157	A8	R-4	3	9490	-	6020	5530
				59.1	19.8	49	-	26.1	173.8					36	20950	-	13300	12200
				1500.0	504.0	39	-	663.0	4414.0					3	9490	-	4980	4660
				59.1	19.8	49	-	26.1	173.8					36	20950	-	11000	10300
16.9-30	14	W15Lx30	W14Lx30	1444.0	444.0	31	-	670.0	4310.0	TBLS/ TT	154	A8	R-4	3	8625	-	5475	5025
				56.9	17.5	39	-	26.4	169.7					41	19050	-	12100	11100
				1444.0	444.0	31	-	670.0	4310.0					3	8625	-	4530	4240
				56.9	17.5	39	-	26.4	169.7					41	19050	-	10000	9350



CAMSO BHL 532

Formerly Solideal SLA R4

ROADING COMFORT AND OFF-ROAD TRACTION

FEATURES

- Engineered low-vibration tread design
- Continuous multi-angle tread lugs
- Hauler stepped tread design

BENEFITS

- Minimizes vibrations for improved ride quality
- Minimizes vibrations for improved ride quality
- Improves self-cleaning and stone ejection for excellent traction

PERFORMANCE

TIRE LIFE



PUNCTURE RESISTANCE



TRACTION



TIRE SIZE	PR	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] [inches]						TT/ TBLS	LOAD INDEX	SPEED SYMBOL	TRA CODE	INFLATION PRESSURE [bar] [PSI]	MAXIMUM TIRE LOAD [kg] [lb]			
		Recommended	Alternative	O.D.	O.W.	O.T.D. [mm] [32nd]	M.D.S.	S.L.R.	R.C.						Static	Creep	8 km/h	16 km/h
14.9-24	12	W13x24	W11x24. W12x24	1221	394	25	434	548	3644	TBLS	145	A8	R-4	2.90	6670	-	4230	3885
				48.1	15.5	31	17.1	21.6	143.5					41	14700	-	9350	8600
				1221	394	25	434	548	3644					2.90	6670	-	3500	3275
				48.1	15.5	31	17.1	21.6	143.5					41	14700	-	7750	7250
16.9-24	12	W15Lx24	W14Lx24	1281	450	27	-	578	3823	TBLS	149	A8	R-4	2.60	7475	-	4745	4355
				50.4	17.7	34	-	22.8	150.5					38	16500	-	10450	9600
				1281	450	27	-	578	3823					2.60	7475	-	3930	3675
				50.4	17.7	34	-	22.8	150.5					38	16500	-	8700	8100
17.5L-24	10	W15Lx24	W14Lx24	1243	445	25	481	546	3709	TBLS	144	A8	R-4	2.20	6440	-	4090	3750
				48.9	17.5	31	18.9	21.5	146.0					31	14200	-	9050	8300
				1243	445	25	481	546	3709					2.20	6440	-	3380	3165
				48.9	17.5	31	18.9	21.5	146.0					31	14200	-	7450	7000
19.5L-24	12	DW16Ax24	W16x24	1320	495	26	-	585	3978	TBLS	151	A8	R-4	2.30	7935	-	5240	4625
				52.0	19.5	33	-	23.0	156.6					33	17500	-	11550	10200
				1320	495	26	-	585	3978					2.30	7935	-	4450	3900
				52.0	19.5	33	-	23.0	156.6					33	17500	-	9800	8600
21L-24	12	DW18Ax24	W18Lx24	1377	534	28	580	601	4110	TBLS	155	A8	R-4	2.20	8915	-	5660	5195
				54.2	21.0	35	22.8	23.7	161.8					31	19700	-	12500	11450
				1377	534	28	580	601	4110					2.20	8915	-	4680	4380
				54.2	21.0	35	22.8	23.7	161.8					31	19700	-	10350	9650
18.4-26	12	W16Lx26	DW16A. W15Lx26	1449	490	26	525	626	4269	TBLS/ TT	156	A8	R-4	2.50	9200	-	5840	5360
				57.0	19.3	33	20.7	24.6	168.1					36	20300	-	12900	11850
				1449	490	26	525	626	4269					2.50	9200	-	4830	4520
				57.0	19.3	33	20.7	24.6	168.1					36	20300	-	10650	10000
16.9-28	12	W15Lx28	W14Lx28	1417	455	28	547	621	4224	TBLS/ TT	152	A8	R-4	2.60	8165	-	5180	3800
				55.8	17.9	35	21.5	24.4	166.3					37	18000	-	11450	8400
				1417	455	28	547	621	4224					2.60	8165	-	4290	3690
				55.8	17.9	35	21.5	24.4	166.3					37	18000	-	9450	8150



CAMSO
4L R1

ROADING COMFORT AND OFF-ROAD TRACTION

FEATURES

- Aggressive curved R1 tread pattern
- Hauler stepped tread design
- Robust carcass design

BENEFITS

- Maximizes traction and improves ride quality
- Maximizes tread cleanout in off-road conditions for improved traction
- Improves stability and side impact resistance

PERFORMANCE

TIRE LIFE



PUNCTURE RESISTANCE



TRACTION



TIRE SIZE	PR	TT / TBLS	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] [inches]					LOAD INDEX	SPEED SYMBOL	TRA CODE	INFLATION PRESSURE [bar] [PSI]	SERVICE	APPLICATION	MAXIMUM TIRE LOAD [kg] [lb]				
					Recom- mended	Alterna- tive	O.D.	O.W.	O.T.D. [mm] [32nd]							S.L.R.	R.C.	STATIC	8 km/h	16 km/h
			5 mph	10 mph															25 mph	30 mph
10.0/75- 15.3	8	TT / TBLS	9x15.3	-	795	261	22	344	2373	119	A8	R-4	3.10	DUMPER	FREE	2245	1905	1810	-	1225
					31.3	10.3	28	13.5	93.4				4950			4200	4000	-	2700	
					795	261	22	344	2373	106			3.10		DRIVE	2235	1330	1265	-	855
					31.3	10.3	28	13.5	93.4				4950			2950	2800	-	1900	
11.5/80- 15.3	8	TT / TBLS	9x15.3	-	853	286	23	362	2549	126	A8	R-1	2.70	DUMPER	FREE	2805	2380	2260	-	1530
					33.6	11.3	29	14.3	100.4				6200			5250	5000	-	3400	
					853	286	23	362	2549	114			2.70		DRIVE	2775	1650	1570	-	1060
					33.6	11.3	29	14.3	100.4				6150			3650	3450	-	2350	
12.5/80-18	12	TBLS	W9x18	11x18	989.0	312.0	30	450.0	3005.0	129	A6	R-1	4	-	DRIVE	4375	2410	2240	1665	-
					38.9	12.3	38	17.7	118.3				9650			5300	4950	3700	-	
					989.0	312.0	30	450.0	3005.0	142			4		FREE ROLLING	4375	3450	3205	2385	-
					38.9	12.3	38	17.7	118.3				9650			7600	7100	5250	-	
18-19.5	16	TT / TBLS	14x19.5	-	1105	448	26	497	3667	160	A8	R-1	4.50	MPT	DRIVE	7425	5850	5400	-	4050
					43.5	17.6	33	19.6	144.4				16400			12900	11900	-	8950	
405/70-20 (16/70-20)	14	TT / TBLS	13x20	13SDC	1098	410	34	505	3332	154	A8	R-1	3.50	MPT	FREE	6190	5250	4990	-	3375
					43.2	16.1	43	19.9	131.2				13650			11600	11000	-	7450	
					1098	410	34	505	3332	142			3.50		DRIVE	6230	3710	3525	-	2385
					43.2	16.1	43	19.9	131.2				13750			8200	7800	-	5250	
18-22.5	16	TT / TBLS	14x22.5	-	1105	448	28	494	3667	163	A8	R1	4.50	MPT	DRIVE	8045	6340	5850	-	4390
					43.5	17.6	35	19.4	144.4				17750			14000	12900	-	9700	
405/70-24 (16/70-24)	14	TT / TBLS	13x24	13SDC	1202	406	27	543	3587	156	A8	R-1	2.70	MPT	FREE	6600	5600	5320	-	3600
					47.3	16.0	34	21.4	141.2				14550			12350	11750	-	7950	
					1202	406	27	543	3587	144			2.70		DRIVE	6580	3920	3725	-	2520
					47.3	16.0	34	21.4	141.2				14550			8650	8200	-	5550	



CAMSO
4L R1 (cont.)

TIRE SIZE	PR	TT / TBLS	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] [inches]					LOAD INDEX	SPEED SYMBOL	TRA CODE	INFLATION PRESSURE [bar] [PSI]	SERVICE	APPLICATION	MAXIMUM TIRE LOAD [kg] [lb]				
					Recom- mended	Alterna- tive	O.D.	O.W.	O.T.D. [mm] [32nd]							S.L.R.	R.C.	STATIC	8 km/h	16 km/h
			5 mph	10 mph															25 mph	30 mph
15.5/80-24	12	TT / TBLS	13x24	W12/W13/ W14L	1297	411	40	550	3852	157	A8	R-1	3.00	MPT	FREE	2245	1905	1810	-	1225
					51.1	16.2	50	21.7	151.7				4950			4200	4000	-	2700	
					1297	411	40	550	3852	145			3.00		DRIVE	2235	1330	1265	-	855
					51.1	16.2	50	21.7	151.7				4950			2950	2800	-	1900	
15.5/80-24	14	TT / TBLS	13x24	W12/W13/ W14L	1294	402	40	551	3864	160	A8	R-1	3.50	MPT	FREE	2805	2380	2260	-	1530
					50.9	15.8	50	21.7	152.1				6200			5250	5000	-	3400	
					1294	402	40	551	3864	148			3.50		DRIVE	2775	1650	1570	-	1060
					50.9	15.8	50	21.7	152.1				6150			3650	3450	-	2350	
16.5/85-24	8	TBLS	13x24	W13/W14L/ W15L	1327	417	26	575	4026	154	A8	R-1	1.90	MPT	FREE	6190	5250	4990	-	3375
					52.2	16.4	33	22.6	158.5				13650			11600	11000	-	7450	
					1327	417	26	575	4026	142			1.90		DRIVE	6230	3710	3525	-	2385
					52.2	16.4	33	22.6	158.5				13750			8200	7800	-	5250	
16.5/85-24	14	TT / TBLS	13x24	W13/W14L/ W15L	1327	428	25	256	3998	165	A8	R-1	3.30	MPT	FREE	8500	7210	6850	-	4635
					52.2	16.9	31	10.1	157.4				18750			15900	15100	-	10250	
					1327	428	25	256	3998	153			3.30		DRIVE	8580	5110	4855	-	3285
					52.2	16.9	31	10.1	157.4				18950			11300	10700	-	7250	



CAMSO BHL 530

Formerly Solideal MR F3

PERFORMANCE AND QUALITY YOU CAN RELY ON

FEATURES

- Engineered F3 rib tread design
- Robust carcass
- Deep tread depth

BENEFITS

- Provides smooth ride and effective steering
- Reduces tread crowning for even wearing and excellent stability
- Enhances longevity

PERFORMANCE



TIRE SIZE	PR	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] [Inches]						TT/ TBLS	LOAD INDEX	SPEED SYMBOL	TRA CODE	INFLATION PRESSURE [bar] [PSI]	MAXIMUM TIRE LOAD [kg] [lb]			
		Recommended	Alternative	O.D.	O.W.	O.T.D. [mm] [32nd]	M.D.S.	S.L.R.	R.C.						Static	Creep	8 km/h	16 km/h
11L-15SL	10	8LBx15	10LBx15	768	280	13.5	278	362	2397	TBLS	118	B	F-3	3.00	2640	-	-	-
				30.2	11.0	17	10.9	14.3	94.4					42.86	5850	-	-	-
11L-16SL	12	8LBx16	W8L. 10LB. W10Lx16	802	262	13.5	278	358	2397	TBLS	123	B	F-3	3.60	3110	-	-	-
				31.6	10.3	17	10.9	14.1	94.4					51.43	6850	-	-	-
14.5/75-16.1SL	10	W11Cx16.1	-	940	361	17	391	417	2706	TBLS	121	A8	F-3	2.80	4350	-	2480	2175
				37.0	14.2	21	15.4	16.4	106.5					40.00	9600	-	5450	4800



CAMSO TLH 792S

Formerly Solideal SolidAir TLH

EXTREME-DUTY FLAT-FREE TIRE SOLUTION

FEATURES

- Engineered solid tire solution
- Patented triangular aperture design
- Massive tread depth
- Hauler stepped tread design

BENEFITS

- Provides flat-free operation and ultimate durability
- Optimizes stability, strength and comfort
- Improves durability and traction
- Provides excellent cleanout for improved traction

PERFORMANCE



TIRE SIZE	RIM SIZE	ACTUAL TIRE DIMENSIONS [mm] [inches]						HEEL		LOAD CAPACITY [kg] [lb]						
										COUNTERBALANCED LIFT TRUCKS			OTHER VEHICLES			STATIC
		O.D.	O.W.	O.T.D. [mm] [32nd]	M.D.S.	S.L.R.	R.C.	NORMAL	QUICK	15 km/h 9 mph	25 km/h 16 mph	25 km/h 16 mph	6 km/h 4 mph	10 km/h 6 mph	25 km/h 16 mph	0 km/h 0 mph
13.00-24	8.50V	1290	330	70	377	595	4027	-	■	-	-	-	7650	6950	6375	9625
		50.8	13.0	88	14.8	23.4	158.5	-	■	-	-	-	16900	15350	14050	21250
14.00-24	8.50V	1330	350	88	394	617	4164	-	■	-	-	-	8460	7685	7050	10645
		52.4	13.8	111	15.5	24.3	163.9	-	■	-	-	-	18700	16950	15550	23500



CAMSO
SL G3

MULTI-SURFACE STABILITY AND PERFORMANCE

FEATURES

- Extra-deep non-directional tread pattern
- Optimized lug-to-void ratio
- Heavy-duty sidewall construction
- Flatter tread profile

BENEFITS

- Optimizes durability and traction on mixed and hard surfaces
- Provides excellent traction for mixed and hard surface applications
- Provides superior side impact resistance and stability
- Resists tread crowning for even wearing

PERFORMANCE

TIRE LIFE



PUNCTURE RESISTANCE



TRACTION



TIRE SIZE	PR	TT / TBLS	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] [in]						LOAD INDEX	SPEED SYMBOL	SERVICE	TRA CODE
			Recommended	Alternative	O.D.	O.W.	O.T.D. [mm] [32nd]	M.D.S.	S.L.R.	R.C.				
13.00-24 TG	12	TT / TBLS	8.00TG	10.00VA 9.00DC	1303	367	28	413	576	3832	143	A8	GRADER	G-3
					51.3	14.4	35	16.3	22.7	150.9				
					1303	367	28	413	576	3832	168	A2	LOADER-DOZER	L-3
					51.3	14.4	35	16.3	22.7	150.9				
14.00-24 TG	12	TT / TBLS	8.00TG	10.00VA 9.00DC	1354	385	30	445	592	3998	147	A8	GRADER	G-3
					53.3	15.2	38	17.5	23.3	157.4				
					1354	385	30	445	592	3998	166	A2	LOADER-DOZER	L-3
					53.3	15.2	38	17.5	23.3	157.4				
14.00-24 TG	16	TT / TBLS	10.00VA	-	1338	393	30	428	622	3993	153	A8	GRADER	G-3
					52.7	15.5	38	16.9	24.5	157.2				
					1338	393	30	428	622	3993	177	A2	LOADER-DOZER	L-3
					52.7	15.5	38	16.9	24.5	157.2				

MAXIMUM TIRE LOAD [kg] [lb] versus INFLATION PRESSURE [bar] [PSI]																			
1.25	1.50	1.75	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	4.00	4.25	4.50	4.75	5.00	5.25	5.50	5.75	6.00
18	21	25	29	32	36	39	43	46	50	54	57	61	64	68	71	75	79	82	86
1700	1900	2060	2240	2360(10)	2500	2650	2725(12)	2800(14)	2900(16)	-	-	-	-	-	-	-	-	-	-
3750	4200	4550	4950	5200(10)	5500	5850	6000(12)	6200(14)	6400(16)	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	4500	4750	5000(10)	5150	5300	5600(12)	5600	5800	6000(14)	6150	6300	6500(16)
-	-	-	-	-	-	-	-	9950	10500	11050(10)	11350	11700	12350(12)	12350	12800	13250(14)	13600	13900	14350(16)
2060	2300	2500	2650	2800	3075(12)	3250	3450(14)	3550	3650(16)	-	-	-	-	-	-	-	-	-	-
4550	5100	5500	5850	6200	6800(12)	7150	7600(14)	7850	8050(16)	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	5450	5600(10)	6000	6150	6300(12)	6500	6700(14)	6900	7100	7300(16)	-	-
-	-	-	-	-	-	-	-	12050	12350(10)	13250	13600	13900(12)	14350	14800(14)	15250	15650	16100(16)	-	-
2060	2300	2500	2650	2800	3075(12)	3250	3450(14)	3550	3650(16)	-	-	-	-	-	-	-	-	-	-
4550	5100	5500	5850	6200	6800(12)	7150	7600(14)	7850	8050(16)	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	5450	5600(10)	6000	6150	6300(12)	6500	6700(14)	6900	7100	7300(16)	-	-
-	-	-	-	-	-	-	-	12050	12350(10)	13250	13600	13900(12)	14350	14800(14)	15250	15650	16100(16)	-	-



CAMSO SL G2

HEAVY-DUTY OFF-ROAD DURABILITY AND TRACTION

FEATURES

- Extra-deep tread pattern
- Hauler stepped tread design
- Heavy-duty sidewall construction
- Flatter tread profile

BENEFITS

- Provides best durability and traction in off-road conditions
- Provides excellent cleanout for improved traction
- Provides superior side impact resistance and stability
- Resists tread crowning for even wearing

PERFORMANCE



TIRE SIZE	PR	TT / TBLS	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] [in]						LOAD INDEX	SPEED SYMBOL	SERVICE	TRA CODE
			Recommended	Alternative	O.D.	O.W.	O.T.D. [mm] [32nd]	M.D.S.	S.L.R.	R.C.				
13.00-24 TG	12	TT / TBLS	8.00TG	10.00VA 9.00DC	1261	358	22	413	559	3789	143	A8	GRADER	G-2
					49.6	14.1	28	16.3	22.0	149.2				
					1261	358	22	413	559	3789	168	A2	LOADER-DOZER	L-2
					49.6	14.1	28	16.3	22.0	149.2				
13.00-24 TG	12	TT / TBLS	8.00TG	10.00VA 9.00DC	1324	384	22	411	569	3982	147	A8	GRADER	G-2
					52.1	15.1	28	16.2	22.4	156.8				
					1324	384	22	411	569	3982	166	A2	LOADER-DOZER	L-2
					52.1	15.1	28	16.2	22.4	156.8				



MAXIMUM TIRE LOAD [kg] [lb] versus INFLATION PRESSURE [bar] [PSI]																				
1.25	1.50	1.75	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	4.00	4.25	4.50	4.75	5.00	5.25	5.50	5.75	6.00	
18	21	25	29	32	36	39	43	46	50	54	57	61	64	68	71	75	79	82	86	
1700	1900	2060	2240	2360(10)	2500	2650	2725(12)	2800(14)	2900(16)	-	-	-	-	-	-	-	-	-	-	-
3750	4200	4550	4950	5200(10)	5500	5850	6000(12)	6200(14)	6400(16)	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	4500	4750	5000(10)	5150	5300	5600(12)	5600	5800	6000(14)	6150	6300	6500(16)	
-	-	-	-	-	-	-	-	9950	10500	11050(10)	11350	11700	12350(12)	12350	12800	13250(14)	13600	13900	14350(16)	
2060	2300	2500	2650	2800	3075(12)	3250	3450(14)	3550	3650(16)	-	-	-	-	-	-	-	-	-	-	-
4550	5100	5500	5850	6200	6800(12)	7150	7600(14)	7850	8050(16)	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	5450	5600(10)	6000	6150	6300(12)	6500	6700(14)	6900	7100	7300(16)	-	-	
-	-	-	-	-	-	-	-	12050	12350(10)	13250	13600	13900(12)	14350	14800(14)	15250	15650	16100(16)	-	-	



CAMSO TLH 532

Formerly Solideal TH2

HIGH QUALITY FOR STANDARD DUTY

FEATURES

- Deep tread pattern
- Optimized tread pattern
- Flatter tread profile


BENEFITS

- Enhances durability and traction
- Provides good traction in off-road conditions
- Resists tread crowning for even wearing

PERFORMANCE



TIRE SIZE	PR	TT / TBLS	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] [in]						LOAD INDEX	SPEED SYMBOL	SERVICE	TRA CODE
			Recommended	Alternative	O.D.	O.W.	O.T.D. [mm] [32nd]	M.D.S.	S.L.R.	R.C.				
13.00-24 TG	12	TT / TBLS	8.00TG	10.00VA 9.00DC	1303	367	28	413	576	3832	143	A8	GRADER	G-3
					51.3	14.4	35	16.3	22.7	150.9				
					1303	367	28	413	576	3832	168	A2	LOADER-DOZER	L-3
					51.3	14.4	35	16.3	22.7	150.9				
14.00-24 TG	12	TT / TBLS	8.00TG	10.00VA 9.00DC	1354	385	30	445	592	3998	147	A8	GRADER	G-3
					53.3	15.2	38	17.5	23.3	157.4				
					1354	385	30	445	592	3998	166	A2	LOADER-DOZER	L-3
					53.3	15.2	38	17.5	23.3	157.4				



MAXIMUM TIRE LOAD [kg] [lb] versus INFLATION PRESSURE [bar] [PSI]																				
1.25	1.50	1.75	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	4.00	4.25	4.50	4.75	5.00	5.25	5.50	5.75	6.00	
18	21	25	29	32	36	39	43	46	50	54	57	61	64	68	71	75	79	82	86	
1700	1900	2060	2240	2360(10)	2500	2650	2725(12)	2800(14)	2900(16)	-	-	-	-	-	-	-	-	-	-	-
3750	4200	4550	4950	5200(10)	5500	5850	6000(12)	6200(14)	6400(16)	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	4500	4750	5000(10)	5150	5300	5600(12)	5600	5800	6000(14)	6150	6300	6500(16)	
-	-	-	-	-	-	-	-	9950	10500	11050(10)	11350	11700	12350(12)	12350	12800	13250(14)	13600	13900	14350(16)	
1700	1900	2060	2240	2360(10)	2500	2650	2725(12)	2800(14)	2900(16)	-	-	-	-	-	-	-	-	-	-	-
3750	4200	4550	4950	5200(10)	5500	5850	6000(12)	6200(14)	6400(16)	-	-	-	-	-	-	-	-	-	-	-
-	-	-	-	-	-	-	-	4500	4750	5000(10)	5150	5300	5600(12)	5600	5800	6000(14)	6150	6300	6500(16)	
-	-	-	-	-	-	-	-	9950	10500	11050(10)	11350	11700	12350(12)	12350	12800	13250(14)	13600	13900	14350(16)	




CAMSO TM R4

DURABLE OFF-ROAD PERFORMANCE

- ### FEATURES

 - Hauler stepped tread design
 - Tapered tread lugs
 - Optimized lug-to-void ratio
 - Heavy-duty carcass
- ### BENEFITS

 - Enhances tread cleanout for improved traction
 - Improves lug stability for even wearing
 - Enhances longevity and tread puncture resistance
 - Provides excellent stability and side impact resistance

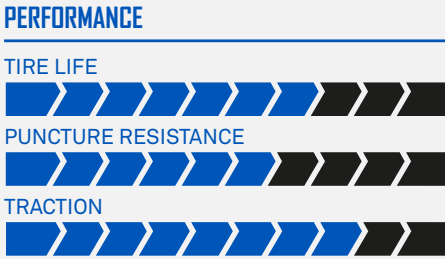

TIRE SIZE	PR	TT / TBLS	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] [Inches]					LOAD INDEX	SPEED SYMBOL	TRA CODE	INFLATION PRESSURE [bar] [PSI]	SERVICE	APPLICATION	MAXIMUM TIRE LOAD [kg] [lb]					
					Recom-mended	Alterna-tive	O.D.	O.W.	O.T.D. [mm] [32nd]							S.L.R.	R.C.	STATIC	8 km/h	16 km/h	40 km/h
			5 mph	10 mph															25 mph	30 mph	
18-19.5	16	TT / TBLS	14x19.5	-	1117	454	32	505	3352	160	A8	R-4	4.50	MPT	DRIVE	9090	6300	5985	-	4050	
					44.0	17.9	40	19.9	132.0				64			20050	13900	13200	-	8950	
405/70-20 (16/70-20)	14	TT / TBLS	13x20	13SDC	1085	403	27	490	3238	154	A8	R-4	3.50	MPT	FREE	6190	5250	4990	-	3375	
					42.7	15.9	34	19.3	127.5				50			13650	11600	11000	-	7450	
					1085	403	27	490	3238	142			3.50			DRIVE	6230	3710	3525	-	2385
					42.7	15.9	34	19.3	127.5				50				13750	8200	7800	-	5250
18-22.5	16	TT / TBLS	14x22.5	-	1209	444	35	545	3638	163	A8	R-4	4.50	MPT	DRIVE	9850	6825	6485	-	4390	
					47.6	17.5	44	21.5	143.2				64			21750	15050	14300	-	9700	
400/80-24 (15.5/80-24)	16	TBLS	13x24	13SDC	1244	411	37	572	3756	156	A8	R-4	4.00	MPT	CONSTANT	6190	5250	4990	-	3375	
					49.0	16.2	47	22.5	147.9				57			13650	11600	11000	-	7450	
					1244	411	37	572	3756	156			4.00		CYCLIC	6230	3710	3525	-	2385	
					49.0	16.2	47	22.5	147.9				57			13750	8200	7800	-	5250	
400/80-24 (15.5/80-24)	20	TBLS	13x24	13SDC	1238	409	37	568	3771	162	A8	R-4	5.00	MPT	CONSTANT	10925	5940	5370	-	4560	
					48.7	16.1	47	22.4	148.5				71			24100	13100	11850	-	10050	
					1238	409	37	568	3771	162			5.00		CYCLIC	10925	7125	6365	-	4560	
					48.7	16.1	47	22.4	148.5				71			24100	15750	14050	-	10050	
440/80-24 (16.5/85-24)	22	TBLS	DW14Lx24	DW13/DW13L/ DW15L	1328	453	33	600	4016	168	A8	R-4	5.00	MPT	CONSTANT	12880	7000	6330	-	5375	
					52.3	17.8	42	23.6	158.1				71			28396	15679	14074	-	11850	
					1328	453	33	600	4016	168			5.00		CYCLIC	12880	8400	7505	-	5375	
					52.3	17.8	42	23.6	158.1				71			28396	19136	16420	-	11850	
460/70-24 IND	-	TL	DW15L	DW14L/DW16L/ TW14L/ TW15L/ TW16L	1261	454	30	-	-	159	A8	R-4	5.00	IND. TRACTOR	CYCLIC	10065	7305	6565	4855	4680	
					49.6	17.9	39	-	-				71			22190	16105	14475	10705	10320	
					1261	454	30	-	-	159			5.00		CONSTANT	10065	6345	5470	4640	4550	
					49.6	17.9	39	-	-				71			22190	13990	12060	10230	10030	




CAMSO 4L13

A SMOOTH RIDE WITH ENHANCED TRACTION

- ### FEATURES

 - Versatile directional tread pattern with center block
 - Hauler stepped tread design
 - Open shoulder tread design
 - Heavy-duty carcass
- ### BENEFITS

 - Reduces vibrations and enhances driving comfort
 - Maximizes tread cleanout in off-road conditions for improved traction
 - Provides excellent traction in off-road conditions
 - Provides excellent stability and side impact resistance

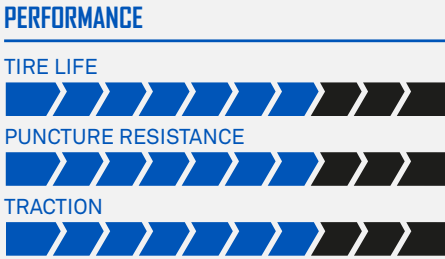

TIRE SIZE	PR	TT / TBLS	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] [Inches]					LOAD INDEX	SPEED SYMBOL	INFLATION PRESSURE [bar] [PSI]	SERVICE	APPLICATION	MAXIMUM TIRE LOAD [kg] [lb]								
					Recom- mended	Alterna- tive	O.D.	O.W.	O.T.D. [mm] [32nd]						S.L.R.	R.C.	STATIC	10 km/h	15 km/h	25 km/h	30 km/h	40 km/h	50 km/h
			6 mph	9 mph														15 mph	18 mph	24 mph	30 mph		
10.0/75-15.3	8	TT / TBLS	9x15.3	-	797	265	29	119	4016	119	A8	3.10	MPT	FREE	2245	1905	1810	1620	1525	1360	1225		
					31.4	10.4	37	23.6	158.1						4950	4200	3990	3570	3360	3000	2700		
					797	265	29	106	4016	106					3.10	DRIVE	2245	1330	1265	1130	1065	950	855
					31.4	10.4	37	23.6	158.1								4950	2935	2785	2495	2345	2095	1885
11.5/80-15.3	10	TT / TBLS	9x15.3	-	847	294	25	400	2582	131	A8	3.40	MPT	FREE			3220	2730	2595	2320	2185	1950	1755
					33,3	11,6	31	15,7	101,7								7100	6020	5720	5115	4815	4300	3870
					847	294	25	400	2582	119					3.40	DRIVE	3220	1905	1810	1620	1525	1360	1225
					33,3	11,6	31	15,7	101,7								7100	4200	3990	3570	3360	3000	2700
10.5-18	10	TT / TBLS	9x18	9SDC	891	269	25	393	2650	126	B	3.75	MPT	-			4875	3510	3200	-	2805	1905	2185
					35.1	10.6	31	15.5	104.3								10750	7750	7050	-	6200	4200	4800
12.5-18	12	TT / TBLS	11x18	11SDC 12SDC 12	989	335	22	-	-	131	B	3.50	MPT	-	4250	-	-	-	3200	2185	1905		
					38,9	13,2	28	-	-						10750	-	-	-	7050	4800	4450		
10.5-20	10	TT / TBLS	9x20	9SDC	950	278	22	423	2825	128	B	3.50	MPT	-	4500	3240	2970	-	2970	2015	2015		
					37.4	10.9	28	16.7	111.2						9950	7150	6550	-	6550	4450	4450		
12.5-20	12	TT / TBLS	11x20	11SDC 12SDC 12	1054	348	23	471	3138	132	B	3.50	MPT	-	5000	3600	3300	-	3300	2240	2240		
					41.5	13.7	29	18.5	123.5						11050	7950	7300	-	7300	4950	4950		
14.5-20	14	TT / TBLS	11x20	11SDC 12SDC 12	1107	359	27	490	3277	138	B	3.50	MPT	-	5900	4250	3895	-	3895	2645	2645		
					43.6	14.1	34	19.3	129.0						13000	9400	8600	-	8600	5850	5850		
405/70-20 (16/70-20)	14	TT / TBLS	13x20	13SDC	1081	442	26	503	3183	154	A8	3.50	MPT	FREE	6190	5250	4990	-	4990	3375	3375		
					42.6	17.4	33	19.8	125.3						13650	11600	11000	-	11000	7450	7450		
					1081	442	26	503	3183	142				50	DRIVE	6230	3710	3525	-	3525	2385	2385	
					1.7	0.7	33	0.8	4.9							13750	8200	7800	-	7800	5250	5250	
405/70-24 (16/70-24)	14	TT / TBLS	13x24	13SDC	1188	421	27	600	4016	156	A8	3.50	MPT		FREE	6600	5600	5320	-	5320	3600	3600	
					46.8	16.6	34	23.6	158.1							14550	12350	11750	-	11750	7950	7950	
					1188	421	27	600	4016	144				50	DRIVE	6580	3920	3725	-	3725	2520	2520	
					46.8	16.6	34	23.6	158.1							14550	8650	8200	-	8200	5550	5550	



CAMSO

WHL 753R

Formerly Solideal SRGP

RADIAL PERFORMANCE. VERSATILITY AND DURABILITY

FEATURES

- Heavy-duty Dual-Star carcass
- Optimized tread pattern
- Offset, tapered tread lugs
- Non-directional stepped design

BENEFITS

- Enhances stability and suitability for both one-star and two-star applications
- Provides excellent durability and low wear rate
- Reduces vibration for improved ride quality
- Enhances cleanout for improved traction

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



TIRE SIZE	PR	TT / TBLS	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] [in]						LOAD INDEX	SPEED SYMBOL	SERVICE	TRA CODE
			Recommended	Alternative	O.D.	O.W.	O.T.D. [mm] [32nd]	M.D.S.	S.L.R.	R.C.				
17.5R25	DUAL STAR® */**	TBLS	14.00/1.5	14.00/1.3 (DC); 13.00/1.4 (DC)	1348	469	28	-	601	4023	182	A2	LOADER - DOZER	L-3
					53.1	18.5	35	-	23.7	158.4				
					1348	469	28	-	601	4023	167	B	EARTHMOVER	E-3
					53.1	18.5	35	-	23.7	158.4				
					1348	469	28	-	601	4023	153	A8	GRADER	G-3
					53.1	18.5	35	-	23.7	158.4				
20.5R25	DUAL STAR® */**	TBLS	17.00/2.0	-	1492	548	33	-	665	4453	193	A2	LOADER - DOZER	L-3
					58.7	21.6	42	-	26.2	175.3				
					1492	548	33	-	665	4453	177	B	EARTHMOVER	E-3
					58.7	21.6	42	-	26.2	175.3				
					1492	548	33	-	665	4453	161	A8	GRADER	G-3
					58.7	21.6	42	-	26.2	175.3				
23.5R25	DUAL STAR® */**	TBLS	19.50/2.5	-	1615	624	35	-	720	4820	201	A2	LOADER - DOZER	L-3
					63.6	24.6	44	-	28.3	189.8				
					1615	624	35	-	720	4820	185	B	EARTHMOVER	E-3
					63.6	24.6	44	-	28.3	189.8				
					1615	624	35	-	720	4820	170	A8	GRADER	G-3
					63.6	24.6	44	-	28.3	189.8				
26.5R25	DUAL STAR® */**	TBLS	22.00/3.0	-	1746	704	40	-	779	5211	209	A2	LOADER - DOZER	L-3
					68.7	27.7	50	-	30.7	205.2				
					1746	704	40	-	779	5211	193	B	EARTHMOVER	E-3
					68.7	27.7	50	-	30.7	205.2				
29.5R25	DUAL STAR® */**	TBLS	25.00/3.5	-	1870	782	40	-	834	5581	216	A2	LOADER - DOZER	L-3
					73.6	30.8	50	-	32.8	219.7				
					1870	782	40	-	834	5581	200	B	EARTHMOVER	E-3
					73.6	30.8	50	-	32.8	219.7				



MAXIMUM TIRE LOAD [kg] [lb] versus INFLATION PRESSURE [bar] [PSI]																			
1.25	1.50	1.75	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	4.00	4.25	4.50	4.75	5.00	5.25	5.50	5.75	6.00
18	21	25	29	32	36	39	43	46	50	54	57	61	64	68	71	75	79	82	86
-	-	-	3650	4000	4250	4625	4850	5300	5600	5800	6000	6150	6500	6700	7100	7300	7500	7750	8000
-	-	-	8050	8800	9350	10200	10700	11700	12300	12800	13200	13600	14300	14800	15700	16100	16500	17100	17600
-	-	-	-	-	-	3350	3550	3750	4000	4125	4375	4625	4750	5000	5150	5450	-	-	-
-	-	-	-	-	-	7400	7850	8250	8800	9100	9650	10200	10500	11000	11400	12000	-	-	-
-	-	2360	2650	2900	3075	3350	3650	-	-	-	-	-	-	-	-	-	-	-	-
-	-	5200	5840	6400	6800	7400	8050	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	10500	11400	12300	13200	13900	14800	15700	16500	17600	18200	19300	19800	20900	21500	22000	22700	24000
-	-	-	4750	5150	5600	6000	6300	6700	7100	7500	8000	8250	8750	9000	9500	9750	10000	10300	10900
-	-	-	-	-	-	4375	4750	5000	5300	5600	5800	6150	6500	6700	6900	7300	-	-	-
-	-	-	-	-	-	9650	10500	11000	11700	12300	12800	13600	14300	14800	15200	16100	-	-	-
-	-	3150	3450	3875	4125	4375	4625	-	-	-	-	-	-	-	-	-	-	-	-
-	-	6950	7600	8550	9100	9650	10200	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	6000	6500	7100	7750	8250	8750	9250	9750	10300	10600	11200	11500	12150	12500	12850	13200	13600
-	-	-	13200	14300	15700	17100	18200	19300	20400	21500	22700	23400	24700	25400	26800	27600	28300	29100	30000
-	-	-	-	-	-	5600	6000	6500	6700	7100	7500	7750	8250	8500	9000	9250	-	-	-
-	-	-	-	-	-	12300	13200	14300	14800	15700	16500	17100	18200	18700	19800	20400	-	-	-
-	-	4000	4500	4875	5300	5600	6000	-	-	-	-	-	-	-	-	-	-	-	-
-	-	8800	9900	10700	11700	12300	13200	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	7500	8250	9000	9500	10300	10900	11500	12150	12850	13200	14000	14500	15000	15500	16000	16500	17000
-	-	-	16500	18200	19800	20900	22700	24000	25400	26800	28300	29100	30900	32000	33100	34200	35300	36400	37500
-	-	-	-	-	-	7100	7500	8000	8500	9000	9500	9750	10300	10600	11200	11500	-	-	-
-	-	-	-	-	-	15700	16500	17600	18700	19800	20900	21500	22700	23400	24700	25400	-	-	-
-	-	-	-	-	-	-	-	-	-	-	15500	16000	17000	17500	18000	19000	19500	20000	20600
-	-	-	-	-	-	-	-	-	-	-	34200	35300	37500	38600	39700	41900	43000	44100	45400
-	-	-	-	-	-	8500	9250	9750	10300	10900	11500	11800	12500	12850	13600	14000	-	-	-
-	-	-	-	-	-	18700	20400	21500	22700	24000	25400	26000	27600	28300	30000	30900	-	-	-



CAMSO

WHL 775R

Formerly Solideal SRLD

MULTI-SURFACE DURABILITY AT ITS BEST

FEATURES

- Extra-deep lug tread
- Robust Dual-Star carcass
- Contoured lug base
- Heavy-duty sidewall construction

BENEFITS

- Enhances durability and resistance to flat tires for extreme mixed and hard surface applications
- Provides excellent stability and enhanced loading capacity
- Promotes stone ejection and resistance to cracking
- Protects against side impacts and deformation under heavy load

PERFORMANCE

TIRE LIFE




PUNCTURE RESISTANCE



TRACTION



TIRE SIZE	PR	TT / TBLS	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] [in]						LOAD INDEX	SPEED SYMBOL	SERVICE	TRA CODE
			Recommended	Alternative	O.D.	O.W.	O.T.D. [mm] [32nd]	M.D.S.	S.L.R.	R.C.				
20.5R25	DUAL STAR® */**	TBLS	17.00/2.0	-	1544	517	74	-	704	4637	193	A2	LOADER - DOZER	L-5
					60.8	20.4	93.2	-	27.7	182.6				
					1544	517	74	-	704	4637	177	B	EARTHMOVER	L-5
					60.8	20.4	93.2	-	27.7	182.6				
					1544	517	74	-	704	4637	161	A8	GRADER	L-5
					60.8	20.4	93.2	-	27.7	182.6				
23.5R25	DUAL STAR® */**	TBLS	19.50/2.5	-	1673	605	80	-	751	5025	201	A2	LOADER - DOZER	L-5
					65.9	23.8	100.8	-	29.6	197.8				
					1673	605	80	-	751	5025	185	B	EARTHMOVER	L-5
					65.9	23.8	100.8	-	29.6	197.8				
26.5R25	DUAL STAR® */**	TBLS	22.00/3.0	-	1791	700	86	-	801	5379	209	A2	LOADER - DOZER	L-5
					70.5	27.6	108.3	-	31.5	211.8				
					1791	700	86	-	801	5379	193	B	EARTHMOVER	L-5
					70.5	27.6	108.3	-	31.5	211.8				
29.5R25	12	TT / TBLS	25.00/3.5	-	1870	782	40	-	834	5581	216	A2	LOADER - DOZER	L-3
					73.6	30.8	50	-	32.8	219.7				
					1870	782	40	-	834	5581	200	B	EARTHMOVER	E-3
					73.6	30.8	50	-	32.8	219.7				



MAXIMUM TIRE LOAD [kg] [lb] versus INFLATION PRESSURE [bar] [PSI]																			
1.25	1.50	1.75	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	4.00	4.25	4.50	4.75	5.00	5.25	5.50	5.75	6.00
18	21	25	29	32	36	39	43	46	50	54	57	61	64	68	71	75	79	82	86
-	-	-	4750	5150	5600	6000	6300	6700	7100	7500	8000	8250	8750	9000	9500	9750	10000	10300	10900
-	-	-	10500	11400	12300	13200	13900	14800	15700	16500	17600	18200	19300	19800	20900	21500	22000	22700	24000
-	-	-	-	-	-	4375	4750	5000	5300	5600	5800	6150	6500	6700	6900	7300	-	-	-
-	-	-	-	-	-	9650	10500	11000	11700	12300	12800	13600	14300	14800	15200	16100	-	-	-
-	-	3150	3450	3875	4125	4375	4625	-	-	-	-	-	-	-	-	-	-	-	-
-	-	6950	7600	8550	9100	9650	10200	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	6000	6500	7100	7750	8250	8750	9250	9750	10300	10600	11200	11500	12150	12500	12850	13200	13600
-	-	-	13200	14300	15700	17100	18200	19300	20400	21500	22700	23400	24700	25400	26800	27600	28300	29100	30000
-	-	-	-	-	-	5600	6000	6500	6700	7100	7500	7750	8250	8500	9000	9250	-	-	-
-	-	-	-	-	-	12300	13200	14300	14800	15700	16500	17100	18200	18700	19800	20400	-	-	-
-	-	-	7500	8250	9000	9500	10300	10900	11500	12150	12850	13200	14000	14500	15000	15500	16000	16500	17000
-	-	-	16500	18200	19800	20900	22700	24000	25400	26800	28300	29100	30900	32000	33100	34200	35300	36400	37500
-	-	-	-	-	-	7100	7500	8000	8500	9000	9500	9750	10300	10600	11200	11500	-	-	-
-	-	-	-	-	-	15700	16500	17600	18700	19800	20900	21500	22700	23400	24700	25400	-	-	-
-	-	-	-	-	-	-	-	-	-	-	15500	16000	17000	17500	18000	19000	19500	20000	20600
-	-	-	-	-	-	-	-	-	-	-	34200	35300	37500	38600	39700	41900	43000	44100	45400
-	-	-	-	-	-	8500	9250	9750	10300	10900	11500	11800	12500	12850	13600	14000	-	-	-
-	-	-	-	-	-	18700	20400	21500	22700	24000	25400	26000	27600	28300	30000	30900	-	-	-



CAMSO

WHL 776R

Formerly Solideal SRLS

HARD SURFACE DURABILITY AT ITS BEST

FEATURES

- Extra-deep smooth tread
- Robust Dual-Star carcass
- Flat tread profile
- Heavy-duty sidewall construction

BENEFITS

- Best durability and resistance to flat tires for extreme hard surface applications
- Provides excellent stability and enhanced loading capability
- Provides enhanced stability and even wear
- Protects against side impacts and deformation under heavy load

PERFORMANCE

TIRE LIFE



PUNCTURE RESISTANCE



TRACTION



TIRE SIZE	PR	TT / TBLS	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] [in]						LOAD INDEX	SPEED SYMBOL	SERVICE	TRA CODE
			Recommended	Alternative	O.D.	O.W.	O.T.D. [mm] [32nd]	M.D.S.	S.L.R.	R.C.				
17.5R25	DUAL STAR® */**	TBLS	14.00/1.5	14.00/1.3 (DC); 13.00/1.4 (DC)	1402	443	75.2	-	646	4211	182	A2	LOADER - DOZER	L-5
					55.2	17.4	94.7	-	25.4	165.8				
					1402	443	75.2	-	646	4211	167	B	EARTHMOVER	L-5
					55.2	17.4	94.7	-	25.4	165.8				
					1402	443	75.2	-	646	4211	153	A8	GRADER	L-5
					55.2	17.4	94.7	-	25.4	165.8				
23.5R25	DUAL STAR® */**	TBLS	19.50/2.5	-	1673	623	80	-	762	5025	201	A2	LOADER - DOZER	L-5
					65.9	24.5	101	-	30.0	197.8				
					1673	623	80	-	762	5025	185	B	EARTHMOVER	L-5
					65.9	24.5	101	-	30.0	197.8				
26.5R25	DUAL STAR® */**	TBLS	22.00/3.0	-	1785	709	86	-	800	5361	209	A2	LOADER - DOZER	L-5
					70.3	27.9	108	-	31.5	211.1				
					1785	709	86	-	800	5361	193	B	EARTHMOVER	L-5
					70.3	27.9	108	-	31.5	211.1				



MAXIMUM TIRE LOAD [kg] [lb] versus INFLATION PRESSURE [bar] [PSI]																			
1.25	1.50	1.75	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	4.00	4.25	4.50	4.75	5.00	5.25	5.50	5.75	6.00
18	21	25	29	32	36	39	43	46	50	54	57	61	64	68	71	75	79	82	86
-	-	-	3650	4000	4250	4625	4850	5300	5600	5800	6000	6150	6500	6700	7100	7300	7500	7750	8000
-	-	-	8050	8800	9350	10200	10700	11700	12300	12800	13200	13600	14300	14800	15700	16100	16500	17100	17600
-	-	-	-	-	-	3350	3550	3750	4000	4125	4375	4625	4750	5000	5150	5450	-	-	-
-	-	-	-	-	-	7400	7850	8250	8800	9100	9650	10200	10500	11000	11400	12000	-	-	-
-	-	2360	2650	2900	3075	3350	3650	-	-	-	-	-	-	-	-	-	-	-	-
-	-	5200	5840	6400	6800	7400	8050	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	6000	6500	7100	7750	8250	8750	9250	9750	10300	10600	11200	11500	12150	12500	12850	13200	13600
-	-	-	13200	14300	15700	17100	18200	19300	20400	21500	22700	23400	24700	25400	26800	27600	28300	29100	30000
-	-	-	-	-	-	5600	6000	6500	6700	7100	7500	7750	8250	8500	9000	9250	-	-	-
-	-	-	-	-	-	12300	13200	14300	14800	15700	16500	17100	18200	18700	19800	20400	-	-	-
-	-	-	7500	8250	9000	9500	10300	10900	11500	12150	12850	13200	14000	14500	15000	15500	16000	16500	17000
-	-	-	16500	18200	19800	20900	22700	24000	25400	26800	28300	29100	30900	32000	33100	34200	35300	36400	37500
-	-	-	-	-	-	7100	7500	8000	8500	9000	9500	9750	10300	10600	11200	11500	-	-	-
-	-	-	-	-	-	15700	16500	17600	18700	19800	20900	21500	22700	23400	24700	25400	-	-	-



CAMSO ADT 753R

Formerly Solideal SRAT

RADIAL PERFORMANCE MEETS HIGH TRACTION

FEATURES

- Heavy-duty Dual-Star carcass
- Non-directional tread pattern with optimized lug-to-void ratio
- Deep tread depth
- Premium rubber compounds

BENEFITS

- Optimizes stability for articulated dump truck applications
- Increases traction and durability in off-road conditions
- Enhances traction in off-road conditions
- Reduces heat build-up

PERFORMANCE

TIRE LIFE



PUNCTURE RESISTANCE



TRACTION



TIRE SIZE	PR	TT / TBLS	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] [in]						LOAD INDEX	SPEED SYMBOL	SERVICE	TRA CODE
			Recommended	Alternative	O.D.	O.W.	O.T.D. [mm] [32nd]	M.D.S.	S.L.R.	R.C.				
20.5R25	DUAL STAR® */**	TBLS	17.00/2.0	-	1485	524	31	-	663	4460	193	A2	LOADER - DOZER	L-3
					58.5	20.6	39	-	26.1	175.6				
					1485	524	31	-	663	4460	177	B	EARTHMOVER	E-3
					58.5	20.6	39	-	26.1	175.6				
					1485	524	31	-	663	4460	161	A8	GRADER	G-3
					58.5	20.6	39	-	26.1	175.6				
23.5R25	DUAL STAR® */**	TBLS	19.50/2.5	-	1615	614	29	-	716	4850	201	A2	LOADER - DOZER	L-3
					63.6	24.2	36.5	-	28.2	190.9				
					1615	614	29	-	716	4850	185	B	EARTHMOVER	E-3
					63.6	24.2	36.5	-	28.2	190.9				
26.5R25	DUAL STAR® */**	TBLS	22.00/3.0	-	1736	688	33	-	767	5236	209	A2	LOADER - DOZER	L-3
					68.3	27.1	41.6	-	30.2	206.1				
					1736	688	33	-	767	5236	193	B	EARTHMOVER	E-3
					68.3	27.1	41.6	-	30.2	206.1				
29.5R25	DUAL STAR® */**	TBLS	25.00/3.5	-	1871	777	38	-	817	5619	216	A2	LOADER - DOZER	L-3
					73.7	30.6	47.9	-	32.2	221.2				
					1871	777	38	-	817	5619	200	B	EARTHMOVER	E-3
					73.7	30.6	47.9	-	32.2	221.2				



MAXIMUM TIRE LOAD [kg] [lb] versus INFLATION PRESSURE [bar] [PSI]																			
1.25	1.50	1.75	2.00	2.25	2.50	2.75	3.00	3.25	3.50	3.75	4.00	4.25	4.50	4.75	5.00	5.25	5.50	5.75	6.00
18	21	25	29	32	36	39	43	46	50	54	57	61	64	68	71	75	79	82	86
-	-	-	4750	5150	5600	6000	6300	6700	7100	7500	8000	8250	8750	9000	9500	9750	10000	10300	10900
-	-	-	10500	11400	12300	13200	13900	14800	15700	16500	17600	18200	19300	19800	20900	21500	22000	22700	24000
-	-	-	-	-	-	4375	4750	5000	5300	5600	5800	6150	6500	6700	6900	7300	-	-	-
-	-	-	-	-	-	9650	10500	11000	11700	12300	12800	13600	14300	14800	15200	16100	-	-	-
-	-	3150	3450	3875	4125	4375	4625	-	-	-	-	-	-	-	-	-	-	-	-
-	-	6950	7600	8550	9100	9650	10200	-	-	-	-	-	-	-	-	-	-	-	-
-	-	-	6000	6500	7100	7750	8250	8750	9250	9750	10300	10600	11200	11500	12150	12500	12850	13200	13600
-	-	-	13200	14300	15700	17100	18200	19300	20400	21500	22700	23400	24700	25400	26800	27600	28300	29100	30000
-	-	-	-	-	-	5600	6000	6500	6700	7100	7500	7750	8250	8500	9000	9250	-	-	-
-	-	-	-	-	-	12300	13200	14300	14800	15700	16500	17100	18200	18700	19800	20400	-	-	-
-	-	-	7500	8250	9000	9500	10300	10900	11500	12150	12850	13200	14000	14500	15000	15500	16000	16500	17000
-	-	-	16500	18200	19800	20900	22700	24000	25400	26800	28300	29100	30900	32000	33100	34200	35300	36400	37500
-	-	-	-	-	-	7100	7500	8000	8500	9000	9500	9750	10300	10600	11200	11500	-	-	-
-	-	-	-	-	-	15700	16500	17600	18700	19800	20900	21500	22700	23400	24700	25400	-	-	-
-	-	-	-	-	-	-	-	-	-	-	15500	16000	17000	17500	18000	19000	19500	20000	20600
-	-	-	-	-	-	-	-	-	-	-	34200	35300	37500	38600	39700	41900	43000	44100	45400
-	-	-	-	-	-	8500	9250	9750	10300	10900	11500	11800	12500	12850	13600	14000	-	-	-
-	-	-	-	-	-	18700	20400	21500	22700	24000	25400	26000	27600	28300	30000	30900	-	-	-



CAMSO WHL 775

A PREMIUM WHEEL LOADER TIRE DURABILITY SOLUTION

FEATURES

- Extra-deep L5 lug tread
- Heavy-duty carcass
- Heavy-duty sidewall construction
- Contoured lug base

BENEFITS

- Enhances durability and resistance to flat tires for extreme mixed and hard surface applications
- Increases stability and side impact resistance
- Protects against side impacts and deformation under heavy load
- Promotes stone ejection and resistance to cracking

PERFORMANCE



TIRE SIZE	PR	TL / TT	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] [in]			LOAD INDEX	SPEED SYMBOL	SERVICE	TRA CODE	APPLICATION
			Recommended	Alternative	O.D.	O.W.	O.T.D. [mm] [32nd]					
17.5-25	16	TL	14.00/1.5	-	1405	448	61	177	A2	LOADER - DOZER	L-5	-
					55.3	17.6	77					
20.5-25	20	TL	17.00/2.0	-	1566	532	77	186	A2	LOADER - DOZER	L-5	-
					61.7	20.9	97					
23.5-25	20	TL	19.50/2.5	-	1670	596	87	191	A2	LOADER - DOZER	L-5	-
					65.7	23.5	110					

MAXIMUM TIRE LOAD [kg] [lb]											
INFLATION PRESSURE [bar] [PSI]	STATIC	BREAK-OUT	CREEP	5 km/h 3 mph	10 km/h 6 mph	15 km/h 9 mph	20 km/h 12 mph	25 km/h 15 mph	30 km/h 18 mph	35 km/h 21 mph	40 km/h 24 mph
4.75	11700	-	9500	8300	7300	6350	6150	5850	5600	5400	5100
69	25795	-	20945	18300	16095	14000	13560	12895	12345	11905	11245
4.50	15200	-	12400	10800	9500	8250	8000	7600	7300	7050	6650
65	33510	-	27335	23810	20945	18190	17635	16755	16095	15545	14660
3.75	17400	-	14200	12400	10900	9500	9150	8700	8400	8050	7650
54	38360	-	31305	27335	24030	20945	20170	19180	18520	17745	16865



CAMSO
WL

HIGH PERFORMANCE. MAXIMUM PROTECTION

FEATURES

- Heavy-duty carcass
- Large casing design
- Extra-deep lug depth
- Premium rubber compounds

BENEFITS

- Provides best stability and side impact resistance
- Improves ride quality and stability
- Provides best durability and traction
- Provides best durability and cut resistance

PERFORMANCE

TIRE LIFE



PUNCTURE RESISTANCE



TRACTION



TIRE SIZE	PR	TT / TBLs	TUBE	VALVE	FLAP	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] [in]						LOAD INDEX	SPEED SYMBOL
						Recommended	Alternative	O.D.	O.W.	O.T.D. [mm] [32nd]	M.D.S.	S.L.R.	R.C.		
8.25-20	14	TT	8.25/ 9.00-20	V03-02-14	8.25/9.00/ 10.00/12.00-20	6.50	7.00	1000	252	26	272	486	2985	148	A2
								39.4	9.9	33	10.7	19.1	117.5		
								1000	252	26	272	486	2985		
								39.4	9.9	33	10.7	19.1	117.5		
9.00-20	14	TT	8.25/ 9.00-20	V03-02-14	8.25/9.00/ 10.00/12.00-20	7.00	6.50/7.50	1039	267	27	301	485	3101	153	A2
								40.9	10.5	34	11.9	19.1	122.1		
								1039	267	27	301	485	3101		
								40.9	10.5	34	11.9	19.1	122.1		
10.00-20	16	TT	10.00/ 11.00-20	V03-02-14	8.25/9.00/ 10.00/12.00-20	7.50	7.00/8.00	1070	284	26	316	496	3226	158	A2
								42.1	11.2	33	12.4	19.5	127.0		
								1070	284	26	316	496	3226		
								42.1	11.2	33	12.4	19.5	127.0		
11.00-20	16	TT	10.00/ 11.00-20	V03-02-14	8.25/9.00/ 10.00/12.00-20	8.00	8.50	1064	280	22	334	512	3376	160	A2
								41.9	11.0	28	13.1	20.2	132.9		
								1064	280	22	334	512	3376		
								41.9	11.0	28	13.1	20.2	132.9		

MAXIMUM TIRE LOAD [kg] [lb]					
All surfaces			Improved surfaces		
Static	Creep	0-8 km/h 0-5 mph	16 km/h 6 mph	25 km/h 16 mph	45 km/h 28 mph
6105	5120	3645	3150	2600	2325
13500	11300	8050	6950	5750	5150
9.00 bar	9.00 bar	8.00 bar	8.00 bar	7.50 bar	7.50 bar
129 PSI	129 PSI	114 PSI	114 PSI	107 PSI	107 PSI
6990	5860	4170	3605	2975	2660
15450	12950	9200	7950	6550	5850
8.50 bar	8.50 bar	7.50 bar	7.50 bar	7.00 bar	7.00 bar
121 PSI	121 PSI	107 PSI	107 PSI	100 PSI	100 PSI
8215	6890	4900	4240	3500	3125
18150	15200	10800	9350	7750	6900
8.50 bar	8.50 bar	8.00 bar	8.00 bar	7.50 bar	7.50 bar
121 PSI	121 PSI	114 PSI	114 PSI	107 PSI	107 PSI
8700	7300	5200	4500	3700	3300
19200	16100	11500	9950	8150	7300
8.50 bar	8.50 bar	7.75 bar	7.75 bar	7.00 bar	7.00 bar
121 PSI	121 PSI	111 PSI	111 PSI	100 PSI	100 PSI



CAMSO WEX 552

Formerly known as Solideal WEX

PERFORMANCE AND QUALITY YOU CAN COUNT ON

FEATURES

- Robust carcass
- Advanced rubber compounds
- Deep lug depth

BENEFITS

- Enhances stability and side impact resistance
- Improves durability and cut resistance
- Enhances durability and traction

PERFORMANCE

TIRE LIFE



PUNCTURE RESISTANCE



TRACTION



TIRE SIZE	PR	TT / TBLs	TUBE	VALVE	FLAP	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] [in]						LOAD INDEX	SPEED SYMBOL
						Recommended	Alternative	O.D.	O.W.	O.T.D. [mm] [32nd]	M.D.S.	S.L.R.	R.C.		
9.00-20	14	TT	8.25/ 9.00-20	V03-02-14	8.25/9.00/ 10.00/12.00-20	7.00	6.50/7.50	1022	267	19.5	302	448	3090	153	A2
								40.2	10.5	25	11.9	17.6	121.7		
								1022	267	19.5	302	448	3090		
								40.2	10.5	25	11.9	17.6	121.7		
10.00-20	14	TT	10.00/ 11.00-20	V03-02-14	8.25/9.00/ 10.00/12.00-20	7.50	7.00/8.00	1064	281	21	325	461	3208	155	A2
								41.9	11.1	26	12.8	18.1	126.3		
								1064	281	21	325	461	3208		
								41.9	11.1	26	12.8	18.1	126.3		
10.00-20	16	TT	10.00/ 11.00-20	V03-02-14	8.25/9.00/ 10.00/12.00-20	7.50	7.00/8.00	1064	281	21	325	461	3208	158	A2
								41.9	11.1	26	12.8	18.1	126.3		
								1064	281	21	325	461	3208		
								41.9	11.1	26	12.8	18.1	126.3		

MAXIMUM TIRE LOAD [kg] [lb]					
All surfaces			Improved surfaces		
Static	Creep	0-8 km/h 0-5 mph	16 km/h 6 mph	25 km/h 16 mph	45 km/h 28 mph
6990	5860	4170	3605	2975	2660
15450	12950	9200	7950	6550	5850
8.50 bar	8.50 bar	7.50 bar	7.50 bar	7.00 bar	7.00 bar
121 PSI	121 PSI	107 PSI	107 PSI	100 PSI	100 PSI
7455	6255	4450	3850	3175	2840
16450	13800	9800	8500	7000	6250
7.5 bar	7.5 bar	7.0 bar	7.0 bar	6.0bar	6.0bar
107 PSI	107 PSI	100 PSI	100 PSI	87 PSI	87 PSI
8215	6890	4900	4240	3500	3125
18150	15200	10800	9350	7750	6900
8.50 bar	8.50 bar	8.00 bar	8.00 bar	7.50 bar	7.50 bar
121 PSI	121 PSI	114 PSI	114 PSI	107 PSI	107 PSI



CAMSO CMP 533

COMPACTION PERFORMANCE AND DURABILITY SOLUTION

FEATURES

- Optimized tread pattern
- Robust carcass design
- Flatter tread profile
- Engineered tread profile with hauler steps and shoulder lugs

BENEFITS

- Minimizes ground pressure and damage for better compaction performance
- Enhances side impact resistance for fewer flats
- Ensures even tread wearing for greater durability
- Enhances traction for improved performance

PERFORMANCE

TIRE LIFE



PUNCTURE RESISTANCE



TRACTION



TIRE SIZE	PR	TT/ TBLS	TUBE	VALVE	FLAP	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] [in]				LOAD INDEX	SPEED SYMBOL	TRA CODE	IP [bar] [PSI]	LOAD CAPACITY [kg] [lb]	
						Recommended	Alternative	O.D.	O.W.	M.D.S.	S.L.R.					10 km/h 6 mph	15 km/h 9 mph
23.1-26 IND	12	TBLS	10.00/ 11.00-20	V5-15-1	8.25/ 9.00/ 10.00/ 11.00/ 12.00-20	DW20B	DW20A; TW20B	1555	611,0	-	688.0	162	A8	R-3	1.9	5940	5370
								388,8	24,1	-	271				27	13100	11850



CAMSO CMP 576

Formerly Solideal SM C1

EXCELLENT COMPACTION PERFORMANCE

FEATURES

- Aggressive curved R1 tread pattern
- Heavy-duty reinforced sidewall
- Hauler stepped tread design

BENEFITS

- Maximizes traction and improves ride quality
- Provides side impact protection for fewer flat tires
- Maximizes tread cleanout in off-road conditions for improved traction

PERFORMANCE

TIRE LIFE



PUNCTURE RESISTANCE



TRACTION



TIRE SIZE	PR	TT/ TBLS	TUBE	VALVE	FLAP	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] [in]				LOAD INDEX	SPEED SYMBOL	TRA CODE	IP [bar] [PSI]	LOAD CAPACITY [kg] [lb]	
						Recommended	Alternative	O.D.	O.W.	M.D.S.	S.L.R.					10 km/h 6 mph	15 km/h 9 mph
7.50-15 NHS	14	TT	700/ 750/ 815-17	TR 440	7.00/ 7.50/ 8.25-15	6.00	6.50	788	214	226	362	136	A3	C-1	8.50	2835	2270
								31.0	8.4	8.9	14.3				121	6250	5000
8.50/90-15K	6	TBLS	-	-	-	6.00	5.5F	761	217	-	688.0	120	A3	C-1	3.50	1770	1400
								30.0	8.5	-	271				50	3900	3100
11.00-20 NHS	16	TT	10.00/ 11.00-20	V3-02- 15 TR 444	8.25/ 9.00/ 10.00/ 11.00/ 12.00-20	8.00	8.50	1056	287	313	493	158	A3	C-1	7.40	5445	4355
								41.6	11.3	12.3	19.4				106	12000	9600



CAMSO SKS 511

Formerly Solideal SKS R1

OFF-ROAD TRACTION AT ITS BEST

FEATURES

- Aggressive curved R1 tread pattern
- Heavy-duty reinforced sidewall
- Hauler stepped tread design

BENEFITS

- Maximizes traction and improves ride quality
- Provides side impact protection for fewer flat tires
- Maximizes tread cleanout in off-road conditions for improved traction

PERFORMANCE

TIRE LIFE



PUNCTURE RESISTANCE



TRACTION



TIRE SIZE	PR	RIM SIZE		ACTUAL TIRE DIMENSIONS [mm] [inches]						TT/ TBLS	LOAD INDEX	SPEED SYMBOL	TRA CODE	INFLATION PRESSURE [bar] [PSI]	MAXIMUM TIRE LOAD [kg] [lb]			
		Recommended	Alternative	O.D.	O.W.	O.T.D. [mm] [32nd]	M.D.S.	S.L.R.	R.C.						Static	Creep	8 km/h	16 km/h
26x12-12	8	10.50	8.50/8.50JA	667	300	21.0	325	302	2024	TBLS	119	A2	R-1	3.50	2160	1580	1370	1080
				26.3	11.8	26	12.8	11.9	79.7					50	4750	3500	3000	2400
29x12.5-15	8	10LB	-	748	309	18.0	389	339	2255	TBLS	123	A2	R-1	3.10	2440	1780	1545	1220
				29.4	12.2	23	15.3	13.3	88.8					44	5400	3950	3400	2700
31x15.5-15	8	13.00	13LB	804	380	21.0	409	370	2424	TBLS	126	A2	R-1	3.10	2670	1940	1690	1340
				31.7	15.0	26	16.1	14.6	95.4					44	5900	4300	3750	2950
26x12-16.5 (300/40-16.5)	10	9.75	-	659	285	21.0	299	297	2014	TBLS	124	A2	R-1	4.00	2580	1870	1630	1290
				25.9	11.2	26	11.8	11.7	79.3					57	5700	4150	3600	2850
33x15.5-16.5	10	12.00	-	830	371	23.0	396	373	2488	TBLS	143	A2	R-1	3.40	4310	3130	2725	2150
				32.7	14.6	29	15.6	14.7	98.0					49	9500	6900	6000	4750

CONSTRUCTION TRACKS



CAMSO MEX HXD

EXTREME RESISTANCE TO SEVERE CONDITIONS

FEATURES

- Patented 3S internal iron core
- High-tensile, rubber sealed steel cables protected by heavy-duty carcass and tread
- Curbshield technology with heavy-duty carcass
- Patented 3S internal iron core

BENEFITS

- Avoids unexpected downtime on job site and the beginning of the degradation process
- Resists carcass punctures and cable corrosion to extend service life
- Maximizes service life prior to track degradation process triggered by edge cutting leading to iron core corrosion
- Minimizes vibrations for better ride quality and lower maintenance cost

PERFORMANCE



TREAD PATTERNS



AH



AB



CAMSO MEX HXD (cont.)

WIDTH	PITCH	TREAD	GUIDING	METAL PIECE NAME	CARCASS THICKNESS	LUG HEIGHT	METAL PIECE TYPE	METAL PIECE SPECIFICATION
230	48	AH	I	KA	26.5	24.5	3S	STANDARD
300	55	AH	I	SA	35	27.5	3S	NARROW
300	55	AH	I	WA	35	27.5	3S	WIDE
400	72.5	AH	I	WA	43	27.5	3S	NARROW
400	72.5	AH	I	EA	43	27.5	3S	WIDE
400	72.5	AH	J	EA	45.5	27.5	3S RAIL TYPE	STANDARD
400	75.5	AH	J	WA	47	27.5	3S OFFSET RAIL TYPE	STANDARD
450	71	AH	I	JA	48	30	3S	STANDARD
450	76	AH	I	JA	48	30	3S	STANDARD
450	81	AH	I	OA	46.5	30.5	3S	NARROW
450	81	AH	I	AA	46.5	30.5	3S	WIDE
450	83.5	AH	J	UA	47	27.5	3S OFFSET RAIL TYPE	STANDARD
485	92	AH	I	D	62.5	27	OFFSET	STANDARD
500	92	AB	I	D	58	30	STANDARD	STANDARD



CAMSO MEX SD

PREDICTABLE SERVICE LIFE AND PERFORMANCE

FEATURES

- Patented 3S internal iron core
- High-tensile, rubber sealed steel cables
- Curbshield technology
- Patented 3S internal iron core


BENEFITS

- Avoids unexpected downtime on job site and the beginning of the degradation process
- Resists carcass punctures and cable corrosion to extend service life
- Extends service life prior to track degradation process triggered by edge cutting leading to iron core corrosion
- Minimizes vibrations for better ride quality and lower maintenance cost

PERFORMANCE



TREAD PATTERNS

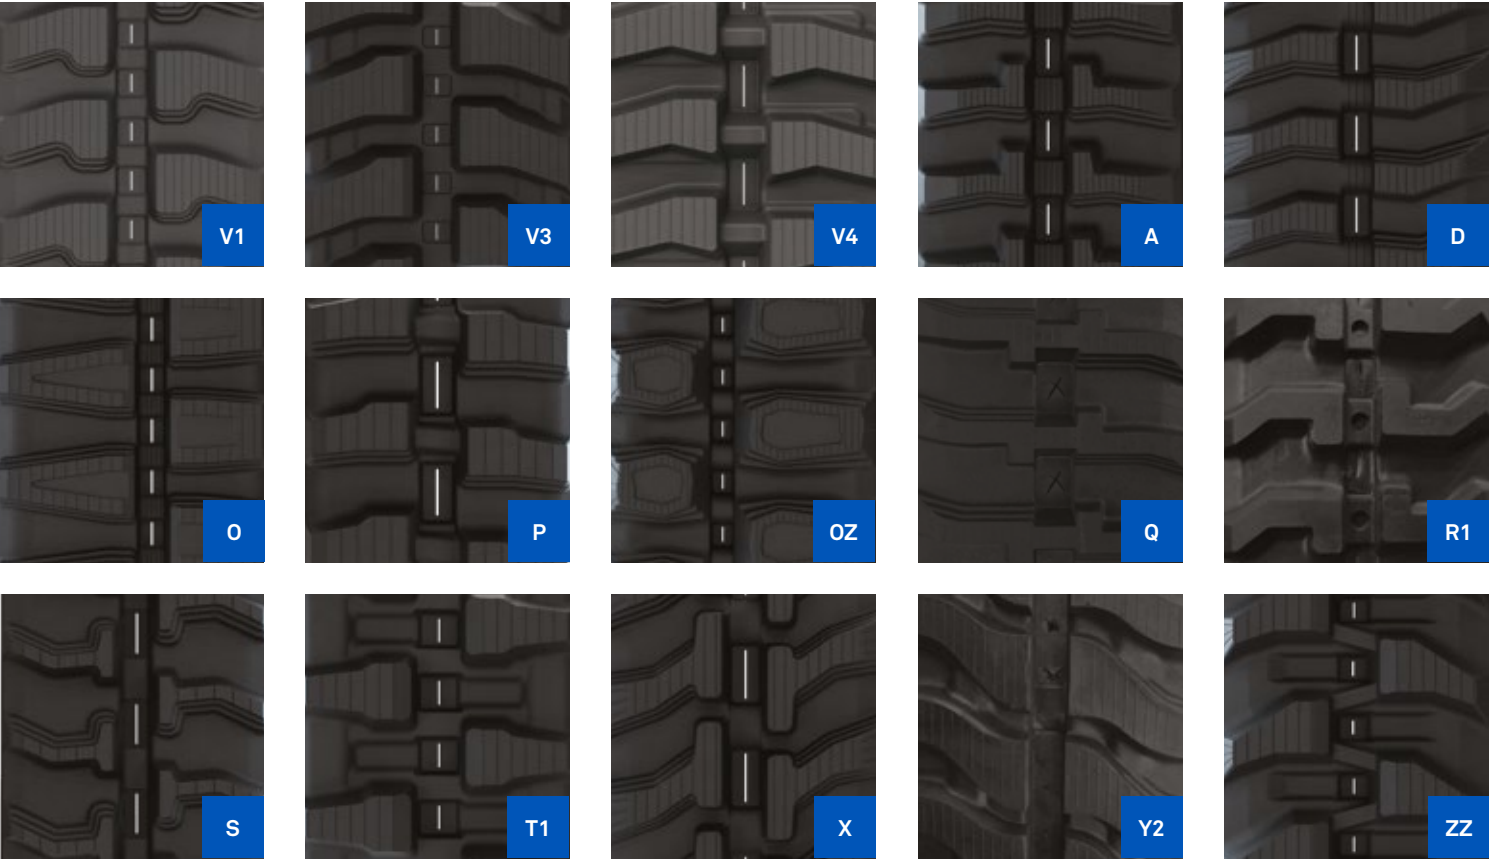

CAMSO MEX SD (cont.)

WIDTH	PITCH	TREAD	GUIDING	METAL PIECE NAME	CARCASS THICKNESS	LUG HEIGHT	METAL PIECE TYPE	METAL PIECE SPECIFICATION
130	72	A	A	RB	18	15	STANDARD	STANDARD
180	60	S	A	F	16	13	STANDARD	STANDARD
	72	X	A	R	20	15	STANDARD	NARROW
		X	A	P	21	17	STANDARD	WIDE
200	72	P	B	R	21	17	RAIL TYPE	STANDARD
		A	A	P	22	15	STANDARD	WIDE
		X	A	R	20	15	STANDARD	NARROW
		X	A	P	24	18	STANDARD	WIDE
230	72	V4	J	P	24.5	17	RAIL TYPE	WIDE
		A	A	P	22	18	STANDARD	WIDE
		B	A	P	22	18	STANDARD	WIDE
	48	V1	J	P2	21.5	17	RAIL TYPE	WIDE
		V1	I	KA	22	18	3S	STANDARD
250	72	T1	J	K	26	22	RAIL TYPE	STANDARD
		ZZ	J	K	22.5	23	RAIL TYPE	STANDARD
	48	B	A	P	24	17	STANDARD	WIDE
		D	A	P	24	17	STANDARD	WIDE
	52.5	R1	A	PR	30	18	STANDARD	WIDE
300	52.5	V1	I	KA	27	20	3S	STANDARD
		V1	I	SA	30	24	3S	NARROW
	53	V1	I	WA	30	24	3S	WIDE
		V1	I	SA	31	23	3S	NARROW
	55	V1	I	WA	31	23	3S	WIDE
320	55.5	V1	J	SA	33	25	3S RAIL TYPE	NARROW
	55.5	Y2	J	SF	36	25	RAIL TYPE	STANDARD
	55.5	O	J	SA	34	25	3S OFFSET - RAIL TYPE	NARROW
350	100	Q	A	W	39	25	STANDARD	STANDARD
400	54.5	V1	J	WA	39	25	3S RAIL TYPE	WIDE
	52.5	V1	I	WF	36	22	STANDARD	WIDE
450	72.5	V1	I	EA	40	25	3S	WIDE
		V1	I	WA	40	25	3S	NARROW
	71	V1	J	EA	42	25	3S RAIL TYPE	WIDE
500	75.5	V1	I	JA	46	27	3S	STANDARD
	81	V3	I	JS	52	30	STANDARD	STANDARD
	83.5	V1	I	AA	42	28	3S	WIDE
		V1	I	OA	42	28	3S	NARROW
550	83.5	Z2	I	EA-V	57	30	3S	STANDARD
	92	V1	I	DA	58	33	3S	STANDARD



CAMSO CTL HXD

THE BEST TRACK FOR DURABILITY AND PERFORMANCE

FEATURES

- Single-cure technology with next generation rubber compound
- Trackguard iron core with heavy-duty carcass
- Endless high-tensile steel cables
- Optimized tread pattern with next generation rubber compound


BENEFITS

- Promotes even tread wearing for long, predictable tread life
- Improves rolling path life for reduced failures and enhanced durability
- Eliminates unexpected downtime due to cable/track breakage
- Maintains excellent traction throughout tread life

PERFORMANCE



TREAD PATTERNS



HH



AB



ST

WIDTH	LINKS	PITCH	TREAD	GUIDING	METAL PIECE	METAL PIECE TYPE
180	39	72	HH	B	R	CONVENTIONAL
180	39, 41, 44, 45	72	ST	J	R	RAIL TYPE
230	39, 41, 44, 45	72	ST	J	R	RAIL TYPE
250	39	72	HH	B	R	CONVENTIONAL
320	45, 48, 49, 50, 52, 53, 54, 56	86	HH	B	E	CONVENTIONAL
320	46, 48, 52	86	HH	J	W	RAIL TYPE
400	49, 50, 52, 53, 54, 55, 56, 60	86	HH	B	E	CONVENTIONAL
450	42, 52, 55, 56, 59, 60	86	HH	B	E	CONVENTIONAL
450	48, 50	100	HH	J	E	RAIL TYPE
450	58	86	HA	B	E	CONVENTIONAL



CAMSO CTL SD

ALL-SEASON TRACTION AND DURABILITY

FEATURES

- Single-cure technnnology with advanced rubber compound
- Trackguard iron core
- Endless high-tensile steel cables
- Versatile self-cleaning stepped tread design


BENEFITS

- Promotes even tread wearing for long, predictable tread life
- Improves rolling path life for reduced failures and enhanced durability
- Eliminates unexpected downtime due to cable/track breakage
- Maintains good traction throughout tread life

PERFORMANCE



TREAD PATTERNS



B

WIDTH	LINKS	PITCH	TREAD	GUIDING	METAL PIECE	METAL PIECE TYPE
320	45, 46, 48, 49, 50, 52, 53, 54, 56	86	B	B	E	CONVENTIONAL
320	46, 48, 52	86	B	J	W	RAIL TYPE
400	49, 50, 52, 53, 54, 55, 56	86	B	B	E	CONVENTIONAL
450	48, 5	100	B	J	E	RAIL TYPE
450	52, 55, 56, 58, 59, 60, 63, 65	86	B	B	E	CONVENTIONAL



CAMSO HXD SMOOTH

DURABILITY AT ITS BEST

FEATURES

- Single-cure technology with next generation rubber compound
- Optimized multi layer internal construction
- Smooth tread pattern with heavy duty carcass


BENEFITS

- Promotes even tread wearing for long, predictable tread life
- Improves weight distribution with better lateral stiffness
- Increases track life

PERFORMANCE



SIDE VIEW



WIDTH		LENGHT		TREAD	CARCASS THICKNESS		TREAD THICKNESS		TOTAL THICKNESS	
in	mm	in	mm		in	mm	in	mm	in	mm
16	406	272.5	6921	Smooth	1.2	30	0.8	21	2	51
15.75	400	317	8049	Smooth	1.1	27.5	1.2	30.5	2.3	58
18	457	317	8049	Smooth	1.1	27.5	1.2	30.5	2.3	58



CAMSO HXD CHEVRON

DURABILITY MEETS TRACTION

FEATURES

- Single-cure technology with next generation rubber compound
- Optimized multi layer internal construction
- Chevron type tread pattern

BENEFITS

- Promotes even tread wearing for long, predictable tread life
- Improves weight distribution with better lateral stiffness
- Provides high traction in softer surfaces

PERFORMANCE



SIDE VIEW



WIDTH		LENGHT		TREAD	CARCASS THICKNESS		TREAD THICKNESS		TOTAL THICKNESS	
in	mm	in	mm		in	mm	in	mm	in	mm
16	406	272.5	6921	Chevron	0.9	23.5	1.5	38	2.4	61.5
15.75	400	317	8049	Chevron	0.9	23.5	1.5	38	2.4	61.5
18	457	317	8049	Chevron	0.9	23.5	1.5	38	2.4	61.5



FEATURES

- Next generation rubber compound

- Promotes even tread wearing for long, predictable tread life

A1



WIDTH	PITCH	LINKS	TREAD	GUIDING	METAL PIECE	CARCASS THICKNESS	LUG HEIGHT	METAL PIECE TYPE
350	100	53, 56, 58, 80	A1	B	E	42	27	STANDARD
700	100	96, 98	A2	B	T	66	32	STANDARD
750	150	66	A2	B	T	80	36	STANDARD

COMPLETE LINE OVERVIEW

SKID STEER LOADERS



CAMSO SKS 775

CAMSO SKS 732

CAMSO SKS 793S

CAMSO HAULER SKZ

CAMSO SKS 792S

CAMSO SKS 796S

CAMSO HAULER SKS

SKID STEER LOADERS (cont.)



CAMSO XTRA WALL

CAMSO SKS 774

CAMSO SKS 332

CAMSO SKS 782S

CAMSO SKS 786S

BACKHOE LOADERS



CAMSO BHL 753

CAMSO SL R4

CAMSO BHL 532

CAMSO 4L R1

CAMSO BHL 530

TELEHANDLERS



CAMSO TLH 792S

CAMSO SL G3

CAMSO SL G2

CAMSO TLH 532

CAMSO TM R4

CAMSO 4L I3

WHEEL LOADERS | ARTICULATED DUMP TRUCKS | MOTOR GRADERS



CAMSO WHL 753R

CAMSO WHL 775R

CAMSO WHL 776R

CAMSO ADT 753R

RADIAL

WHEEL LOADERS | ARTICULATED DUMP TRUCKS | MOTOR GRADERS (cont.)



CAMSO WHL 775

CAMSO SKZ

CAMSO LM L3

CAMSO LM L2

CAMSO WHL 773

WHEEL EXCAVATORS

COMPACTION EQUIPMENT



CAMSO WL

CAMSO WEX 552



CAMSO CMP 533

CAMSO CMP 576

TRUCK MOUNTED FORKLIFTS



CAMSO SKS 511

MINI-EXCAVATORS

COMPACT TRACK LOADERS

MULTI-TERRAIN LOADERS



CAMSO MX HXD

CAMSO MX SD

CAMSO CTL HXD




CAMSO CTL SD

CAMSO MTL HXD

OTT FOR SKID STEER LOADERS

CARRIERS

PAVERS




CAMSO OTT HXD


CAMSO CARRIER HXD

CAMSO HXD SMOOTH

CAMSO HXD CHEVRON

[illegible]

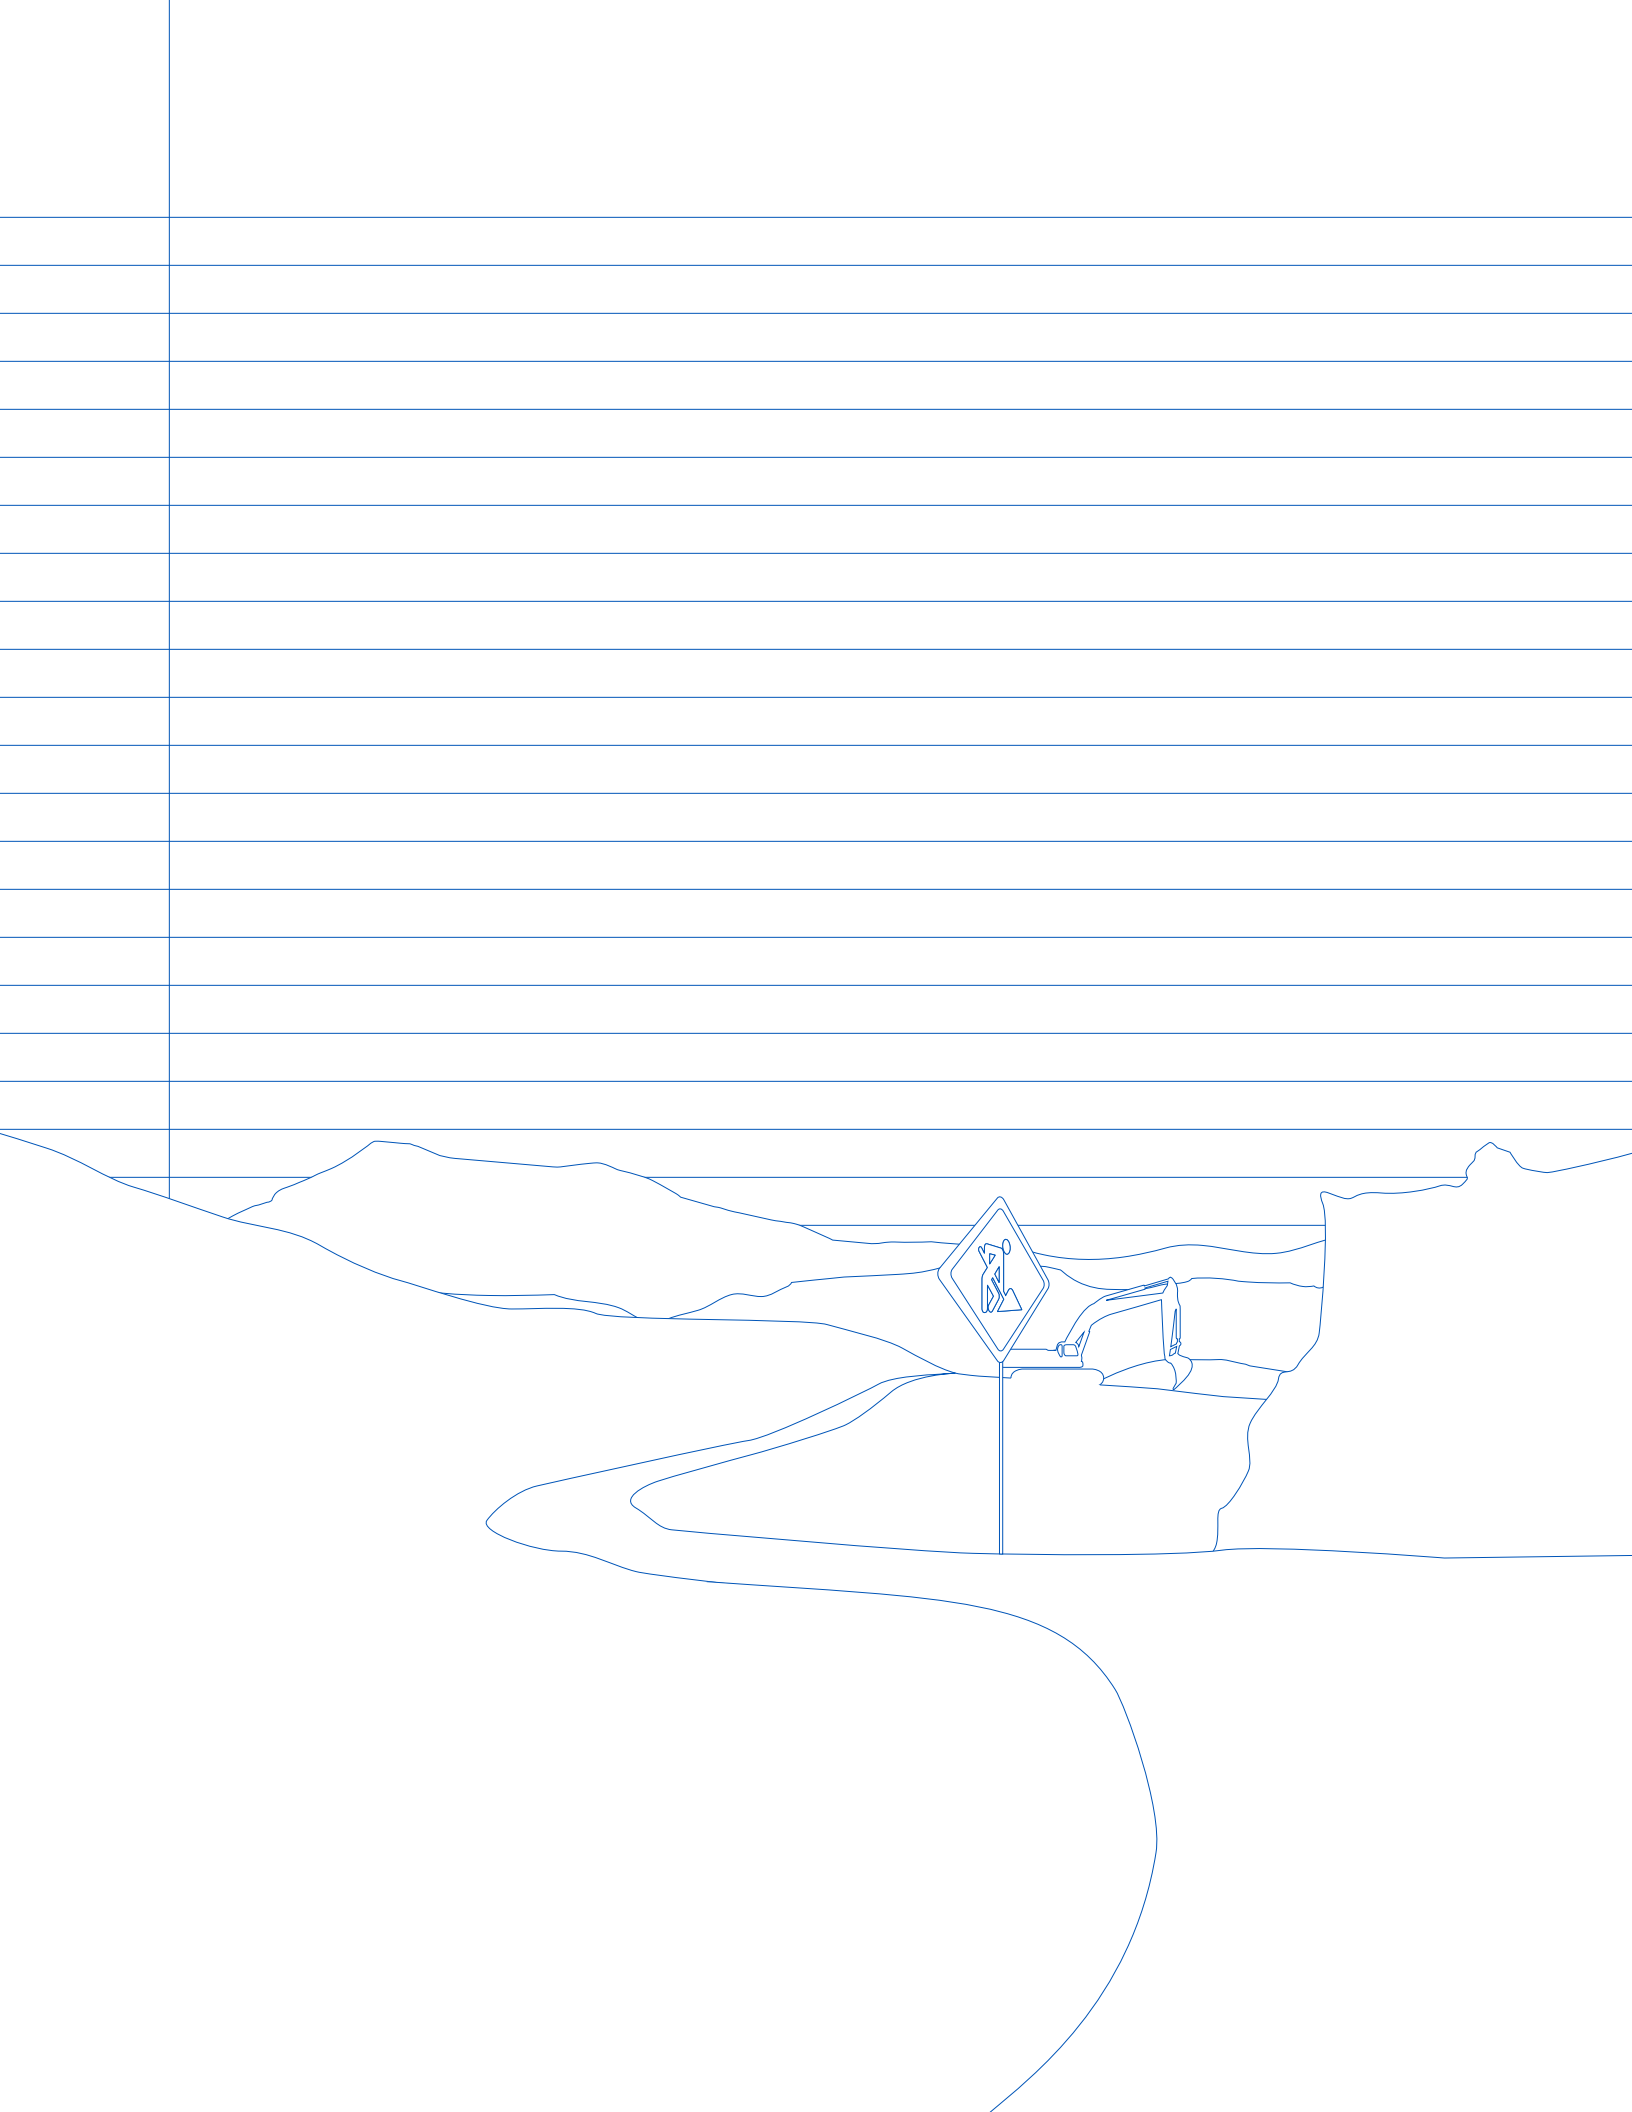

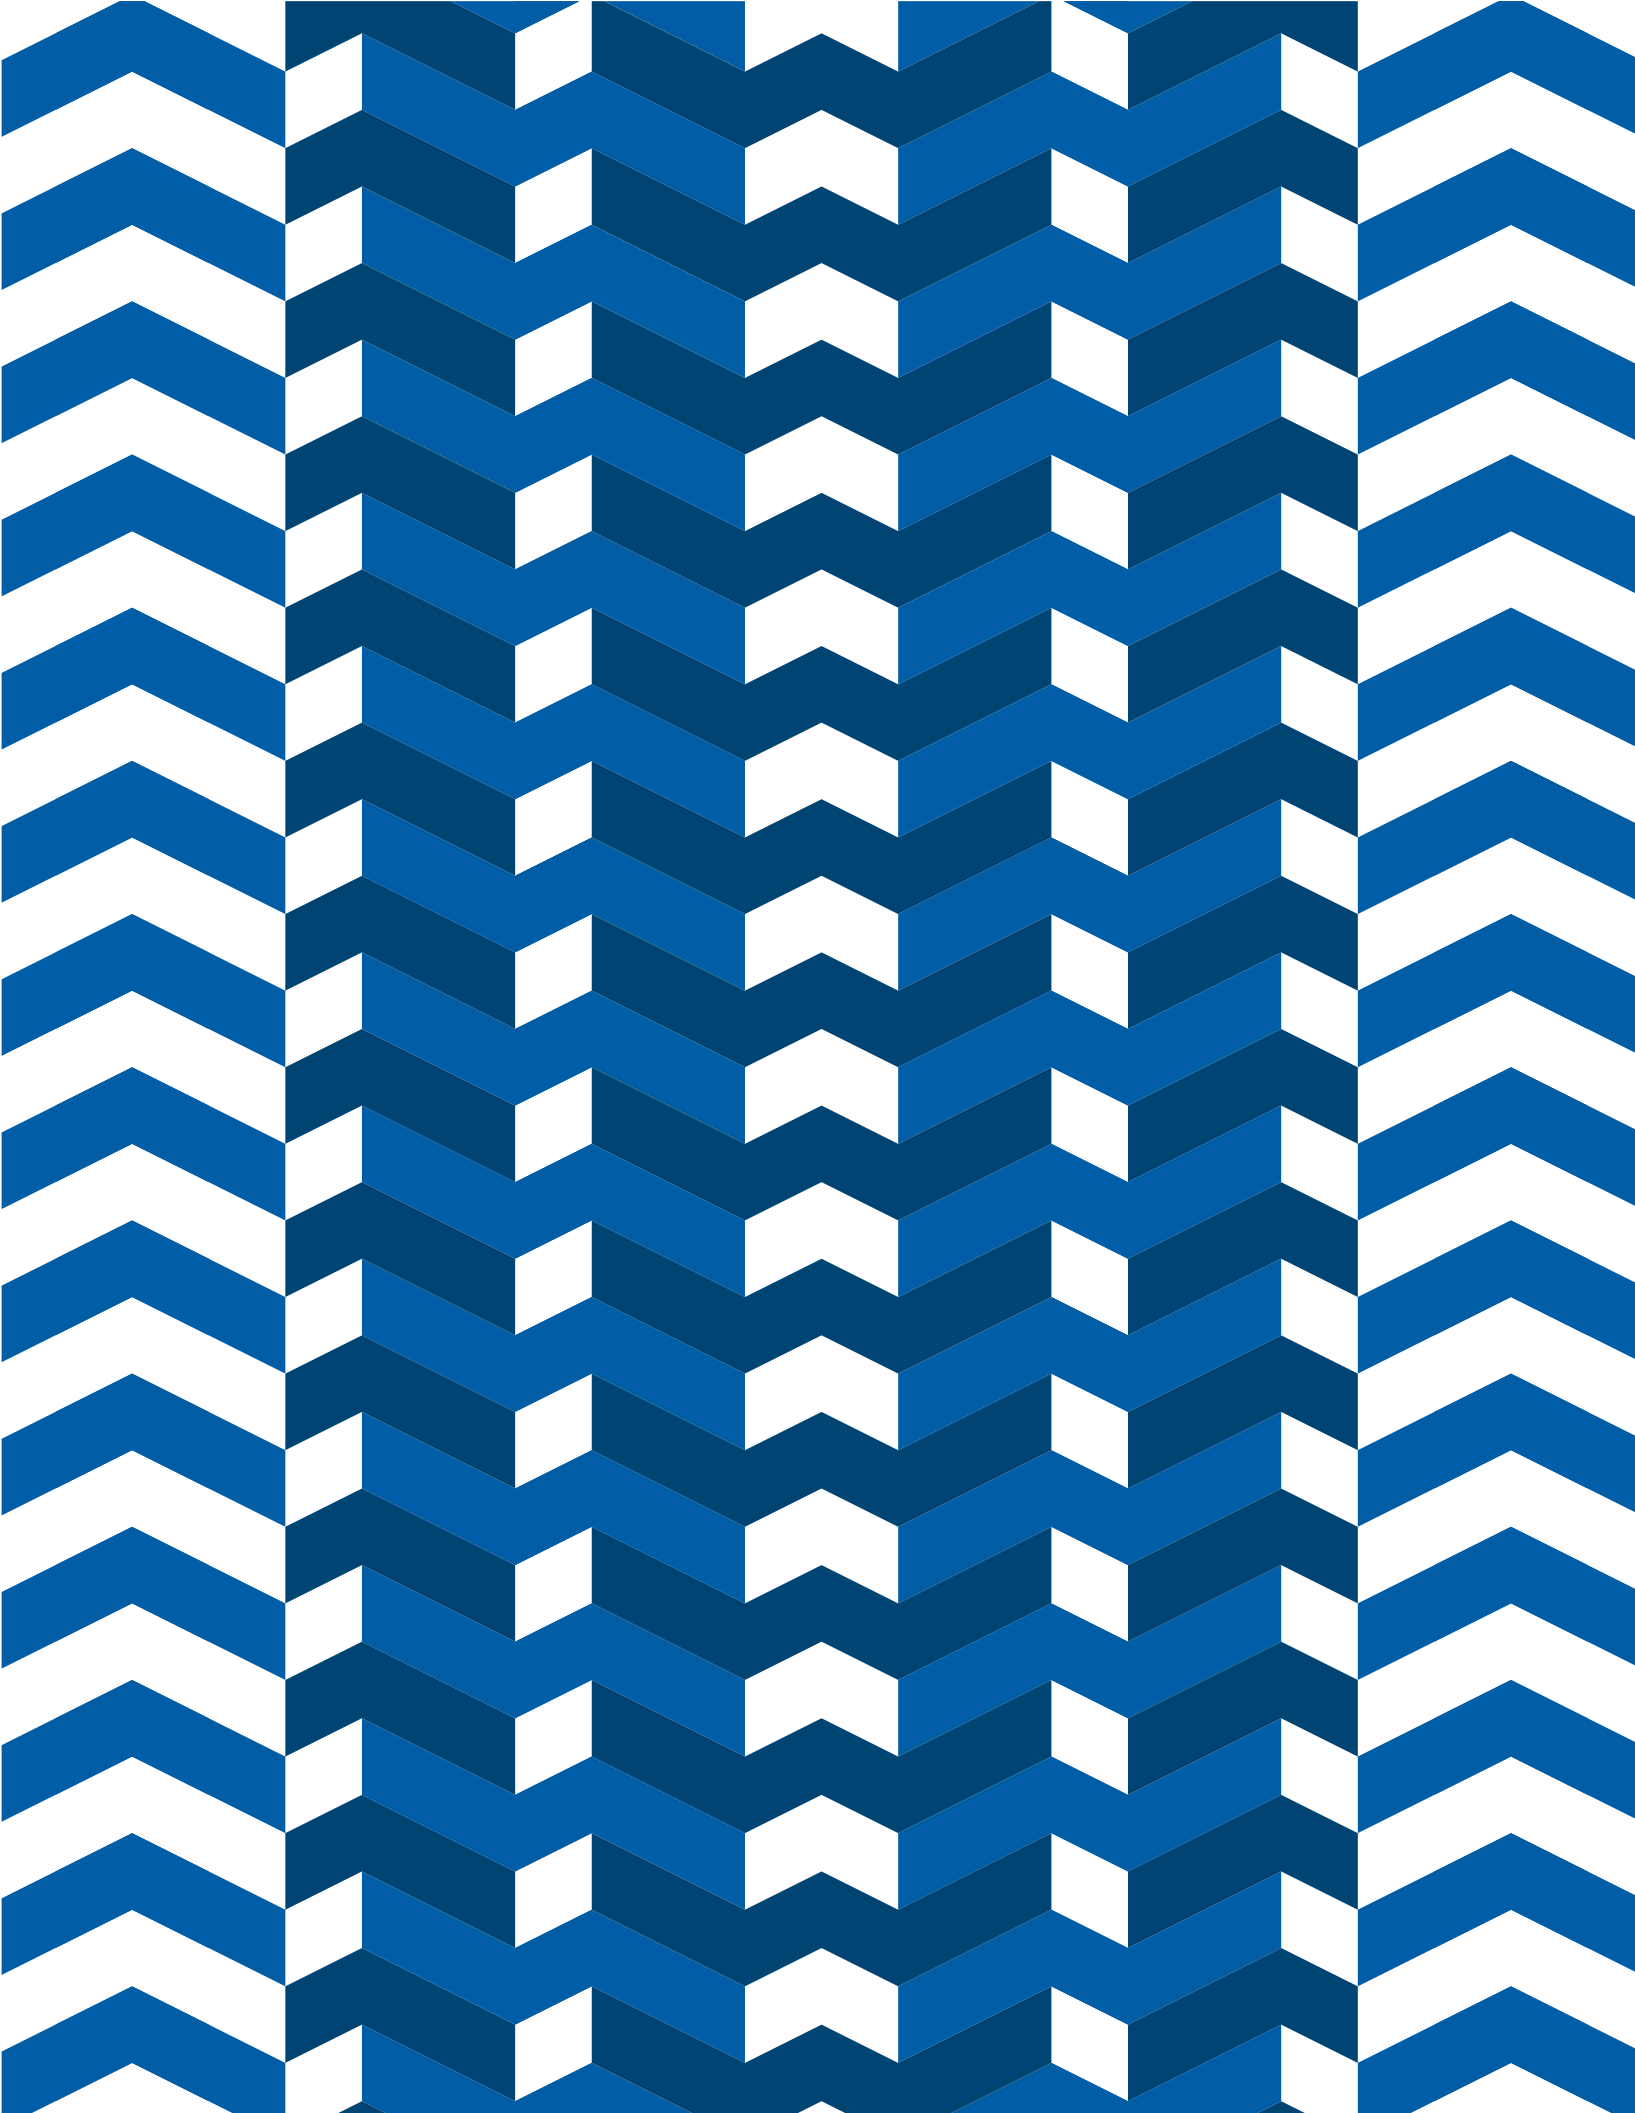

TOUGH IS OUR WAY OF LIFE

