


WRFC WEAR RING

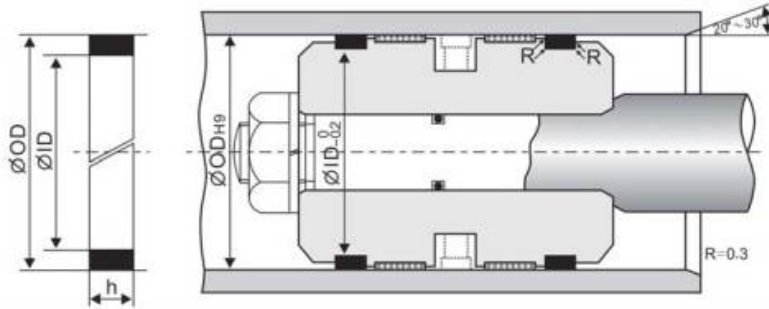

APPLICATION	
MATERIAL	PTFE
TEMP.	-55°C ~ 200°C
SPEED	1.5m/s

ITEM	OD	ID	h	ITEM	OD	ID	h
WRFC-080	80	72	5.9	WRFC-165	165	157	7.9
WRFC-085	85	77	5.9	WRFC-170	170	162	7.9
WRFC-090	90	82	5.9	WRFC-180	180	172	7.9
WRFC-095	95	87	5.9	WRFC-190	190	182	7.9
WRFC-100	100	92	5.9	WRFC-200	200	192	7.9
WRFC-105	105	97	5.9	WRFC-210	210	202	7.9
WRFC-110	110	102	5.9	WRFC-080	80	76	8.0
WRFC-115	115	107	5.9	WRFC-095	95	87	9.5
WRFC-120	120	112	5.9	WRFC-100	100	92	9.5
WRFC-125	125	117	5.9	WRFC-105	105	97	9.5
WRFC-130	130	122	5.9	WRFC-110	110	102	9.5
WRFC-135	135	127	5.9	WRFC-115	115	107	9.5
WRFC-140	140	132	5.9	WRFC-120	120	112	9.5
WRFC-145	145	137	5.9	WRFC-125	125	117	9.5
WRFC-150	150	142	5.9	WRFC-130	130	122	9.5
WRFC-160	160	152	5.9	WRFC-135	135	127	9.5
WRFC-140	165	157	5.9	WRFC-140	140	132	9.5
WRFC-170	170	162	5.9	WRFC-145	145	137	9.5
WRFC-085	85	77	7.9	WRFC-150	150	142	9.5
WRFC-090	90	82	7.9	WRFC-160	160	152	9.5
WRFC-095	95	87	7.9	WRFC-165	165	157	9.5
WRFC-100	100	92	7.9	WRFC-170	170	162	9.5
WRFC-105	105	97	7.9	WRFC-180	180	172	9.5
WRFC-110	110	102	7.9	WRFC-185	185	177	9.5
WRFC-115	115	107	7.9	WRFC-190	190	182	9.5
WRFC-120	120	112	7.9	WRFC-200	200	192	9.5
WRFC-125	125	117	7.9	WRFC-085	85	77	14.8
WRFC-130	130	122	7.9	WRFC-090	90	82	14.8
WRFC-135	135	127	7.9	WRFC-095	95	87	14.8
WRFC-140	140	132	7.9	WRFC-100	100	92	14.8
WRFC-145	145	137	7.9	WRFC-105	105	97	14.8
WRFC-150	150	142	7.9	WRFC-110	110	102	14.8
WRFC-155	155	147	7.9	WRFC-115	115	107	14.8
WRFC-160	160	152	7.9	WRFC-120	120	112	14.8