


HY ROD SEAL BACK UP RING

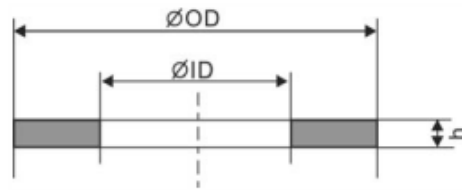

APPLICATION	
MATERIAL	NY
TEMP.	-35°C~100°C

ITEM	ID	OD	h	ITEM	ID	OD	h
HY-40*50*3	40	50	3	HY-75*90-3	75	90	3
HY-40*55*3	40	55	3	HY-75*95*3	75	95	3
HY-45*55*3	45	55	3	HY-80*93*3	80	93	3
HY-45*60*3	45	60	3	HY-80*95*3	80	95	3
HY-45*60*3	45	65	3	HY-80*100*3	80	100	3
HY-50*63*3	50	63	3	HY-85*100*2	85	100	2
HY-50*65*3	50	65	3	HY-85*100*3	85	100	3
HY-50*70*3	50	70	3	HY-85*105*3	85	105	3
HY-55*65*3	55	65	3	HY-90*105*3	90	105	3
HY-55*68*3	55	68	3	HY-90*110*3	90	110	3
HY-55*70*3	55	70	3	HY-95*110*3	95	110	3
HY-55*75*3	55	75	3	HY-95*115*3	95	115	3
HY-55*80*3	55	80	3	HY-100*115*3	100	115	3
HY-60*73*3	60	73	3	HY-100*120*3	100	120	3
HY-60*75*3	60	75	3	HY-105*120*3	105	120	3
HY-60*80*3	60	80	3	HY-105*125*3	105	125	3
HY-65*70*3	65	70	3	HY-110*125*3	110	125	3
HY-65*73*3	65	73	3	HY-110*130*3	110	130	3
HY-65*75*3	65	75	3	HY-115*130*3	115	130	3
HY-65*78*3	65	78	3	HY-115*135*3	115	135	3
HY-65*80*3	65	80	3	HY-120*135*3	120	135	3
HY-65*85*3	65	85	3	HY-120*140*3	120	140	3
HY-65*90*3	65	90	3	HY-125*140*3	125	140	3
HY-70*80*3	70	80	3	HY-130*145*3	130	145	3
HY-70*83*3	70	83	3	HY-130*150*3	130	150	3
HY-70*85*3	70	85	3	HY-135*150*3	135	150	3
HY-70*90*3	70	90	3	HY-140*160*3	140	160	3
HY-75*85*3	75	85	3	HY-145*160*3	145	160	3
HY-75*88*3	75	88	3				