


## COMBI SEALS

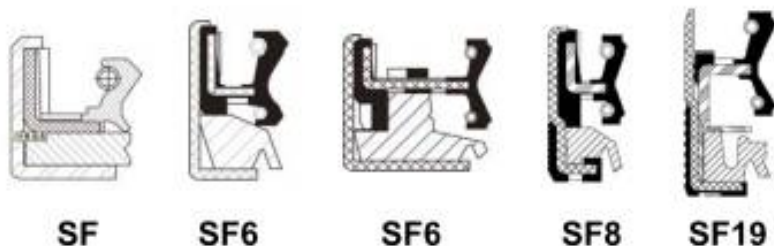

APPLICATION	
MATERIAL	NBR/FKM+STEEL
TEMP.	-30~80°C
PRESSURE	0.3kgf/cm <sup>2</sup>

ITEM	ID	OD	H
SF-030*44*11	30	44	11
SF-035*52*16	35	52	16
SF-040*58*10	40	58	10
SF-040*58*13	40	58	13
SF-042*62*14	42	62	14
SF-045*62*11	45	62	11
SF-045*65*12	45	65	12
SF-045*65*15	45	65	15
SF-045*65*16	45	65	16
SF-050*73*8	50	73	8
SF-050*75*12	50	75	12
SF-055*80*10	55	80	10
SF-055*90*8/16	55	90	8/16
SF-090*120*13	90	120	13
SF6-030*44*14	30	44	14
SF6-040*60*18.5	40	60	18.5
SF6-045*65*18.5	45	65	18.5
SF6-046.15*80*16.5	46.15	80	16.5
SF8-045*60*16	45	60	16
SF19-046*65*21	46	65	21
SF19-060*75*17/19	60	75	17/19