


TC50G1.....P01
Threaded reservoir



TC50GA.....P01
Unthreaded hole in reservoir

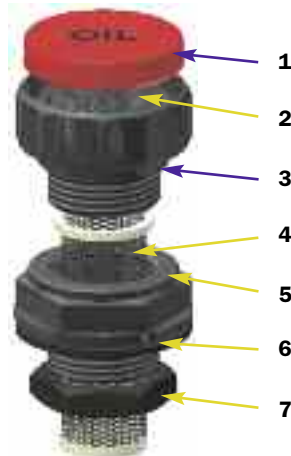


TC50 ((Materials))

- 1 - Cover: Nylon
- 2 - Filter element: Galvanised Steel
- 3 - Filler cap: Nylon
- 4 - Strainer: Galvanised Steel/Nylon
AISI 304 Nylon
- 5 - Collar: Nylon
- 6 - Seal: Inorganic fibre
- 7 - Ringnut: Phosphated Steel

Weight

TC 50 G1: 0,070 Kg
TC 50 GA: 0,100 Kg

Dimensions

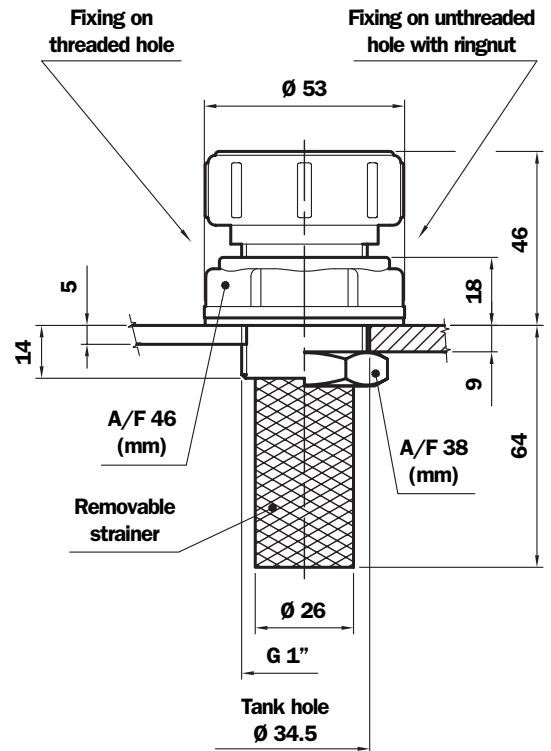

Ordering information

Filler cap	1	2	3	4	5	6	7
TC50	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Example: TC50	G1	L90	P	R	O	C70	P01

1 - Connection

<input type="checkbox"/> G1	G 1"
<input type="checkbox"/> GA	With ringnut

2 - Filter element

<input type="checkbox"/> L90	Galvanised steel
-------------------------------------	------------------

3 - Seal

<input type="checkbox"/> P	Inorganic fibre
-----------------------------------	-----------------

4 - Cover colour

<input type="checkbox"/> R	Red
<input type="checkbox"/> G	Yellow

5 - Cover wording

<input type="checkbox"/> O	Oil
<input type="checkbox"/> N	Neutral

6 - Basket


<input type="checkbox"/> C70	Basket L= 70 - Galvanised Steel
<input type="checkbox"/> I70	Basket L= 70 - AISI 304
<input type="checkbox"/> S	Without

7 - Options

<input type="checkbox"/> P01	MP Filtri standard
-------------------------------------	--------------------



Dimensions

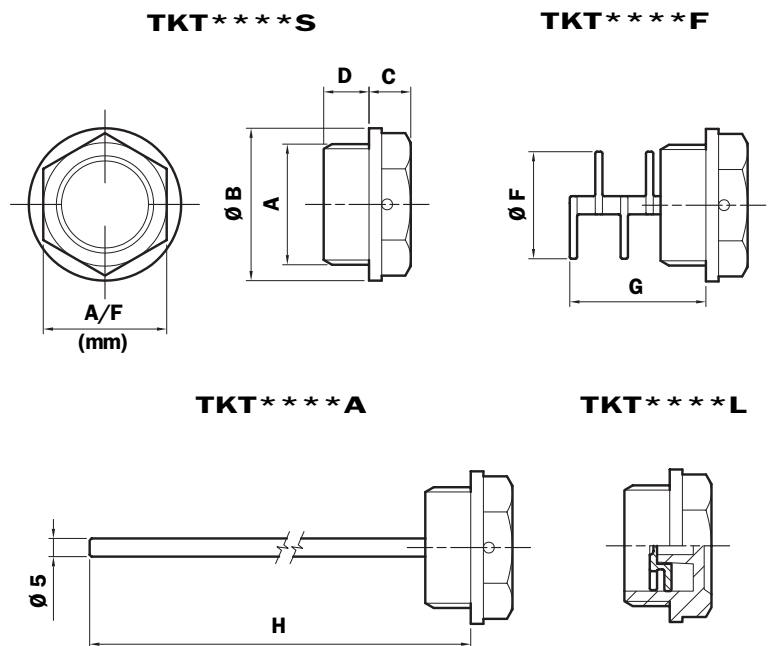

TKT (Materials)

- 1 - Body: Nylon
- 2 - Seals: NBR
Inorganic fibre
- 3 - Labyrinth: Nylon
- 4 - Anti-splash feature: Nylon
- 5 - Dipstick: Phosphated Steel

Quantity per pack Number of Parts

TKT 25

Size	A	Ø B	C	A/F (mm)	D	Ø F	G	H
G13	G 1/4"	20	7	17	9	-	-	206
G16	G 3/8"	22	8	18	10	13,5	33	207
G20	G 1/2"	28	8	22	11	17,5	34	208
G26	G 3/4"	35	9	27	12	23,5	35	209
G33	G 1"	42	11,5	34	12,5	29,5	37,5	202,5
G42	G 1 1/4"	52	12	42	13	38	40	203
G48	G 1 1/2"	58	14	47	13	38	38	203
G60	G 2"	74	14	64	20	-	-	200

N.B. Seals thickness 2 mm.


Recommended tightening torque 10 ± 15 Nm.

Ordering information

Filler cap

TKT

Example: TKT



1 - Size

G13	G 1/4"
G16	G 3/8"
G20	G 1/2"
G26	G 3/4"
G33	G 1"
G42	G 1 1/4"
G48	G 1 1/2"
G60	G 2"

2 - Colour

N	Black nylon
---	-------------

48

3 - Cover wording

N	Neutral
O	Oil

4 - Seal

A	NBR x TKT****F and TKT****A
B	Fibre inorganique x TKT****S and TKT****L

5 - Style

S	Without breather
F	Breather hole


6 - Accessories

S	Without
A	Standard dipstick
F	Anti-splash feature (except G13-G60)
L	Labyrinth filter (except G33-G42-G48-G60)


7 - Options

P01	MP Filtri standard
-----	--------------------

Dimensions





TSD****S



TSD****A

TSD****F

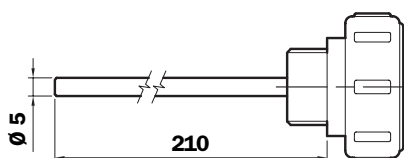

TSD (Materials)

- 1 - Body: Nylon
- 2 - Cover: Nylon
- 3 - Seal: NBR
- 4 - Filter: Galvanised steel
- 5 - Anti-splash feature: Nylon
- 6 - Dipstick: Phosphated Steel

**Quantity per pack
Number of Parts**

TSD 25

Size	A	Ø B	C	D	Ø E	Ø F	G
G16	G 3/8"	35	21	10	23	13,5	36
G20	G 1/2"	39	21	11	27	17,5	36
G26	G 3/4"	45	21	12	33	23,5	37
G33	G 1"	51	24,5	13	39	29,5	44
G42	G 1 1/4"	66	29,5	14	54	38	47
G48	G 1 1/2"	66	29,5	14	54	38	47


N.B. Seals thickness 2 mm.
Recommended tightening torque 10+15 Nm.

Ordering information

Filler cap

TSD

Example: TSD



1 - Size

G16	G 3/8"
G20	G 1/2"
G26	G 3/4"
G33	G 1"
G42	G 1 1/4"
G48	G 1 1/2"

2 - Cover colour

R	Red
Y	Yellow

3 - Cover wording

N	Neutral
O	Oil
G	Gasoil

4 - Seal

A	NBR
----------	-----

5 - Filter element

A	Steel (excepté "Gasoil")
O	Without

6 - Accessories

S	Without
A	Standard dipstick
F	Anti-splash feature

7 - Options

P01	MP Filtri standard
------------	--------------------