

NewOLiNE

Corrugated Roof And Facade Coating Plates



Sound Insulation

Newoline sheets eliminate sound. They prevent noise coming from outside.

CORRUGATED ROOF AND FACADE COATING PLATES



EASY TO APPLY

Curved knife, nails and hammer are sufficient to cut the product in desired dimensions and apply it.

Newoline sheets are easily handling materials and they can be transported to the roofs where application is to be done by means of their light weight and flexibility.

Newoline sheets can be easily applied to the garages, gardens and the areas of use in agricultural areas and roofs easily and conveniently.



LIGHTWEIGHT

It is very light for your old or new roofs with only 3,5 kg/m2 weight. It is easy to carry.



WATER TIGHTNESS

Newoline sheets are produced in such a way to conform to and adapt all climate conditions.



DURABLE

It is produced from the mixture of bitumen soaked organic fibre and a special type of resin. Thanks to the special method which we developed, Newoline sheets have become very durable.

Newoline sheets consist of special developed constituents.

B1 Class Corrugated Styropor Plate

— Heat insulation material made from Eps Polystrene (styropor) material in Newoline form.

— It is a heat insulation material produced in the form of ready-made sheet.

— Since its dimensions are 85×185, it provides convenience in storing, putting to the roof and assembly.

— It was produced from 14 Danste Eps heat insulation material.

It solves the perspiring issue of

— Newoline roofs thanks to its heat insulation, it ensures to make fuel savings.

Raw Material : Eps (Extruded Polystyrene)

Denstiy : 14 Density

Colour : White

Form : Newoline Form


— It absorbs sound and provides insulation.

— Minimizes your total roof building costs to much more reasonable costs.

— It prevents the very widespread losses of heat from roofs.

— It creates comfortable environments.

It prevents the form disruptions caused on your corrugated sheets

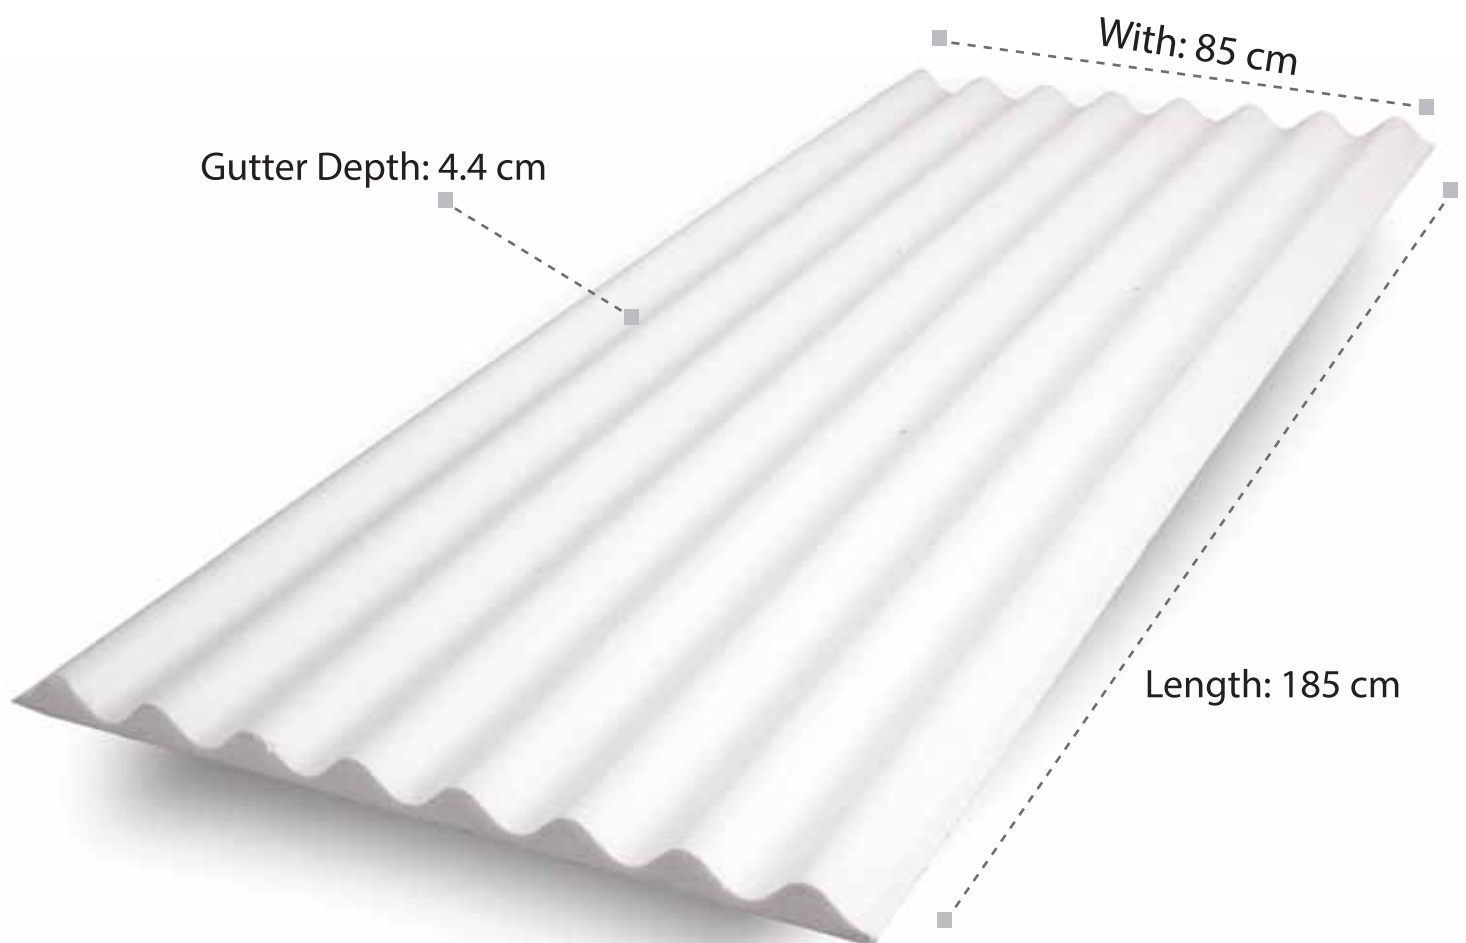

NewOLiNE

Corrugated Roof And Facade Coating Plates



— We did not do something which others did yet something new. This new thing is roofing and facade coating machine. We named it NEWOLINE.

— This product was produced at the quality and standards you require. It is an environment friendly material with its flexible structure, strength against UV rays, property of not being affected by chemicals and biological substances and it does not require care.

— Our sheets are bitumen immersed, organic fiber sheets and their strengths and resistances are increased and tested. They can be used in all climates and conditions thanks to the special resin used with paint pistol.

— NEWOLINE sheets give an extra advantage compared to the other roofing materials with their lightweight structures. Our company which was established to produce.

NEWOLINE sheet was constructed on an area of 30.000 m². Our factory which manufactures with our exclusively developed Technologies is state of art in roofing and facade coating market. Its ease of use, cost and quality are our most significant advantages.

Usage Areas

- Houses and Residences
- Mass Housing and Collective Housing
- Institution Buildings
- Farms, Rural buildings
- Industrial Buildings and Facilities
- Commercial Buildings



Why use Newoline Corrugated Roofing Sheet

- Increase the level of comfort of the areas where you live with Newoline Corrugated roofing sheets.
- Our roofing and facade coating material manufactured as a noncorrosive, watertight and aesthetic substance increases the value of wherever it was used.
- Our sheets are easy to apply due to their light weight structure.
- They prolong the lives of your buildings thanks to their durability and water tightness properties.
- Newoline roofing and facade coating sheets increase the values of your buildings and protect them with longer lives.



Accessories



Galvanized Concrete Nail (for inclined concrete)

Diameter : 5 cm
Length : 7 cm - 9 cm - 10 cm - 13 cm
Packaging : 1000 pcs / pack



Roof ridge

Width x Length : 48.5 cm x 200 cm
Quantity : 0.54 adet / m
Packaging : 20 pcs / pack



Galvanized Mono-block Capped Newoline Nail (for wooden buildings)

Diameter : 3 mm
Length : 8 cm 10 cm
Packaging : 400 pcs / pack



NewOLiNE

Corrugated Roof And Facade Coating Plates






New **OLiNE**

Corrugated Roof And Facade Coating Plates

www.yigitsangrup.com.tr



Length : 2000 mm (± 2)

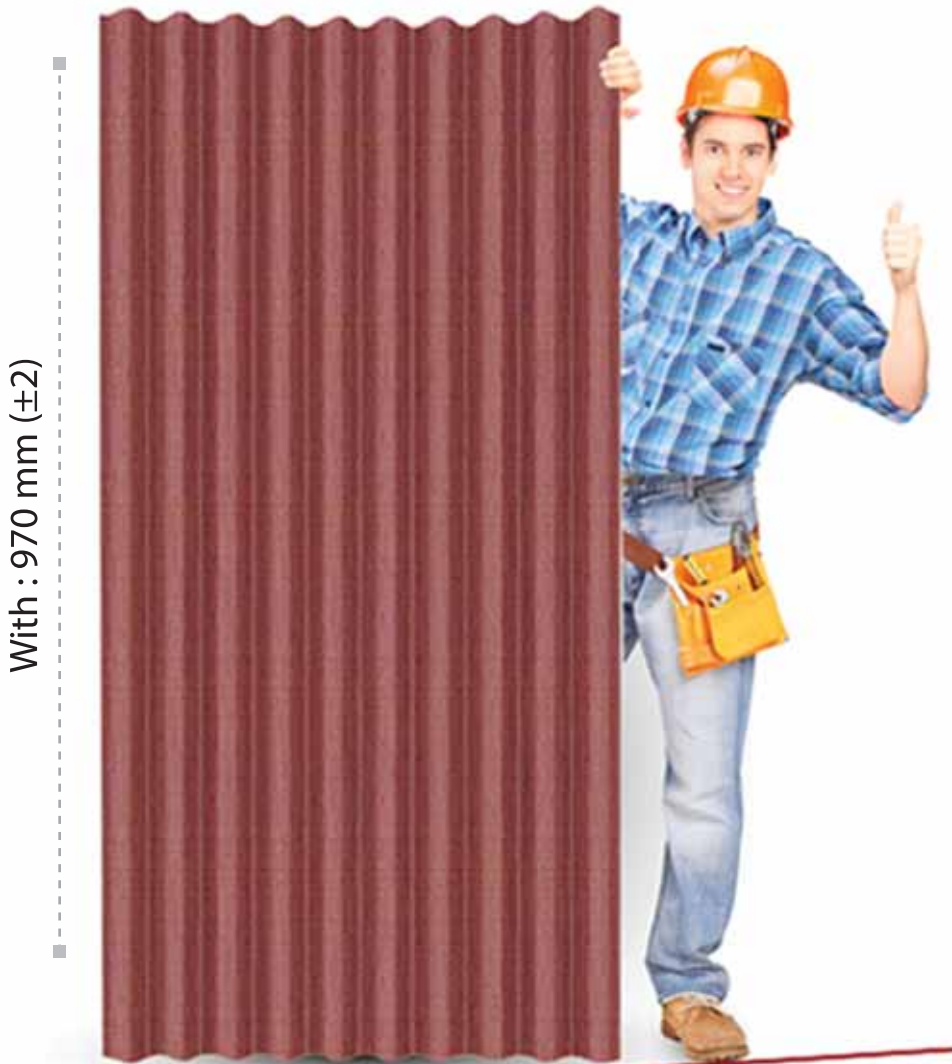

With

970 mm (± 2)

Length

2000 mm (± 2)

Net Coating Area

1.58 m (± 2)

Gutter Height

38 mm (± 2)

Number Of Gutters

10 Gutters / Plates

Packaging

350 Plates / Plates

- Do not stock more than two palettes as one on another
- Must be kept in closed areas for protection against sun and rain.

