



ALL-PURPOSE LASER SENSOR

Position, Contrast,
& Transparency Detection

TRUE DO-IT-ALL SENSOR

SIMPLE
SET UP

UNIVERSAL CHANGE DETECTION

(U.C.D. Function) LR-ZH Models

DISTANCE

INTENSITY


The LR-ZH models stand as the perfect combination of simplicity and performance. Simply press and hold the SET & UP buttons simultaneously to allow the sensor to detect any target that varies from the background. This is possible through the innovative U.C.D. Function, which monitors changes in both position and intensity to provide reliable and stable detection with ease.

TRANSPARENT TARGETS



From clear bottles to plastic films, the LR-ZH models are able to easily detect transparent objects.

CONTRAST CHANGES

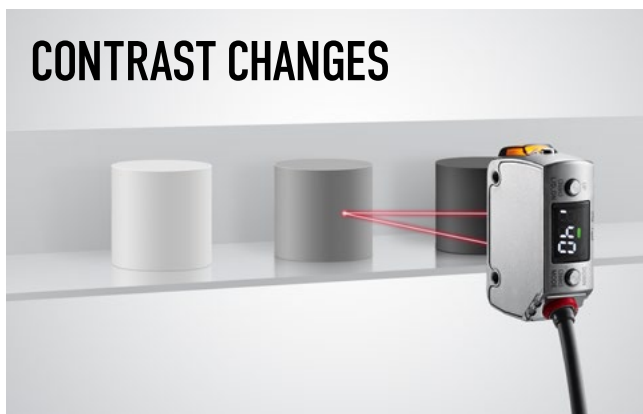

The ability to detect contrast changes ensures detection of targets close to the background

POSITION BASED DETECTION

DISTANCE

Position-based sensing, along with the diffuse sensor design, allow the LR-Z Series to reliably detect targets regardless of shape, color, or surface finish. All without the use of a cumbersome reflector.


Max.
**500
mm**
19.69"
RANGE

DARK TARGETS



The Light Power Control Function adjusts light intensity to guarantee proper detection of dark and distant targets.

METAL TARGETS

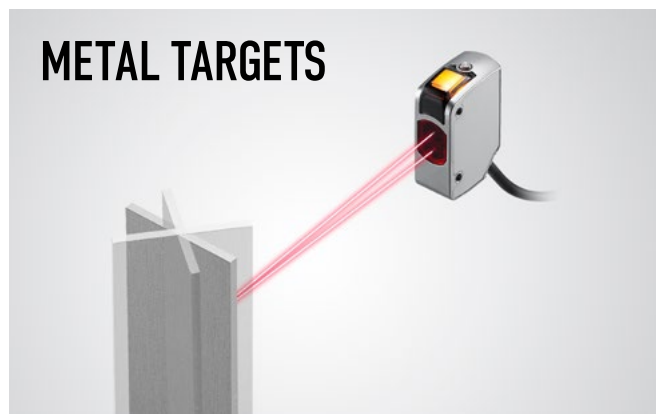

Even at extreme angles, shiny metal targets are stably detected with the versatile DATUM Calibration.

ADDITIONAL FEATURES



Rugged Metal Housing

The durable stainless steel housing provides increased longevity in rough factory environments.



Water and Dust Resistance

The impressive IP68 & IP69K enclosure ratings ensure detection in both washdown and heavy buildup areas.



7-Segment LED Display

Installation, calibration, and monitoring are made easy with the intuitive LED display.
(LR-ZH: white LED, LR-ZB: red LED)



Highly Visible Indicator

The sensor output status is easily recognized from a distance making troubleshooting a breeze.




Simplified Operation

Three buttons is all it takes to fully utilize the innovative features of the LR-Z Series.




Improved Ambient Light Resistance (LR-ZH only)

Resistance to ambient light has been greatly improved. This type can withstand up to 10000 lux of incandescent light and up to 20000 lux of sunlight.

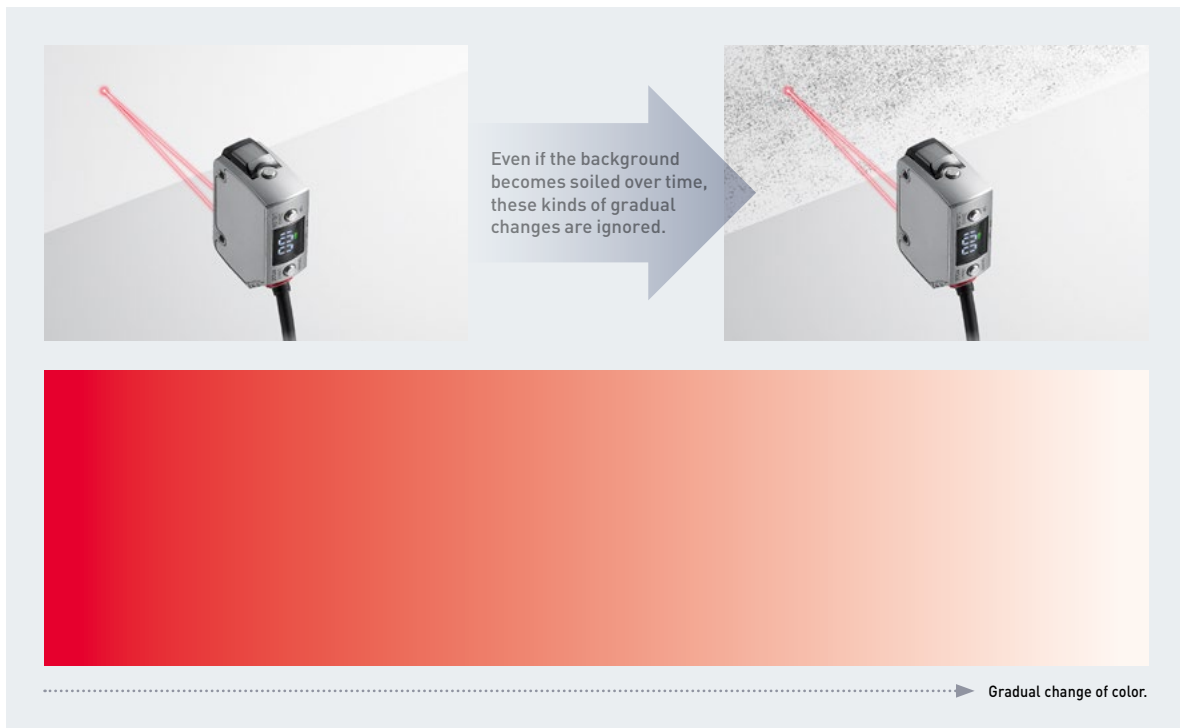

Dynamic Stability Control

The D.S.C. function ensures stable detection by accounting for changes in the background due to dust or vibration.

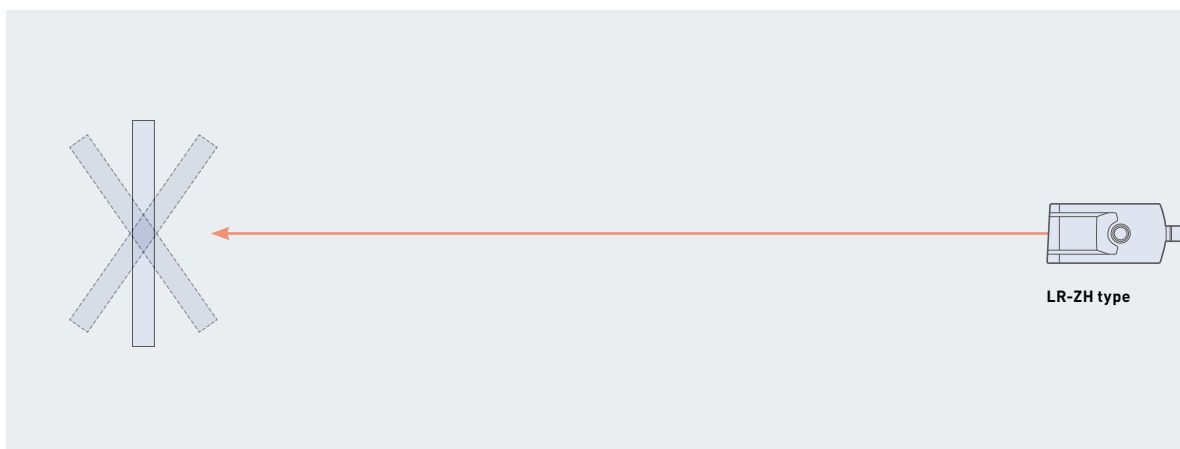


High Angular Characteristic


When used with high-gloss metallic workpieces, this sensor provides angle characteristics about twice that of conventional models. This contributes to more accurate detection from a variety of angles.

Horizontal direction angle characteristics at a detecting distance of 200 mm **7.87'**

- Response time: 1.5 ms
- Response time: 10 ms
- Response time: 50 ms




APPLICATIONS

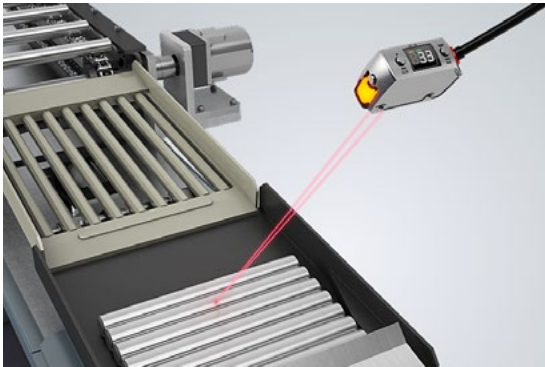


Detection of Metallic Workpieces

Accurately detects metallic workpieces, even from angled installation.

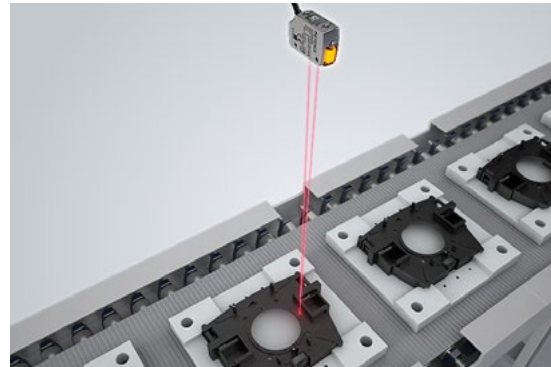

Detection of Black Workpieces

Provides problem-free detection of difficult workpieces with low reflectivity and complex shapes.

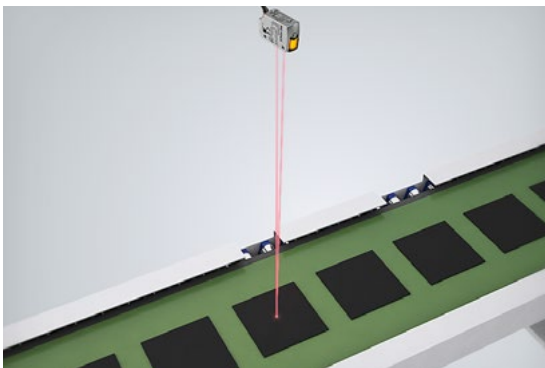

Detection of Black Nonwoven Fabric

Universal Change Detection, a new feature of LR-ZH, makes it possible to stably detect even thin workpieces with low reflectivity, such as anti-reflective materials.




Durable Enough to Remain Problem-Free After Cleaning

Thanks to the IP69K enclosure rating, this sensor is robust enough to function without a cover even in processes that expose the sensor to water during cleaning.



Detection of Transparent Workpieces

Thanks to the Universal Change Detection (LR-ZH Models) feature, even transparent objects can be detected with the use of guides and jigs.

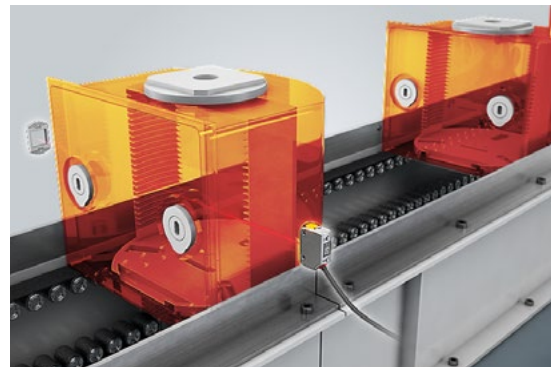

Detection of FOUPs

Even FOUPs (front opening unified pods) can be detected with the use of a reflector and Universal Change Detection (LR-ZH Models).

Lineup

Type	Detecting distance	Spot diameter	Standard detectable deviation	Connection method	Output	Model	Weight			
 M18 threaded mount w/ M12 connector	 25 to 490 mm 0.98° to 19.29°	Approx. ø3 mm ø0.12° 	9 mm 0.35° (25 to 170 mm 0.98° to 6.69°) 25 mm 0.98° (170 to 290 mm 6.69° to 11.42°) 40 mm 1.57° (290 to 390 mm 11.42° to 15.35°) 50 mm 1.97° (390 to 490 mm 15.35° to 19.29°)	M12 4-pin	NPN/PNP selectable	LR-ZH490CB [NEW] U.C.D. Function	75 g			
 M18 threaded mount w/ M12 connector	 25 to 240 mm 0.98° to 9.45°	Approx. 2.4 mm 0.09°  Approx. 1.2 mm 0.05° At detecting distance of 240 mm 9.45°	9 mm 0.35° (25 to 170 mm 0.98° to 6.69°) 25 mm 0.98° (170 to 240 mm 6.69° to 9.45°)	M12 4-pin	Bipolar (NPN+ PNP)	LR-ZB240CB				
 M18 threaded mount w/ M12 connector	 25 to 90 mm 0.98° to 3.54°	Approx. 2 mm 0.08°  Approx. 1 mm 0.04° At detecting distance of 90 mm 3.54°	1.5 mm 0.06° (25 to 40 mm 0.98° to 1.57°) 3 mm 0.12° (40 to 90 mm 1.57° to 3.54°)	M12 4-pin	Bipolar (NPN+ PNP)	LR-ZB90CB				
 Rectangular w/ cable	 35 to 500 mm 1.38° to 19.69°	Approx. ø3 mm ø0.12° 	9 mm 0.35° (35 to 180 mm 1.38° to 7.09°) 25 mm 0.98° (180 to 300 mm 7.09° to 11.81°) 40 mm 1.57° (300 to 400 mm 11.81° to 15.75°) 50 mm 1.97° (400 to 500 mm 15.75° to 19.69°)	2 m cable	NPN	LR-ZH500N [NEW] U.C.D. Function	110 g			
 Rectangular w/ M8 connector				PNP	LR-ZH500P [NEW] U.C.D. Function					
				M8 4-pin	NPN	LR-ZH500CN [NEW] U.C.D. Function	55 g			
					PNP	LR-ZH500CP [NEW] U.C.D. Function				
				M8 3-pin	PNP	LR-ZH500C3P [NEW] U.C.D. Function				
 Rectangular w/ cable	 35 to 250 mm 1.38° to 9.84°	Approx. 2.4 mm 0.09°  Approx. 1.2 mm 0.05° At detecting distance of 250 mm 9.84°	9 mm 0.35° (35 to 180 mm 1.38° to 7.09°) 25 mm 0.98° (180 to 250 mm 7.09° to 9.84°)	2 m cable	NPN	LR-ZB250AN	110 g			
 Rectangular w/ M8 connector				PNP	LR-ZB250AP					
				M8 4-pin	NPN	LR-ZB250CN	55 g			
					PNP	LR-ZB250CP				
				M8 3-pin	PNP	LR-ZB250C3P				
 Rectangular w/ cable	 35 to 100 mm 1.38° to 3.94°	Approx. 2 mm 0.08°  Approx. 1 mm 0.04° At detecting distance of 100 mm 3.94°	1.5 mm 0.06° (35 to 50 mm 1.38° to 1.97°) 3 mm 0.12° (50 to 100 mm 1.97° to 3.94°)	2 m cable	NPN	LR-ZB100N	110 g			
 Rectangular w/ M8 connector				PNP	LR-ZB100P					
				M8 4-pin	NPN	LR-ZB100CN	55 g			
					PNP	LR-ZB100CP				
				M8 3-pin	PNP	LR-ZB100C3P				

Mounting brackets

Type	Model	Compatible models	Material/Weight
 Standard mounting bracket (M3 screw × 2 supplied)	OP-87408 ¹	Rectangular	SUS316L 30 g
 Rear mounting bracket (M3 screw × 2 supplied)	OP-87409	Rectangular	SUS316L 30 g
 Robust mounting bracket (t = 3) (M3 screw × 2 supplied)	OP-87410 ²	Rectangular	SUS316L 170 g
 M18 nut & Lock washer set	OP-87413	M18 Threaded Mount	M18 nut SUS316L 10 g Lock washer SUS304 5 g

¹ This bracket is dedicated to the cable type. Use OP-87409 or OP-87410, when installing the connector type.

² This can be used only in combination with an L-shaped connector cable, when installing the connector type.

Reflectors (For U.C.D. function only)

Type	Model	Compatible models	Maximum detecting distance	Appearance
Reflector	R-6L	LR-ZH models	700 mm 27.56°	
Reflective tape	OP-87123		700 mm 27.56°	 25 × 25 mm 0.98° × 0.98°

* When using the reflector or reflective tape, ensure that the spot from the sensor is stationary on the reflector.


Mounting brackets [adjustable brackets]

Type	Model	Compatible models	Material/Weight
 Adjustable bracket (M3 screw × 2 supplied)	OP-87404	Rectangular	Zinc nickel plating 95 g
 Adjustable bracket	OP-87405	M18 Threaded Mount	Zinc nickel plating 100 g
 Screw length	Screw length: 45 mm 1.77° OP-87406	—	Iron nickel plating 70 g
 Locking screw for adjustable bracket	Screw length: 65 mm 2.56° OP-87407	—	Iron nickel plating 80 g

Adjustable bracket




Adjustable bracket for rectangular type



Adjustable bracket for threaded mount type

Cables

Specifications	Material	Appearance	Connection method	Length	Model
Standard	Cable: PVC Connector: Brass Nickel Plating	 Straight type	M12 4-pin	2 m 6.56'	OP-75721
				10 m 32.81'	OP-85502
	M8 4-pin		2 m 6.56'	OP-73864	
			10 m 32.81'	OP-73865	
Cable: PVC Connector: Zinc Nickel Plating	M8 3-pin		2 m 6.56'	OP-87627	
	Oil resistant		Cable: PUR Connector: Zinc Nickel Plating	M12 4-pin	2 m 6.56'
10 m 32.81'					OP-87637
M8 4-pin			2 m 6.56'	OP-87628	
		10 m 32.81'	OP-87629		
Chemical resistant	Cable: PVC Connector: SUS316L	M12 4-pin	2 m 6.56'	OP-87402	
		M8 4-pin	2 m 6.56'	OP-87621	
		M8 3-pin	2 m 6.56'	OP-87622	
Standard	Cable: PVC Connector: Brass Nickel Plating	 L-shaped type	M12 4-pin	2 m 6.56'	OP-75722
				10 m 32.81'	OP-87274
	M8 4-pin		2 m 6.56'	OP-85497	
			M8 3-pin	2 m 6.56'	OP-87631
Cable: PVC Connector: Zinc Nickel Plating	M12 4-pin		2 m 6.56'	OP-87640	
			10 m 32.81'	OP-87641	
Oil resistant	Cable: PUR Connector: Zinc Nickel Plating		M8 4-pin	2 m 6.56'	OP-87632
				10 m 32.81'	OP-87633
Chemical resistant	Cable: PVC Connector: SUS316L	M12 4-pin	2 m 6.56'	OP-87403	
		M8 4-pin	2 m 6.56'	OP-87619	
		M8 3-pin	2 m 6.56'	OP-87620	


Enclosure ratings for each cable type

Enclosure rating	Standard cable	Oil resistant cable	Chemical resistant cable
IP67 IEC60529	✓	✓	✓
IP68 IEC60529	-	✓	✓
IP69K DIN40050-9	-	-	✓
ECOLAB, Diversey	-	-	✓*


* Have passed resistance tests with cleaning agents from multiple manufacturers.

I/O circuit diagram


Bipolar type (LR-ZBxB)



NPN type (LR-ZxN)




PNP type (LR-ZxP)



* Cable type and M8 connector 4 pin type only


LR-ZH490CB

(When NPN output is selected)



LR-ZH490CB

(When PNP output is selected)



M12 Connector
pin layout (4-pin type)

M8 Connector
pin layout (4-pin type)


M8 Connector
pin layout (3-pin type)

Universal Change Detection:

Universal Change Detection works by storing the light receiving pattern (distance and returned light intensity) associated with a set background or reference surface. From here, the sensor is able to detect any variations from the calibrated light receiving pattern (position changes and/or intensity changes).


Background

OFF




Position Change

ON



Intensity Change

ON



SPECIFICATIONS


Specifications



Type		Distance based laser sensor						
Appearance		M18 Threaded mount			Rectangular			
Model	Bipolar	M12 connector 4-pin	LR-ZH490CB*1 [NEW] U.C.D. Function	LR-ZB240CB	LR-ZB90CB	—	—	—
	NPN	2 m 6.56' cable	—	—	—	LR-ZH500N [NEW] U.C.D. Function	LR-ZB250AN	LR-ZB100N
		M8 connector 4-pin	—	—	—	LR-ZH500CN [NEW] U.C.D. Function	LR-ZB250CN	LR-ZB100CN
	PNP	2 m 6.56' cable	—	—	—	LR-ZH500P*1 [NEW] U.C.D. Function	LR-ZB250AP	LR-ZB100P
		M8 connector 4-pin	—	—	—	LR-ZH500CP*1 [NEW] U.C.D. Function	LR-ZB250CP	LR-ZB100CP
		M8 connector 3-pin	—	—	—	LR-ZH500C3P*1 [NEW] U.C.D. Function	LR-ZB250C3P	LR-ZB100C3P
Detectable distance		25 to 490 mm 0.98" to 19.29" (465 to 0)" ²	25 to 240 mm 0.98" to 9.45" (215 to 0)" ²	25 to 90 mm 0.98" to 3.54" (650 to 0)" ²	35 to 500 mm 1.38" to 19.69" (465 to 0)" ²	35 to 250 mm 1.38" to 9.84" (215 to 0)" ²	35 to 100 mm 1.38" to 3.94" (650 to 0)" ²	
Standard detectable deviation		25 to 170 mm 0.98" to 6.69" : 9 mm 0.35" 170 to 290 mm 6.69" to 11.42" : 25 mm 0.98" 290 to 390 mm 11.42" to 15.35" : 40 mm 1.57" 390 to 490 mm 15.35" to 19.29" : 50 mm 1.97"	25 to 170 mm 0.98" to 6.69" : 9 mm 0.35" 170 to 240 mm 6.69" to 9.45" : 25 mm 0.98"	25 to 40 mm 0.98" to 1.57" : 1.5 mm 0.06" 40 to 90 mm 1.57" to 3.54" : 3 mm 0.12"	35 to 180 mm 1.38" to 7.09" : 9 mm 0.35" 180 to 300 mm 7.09" to 11.81" : 25 mm 0.98" 300 to 400 mm 11.81" to 15.75" : 40 mm 1.57" 400 to 500 mm 15.75" to 19.69" : 50 mm 1.97"	35 to 180 mm 1.38" to 7.09" : 9 mm 0.35" 180 to 250 mm 7.09" to 9.84" : 25 mm 0.98"	35 to 50 mm 1.38" to 1.97" : 1.5 mm 0.06" 50 to 100 mm 1.97" to 3.94" : 3 mm 0.12"	
Display resolution		1 to 5 (1 to 5 mm 0.04" to 0.20")	1 to 3 (1 to 3 mm 0.04" to 0.12)	2 (0.2 mm 0.01")	1 to 5 (1 to 5 mm 0.04" to 0.20")	1 to 3 (1 to 3 mm 0.04" to 0.12)	2 (0.2 mm 0.01")	
Spot size		Approx. ø3 mm ø0.12"	Approx. 2.4 × 1.2 mm 0.09" × 0.05" at 240 mm 9.45"	Approx. 2 × 1 mm 0.08" × 0.04" at 90 mm 3.54"	Approx. ø3 mm ø0.12"	Approx. 2.4 × 1.2 mm 0.09" × 0.05" at 250 mm 9.84"	Approx. 2 × 1 mm 0.08" × 0.04" at 100 mm 3.94"	
Response time		1.5 ms / 10 ms / 50 ms selectable						
Light source	Type	Red laser (660 nm)						
	Laser class	Class 2 laser product (IEC60825-1) Class II Laser product (FDA(CDRH) Part1040.10)	Class 1 laser product (IEC60825-1, FDA (CDRH) Part1040.10 ³)	Class 2 laser product (IEC60825-1) Class II Laser product (FDA(CDRH) Part1040.10)	Class 1 laser product (IEC60825-1, FDA (CDRH) Part1040.10 ³)			
Function	Indicator	3-digit 7-segment display (white), output indicator (yellow), DATUM indicator (orange), 1 spot indicator (green)	3-digit 7-segment display (red), output indicator (yellow), DATUM indicator (orange), 1 spot indicator (green)	3-digit 7-segment display (white), output indicator (yellow), DATUM indicator (orange), 1 spot indicator (green)	3-digit 7-segment display (red), output indicator (yellow), DATUM indicator (orange), 1 spot indicator (green)			
	Timer	OFF/ON delay/OFF delay/One-shot						
Specifications	Power voltage	10 to 30 VDC, including 10% ripple (P-P), Class 2 or LPS						
	Power consumption	450 mW or less (18 mA or less at 24 V, 34 mA or less at 12 V)						
	Control output	LR-ZHxB: NPN Open collector/PNP Open collector selectable, LR-ZBxB: NPN+PNP Open collector, LR-ZxN: NPN Open collector, LR-ZxP: PNP Open collector, Applied voltage 30 VDC or less, Control current 100 mA or less, Residual voltage 1.2 V or less at 10 mA or less, 2 V or less at 10 to 100 mA						
	Protection circuit	Protection against reverse power connection, output overcurrent, output surge, reverse output connection						
	Output operation	Light-ON / Dark-ON selectable						
	External input *4	Input time calibration: 35 ms or more ON, 35 ms or more OFF Laser emission stop: 2 ms or more ON, 20 ms or more OFF Short-circuit current NPN: 1 mA or less/PNP: 2 mA or less	None		Input time calibration: 35 ms or more ON, 35 ms or more OFF Laser emission stop: 2 ms or more ON, 20 ms or more OFF Short-circuit current NPN: 1 mA or less/PNP: 2 mA or less			
Environmental resistance	Enclosure rating	IP68(IEC60529), IP69K(DIN40050-9), NEMA 4X, 6P, 13(NEMA250), ECOLAB ^{*5} , Diversey ^{*5}						
	Ambient light *6	Incandescent lamp: 10000 lux or less Sunlight: 20000 lux or less at 240 mm 9.45" Incandescent lamp: 2000 lux or less Sunlight: 4000 lux or less at 490 mm 19.29"	Incandescent lamp: 2000 lux or less Sunlight: 4000 lux or less	Incandescent lamp: 4000 lux or less Sunlight: 8000 lux or less	Incandescent lamp: 10000 lux or less Sunlight: 20000 lux or less at 250 mm 9.84" Incandescent lamp: 2000 lux or less Sunlight: 4000 lux or less at 500 mm 19.69"	Incandescent lamp: 2000 lux or less Sunlight: 4000 lux or less	Incandescent lamp: 4000 lux or less Sunlight: 8000 lux or less	
	Ambient temperature	-10 to +50°C (No freezing)						
	Storage temperature	-25 to +75°C (No freezing)						
	Ambient humidity	35 to 85%RH (No condensation)						
	Shock resistance	1000 m/s ² in X, Y, Z axis directions respectively 6 times						
	Vibration resistance	10 to 55 Hz Double amplitude 1.5 mm 0.06" in the X, Y, Z axis directions respectively, 2 hours						
	Insulating resistance	20 MΩ or more (500 VDC)						
	Withstand voltage	1000 VAC 50/60 Hz 1 min						
Material		Case: SUS316L, Display: PES, Lens cover: PMMA with scratch-resistant coating, Packing/Connector ring: FKM, Nut: SUS316L, Lock washer: SUS304			Case: SUS316L, Display: PES, Lens cover: PMMA with scratch-resistant coating, Packing/Connector ring: FKM			
Accompanying items		Instruction Manual, FDA warning/certification/identification label, Laser warning/explanation labels	Instruction Manual, Certification/identification label (FDA)		Instruction Manual, FDA warning/certification/identification label, Laser warning/explanation labels	Instruction Manual, Certification/identification label (FDA)		


*1 IO-Link specification v.1.1/COM2 (38.4 kbps) is supported. (LR-ZH490CB: Only when PNP output is selected.) You can download a setup file from the KEYENCE website (<http://www.keyence.com>). If using the product in an environment in which downloading files over the internet is not possible, contact your nearest KEYENCE office. *2 Display readings can be used as a guide for the detecting distance. When the setting value is tuned, the readout shifts. When the value exceeds "99", "FF" is displayed. *3 The laser classification for FDA (CDRH) is implemented based on IEC60825-1 in accordance with the requirements of Laser Notice No.50. *4 M8 connector (3-pin) type does not include the external input function. *5 Have passed resistance tests with cleaning agents from multiple manufacturers. *6 When the response time is 10 ms

Reference data

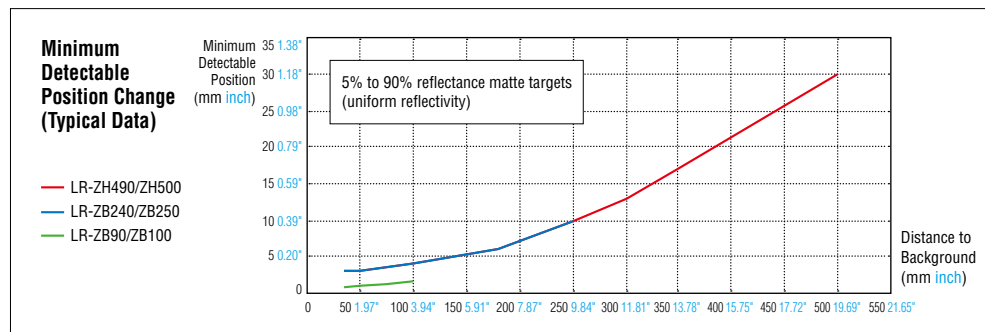


DIMENSIONS


LR-ZH490CB/
ZB240CB/
ZB90CB

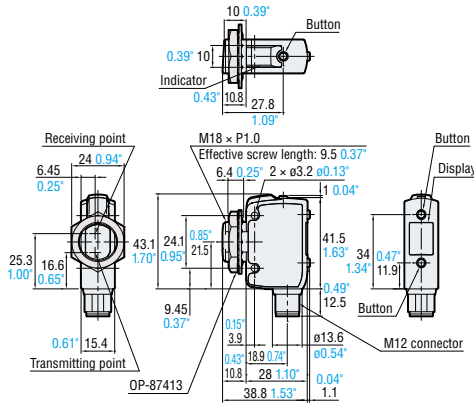


LR-ZH500N/ZH500P/
ZB250AN/ZB250AP/
ZB100N/ZB100P

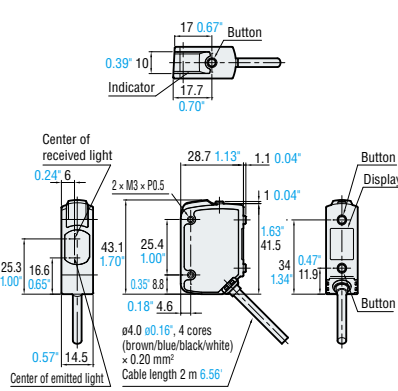


LR-ZH500CN/ZH500CP/ZH500C3P/
ZB250CN/ZB250CP/ZB250C3P/
ZB100CN/ZB100CP/ZB100C3P

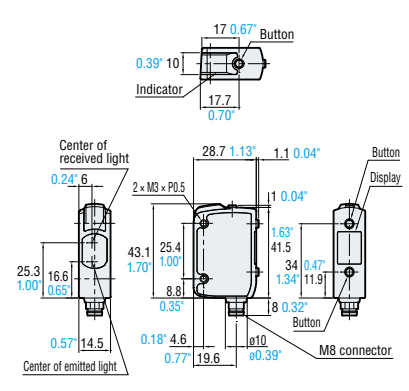


OP-87408




OP-87410




OP-87413




OP-87409




OP-87404 + LR-ZH500N




















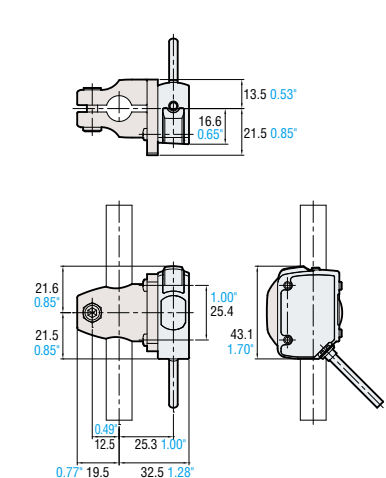


OP-87406/87407 + OP-87404 + LR-ZH500N

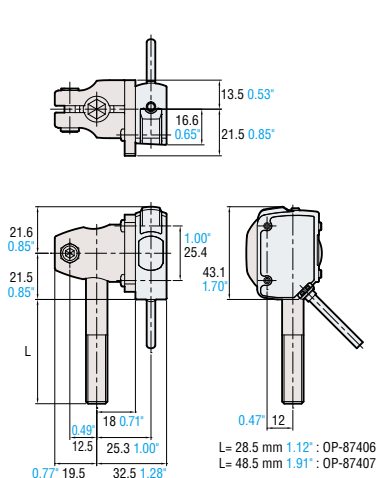

OP-87404

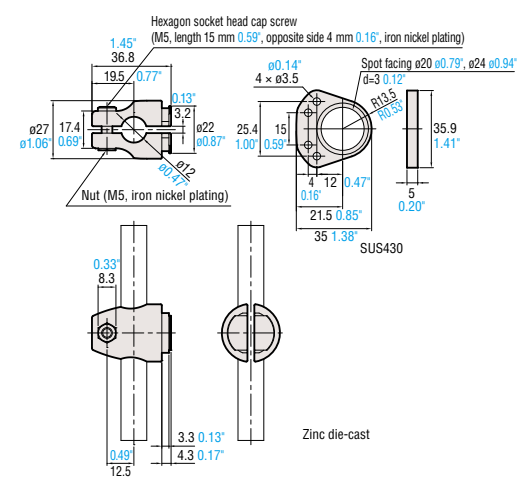


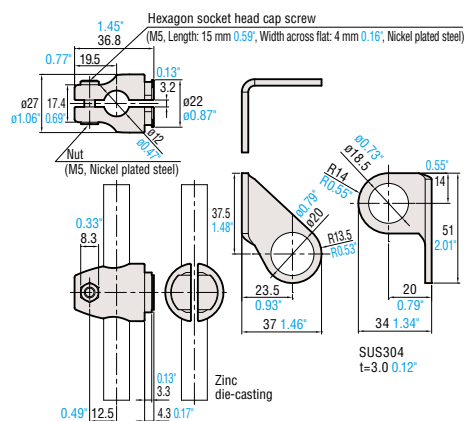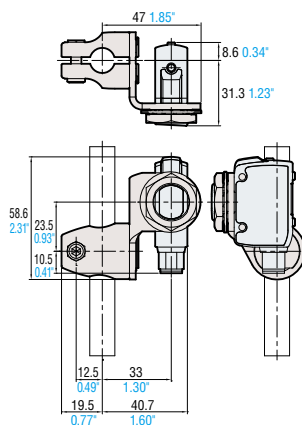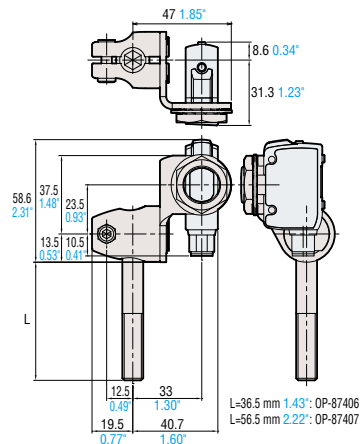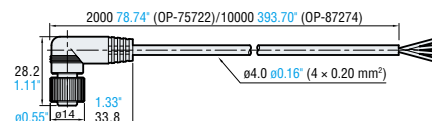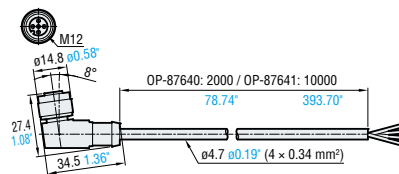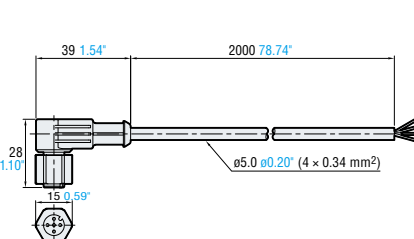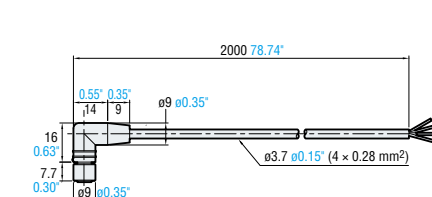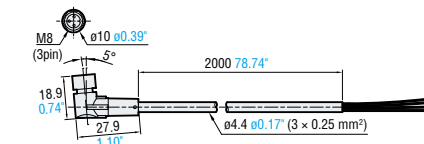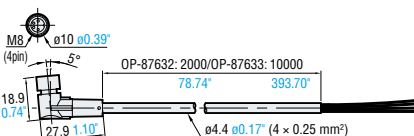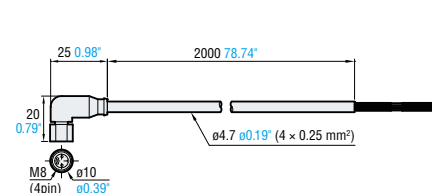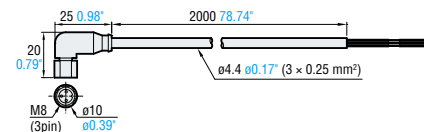OP-87405**OP-87405 + LR-ZH490CB****OP-87406/87407 + OP-87405 + LR-ZH490CB****Reflector R-6L****OP-75721/85502****OP-87636/ 87637****OP-87402****OP-73864 / 73865****OP-87627****OP-87628/87629****OP-87621****OP-87622****OP-75722 / 87274****OP-87640/87641****OP-87403****OP-85497****OP-87631****OP-87632/87633****OP-87619****OP-87620**M12 Connector
pin layout
(4-pin type)M8 Connector
pin layout
(4-pin type)M8 Connector
pin layout
(3-pin type)

No.	Color
①	Brown
②	White
③	Blue
④	Black

Note:

When the L-shaped connector is in use,
the cable is fixed in the direction shown on
the right. The connector is not rotatable.



Additional Sensor Series

KEYENCE offers a complete lineup of self-contained sensors

TOF LASER SENSORS LR-T Series

Detecting Distance [0.06 to 5 m **0.20' to 16.40'**]

Max. 5 m **16.40'** detecting distance

Custom IC for superior detecting capabilities

Metal body with IP65/IP67 enclosure rating



FULL-SPECTRUM SENSORS LR-W Series

Detect any changes in appearance

Innovative White LED Light Source

Long Range, Dual Spot, and Fiber Models

Controller Expansion for Increased Functionality



KEYENCE

CALL
TOLL
FREE

TO CONTACT YOUR LOCAL OFFICE
1-888-KEYENCE
1 - 8 8 8 - 5 3 9 - 3 6 2 3

www.keyence.ca
E-mail : keyencecanada@keyence.com



SAFETY INFORMATION

Please read the instruction manual carefully in order to safely operate any KEYENCE product.

KEYENCE CANADA INC.

Head Office 6775 Financial Drive, Suite 202, Mississauga, ON L5N 0A4, Canada
PHONE: +1-905-366-7655 FAX: +1-905-366-1122

Montreal Office PHONE: +1-514-694-4740 FAX: +1-514-694-3206
Windsor Office PHONE: +1-905-366-7655 FAX: +1-905-366-1122

The information in this publication is based on KEYENCE's internal research/evaluation at the time of release and is subject to change without notice. Company and product names mentioned in this catalog are either trademarks or registered trademarks of their respective companies. The specifications are expressed in metric units. The English units have been converted from the original metric units. Copyright (c) 0000 KEYENCE CORPORATION. All rights reserved.

KCN1-1116

LRZ_S-KCN-C3-US 1116-2 **612062**