




IN-LINE 2D MEASUREMENT SYSTEM


MEASURES 2 DIMENSIONS WITH MICRON PRECISION

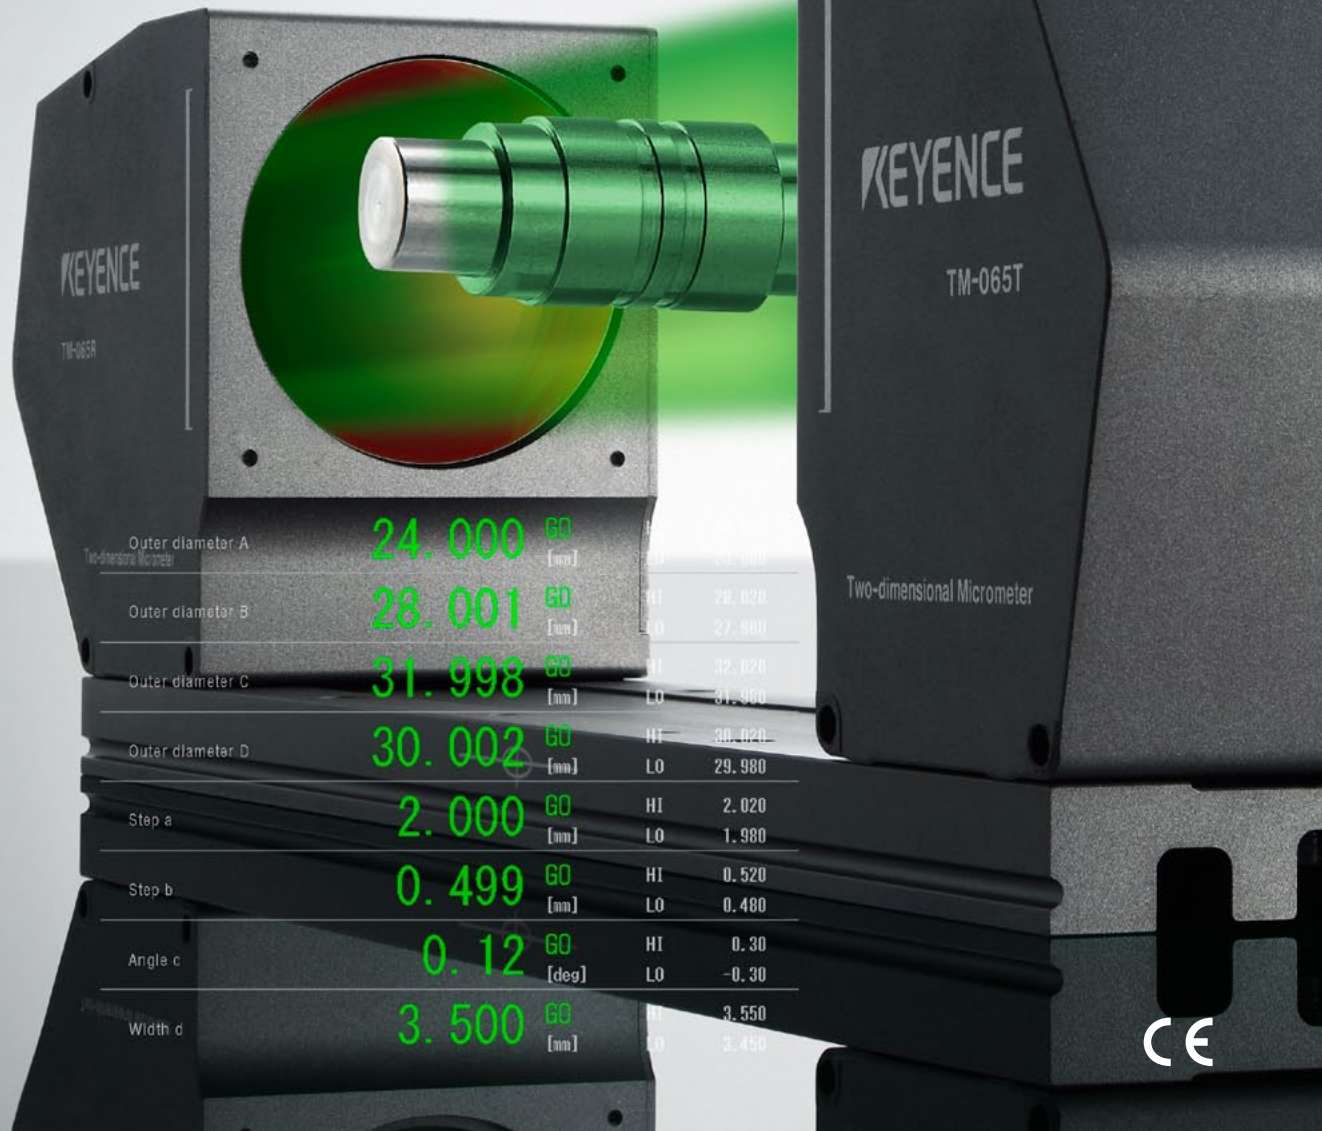

Outer diameter A <small>Two-dimensional Micrometer</small>	24.000	60	HI	23.980
			LO	24.020
Outer diameter B	28.001	60	HI	27.980
			LO	28.020
Outer diameter C	31.998	60	HI	31.980
			LO	32.020
Outer diameter D	30.002	60	HI	29.980
			LO	30.020
Step a	2.000	60	HI	1.980
			LO	2.020
Step b	0.499	60	HI	0.520
			LO	0.480
Angle c	0.12	60	HI	0.30
			LO	-0.30
Width d	3.500	60	HI	3.550
			LO	3.450

Commitment to In-line Measurement


Performs in line 2D dimensional measurements with high speed and precision.
The TM-3000 Series, the industry's first inline 2D measurement system.

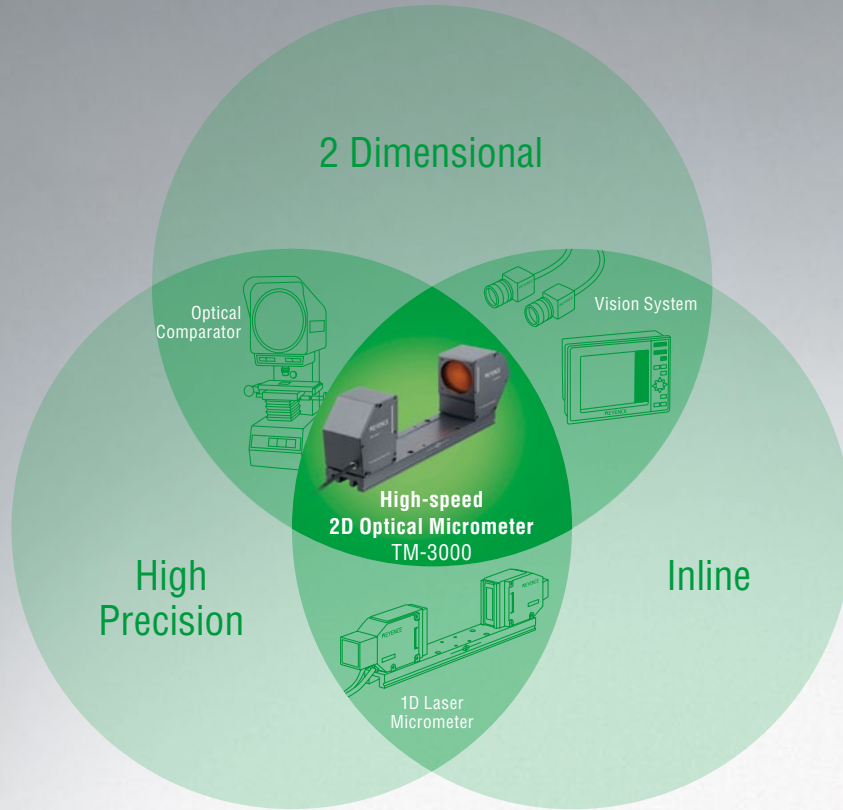

Because the TM-3000 is 2D it can...

Measure single point and edge dimensions

No need to position an object, outer diameter and angles can be measured instantaneously. In addition, since the object position is recognized, accurate measurement is performed with position correction. Furthermore, variations due to surface roughness of an object are suppressed with edge averaging, improving the reliability of measurement.



High speed production support

Newly developed HT processor

Newly developed high speed 2D dedicated includes a high-speed computing CPU and two dedicated image processing DSPs. Using a total of four processors for parallel processing, TM-3000 Series allows for fast processing of 1800(images)/minute.



*HT Processor...High Speed Two Dimensional Processor

*1800 images/min... calculated with approx. 33 ms trigger interval (default setting)

High precision inspection

A high brightness LED and a double telecentric optical system ensure high precision performance

A advantage of the thrubeam type which is not affected by external lighting, $\pm 0.15 \mu\text{m}$ repeatability.



Traceable two dimensional inspections in line


Measurement principle

Uniform collimated lighting with a green LED. Two-dimensional CMOS array detects the light-dark edges in the received light, and measures the dimensions.

Dual telecentric optical system


Dual telecentric lenses ensure only collimated light is used for imaging. Even though the distance from the object to the lenses change, the size of the image on the CMOS does not change. High precision measurement is possible.

Even with slight deviations of the object within the measurement area, the size of the image does not change.

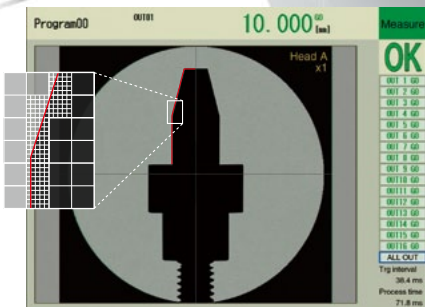

Pinpoint sub-pixel processing

High speed and high precision are achieved by performing pinpoint extraction and sub-pixel processing on just the contour within the specified measurement area, from the silhouette imaged on the CMOS.



HUD unit + collimator lens

Collimated light is produced without any unevenness by spreading LED light uniformly across the complete range.

*HUD unit = High Uniform Diffusion unit

High brightness InGaN green LED



A high brightness LED is used, combining three features,

- Even Brightness Distribution
- Resistant to EMF
- Eye Safe

A variety of measurement modes greatly expand the inspection possibilities

Because the system works in two dimensions it can...

Simultaneously measure a maximum of 16 measurement points within the measurement area. The time for measurement has been greatly reduced.

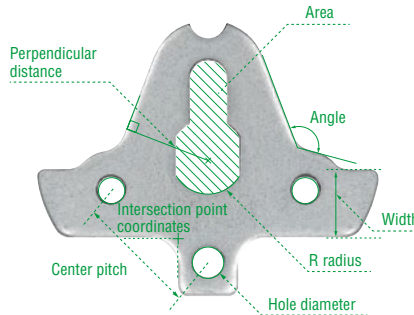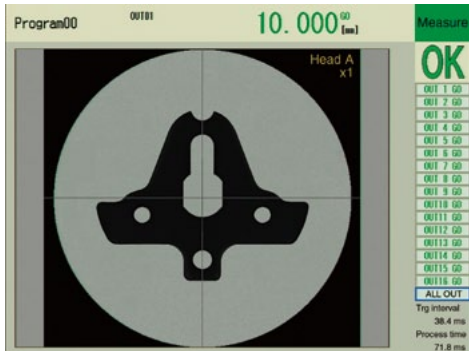

Example of measurement


- : Hole diameter
- : Center pitch
- : Intersection point coordinates
- : R radius
- : Width
- : Angle
- : Perpendicular distance
- : Area

Diverse measurement modes

A flexible combination of 15 types of basic measurement modes, and 8 types of auxiliary measurement modes, can support a variety of inspections.


Outer diameter/Step/Width

Measures a maximum diameter/minimum diameter within the specified area, and a step/width between the detected edges.

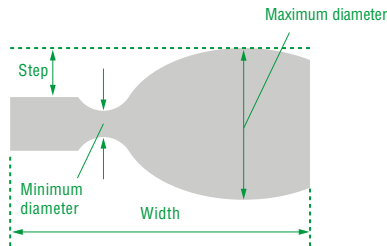


Angle

Measures an angle between two detected straight lines, and a tilt angle from a virtual line.




Distance/Intersection Point Distance

Measures a center of the circles and intersection point, distance between 2 specified points, distance from a point to a straight line.

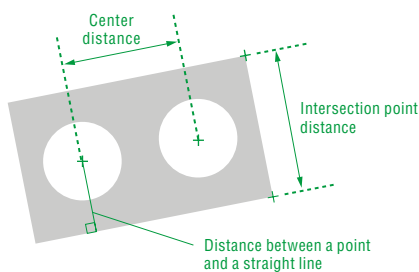


Height / Position/Coordinates

Measures height/ position of detected edges and coordinates of specified points.

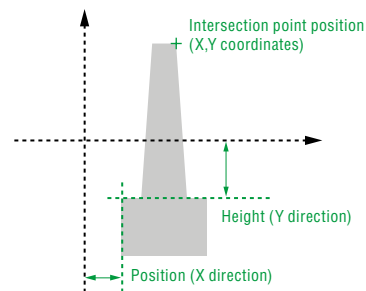


Radius/Roundness

Measures radius and roundness of specified arc.

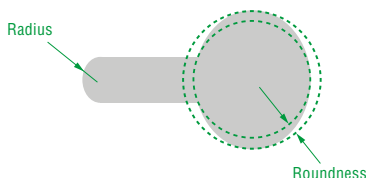


Pitch

Measures a maximum/minimum/average pitch within the specified area.




APPLICATIONS


Unit: mm

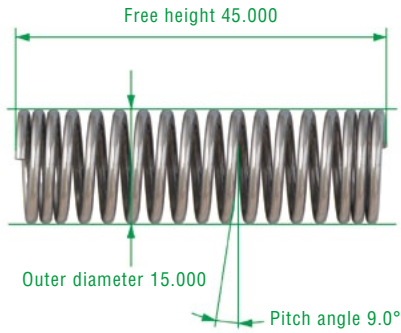


Measures outer diameter /pitch angel of springs

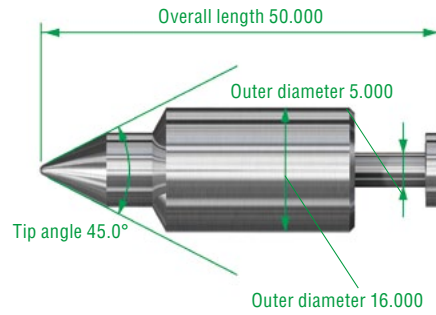


Measures outer diameter/tip angle of needle valves

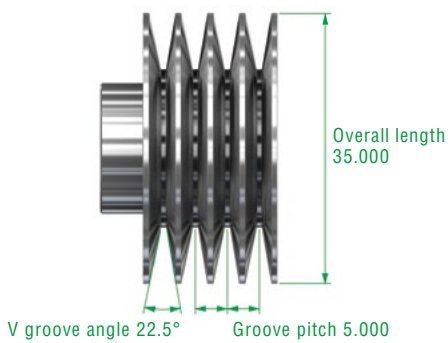


Measures pulley groove pitches/V groove angles

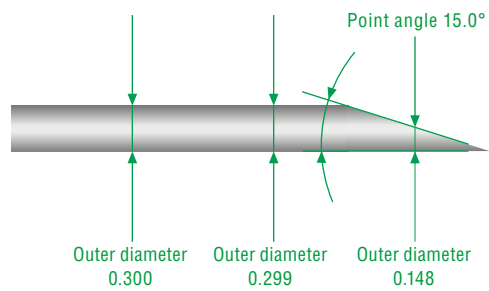


Measures multi-point outer diameter/point angle of injection needles

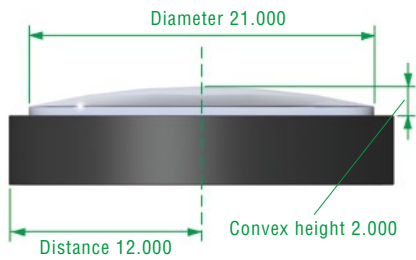


Measures diameter/height of lenses

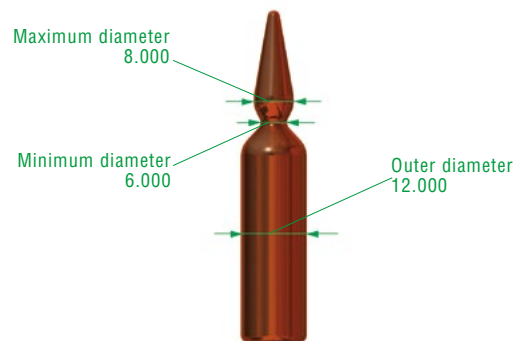

Measures maximum diameter/minimum diameter of ampules

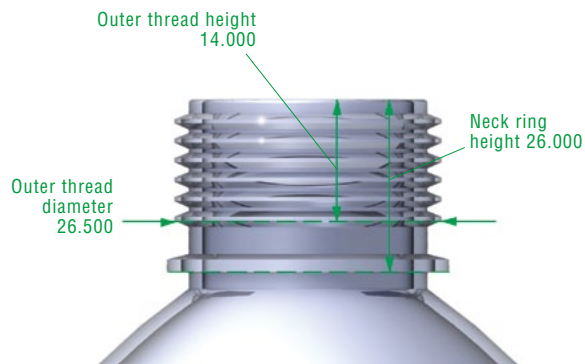

Measures outer diameter and threading a PET bottle

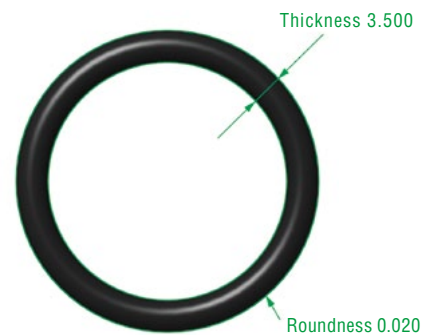


Measures roundness/thickness of O-rings


Correction function with on-the-spot power

Position correction function [edge correction/pattern correction]

Automatically corrects misalignments and tilt of the target which is directly linked to measurement errors. Can measure accurately even when positioning is difficult or objects are conveyed in random orientations.

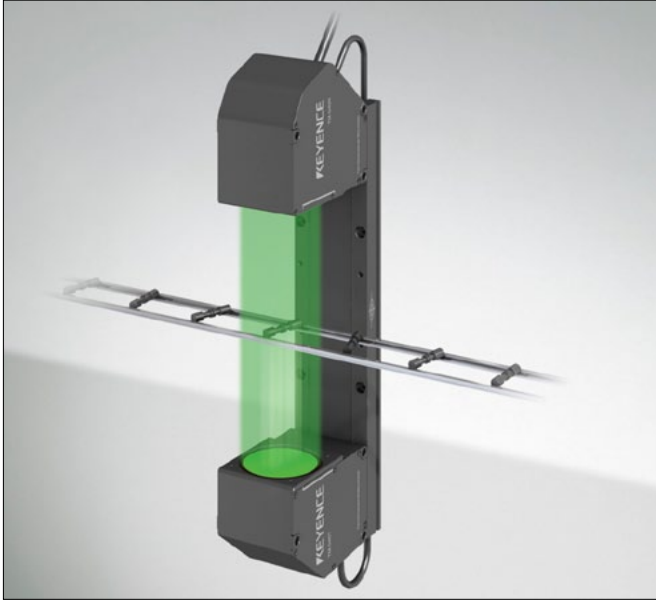


Because the measurement area autotracks according to the position and tilt of objects within the compensation area, it can be measured accurately.

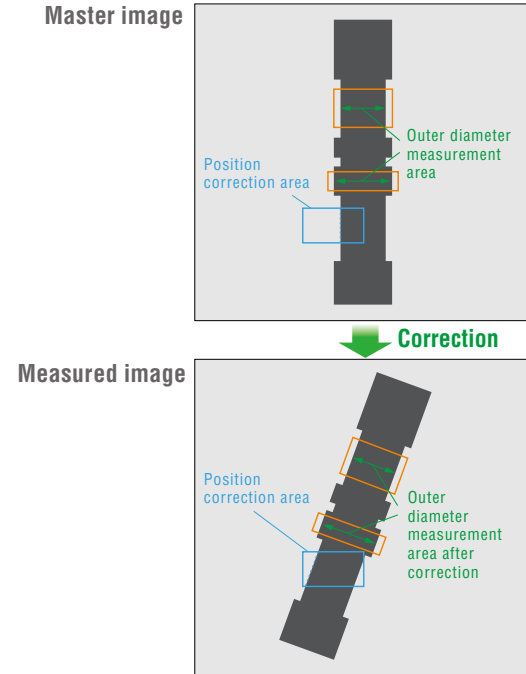


Tilt correction function


When installing the sensor head, a tilt of the master workpiece is horizontally/vertically corrected, which significantly reduces adjustment times.

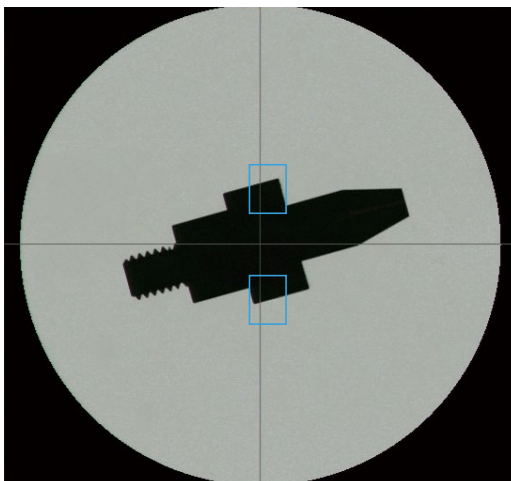

The image of the workpiece is tilted due to the sensor head which has not been installed at an appropriate angle.

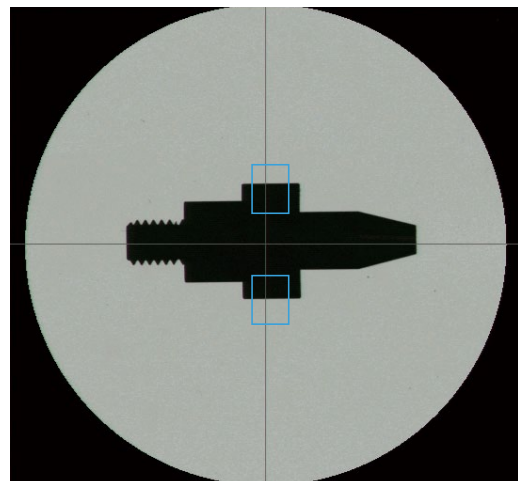

By means of the tilt correction function, the workpiece image is horizontally/vertically captured and accurately measured.

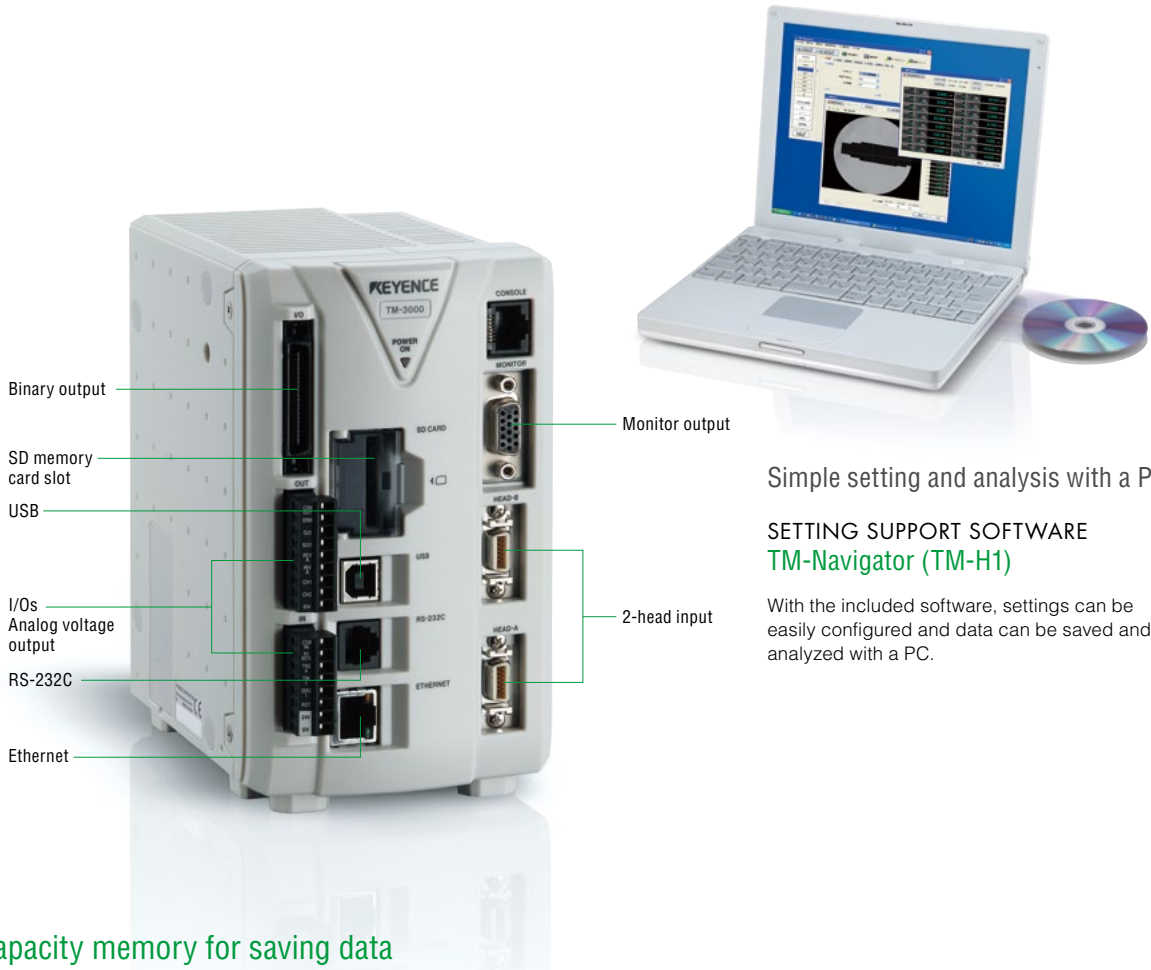

Simple setting and analysis with a PC

**SETTING SUPPORT SOFTWARE
TM-Navigator (TM-H1)**


With the included software, settings can be easily configured and data can be saved and analyzed with a PC.

Large capacity memory for saving data

The controller has built in high capacity memory.
A memory card slot is included for recording histories of multiproduct/mass production.

Profile saving
For analyzing NG records
or production history.

Maximum 100 images

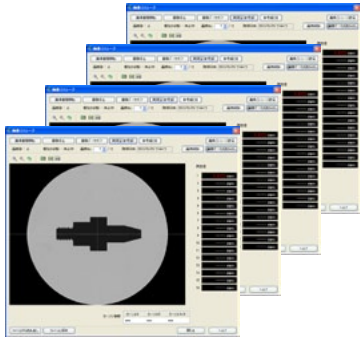

序	年	月	日	時	分	秒	日	時	分	秒	日	時	分	秒	日	時	分	秒	日	時	分	秒		
1	2009/9/20	04:49:59	0476	030	0302	0334	0584	0540	0339	0301	0325	0407	0337											
2	2009/9/20	04:49:59	0471	0339	0291	0332	0291	0340	0292	0301	0320	0300	0320	0304										
3	2009/9/20	04:49:59	0466	0316	0247	0332	0279	0340	0339	0300	0327	0300	0327	0300										
4	2009/9/20	04:49:59	0468	0314	0245	0332	0311	0340	0307	0303	0325	0307	0340											
5	2009/9/20	04:49:59	0471	0341	0249	0332	0263	0340	0267	0300	0324	0307	0340											
6	2009/9/20	04:49:59	0473	0438	0282	0332	0269	0340	0268	0319	0308	0328	0308	0308										
7	2009/9/20	04:49:59	0472	0437	0284	0331	0263	0330	0269	0301	0327	0300	0340											
8	2009/9/20	04:49:59	0471	0442	0286	0330	0269	0330	0269	0313	0329	0313	0329	0313										
9	2009/9/20	04:49:59	0474	0337	0292	0327	0269	0330	0319	0319	0322	0319	0340											
10	2009/9/20	04:49:59	0478	0321	0295	0327	0269	0330	0311	0302	0319	0308	0321	0319	0315									
11	2009/9/20	04:49:59	0474	0310	0295	0327	0269	0330	0319	0325	0316	0311	0309	0308										
12	2009/9/20	04:49:59	0482	0324	0293	0328	0265	0330	0300	0300	0304	0300	0321	0305										
13	2009/9/20	04:49:59	0468	0429	0268	0307	0269	0300	0269	0269	0302	0302	0302	0302										
14	2009/9/20	04:49:59	0467	0322	0290	0308	0263	0300	0263	0263	0302	0302	0302	0302										
15	2009/9/20	04:49:59	0468	0325	0289	0308	0269	0300	0269	0269	0300	0300	0300	0300										
16	2009/9/20	04:49:59	0461	0319	0291	0305	0269	0300	0269	0269	0302	0302	0302	0302										
17	2009/9/20	04:49:59	0465	0317	0289	0304	0267	0267	0319	0308	0321	0300	0302											
18	2009/9/20	04:49:59	0462	0307	0284	0305	0263	0301	0315	0311	0319	0300	0300											
19	2009/9/20	04:49:59	0471	0430	0289	0306	0265	0301	0319	0300	0321	0300	0300											
20	2009/9/20	04:49:59	0474	0318	0287	0306	0263	0301	0319	0300	0321	0300	0300											
21	2009/9/20	04:49:59	0501	0330	0284	0306	0267	0267	0300	0300	0300	0300	0300											
22	2009/9/20	04:49:59	0308	0337	0284	0306	0267	0300	0300	0300	0300	0300	0300											

For daily production control
and traceability

65536 data
can be stored

Handling many product types

The memory in the controller stores up to 16 programs. By using a function to search from the memory card, up to 256 programs can be switched to handle various product types.

Handles 256 types

	Program setting	Image saving	Data storage
Internal memory	16	100	65,536 × 16
SD card (4GB)	256	Approx. 3,800	65,536 × Approx. 8,000

SPECIFICATIONS (SENSOR HEADS)



Model	TM-006	TM-040	TM-065
Measuring range	ø6 mm ø0.24*	ø40 mm ø1.57*	ø65 mm ø2.56*
Smallest detectable object	0.04 mm 0.001*	0.3 mm 0.01*	0.5 mm 0.02*
Transmitter/receiver distance	60 mm 2.36*	180 mm 7.09*	270 mm 10.63*
Light source	InGaN Green LED		
Measurement accuracy	±0.5 μm 0.00020* ^{*1}	±2 μm 0.000079* ^{*3}	±3 μm 0.000118* ^{*5}
Repeatability	±0.06 μm ^{*2}	±0.15 μm 0.000006* ^{*4}	±0.2 μm 0.000008* ^{*6}
Sampling cycle (trigger interval) ^{*7}	5.5ms (33ms at the initial setting)		
Environmental resistance	Enclosure rating ^{*8}	IP64	
	Ambient temperature	0 to 50°C 32 to 122°F	
	Relative humidity	35 to 85% (No condensation)	
Material	Aluminum		
Weight	Transmitter	Approx. 140g	Approx. 560g
	Receiver	Approx. 340g	Approx. 720g
	Base	Approx. 220g	Approx. 630g
		Approx. 1280g	Approx. 1460g
		Approx. 630g	Approx. 1500g

- *1 In a measurement area of 2 mm 0.08" × ø4 mm ø0.16" error when measuring width of KEYENCE standard object (glass calibration scale).
 *2 Value of ±2σ measuring the width of KEYENCE standard object (glass calibration scale) in the center of the measurement area, an average 16 times, average 1.3 mm 0.05" line.
 *3 In a measurement area of 10 mm 0.39" × ø26 mm ø1.02" error when measuring width of KEYENCE standard object (glass calibration scale).
 *4 Value of ±2σ measuring the width of KEYENCE standard object (glass calibration scale) in the center of the measurement area, an average 16 times, average 8 mm 0.31" line.
 *5 Error when measuring width of KEYENCE standard object (glass calibration scale) in a measurement area of 20 mm 0.79" × ø40 mm ø1.57".
 *6 Value of ±2σ measuring the width of KEYENCE standard object (glass calibration scale) in the center of the measurement area, an average 16 times, average 14 mm 0.55" line.
 *7 When measurement area is minimum, others are initial settings
 *8 Apart from connector component

SPECIFICATIONS (CONTROLLER)

Model	TM-3001	TM-3001P
Sensor head compatibility	Compatible	
Number of connectable sensors ^{*1}	2 units max.	
Display	Minimum display unit	0.01 μm, 0.001 mm ² , 0.01°
	Maximum display range	±9999.99 mm, ±99999.9 mm ² , ±99999.9°
Input terminal block	Laser remote interlock input	Non-voltage input
	Trigger input (for Head A)	Voltage input
	Timing 1 input	
	Auto-zero 1 input	
	Reset input	
Output terminal block	Analog voltage output	±10 V × 2 outputs, out put impedance: 100 Ω
	Total judgment output	NPN open-collector output
	Error output	NPN open-collector output (N.C.)
	Process output	PNP open-collector output
	Trigger input enable output	NPN open-collector output
	Adjusted error output	PNP open-collector output
	Trigger input (for Head A)	Non-voltage input
Expansion connector	Timing 2 input	Voltage input
	Auto-zero 2 input	Voltage input, 4 inputs
	Program switching input	
	Memory card save input	Non-voltage input
	Judgment/Binary output* ²	Voltage input
	Strobe output	3-level judgment output: OUT1 to OUT16, total judgment output Binary output: OUT1 to OUT16 measured data output (21 bits) NPN open-collector output
	Trigger input enable output	PNP open-collector output
Analog RGB monitor output	SVGA (800 x 600 pixels)	
RS-232C interface	Measured data output and control input/output (Maximum baud rate: 115200 bps, selectable)	
USB interface	In conformity with USB Revision 2.0 HI-SPEED (USB 1.1 Full-SPEED compatible)	
Ethernet interface	1000BASE-T/1000 BASE-TX/10 BASE-T	
Memory card	SD card CA-SD4G (4GB), CA-SD1G (1GB) support	
Major functions	Position correction function, OUT name change function, select measurement mode (outer diameter, height, step height, position, width, distance, intersection distance, angle, radius, roundness, coordinates, area, search, ring test, pitch) functions, OUT function between operators, auxiliary measurements (straight edge, circular edge, the edge bounding line, center line, intersection, straight line between two points, any line, any point), functions, scaling function, average function, measurement function, measurement value alarm setting function, tolerance setting function, auto-zero function, storage (data/image) function, memory card storage function, program memory function, trigger mode change function, mutual interference prevention function, adjustable measuring range function, detection threshold value change function, mask function, attitude correction function, display language switching function, support software setting function, trigger interval-measurement time display function, others	
Ratings	Power supply voltage	24 VDC ±10%, Ripple: 10% (P to P) or less
	Current consumption	1 head connected 480mA max./ 2 heads connected 550mA max.
Environmental resistance	Ambient temperature	0 to 50°C 32 to 122°F
	Relative humidity	35 to 85% (No condensation)
Material	Polycarbonate	
Weight	Approx. 1120g	

- *1 1 or 2 units can be connected only with the same head model
 *2 OUT 1 to OUT 8 decision result, OUT 9 to OUT 16 decision result, time share output of binary measurement data.
 • The rating of the NPN/PNP open collector output (output terminal block): 50 mA (30 V or less) max., residual voltage: 1.4 V or less (50 mA) 1.0 V (20 mA)
 • The rating of the NPN/PNP open collector output (expansion connector): 50 mA (30 V or less) max., residual voltage: 1.0 V or less
 • Rating for non-voltage input, ON voltage 1V max., OFF current 0.3mA max. (trigger input terminal, ON voltage 5V max., OFF current 1mA max.)
 • Voltage rating, maximum rating 26.4V, ON voltage 10.8V, OFF current 0.3mA (trigger input terminal maximum rating 26.4V, ON voltage 10.8V, OFF current 1mA)

OPERATING SYSTEM ENVIRONMENT

CPU	Pentium III 1GHz min. (recommended 1.7GHz min.)
Support OS	Windows 10 *1 Windows 7 (SP1 or later) *2
	Windows Vista (SP2 or later) *3
	Windows XP (SP3 or later) *4
Memory capacity	512MB min. (1GB min. recommended)
Resolution of display	XGA (1024 x 768 pixels) min, 256 colors min.
Free disk space	1GB min.
Interface	As described above, all those mounted, USB2.0/1.1 *5, Ethernet *6

*For your OS, use environments above that recommended.

*1 Home, Pro, and Enterprise editions are supported.

*2 Home Premium, Professional, and Ultimate editions are supported.

*3 Ultimate, Business, Home Premium, and Home Basic editions are supported.

*4 Professional and Home editions are supported.

*5 Connection through a USB hub is not included in the guarantee.

*6 Connection to LAN and connection via a router is not included in the guarantee.

CONTROLLER



Controller
TM-3001(P)

CONTROLLER LINEUP

NPN Output type	TM-3001
PNP Output type	TM-3001P

SENSOR HEADS

Sensor head
ø6 mm ø0.24" type
TM-006

Sensor head
ø40 mm ø1.57" type
TM-040

Sensor head
ø65 mm ø2.56" type
TM-065



MONITOR

Console (Optional)
OP-82125



Setting and support software
TM-H1



USB cable
OP-66844



High-resolution monitor
CA-MP81



Monitor stand
OP-42278



CABLE - CONNECTOR

Cable between head and controller
CB-Axx
(0.7, 2, 5, 10, 20, 30 m)
(2.3', 6.6', 16.4', 32.8', 65.6', 98.4')



Transmitter to receiver expansion cable
OP-87033 (1 m 3.3')
OP-87034 (3 m 9.8')



Cable between controller - monitor
OP-66842 (3 m 9.8')



I/O connector cable
OP-51657 (3 m 9.8')



Ethernet cable
OP-66843 (3 m 9.8')



RS-232C communication cable
OP-96368 (2.5m 8.2')



D-sub9 pin conversion connector
OP-26401



D-sub25 pin conversion connector
OP-96369



OPTION

Protective cover
OP-87035 (2 per pack)
(for TM-040)
OP-87036 (2 per pack)
(for TM-065)




Memory card
CA-SD4G (4GB)
CA-SD1G (1GB)




DIMENSIONS (SENSOR HEADS)

TM-006

Unit: mm inch

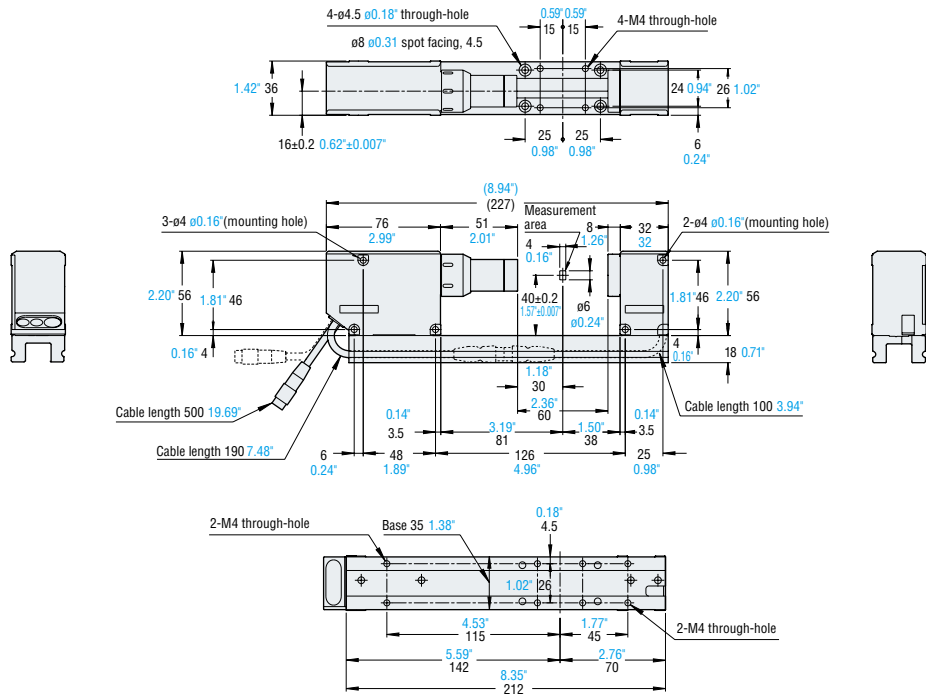


TM-040

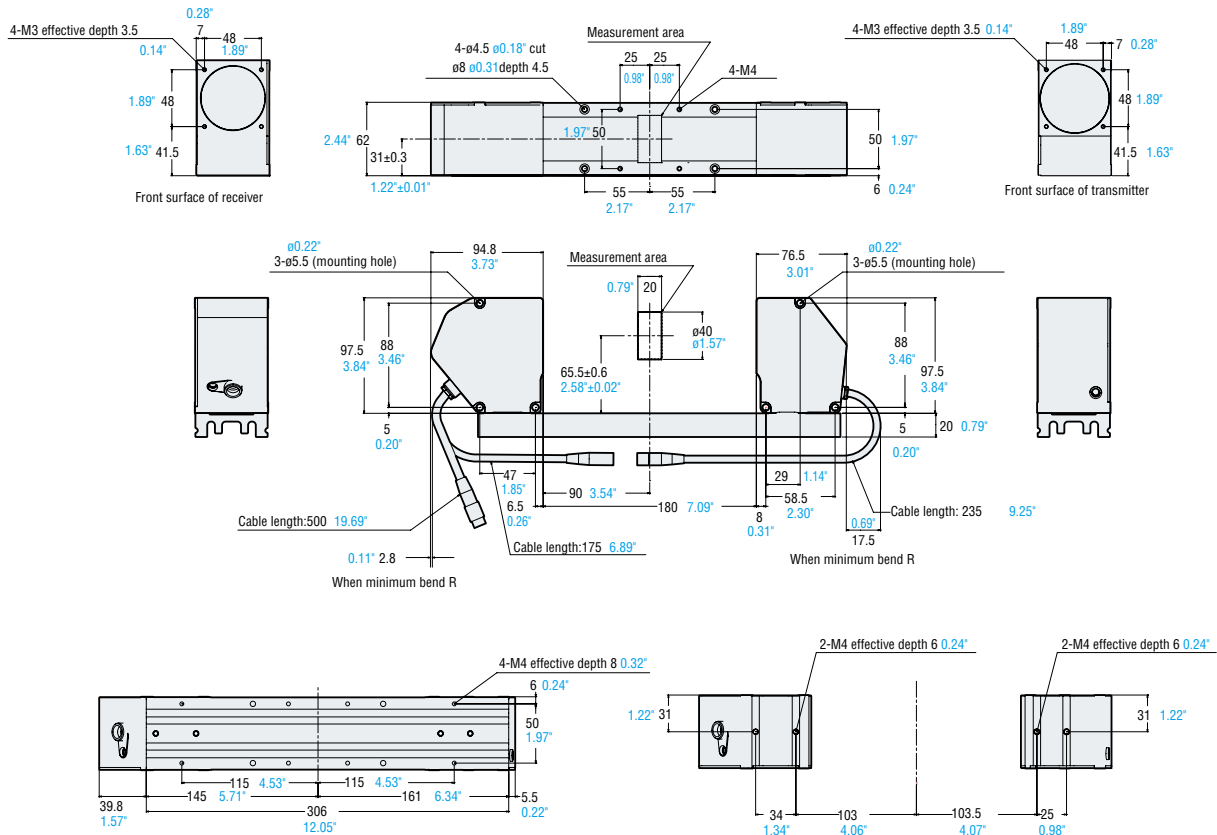

DIMENSIONS (SENSOR HEADS)


TM-065

Unit: mm inch

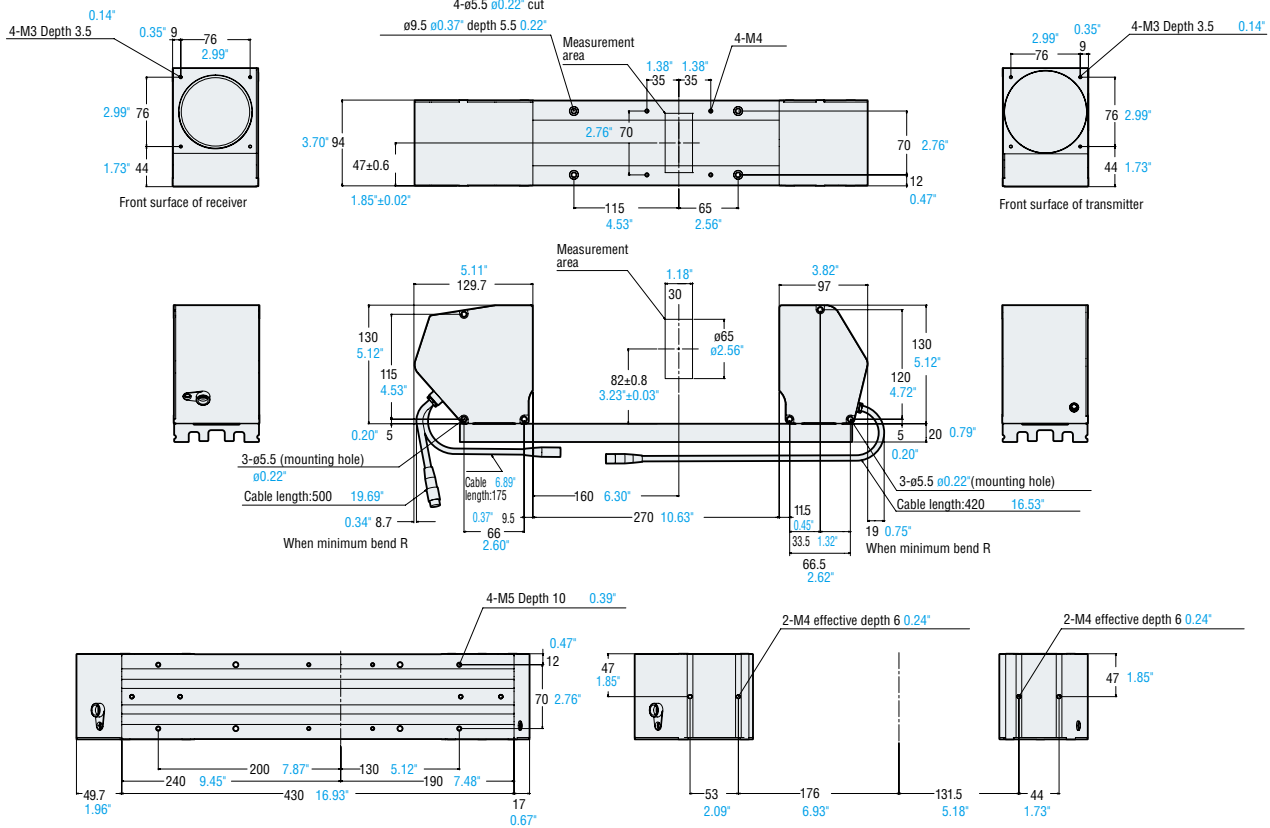


DIMENSIONS (CONTROLLER)

TM-3001(P)

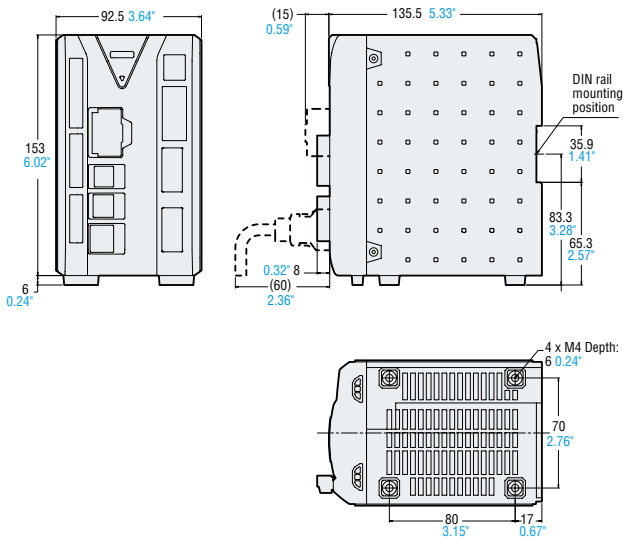


DIMENSIONS (MONITOR)

LCD monitor
CA-MP81

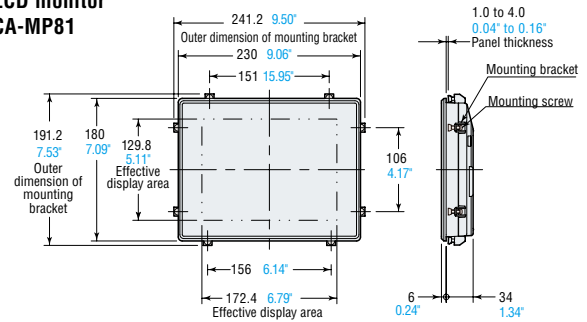

Stand
OP-42278

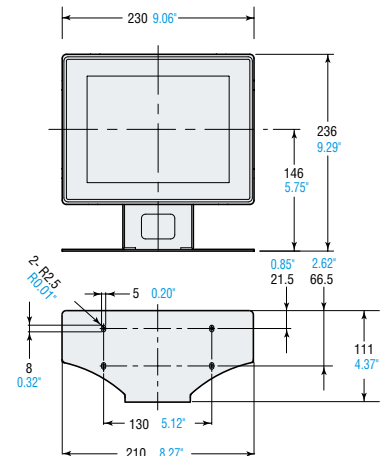

LASER DISPLACEMENT (2D)

LJ-G Series



- High-accuracy of $\pm 0.1\%$ of F.S.
- High-speed sampling
- Simultaneous measurement/judgment at 8 points
- Stable measurement of all targets



Confirmation of PCB mounting height



Confirmation of door/hood mounting accuracy



Confirmation of sealant coating profile




Confirmation of welding groove position

OPTICAL MICROMETER


LS Series




- High-repeatability $\pm 0.06 \mu\text{m}$
- High-speed 2,400 samples/second
- Maintenance-free design
- Easy set-up, target viewer




Measuring the outer diameter of a fiber

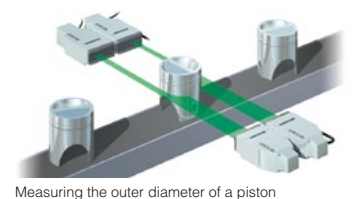

Measuring the outer diameter of a piston



Measuring the width and camber angle of a rubber sheet

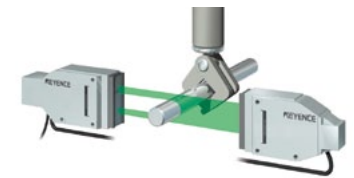

Measuring the outer diameter of a processed shaft

LASER DISPLACEMENT

LK-G5000 Series

CONFOCAL DISPLACEMENT


LT Series



- Sampling rate of 392 kHz
- Linearity of $\pm 0.02\%$ of F.S.
- Repeatability down to $0.01 \mu\text{m}$





Vibration test of high-temperature muffler



Thickness measurement/loop control of a rubber sheet



- Surface scanning method for a variety of high-accuracy measurements
- Multiple measurement modes
- $0.3 \mu\text{m}$ $0.000012''$ resolution



Measuring the profile of solder paste on a PWB

KEYENCE

CALL TOLL FREE TO CONTACT YOUR LOCAL OFFICE
1-888-KEYENCE
 1 - 8 8 8 - 5 3 9 - 3 6 2 3

www.keyence.com



SAFETY INFORMATION

Please read the instruction manual carefully in order to safely operate any KEYENCE product.

GLOBAL NETWORK

CONTACT YOUR NEAREST OFFICE FOR RELEASE STATUS.

KEYENCE CORPORATION OF AMERICA

Head Office 500 Park Boulevard, Suite 200, Itasca, IL 60143, U.S.A. PHONE: +1-201-930-0100 FAX: +1-855-539-0123 E-mail: keyence@keyence.com

AL Birmingham	CA San Jose	CO Denver	IL Chicago	MI Detroit	MO St. Louis	NC Raleigh	PA Philadelphia	TN Nashville	WI Milwaukee
AR Little Rock	CA Cupertino	FL Tampa	IN Indianapolis	MI Grand Rapids	NJ Elmwood Park	OH Cincinnati	PA Pittsburgh	TX Austin	
AZ Phoenix	CA Los Angeles	GA Atlanta	KY Louisville	MN Minneapolis	NY Rochester	OH Cleveland	SC Greenville	TX Dallas	
CA San Francisco	CA Irvine	IA Iowa	MA Boston	MO Kansas City	NC Charlotte	OR Portland	TN Knoxville	WA Seattle	

KEYENCE CANADA INC.

Head Office PHONE: +1-905-366-7655 FAX: +1-905-366-1122 E-mail: keyencecanada@keyence.com
 Montreal PHONE: +1-514-694-4740 FAX: +1-514-694-3206 Windsor PHONE: +1-905-366-7655 FAX: +1-905-366-1122

KEYENCE MEXICO S.A. DE C.V.

PHONE: +52-55-8850-0100 FAX: +52-81-8220-9097
 E-mail: keyencemexico@keyence.com