

AIR CONDITIONERS LINEUP

# PRODUCT CATALOGUE 2014

SPLIT / MULTI SPLIT



#### Notice for specifications

I.U.=Indoor Unit   O.U.=Outdoor Unit   Qu=Quiet   \* =Not decided yet

\* Specifications and design subject to change without notice for further improvement.

Please check with your dealer.

\* Cooling/Heating capacities are based on the following conditions.

Cooling	Indoor temp. : 27°C DB/19°C WB	Heating	Indoor temp. : 20°C DB/15°C WB
	Outdoor temp. : 35°C DB/24°C WB		Outdoor temp. : 7°C DB/6°C WB

\*The colors may be different from the actual colors because this catalog is printed matter.


Manufacturer:

Fuji Furukawa  
Engineering & Construction Co.Ltd.

Distributor:



# High Efficiency

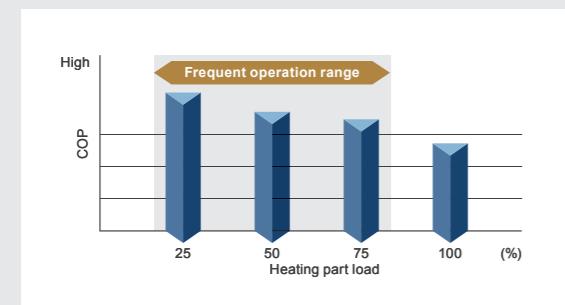


## Pursuit of Seasonal Efficiency

Over 90% of actual operation time, air conditioners are operated at partial capacity instead of rated capacity. We focused on high seasonal efficiency by all DC inverter control and high efficiency technology.



Wide high efficiency range DC twin rotary compressor

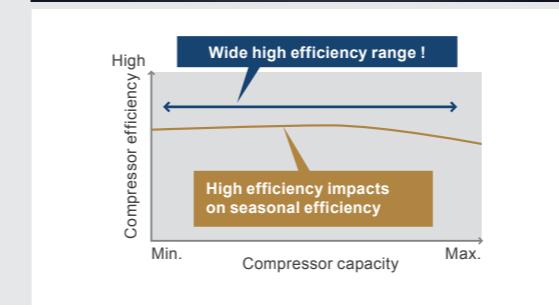

## All DC Inverter Technology


### DC twin rotary compressor

The high efficiency DC inverter type "2-cylinder rotary compressor" is used for our product ranges. It has achieved higher energy efficiency compared with similar compressors by optimizing the structure inside the compressor.




### DC fan motor

DC fan motor produces high power, wide operation range, and high efficiency.



### Sine-wave DC inverter control

High efficiency operation is realized by using a sine wave DC inverter control.

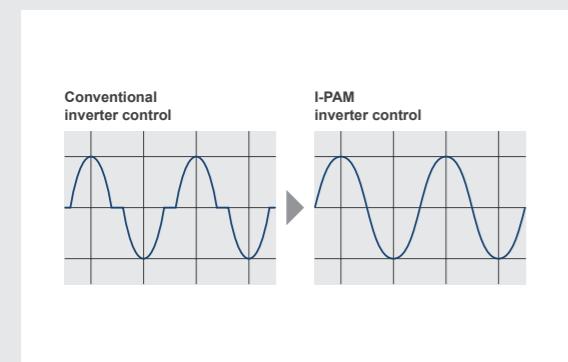

## Optimized Inverter Control


### I-PAM (IPM\*+PAM) inverter control

I-PAM inverter control is a technology which reduces loss by adjusting the current waveform to a better sine waveform. This promotes the effective use of the input power supply to attain high performance.




In addition, the voltage is raised at the start of operation and fast comfort is attainable by more powerful operation.

IPM\*: Intelligent Power Module

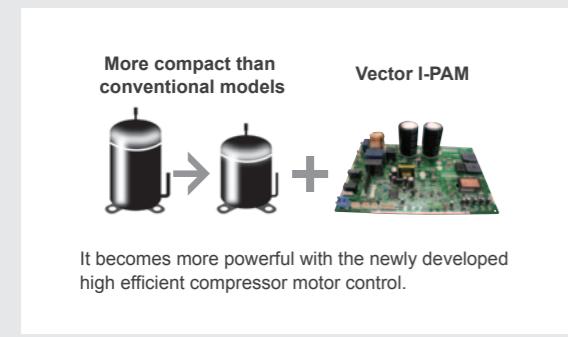

### V-PAM (Vector + I-PAM) inverter control


V-PAM inverter control reduces the effects of magnetic flux and increases the maximum speed and efficiency of the compressor by vector control technology. With this technology, further miniaturization, higher efficiency, and better performance are attained.

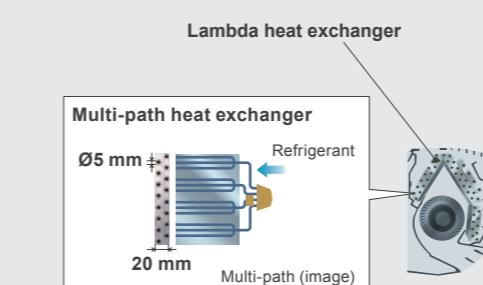

## High Efficiency Heat Exchanger

### High density multi-path heat exchanger

Heat exchange performance is substantially improved by thin and high-density heat exchanger and multi-path efficiency technology.

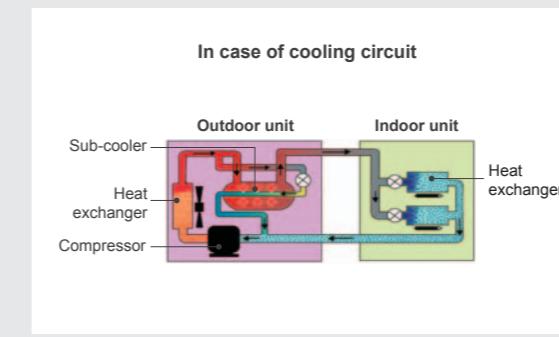

### High performance sub-cool heat exchanger



Higher performance achieved by mounting of counter type bypass circuit. (Large multi type, VRV)

# Energy Saving Control

## Smart Operation


### Human sensor control

Human sensor catches movements of people in a room, and operates with lower capacity when people leave the room. When people come back to the room, it automatically returns to the previous operating mode.

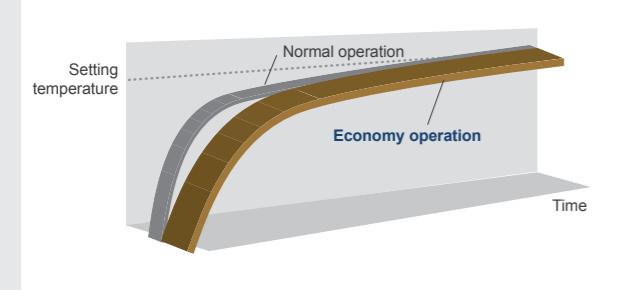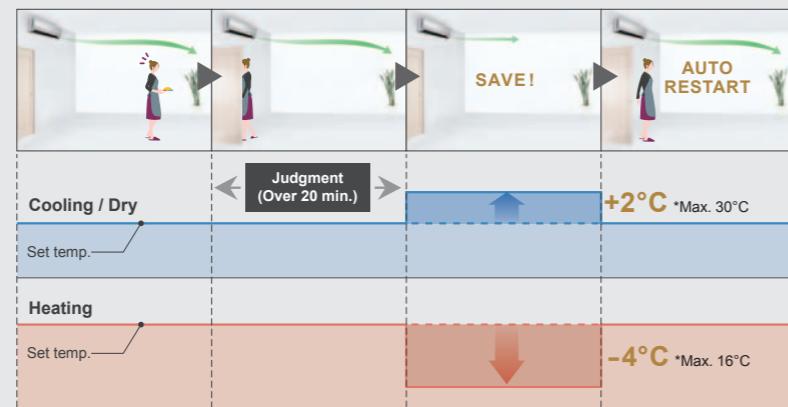


### Economy operation

Limits the maximum operation current, and the power consumption is cut down and the maximum load is suppressed.

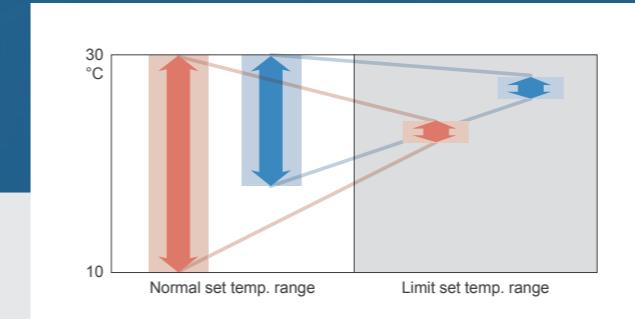

### Room temperature set point limitation

The minimum and maximum temperature range can be set giving further energy saving while considering the comfort of the occupants.

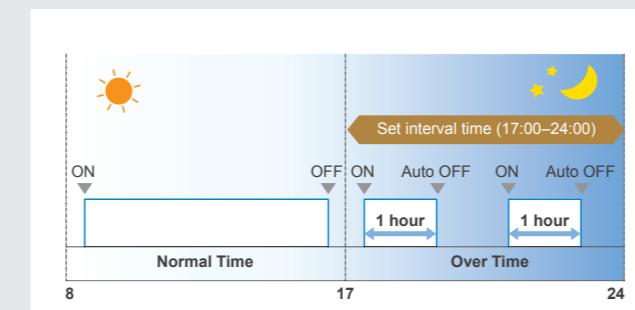


### Auto-off timer

- The indoor unit is turned off automatically when it reaches to the preset operating time frame.
- The time frame of the "Auto off timer" can be flexibly scheduled.
- Off time can be set from 30 to 240 minutes.




Example: At interval time hour (17:00–24:00) to prevent forgetting to turn off  
Set off time : 1 hour

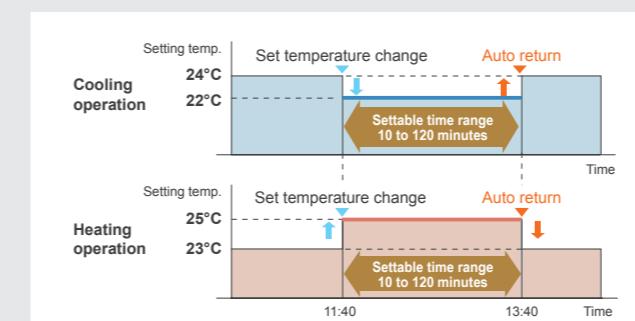

### Set temperature auto return


- The setting temperature automatically returns to the previous setting temperature.
- The time range in which the set temperature can be changed is 10 to 120 minutes.

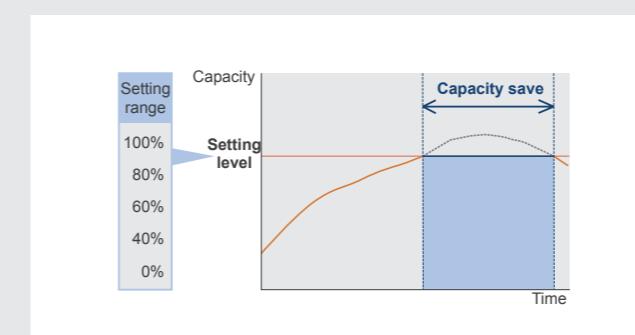

### Capacity save operation



Operation capacity can be set in 5 steps for rated capability. The power consumption at peak is cut down and the maximum load is suppressed.

# Comfort Performance

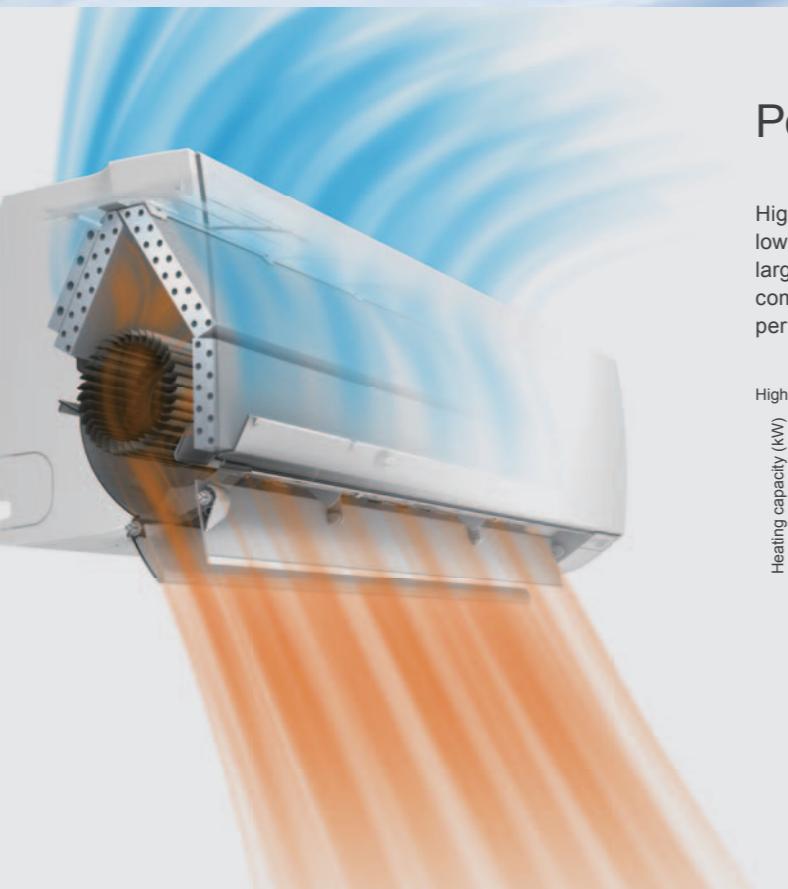

## Powerful Heating


High heating capacity is realized even at low outdoor temperature by mounting a large heat exchanger or large DC rotary compressor and developing high performance inverter PCB

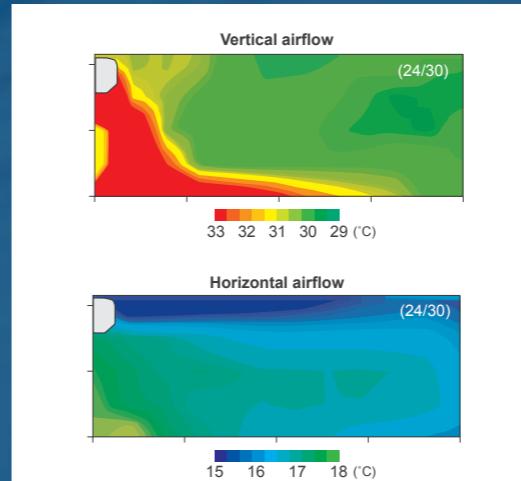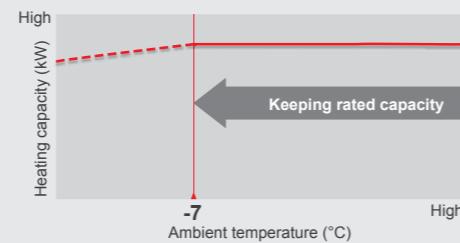

## Quick Comfort

### Comfort airflow

Precision wind direction control is realized and ventilation efficiency is also improved by 3 technologies. Our airflow control makes your environment more comfortable.

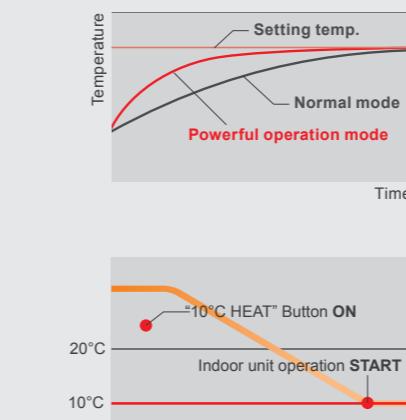


### Powerful operation

Continuous operation by maximum airflow and maximum compressor speed after a certain period of time allows the temperature to reach the setting temp. quickly.





#### High density heat exchanger

High-density 5-mm thin tube diameter heat exchanger mounted. Capacity is enlarged including sub heat exchanger. Heat exchange efficiency substantially improved.

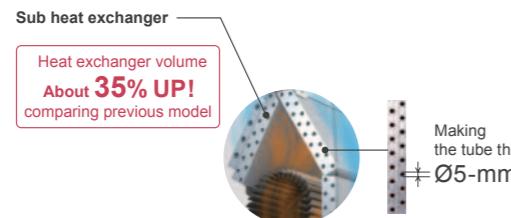

#### All DC inverter technology


By All DC inverter control, electricity loss is decreased and power consumption is substantially reduced.

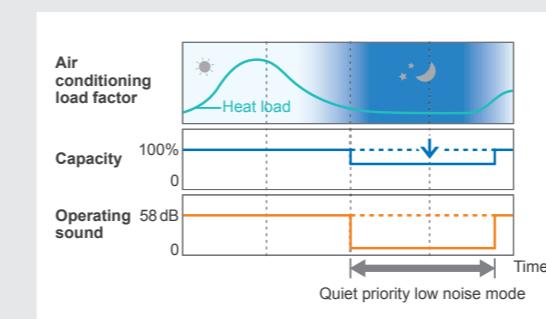

## Quiet and Comfort Control

### Outdoor unit low noise operation

Users can choose low noise levels, depending on the installation environment. The operation time can be set using the timer.

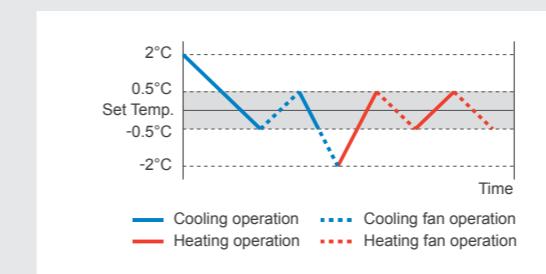

### Auto changeover function


At Auto setting, the cooling / heating mode is automatically switched according to the set temperature and room temperature.

# Easy-To-Use Control

## Residential use




Easy air conditioner control from inside or outside the house using the Smartphones, Tablets, and PC

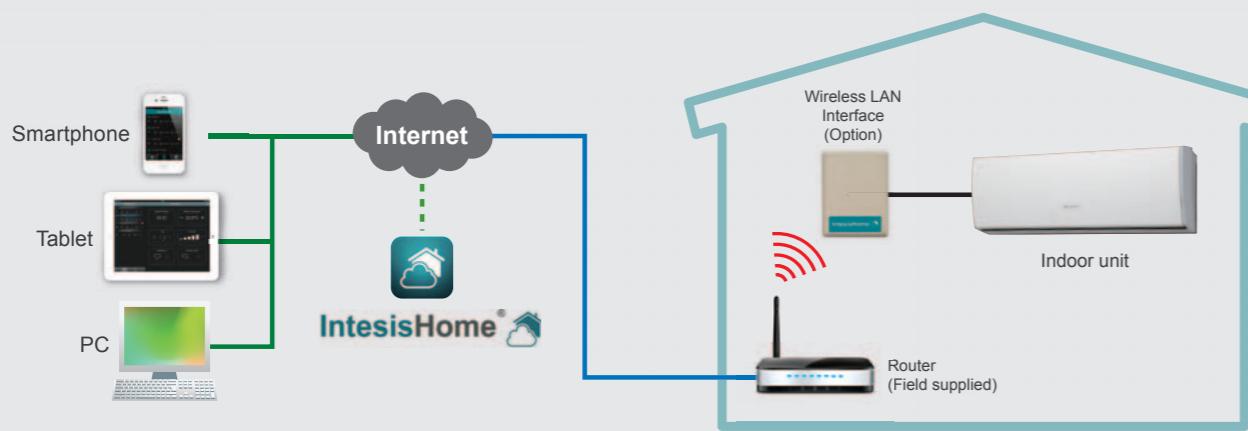

It is the most advanced solution to remotely manage an Air Conditioning system using all sort of mobile devices such as Smartphones, Tablets, and PC.

Fuji Furukawa Engineering & Construction provides an interface that supports central management systems such as KNX®, MODBUS®, BACnet®, and LonWORKS®.

This allows customers to easily perform central control and monitoring of air conditioning equipment.

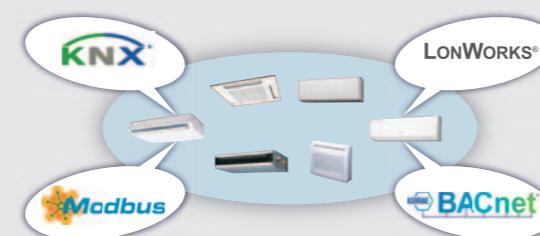

Fuji Furukawa Engineering & Construction provides various easy-to-use Controllers

Fuji Furukawa Engineering & Construction is using ergonomics to expand the use of easy-to-use designs such as easy-to-read large LCD panels, easy-to-operate buttons, and displays with easily recognizable icons.

The individual controllers match the user operational environments, and the home controller makes batch energy saving management easy. Ease of use was pursued using simple operation buttons, a large LCD screen, and other features.



### Home central control



Central  
Remote Controller

### Simple individual control



Wired  
Remote Controller



Simple  
Remote Controller



Slim Wireless  
Remote Controller

## Fuji Furukawa Engineering & Construction following the EU climate action plan 20/20/20 by 2020

20% less

### Primary Energy Use

Fuji Furukawa Engineering & Construction products with high efficiency and therefore low electricity input and low primary energy usage

20% less

### CO<sub>2</sub> Emissions

Fuji Furukawa Engineering & Construction products sharply following the F-Gas regulation 842 / 2006 / EC

20% share

### of Renewable Energy


Fuji Furukawa Engineering & Construction promoting air sourced heat pumps as renewable energy source heating systems

## Pursuit of Energy Saving Taking Actual Operation into Consideration

The heat load varies greatly depending on the time and season. However, the operation ratio EER or COP up to now has been calculated based on the rated value and the annual operating hours per outdoor temperatures was not taken into consideration.

For this reason, SEER and SCOP\* have been made the standard in terms of actual operating hours throughout the year.

\*: SEER = Seasonal Energy Efficiency Ratio  
SCOP = Seasonal Coefficient Of Performance

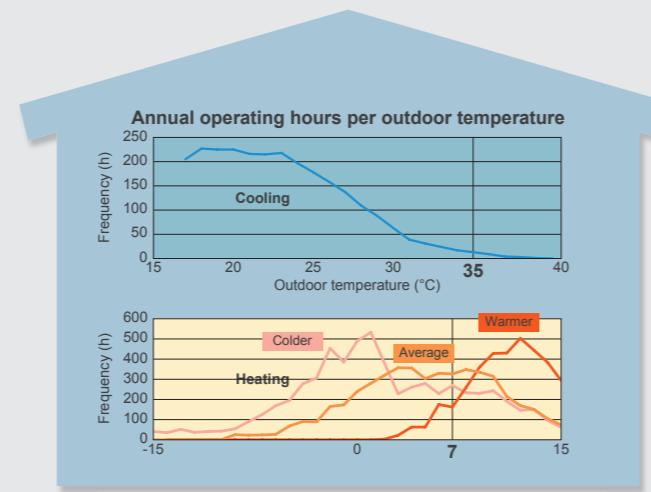


**Fuji Furukawa Engineering & Construction provides air conditioners with higher SEER and SCOP.**

\*SEER and SCOP are indexes that express the annual energy efficiency calculated based on the regulations of (EU) 626/2011.


## Energy Efficiency Classifications

New Energy Labelling Requirement 626 / 2011 / EU : Our models have reached the "Class A" ranking, the highest energy efficiency level that is now shown on energy labels in Europe.

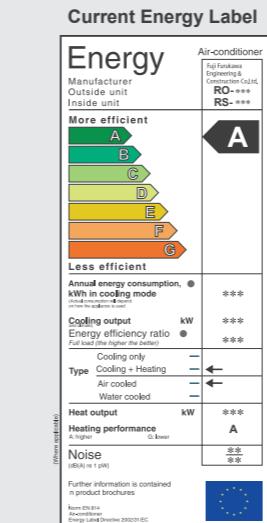

- Performance notation based on multiple points calculations that better matches the actual operation
- Energy labelling revision
- Raising of the CLASS A level

- Three climate zone for heating (Average zone : mandatory) (Warmer and colder zone are optional)
- Seasonal efficiency
- Sound power level

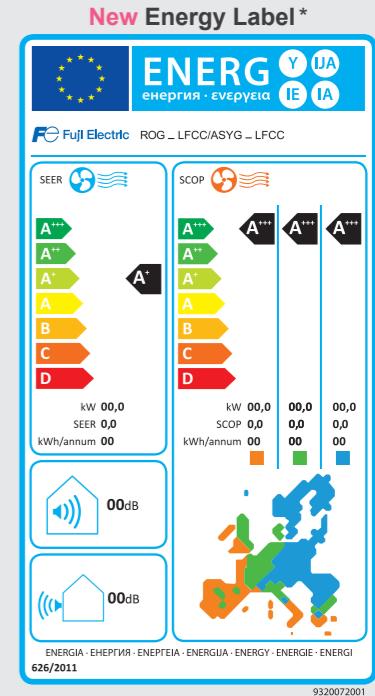

	EER (Cooling mode)	COP (Heating mode)
A	3.20 < EER	3.60 ≥ COP
B	3.20 ≥ EER > 3.00	3.60 ≥ COP > 3.40
C	3.00 ≥ EER > 2.80	3.40 ≥ COP > 3.20
D	2.80 ≥ EER > 2.60	3.20 ≥ COP > 2.80
E	2.60 ≥ EER > 2.40	2.80 ≥ COP > 2.60
F	2.40 ≥ EER > 2.20	2.60 ≥ COP > 2.40
G	2.20 ≥ EER	2.40 ≥ COP

### Gradual ranking regulation up to A+++ (2013 ~ 2019)

- 2013~: A, B, C, D, E, F, G
- 2015~: A+, A, B, C, D, E, F
- 2017~: A++, A+, A, B, C, D, E
- 2019~: A+++, A++, A+, A, B, C, D

\* Enforcement on January 1, 2013 Air conditioners below 12 kW

	SEER (Cooling mode)	SCOP (Heating mode)
A++	SEER ≥ 8.50	SCOP ≥ 5.10
A+	6.10 ≤ SEER < 8.50	4.60 ≤ SCOP < 5.10
A	5.60 ≤ SEER < 6.10	4.00 ≤ SCOP < 4.60
B	5.10 ≤ SEER < 5.60	3.40 ≤ SCOP < 4.00
C	4.60 ≤ SEER < 5.10	3.10 ≤ SCOP < 3.40
D	4.10 ≤ SEER < 4.60	2.80 ≤ SCOP < 3.10
E	3.60 ≤ SEER < 4.10	2.50 ≤ SCOP < 2.80
F	3.10 ≤ SEER < 3.60	2.20 ≤ SCOP < 2.50
G	SEER < 2.60	SCOP < 1.90

## Current Energy Labelling Points

Rated efficiency
• Full capacity
• One point temperature condition
→ EER COP
Operating power consumption
Sound pressure level

Annual efficient operation



Reduce total power consumption



Low noise products



Seasonal efficiency
• Integrates part load capacity
• Optimised for several rating temperatures
→ SEER SCOP
Total power consumption
• Operating power consumption
• Standby power consumption
• Crank case heater
• Thermo off
Sound power level
New criteria

# Energy Saving & Ecology

Deepening environmental, resources and global warming problems. As a global enterprise, Fuji Furukawa Engineering & Construction recognizes that contributing to development of a sustainable economic society is today's most important management topic, and is engaged in a series of environmental protection activities reaching up to sales, maintenance, and recycling, and is aggressively making its products more energy saving.



## AIR CONDITIONERS LINEUP

# PRODUCT CATALOGUE 2014

## CONTENTS

Core Technology.....	002
Approach to New Energy Efficiency Standard .....	010
All Products Lineup .....	014
Feature Explanation .....	078

<b>SPLIT 016</b>	
Wall Mounted .....	018
Floor .....	028
Compact Cassette .....	030
Cassette .....	032
Floor/Ceiling .....	034
Ceiling .....	036
Slim Duct .....	038
Medium Static Pressure Duct .....	040
High Static Pressure Duct .....	042

<b>MULTI SPLIT 046</b>	
Multi type Line-up .....	048
2 & 3-4 Rooms Multi .....	050
8 Rooms Multi .....	052
Specifications of All Indoor Units .....	056
Multi Combination Table .....	058
Simultaneous Multi .....	068
Optional Parts for Split & Multi Split .....	070

## ALL TYPE LINEUP SPLIT & MULTI SPLIT

SPLIT		2.0	2.6	3.5	4.1	5.3	7.1	8.8	10.6	12.5	14.0	15.0	20.0	25.0	
Capacity (kW)		7	9	12	14	18	24	30	36	45	54	60	72	90	
Wall Mounted Page 18 ~	High Spec. & Design 		 RSG09LTCA	 RSG12LTCA											
	High COP 		 RSG07LUCA	 RSG09LUCA	 RSG12LUCA	 RSG14LUCA									
	Standard 		 RSG07LMCA	 RSG09LMCA	 RSG12LMCA	 RSG14LMCA	 RSG18LFCA	 RSG24LFCC	 RSG30LFCA						
	Basic 	 NEW RSG07LLCC	 NEW RSG09LLCC	 RSG12LLCC											
Floor Page 28			 RGG09LVCA	 RGG12LVCA	 RGG14LVCA										
Compact Cassette / Cassette Page 30 ~			 RCG12LVLB	 RCG14LVLB	 RCG18LVLB		 RCG24LVLA	 RCG30LRLE	 RCG36LRLE RCG36LRLA [3phase]	 RCG45LRLA RCG45LRTA [3phase]	 RCG54LRLA RCG54LRTA [3phase]				
Floor/Ceiling Page 34						 RYG18LVTB	 RYG24LVTA								
Ceiling Page 36								 RYG30LRTE	 RYG36LRTE RYG36LRTA [3phase]	 RYG45LRTA	 RYG54LRTA				
Slim Duct Page 38			 RDG12LLTB	 RDG14LLTB	 RDG18LLTB										
Medium Static Pressure Duct Page 40							 RDG24LMLA	 RDG30LMLE	 RDG36LMLA RDG36LMLA [3phase]	 RDG45LMLA RDG45LMLA [3phase]					
High Static Pressure Duct Page 42 ~									 RDG45LHTA RDG45LHTA [3phase]	 RDG54LHTA RDG54LHTA [3phase]	 RDG60LHTA RDG60LHTA [3phase]	 RDG72LHTA RDG72LHTA [3phase]	 RDC90LHTA RDG90LHTA [3phase]		
MULTI SPLIT					 ROG14LAC2	 ROG18LAC2									
Up to 2 Units Page 50					 ROG18LAT3	 ROG24LAT3									
Up to 3 Units Page 50							 ROG30LAT4								
Up to 4 Units Page 50															
Up to 8 Units Page 52								 ROG45LBTT8							
Simultaneous Multi Twin / Triple Page 68								 ROG36LATT [3phase]	 ROG45LATT [3phase]	 ROG54LATT [3phase]					



Energy saving design to provide a comfortable indoor environment while being environment-friendly.

An air conditioner that is people-friendly is also environment-friendly. Fuji Furukawa Engineering & Construction offers a broad lineup of products from large living rooms to bedrooms and children's rooms. We make your room more comfortable with a wide range of air conditioner types from ceiling wall type with automatic filters and cleaning functions to wall mounted type that improve the air cleaning function. Of course these models feature highly efficient operation that conserves electricity.



## 9 types 54 models

- 018** Wall Mounted
- 028** Floor
- 030** Compact Cassette
- 032** Cassette
- 034** Floor/Ceiling
- 036** Ceiling
- 038** Slim Duct
- 040** Medium Static Pressure Duct
- 042** High Static Pressure Duct

SPLIT

# Wall Mounted

**High Spec. & Design : RSG09LTCA / RSG12LTCA**




**ALL DC**



## Features


### Thin & Slim design



Thin and slim design is realized by high density multi-path heat exchanger and high efficiency wind blower.

### Powerful heating

Rated heating capacity is maintained up to an outdoor temperature lower than -7 °C. This new model can operate even at -20 °C low outdoor temperature.

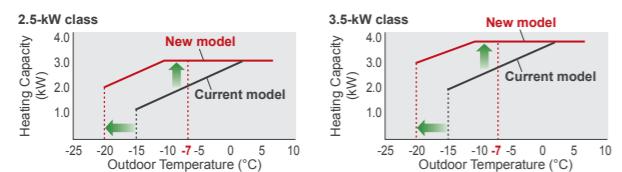


### Energy saving control

Human sensor catches movements of people in a room, and operates with lower capacity when people leave the room. When people come back to the room, it automatically returns to previous operating mode.



### Powerful operation mode

20 minutes continuous operation by maximum airflow and maximum compressor speed is possible. Rapid cooling and heating makes the room comfortable quickly.

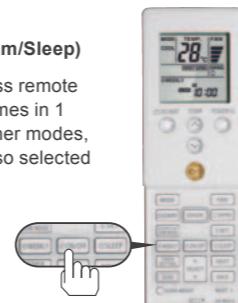


### 3 Mode timer (Weekly/Program/Sleep)

Weekly timer can be easily set by wireless remote controller. ON, OFF can be set up to 4 times in 1 day and up to 28 times in 1 week. For other modes, program timer and sleep timer can be also selected by one push.


### 10°C HEAT Operation

The room temperature can be set to go no lower than 10°C, thus ensuring that the room does not get too cold when not occupied.  
\*Only available with Wireless RC.

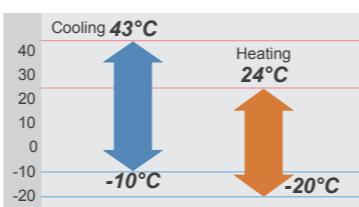

### Low noise mode for outdoor unit

Low noise mode of outdoor unit can be selected by wireless remote controller.

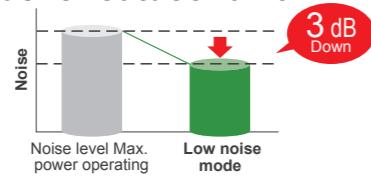

### Optional parts

- Wired Remote Controller: UTY-RNNXM / UTY-RVNXM
- Simple Remote Controller: UTY-RSNXM
- Communication kit: UTY-TWBXF


## Specifications

Model No.	Indoor unit		RSG09LTCA	RSG12LTCA
	Outdoor unit	ROG09LTC		
Power Source	V/Ø/Hz	230/1/50	230/1/50	230/1/50
Capacity	Cooling kW	2.5 (0.9-3.5)	3.5 (1.1-4.0)	4.0 (0.9-6.5)
	Heating kW	3.2 (0.9-5.4)	4.0 (0.9-6.5)	4.40
Input Power	Cooling/Heating kW	0.505/0.660	0.850/0.910	0.850/0.910
EER	Cooling W/W	4.95	4.12	4.12
COP	Heating	4.85	4.40	4.40
Pdesign	Cooling/Heating (@-10°C) kW	2.5/3.0	3.5/4.0	3.5/4.0
SEER	Cooling W/W	8.50	8.50	8.50
SCOP	Heating (Average)	4.60	4.60	4.60
Energy Efficiency Class	Cooling A+++	A++	A++	A++
	Heating (Average) A++	A++	A++	A++
Running Current	Cooling/Heating A	2.6/3.3	4.0/4.3	4.0/4.3
Annual Energy Consumption	Cooling kWh/a 103	144	144	144
	Heating kWh/a 912	1217	1217	1217
Moisture Removal l/h	1.3	1.8	1.8	1.8
Sound Pressure (Cooling) Indoor 42/36/32/21	H/M/L/Q	dB(A)	43/37/32/21	43/37/32/21
Outdoor 48			48	48
Sound Power (Cooling) Indoor 59	High		60	60
Outdoor 63			64	64
Airflow Rate (High)	Indoor / Outdoor m³/h 800/1,700		850/2,050	850/2,050
	Indoor mm 282×870×185		282×870×185	282×870×185
	kg(lbs) 9.5 (21)		9.5 (21)	9.5 (21)
Net Dimension H x W x D	Outdoor mm 540×790×290		620×790×290	620×790×290
	kg(lbs) 33 (73)		40 (88)	40 (88)
Piping Connections (Small / Large)	mm 6.35/9.52		6.35/9.52	6.35/9.52
Drain hose Diameter (I.D./O.D.)	mm 13.8/15.8 to 16.7		13.8/15.8 to 16.7	13.8/15.8 to 16.7
Max Pipe Length (Pre-Charge)	m 20 (15)		20 (15)	20 (15)
Max Height Difference	m 15		15	15
Operation Range	Cooling °CDB -10 to 43		-10 to 43	-10 to 43
	Heating °CDB -20 to 24		-20 to 24	-20 to 24
Refrigerant (Global Warming Potential)	R410A (1,975)		R410A (1,975)	R410A (1,975)

## Dimensions

Models: RSG09LTCA / RSG12LTCA

(Unit : mm)

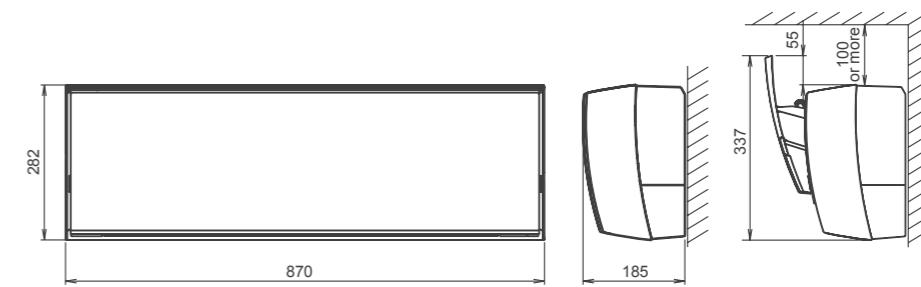

# Wall Mounted

**High COP :** RSG07LUCA / RSG09LUCA / RSG12LUCA / RSG14LUCA



Wireless R.C.




For RSG07/09LUCA



For RSG12/14LUCA


**ALL DC**

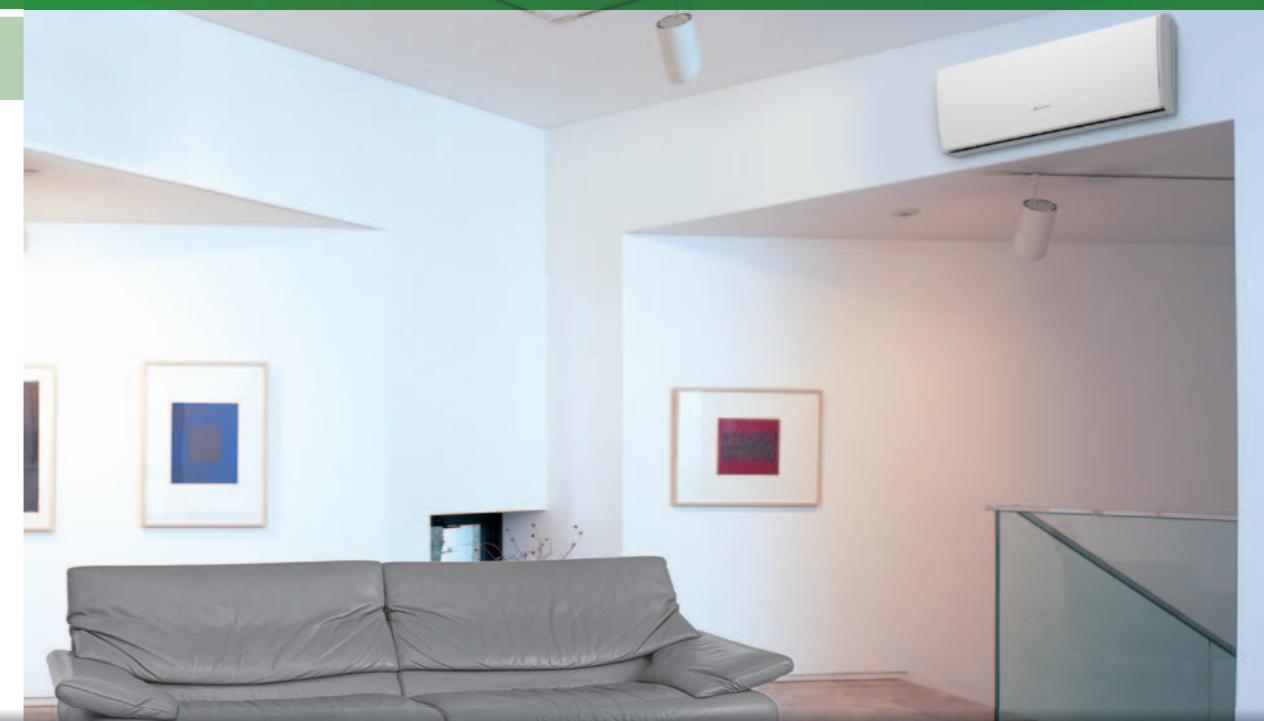

## Features

### Thin & Slim design

Thin and slim design is realized by Ø5-mm heat exchanger and high efficiency wind blower.

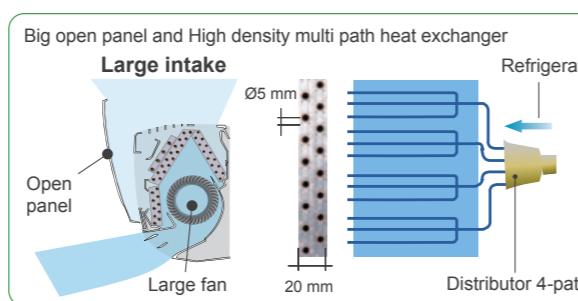

### Powerful operation

20 minutes continuous operation by maximum airflow and maximum compressor speed is possible. Rapid cooling and heating makes the room comfortable quickly.

### 10°C HEAT Operation


The room temperature can be set to go no lower than 10°C, thus ensuring that the room does not get too cold when not occupied.  
\*Only available with Wireless RC.

### 3 Mode timer (Weekly/Program/Sleep)

Weekly timer can be easily set by wireless remote controller. ON, OFF can be set up to 4 times in 1 day and up to 28 times in 1 week. For other modes, program timer and sleep timer can be also selected by one push.




### Low ambient operation

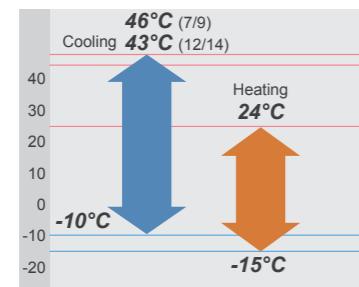

### Low noise mode for outdoor unit

Low noise mode of outdoor unit can be selected by wireless remote controller.

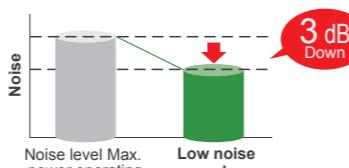

### Optional parts


- Wired Remote Controller: UTY-RNNXM, UTY-RVNXM
- Simple Remote Controller: UTY-RSNXM
- Communication kit: UTY-TWBXF

## Specifications

Model No.	Indoor unit		RSG07LUCA	RSG09LUCA	RSG12LUCA	RSG14LUCA
	Outdoor unit		ROG07LUCA	ROG09LUCB	ROG12LUC	ROG14LUC
Power Source	V/Ø/Hz	230/1/50	230/1/50	230/1/50	230/1/50	230/1/50
Capacity	Cooling kW	2.0 (0.5-3.0)	2.5 (0.5-3.2)	3.5 (0.9-4.0)	4.2 (0.9-5.0)	4.2 (0.9-5.0)
	Heating kW	3.0 (0.5-4.0)	3.2 (0.5-4.2)	4.0 (0.9-5.6)	5.4 (0.9-6.0)	5.4 (0.9-6.0)
Input Power	Cooling/Heating kW	0.460/0.660	0.555/0.680	0.905/0.930	1.235/1.380	1.235/1.380
EER	Cooling W/W	4.35	4.50	3.87	3.40	3.40
COP	Heating W/W	4.55	4.71	4.30	3.91	3.91
Pdesign	Cooling/Heating (@-10°C) kW	2.0/2.6	2.5/2.8	3.5/3.9	4.2/4.8	4.2/4.8
SEER	Cooling W/W	7.20	7.10	7.05	6.78	6.78
SCOP	Heating (Average) W/W	4.10	4.10	4.00	4.00	4.00
Energy Efficiency Class	Cooling A++	A++	A++	A++	A++	A++
	Heating (Average) A+	A+	A+	A+	A+	A+
Running Current	Cooling/Heating A	2.6/3.4	3.1/3.4	4.6/4.7	5.8/6.3	5.8/6.3
Annual Energy Consumption	Cooling kWh/a 97	123	174	217	217	217
	Heating 887	956	1363	1677	1677	1677
Moisture Removal	I/h 1.0	1.3	1.8	2.1	2.1	2.1
Sound Pressure (Cooling)	Indoor 38/35/31/21	42/36/32/21	43/37/32/21	45/40/33/25	45/40/33/25	45/40/33/25
	Outdoor 46	48	50	50	50	50
Sound Power (Cooling)	Indoor 57	59	60	60	60	60
	Outdoor 58	60	65	65	65	65
Airflow Rate (High)	Indoor / Outdoor m³/h 680/1,720	800/1,720	850/1,940	900/1,940	900/1,940	900/1,940
	Indoor mm 282x870x185	282x870x185	282x870x185	282x870x185	282x870x185	282x870x185
Net Dimension H x W x D	Indoor kg(lbs) 9.5 (21)	9.5 (21)	9.5 (21)	9.5 (21)	9.5 (21)	9.5 (21)
	Outdoor mm 540x660x290	540x660x290	540x790x290	540x790x290	540x790x290	540x790x290
	kg(lbs) 23 (51)	25 (55)	33 (73)	34 (75)	34 (75)	34 (75)
Piping Connections (Small / Large)	mm 6.35/9.52	6.35/9.52	6.35/9.52	6.35/9.52	6.35/12.7	6.35/12.7
Drain Hose Diameter (I.D./O.D.)	mm 13.8/15.8 to 16.7	13.8/15.8 to 16.7	13.8/15.8 to 16.7	13.8/15.8 to 16.7	13.8/15.8 to 16.7	13.8/15.8 to 16.7
Max Pipe Length (Pre-Charge)	m 20 (15)	20 (15)	20 (15)	20 (15)	20 (15)	20 (15)
Max Height Difference	m 15	15	15	15	15	15
Operation Range	Cooling -10 to 46 °CDB	-10 to 46	-10 to 43	-10 to 43	-10 to 43	-10 to 43
	Heating -15 to 24 °CDB	-15 to 24				
Refrigerant (Global Warming Potential)	R410A (1,975)	R410A (1,975)	R410A (1,975)	R410A (1,975)	R410A (1,975)	R410A (1,975)

**Dimensions** Models : RSG07LUCA / RSG09LUCA / RSG12LUCA / RSG14LUCA

(Unit : mm)

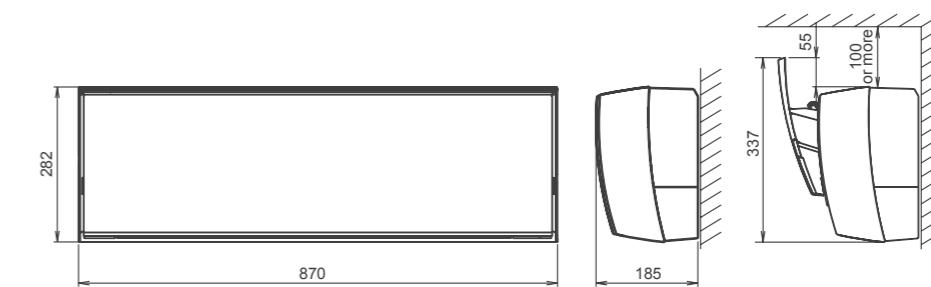



# Wall Mounted

Standard : RSG07LMCA / RSG09LMCA / RSG12LMCA / RSG14LMCA




## Features

### High efficient compact design

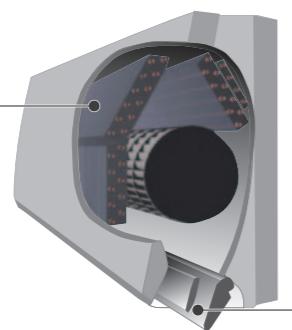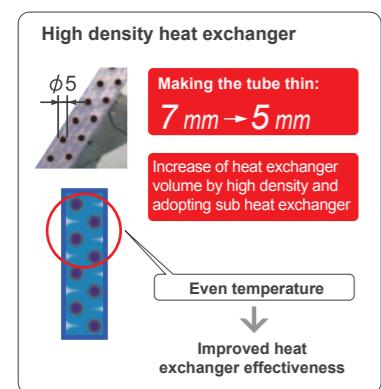

### More comfort airflow

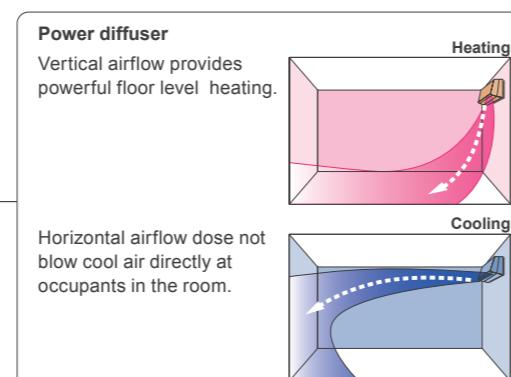

### Powerful operation


20 minutes continuous operation by maximum airflow and maximum compressor speed is possible. Rapid cooling and heating makes the room comfortable quickly.

### 10°C HEAT Operation

The room temperature can be set to go no lower than 10°C, thus ensuring that the room does not get too cold when not occupied.

### Low noise mode for outdoor unit

Low noise mode of outdoor unit can be selected by wireless remote controller.

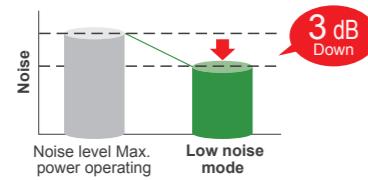


### 24 hr Programmable timer

24 hr program timer and sleep timer can be easily set.



### Low ambient operation

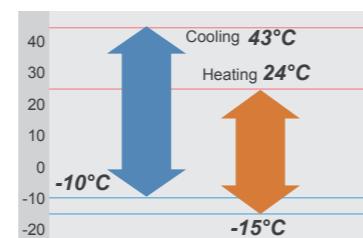

### Optional parts

- Wired Remote Controller: UTY-RNNXM, UTY-RVNXM
- Simple Remote Controller: UTY-RSNXM
- Communication kit: UTY-XCBXZ2



## Specifications

Model No.	Indoor unit		RSG07LMCA	RSG09LMCA	RSG12LMCA	RSG14LMCA
	Outdoor unit		ROG07LMCA	ROG09LMCA	ROG12LMCA	ROG14LMCA
Power Source	V/Ø/Hz	230/1/50	230/1/50	230/1/50	230/1/50	230/1/50
Capacity	Cooling	2.0 (0.5-3.0)	2.5 (0.5-3.2)	3.4 (0.9-3.9)	4.0 (0.9-4.4)	4.0 (0.9-4.4)
	Heating	3.0 (0.5-3.4)	3.2 (0.5-4.0)	4.0 (0.9-5.3)	5.0 (0.9-6.0)	5.0 (0.9-6.0)
Input Power	Cooling/Heating	kW	0.465/0.685	0.65/0.73	0.97/1.02	1.135/1.365
EER	Cooling	W/W	4.30	3.85	3.50	3.52
COP	Heating	W/W	4.38	4.38	3.92	3.66
Pdesign	Cooling/Heating (@-10°C)	kW	2.0/2.3	2.5/2.4	3.4/3.5	4.0/3.9
SEER	Cooling	W/W	6.80	7.00	7.00	6.90
SCOP	Heating (Average)	W/W	4.10	4.10	4.00	4.00
Energy Efficiency Class	Cooling		A++	A++	A++	A++
	Heating (Average)		A+	A+	A+	A+
Running Current	Cooling/Heating	A	2.5/3.3	3.2/3.5	4.6/4.8	5.3/6.3
Annual Energy Consumption	Cooling	kWh/a	103	125	170	203
Moisture Removal		l/h	1.0	1.3	1.8	2.1
Sound Pressure (Cooling)	Indoor	H/M/L/Q	43/40/32/21	43/40/32/21	43/40/32/21	44/40/33/25
	Outdoor	High	45	45	50	49
Sound Power (Cooling)	Indoor	High	59	59	59	60
	Outdoor	High	58	58	61	63
Airflow Rate (High)	Indoor / Outdoor		750/1670	750/1670	750/1830	750/1800
	Indoor	mm	268X840X203	268X840X203	268X840X203	268X840X203
		kg(lbs)	8.5 (19)	8.5 (19)	8.5 (19)	8.5 (19)
Net Dimension H x W x D	Outdoor	mm	535X663X293	535X663X293	535X663X293	540X790X290
		kg(lbs)	21 (46)	21 (46)	26 (57)	34 (75)
Piping Connections (Small / Large)		mm	6.35/9.52	6.35/9.52	6.35/9.52	6.35/12.7
Drain Hose Diameter (I.D./O.D.)		mm	13.8/15.8 to 16.7	13.8/15.8 to 16.7	13.8/15.8 to 16.7	13.8/15.8 to 16.7
Max Pipe Length (Pre-Charge)	m		20 (15)	20 (15)	20 (15)	20 (15)
Max Height Difference		m	15	15	15	15
Operation Range	Cooling	°CDB	-10 to 43	-10 to 43	-10 to 43	-10 to 43
	Heating	°CDB	-15 to 24	-15 to 24	-15 to 24	-15 to 24
Refrigerant (Global Warming Potential)			R410A (1,975)	R410A (1,975)	R410A (1,975)	R410A (1,975)

### Dimensions

Models : RSG07LMCA / RSG09LMCA / RSG12LMCA / RSG14LMCA

(Unit : mm)

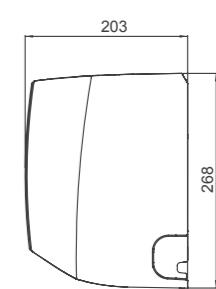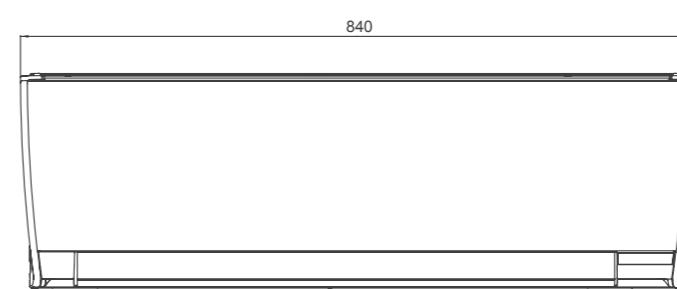

# Wall Mounted

**Basic :** RSG07LLCC / RSG09LLCC / RSG12LLCC




Wireless R.C.

**ALL  
DC**




## Features

### High efficient compact design

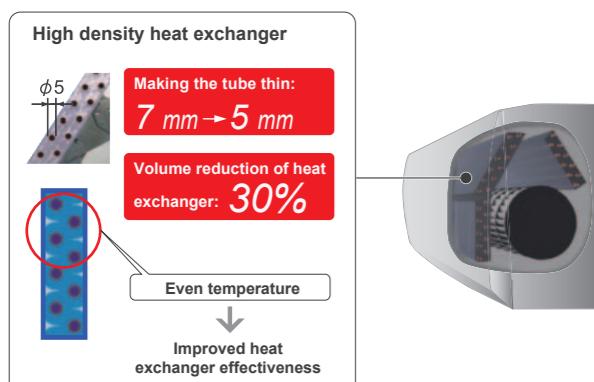

### ON-OFF Programmable timer

You can set an integrated ON-OFF or OFF-ON timer suitable for your life style.  
(Setting time: 0.5, 1, 1.5, 2, 2.5, ----9.5, 10, 11, 12 hours)

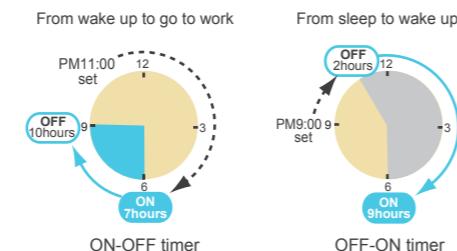

### Powerful operation

20 minutes continuous operation by maximum airflow and maximum compressor speed is possible. Rapid cooling and heating makes the room comfortable quickly.


### Super Quiet Operation

Top class low noise operation by new airflow construction. Our quiet operation makes the more comfortable environment in a bed room and a study room, etc.




### Economy operation

Setting temp. is shifted by 1°C automatically.

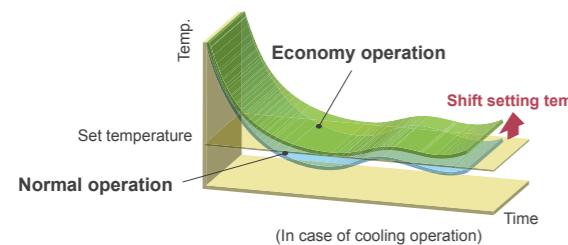

### Low ambient operation

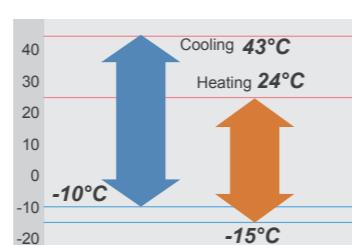

### Optional parts

Remote Controller Holder: UTZ-RXLA


## Specifications

Model No.	Indoor unit		RSG07LLCC	RSG09LLCC	RSG12LLCC
	Outdoor unit		ROG07LLCC	ROG09LLCC	ROG12LLCC
Power Source	V/Ø/Hz		230/1/50	230/1/50	230/1/50
Capacity	Cooling kW		2.0 (0.9-2.8)	2.5 (0.9-3.0)	3.4 (0.9-3.8)
	Heating kW		2.7 (0.9-3.6)	3.0 (0.9-3.8)	4.0 (0.9-5.0)
Input Power	Cooling/Heating kW		0.470/0.620	0.730/0.740	1.080/1.130
EER	Cooling W/W		4.26	3.42	3.15
COP	Heating W/W		4.35	4.05	3.54
Pdesign	Cooling/Heating (@-10°C) kW		2.0/2.2	2.5/2.3	3.4/3.2
SEER	Cooling W/W		6.70	6.90	6.60
SCOP	Heating (Average)		4.00	4.00	3.80
Energy Efficiency Class	Cooling		A++	A++	A++
	Heating (Average)		A+	A+	A
Running Current	Cooling/Heating A		2.6/3.0	3.5/3.5	5.2/5.4
Annual Energy Consumption	Cooling kWh/a		104	127	180
	Heating kWh/a		770	805	1,179
Moisture Removal	I/h		1.0	1.3	1.8
Sound Pressure (Cooling)	Indoor dB(A)		43/38/33/22	43/38/33/22	43/38/33/22
	Outdoor dB(A)		47	47	50
Sound Power (Cooling)	Indoor dB(A)		59	59	59
	Outdoor dB(A)		61	61	65
Airflow Rate (High)	Indoor / Outdoor m³/h		720/1,670	720/1,670	720/1,830
	Indoor mm		262×820×206	262×820×206	262×820×206
Net Dimension H x W x D	kg(lbs)		7.0 (15)	7.0 (15)	7.0 (15)
	Outdoor mm		535×663×293	535×663×293	535×663×293
	kg(lbs)		24 (53)	24 (53)	26 (57)
Piping Connections (Small / Large)	mm		6.35/9.52	6.35/9.52	6.35/9.52
Drain Hose Diameter (I.D./O.D.)	mm		13.8/15.8 to 16.7	13.8/15.8 to 16.7	13.8/15.8 to 16.7
Max Pipe Length (Pre-Charge)	m		20 (15)	20 (15)	20 (15)
Max Height Difference			15	15	15
Operation Range	Cooling °CDB		-10 to 43	-10 to 43	-10 to 43
	Heating °CDB		-15 to 24	-15 to 24	-15 to 24
Refrigerant (Global Warming Potential)			R410A (1,975)	R410A (1,975)	R410A (1,975)

### Dimensions


Models : RSG07LLCC / RSG09LLCC / RSG12LLCC

(Unit : mm)

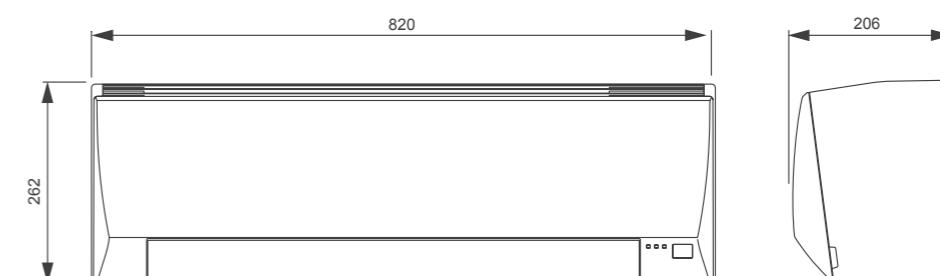


# Wall Mounted

Standard : RSG18LFCA / RSG24LFCC / RSG30LFCA

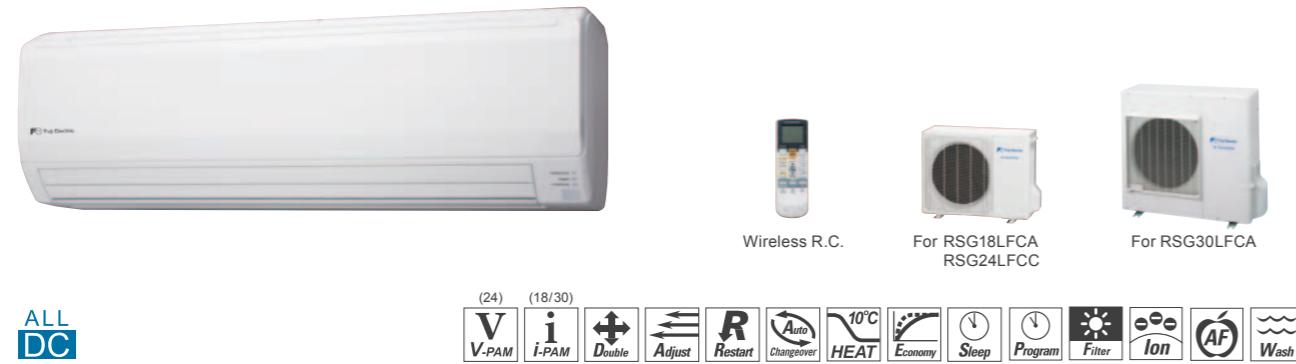


## Features


**"Vertical airflow"** provides powerful floor level heating

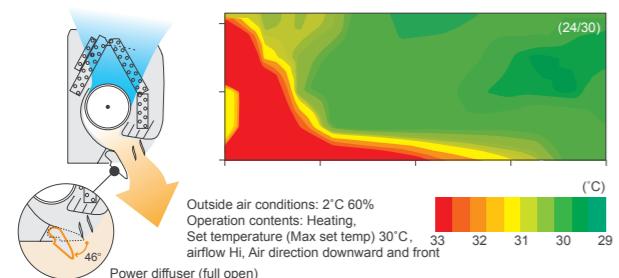

**"Horizontal airflow"** does not blow cool air directly at the occupants in the room

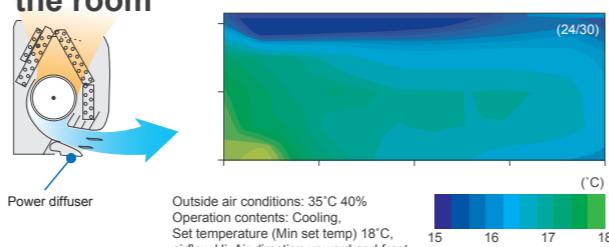

## Air conditioner filter features

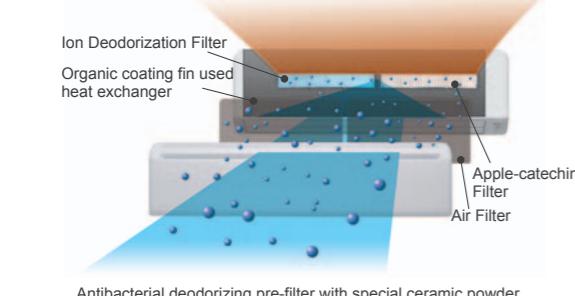

Antibacterial deodorizing pre-filter with special ceramic powder

## Ion Deodorization Filter

The filter deodorizes by powerfully decomposing absorbed odors using the oxidizing and reducing effects of ions generated by the ultra-fine-particle ceramic.

Using different filters at both sides

## Apple-catechin Filter

The Apple-catechin filter uses static electricity to clean fine particles and dust in the air.


## Flexible Installation

	18 type	24 type	30 type
Max. Piping Length	25 m	30 m	50 m
Max. Height	20 m	20 m	30 m

## Easy maintenance

Simplification of drain pan cleaning improves maintenance-ability.

## Low ambient operation

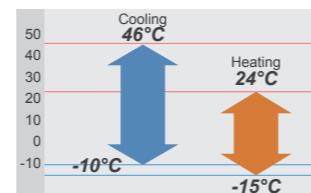

## Optional parts

Wired Remote Controller: UTY-RNNXM, UTY-RVNXM

Simple Remote Controller: UTY-RSNXM



## Specifications

Model No.	Indoor unit		RSG18LFCA ROG18LFC	RSG24LFCC ROG24LFC	RSG30LFCA ROG30LFT
	Outdoor unit	RSG18LFCA ROG18LFC			
Power Source	V/Ø/Hz	230/1/50	230/1/50	230/1/50	230/1/50
Capacity	Cooling kW	5.2 (0.9-6.0)	7.1 (0.9-8.0)	8.0 (2.9-9.0)	8.8 (2.2-11.0)
	Heating kW	6.3 (0.9-9.1)	8.0 (0.9-10.6)	8.8 (2.2-11.0)	2.49/2.44
Input Power	Cooling/Heating kW	1.52/1.71	2.20/2.21	3.21	3.21
EER	Cooling W/W	3.42	3.23	3.61	3.61
COP	Heating W/W	3.68	3.61	3.80	3.80
Pdesign	Cooling/Heating (@-10°C) kW	5.2/5.9	7.1/7.1	8.0/8.0	8.0/8.0
SEER	Cooling W/W	6.94	6.11	5.69	5.69
SCOP	Heating (Average) W/W	3.87	3.80	3.80	3.80
Energy Efficiency Class	Cooling A++	A++	A+	A+	A
	Heating (Average) A	A	A	A	A
Running Current	Cooling/Heating A	6.8/7.6	9.7/9.7	10.9/10.7	10.9/10.7
Annual Energy Consumption	Cooling kWh/a 262	406	2610	2941	492
	Heating kWh/a 2130	2.6	2.7	3.2	3.2
Moisture Removal l/h		43/37/33/26	49/42/37/32	48/42/37/33	48/42/37/33
Sound Pressure (Cooling)	Indoor dB(A) 50	55	55	53	53
	Outdoor dB(A) 58	64	64	64	64
Sound Power (Cooling)	Indoor dB(A) 65	68	68	68	68
Airflow Rate (High)	Indoor / Outdoor m³/h 900/2150	1120/2460	1100/3600	1100/3600	1100/3600
	Indoor mm 320X998X238	320X998X238	320X998X238	320X998X238	320X998X238
	Outdoor kg/lbs 14 (31)	14 (31)	14 (31)	14 (31)	14 (31)
Net Dimension H x W x D mm 620X790X298		620X790X298	830X900X330	830X900X330	830X900X330
	kg/lbs 41 (90)	41 (90)	41 (90)	61 (135)	61 (135)
Piping Connections (Small / Large)	mm 6.35/12.8	6.35/15.88	6.35/15.88	9.52/15.88	9.52/15.88
Drain Hose Diameter (I.D./O.D.)	mm 12/16	12/16	12/16	12/16	12/16
Max Pipe Length (Pre-Charge)	m 25 (15)	30 (15)	30 (15)	50 (20)	50 (20)
Max Height Difference	m 20	20	20	30	30
Operation Range	Cooling °CDB -10 to 46	-10 to 46	-10 to 46	-10 to 46	-10 to 46
	Heating °CDB -15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24
Refrigerant (Global Warming Potential)	R410A (1,975)	R410A (1,975)	R410A (1,975)	R410A (1,975)	R410A (1,975)

## Dimensions

Models : RSG18LFCA / RSG24LFCC / RSG30LFCA

(Unit : mm)

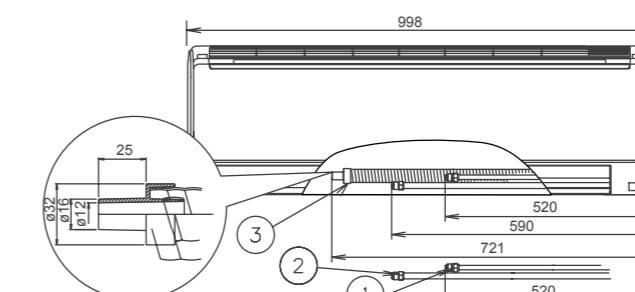


- ① Refrigerant pipe flare connection (Liquid)
- ② Refrigerant pipe flare connection (Gas)
- ③ Drain hose connection (Drain hose)

Model : RGG09LVCA / RGG12LVCA / RGG14LVCA



## Features

### Flexible & easy installation

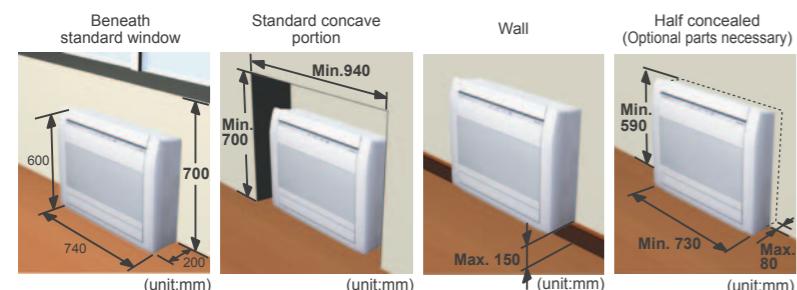

### Filter features

**Ion Deodorization Filter**  
The filter deodorizes by powerfully decomposing absorbed odors using the oxidizing and reducing effects of ions generated by the ultra-fine-particle ceramic.

+ Using different filters at both sides

**Apple-catechin Filter**  
The Apple-catechin filter uses static electricity to clean fine particles and dust in the air.


### 10°C HEAT Operation

The room temperature can be set to go no lower than 10°C, thus ensuring that the room does not get too cold when not occupied


### Easy maintenance

Removable and washable panel


### 2-Fan & Wide airflow

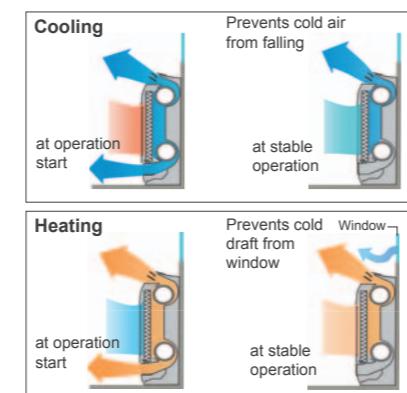

### Flexible piping connection 6 direction of drain & piping

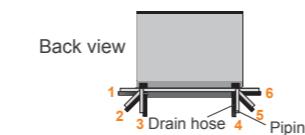

### Low ambient operation

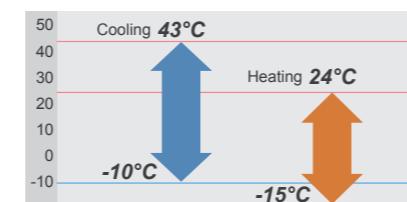

### Optional parts

Wired Remote Controller: UTY-RNNXM, UTY-RVNXM  
Simple Remote Controller: UTY-RSNXM  
Half Concealed Kit: UTR-STA




## Specifications

Model No.	Indoor unit		RGG09LVCA	RGG12LVCA	RGG14LVCA
	Outdoor unit	ROG09LVCA			
Power Source	V/Ø/Hz	230/1/50	230/1/50	230/1/50	230/1/50
Capacity	Cooling kW	2.6 (0.3-5)	3.5 (0.9-4.0)	4.5 (0.9-6.6)	5.2 (0.9-8.0)
Input Power	Cooling/Heating kW	0.53/0.79	0.94/1.19	1.14/1.44	1.68/1.88
EER	Cooling W/W	4.91	3.72	3.61	3.68
COP	Heating W/W	4.43	3.78	3.61	3.68
Pdesign	Cooling/Heating (@-10°C) kW	2.6/2.9	3.5/3.8	4.2/4.7	4.2/4.7
SEER	Cooling W/W	7.00	6.50	4.00	4.00
SCOP	Heating (Average) W/W	4.20	4.00	4.00	4.00
Energy Efficiency Class	Cooling A++	A++	A++	A++	A++
Heating (Average) A+	A+	A+	A+	A+	A+
Running Current	Cooling/Heating A	2.6/3.8	4.4/5.5	5.2/6.4	5.2/6.4
Annual Energy Consumption	Cooling kWh/a	130	188	230	230
Moisture Removal	I/h	967	1330	1645	1645
		1.3	1.8	2.1	2.1
Sound Pressure (Cooling)	Indoor H/M/L/Q	40/35/29/22	40/35/29/22	40/35/29/22	44/38/31/22
	Outdoor High	47	48	50	50
Sound Power (Cooling)	Indoor High	55	55	58	58
	Outdoor High	64	64	65	65
Airflow Rate (High)	Indoor / Outdoor m³/h	570/1680	570/1680	650/1910	650/1910
	Indoor mm	600x740x200	600x740x200	600x740x200	600x740x200
	Outdoor kg/lbs	14 (31)	14 (31)	14 (31)	14 (31)
Net Dimension H x W x D	Indoor mm	540x790x290	540x790x290	578x790x300	578x790x300
	Outdoor kg/lbs	36 (79)	36 (79)	40 (88)	40 (88)
Piping Connections (Small / Large)	mm	6.35/9.52	6.35/9.52	6.35/12.7	6.35/12.7
Drain Hose Diameter (I.D./O.D.)	mm	13.8/15.8 to 16.7	13.8/15.8 to 16.7	13.8/15.8 to 16.7	13.8/15.8 to 16.7
Max Pipe Length (Pre-Charge)	m	20 (15)	20 (15)	20 (15)	20 (15)
Max Height Difference		15	15	15	15
Operation Range	Cooling °CDB	-10 to 43	-10 to 43	-10 to 43	-10 to 43
	Heating °CDB	-15 to 24	-15 to 24	-15 to 24	-15 to 24
Refrigerant (Global Warming Potential)		R410A (1,975)	R410A (1,975)	R410A (1,975)	R410A (1,975)

Dimensions Models : RGG09LVCA / RGG12LVCA / RGG14LVCA

(Unit : mm)

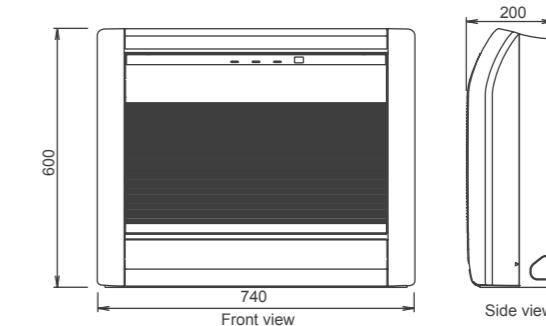

# Compact Cassette

Model : RCG12LVLB / RCG14LVLB / RCG18LVLB / RCG24LVLA




ALL  
DC

## Features

### 2-stage turbo fan

High efficiency design by 2 stage structure

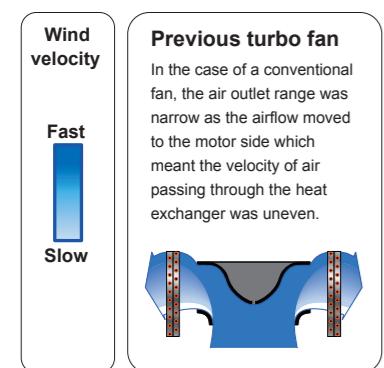


### Easy maintenance

#### ① Maintenance of fan motor and fan

Maintenance of the fan motor and fan can be done easily after taking off the panel as the bell mouth of the fan can be removed easily.

A : Fan motor    B : 2-stage turbo fan  
C : Bell-mouth    D : Panel

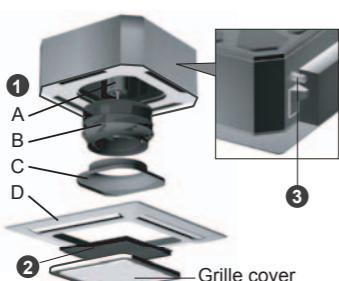

#### ② Air filter

: standard equipment

#### ③ Adaptation of transparent drainage parts

During installation, maintenance and operation, the drain pump and kit can be checked easily.


### High lift drain pump




### Quiet quality

Optimization of wing form (laminar wing type) and wing number (7 blades each)

Designed by CFD-analysis (fluid) simulations

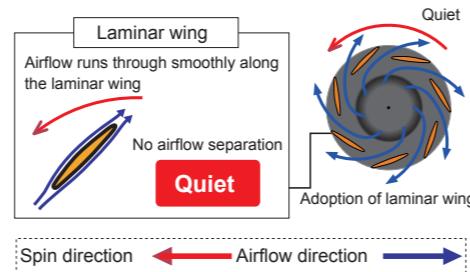

### Low ambient operation

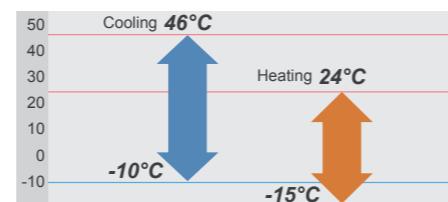

### Compact design

World's first 24,000Btu model in the compact cassette category (Easy installation by taking off ceiling panel of 600 x 600 size)

### Optional parts


Air Outlet Shutter Plate:	UTR-YDZB
Wired Remote Controller:	UTY-RNNXM, UTY-RVNXM
Simple Remote Controller:	UTY-RSNXM
Insulation Kit For High Humidity:	UTZ-KXGC
Fresh Air Intake Kit:	UTZ-VXAA

## Specifications

Model No.	Indoor unit		RCG12LVLB	RCG14LVLB	RCG18LVLB	RCG24LVLA
	Outdoor unit		ROG12LALL	ROG14LALL	ROG18LALL	ROG24LALA
Power Source	V/Ø/Hz	230/1/50	230/1/50	230/1/50	230/1/50	230/1/50
Capacity	Cooling kW	3.5 (0.9-4.4)	4.3 (0.9-5.4)	5.2 (0.9-5.9)	6.8 (0.9-8.0)	6.8 (0.9-8.0)
	Heating kW	4.1 (0.9-5.7)	5.0 (0.9-6.5)	6.0 (0.9-7.5)	8.0 (0.9-9.1)	8.0 (0.9-9.1)
Input Power	Cooling/Heating kW	1.05/1.11	1.33/1.34	1.62/1.66	2.21/2.26	2.21/2.26
EER	Cooling W/W	3.33	3.21	3.21	3.08	3.08
COP	Heating W/W	3.69	3.71	3.61	3.54	3.54
Pdesign	Cooling/Heating (@-10°C) kW	3.5/4.2	4.3/4.5	5.2/5.2	6.8/6.0	6.8/6.0
SEER	Cooling W/W	6.20	6.40	6.20	5.60	5.60
SCOP	Heating (Average) W/W	4.10	4.40	4.20	3.90	3.90
Energy Efficiency Class	Cooling A++	A++	A++	A+	A+	A+
	Heating (Average) A+	A+	A+	A+	A+	A
Running Current	Cooling/Heating A	4.8/5.1	6.1/6.1	7.2/7.4	9.7/9.9	9.7/9.9
Annual Energy Consumption	Cooling kWh/a 198	235	293	425	2151	2151
	Heating 1431	1432	1731			
Moisture Removal	I/h 1.2	1.5	2.2	2.7		
Sound Pressure (Cooling)	Indoor 37/34/30/27	38/34/30/27	38/34/30/26	49/44/36/30		
	Outdoor 47	49	50	52		
Sound Power (Cooling)	Indoor 49	50	50	59		
	Outdoor 61	62	62	67		
Airflow Rate (High)	Indoor / Outdoor m³/h 600/1780	680/1910	680/2000	930/2470		
	Indoor mm 245x570x570/49x700x700	245x570x570/49x700x700	245x570x570/49x700x700	245x570x570/49x700x700		
Net Dimension H x W x D	Indoor kg/lbs 15 (33) / 2.6 (6)	15 (33) / 2.6 (6)	15 (33) / 2.6 (6)	16 (35) / 2.6 (6)		
	Outdoor mm 578x790x300	578x790x300	578x790x300	578x790x315		
	Outdoor kg/lbs 40 (88)	40 (88)	40 (88)	44 (97)		
Piping Connections (Small / Large)	mm 6.35/9.52	6.35/12.70	6.35/12.70	6.35/15.88		
Drain Hose Diameter (I.D./O.D.)	mm 25/32	25/32	25/32	25/32		
Max Pipe Length (Pre-Charge)	m 25 (15)	25 (15)	25 (15)	30 (15)		
Max Height Difference	m 15	15	15	20		
Operation Range	Cooling -10 to 46 °CDB	-10 to 46	-10 to 46	-10 to 46		
	Heating -15 to 24 °CDB	-15 to 24	-15 to 24	-15 to 24		
Refrigerant (Global Warming Potential)	R410A (1,975)	R410A (1,975)	R410A (1,975)	R410A (1,975)		
Cassette Grille	CG-UFFD	CG-UFFD	CG-UFFD	CG-UFFD		

### Dimensions

Models : RCG12LVLB / RCG14LVLB / RCG18LVLB / RCG24LVLA

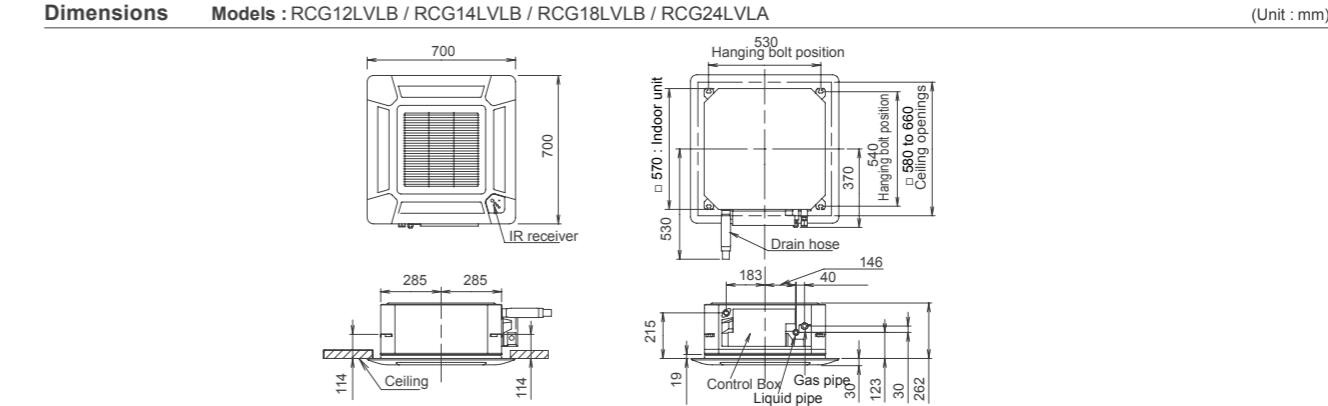

# Cassette


Model : RCG30LRLE / RCG36LRLE / RCG45LRLA / RCG54LRLA /  
RCG36LRLA [3phase] / RCG45LRLA [3phase] / RCG54LRLA [3phase]



## Features


### High efficiency turbo fan with 3-dimensional blade

Previous turbo fan: Air passing through the heat exchanger was uneven and the air would only flow close to the ceiling.

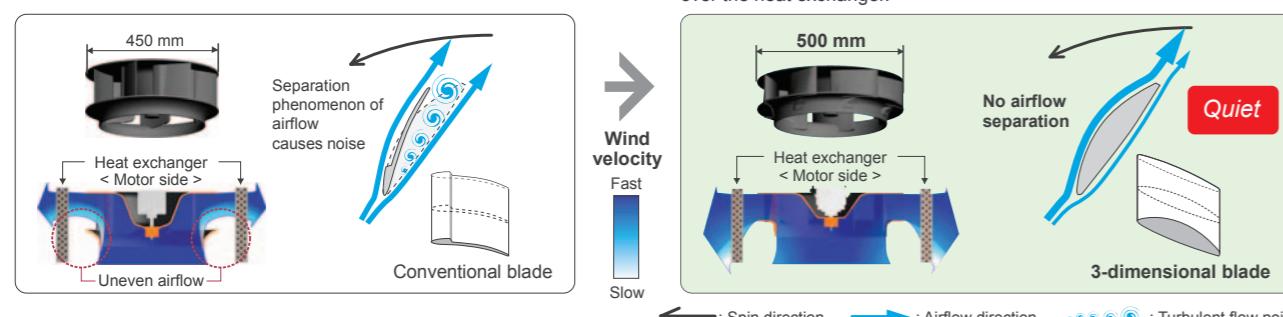

### Improvement of the airflow distribution

New louvre: The louvre design distributes air leaving a space between the chassis and the ceiling allowing far and wide airflow distribution.

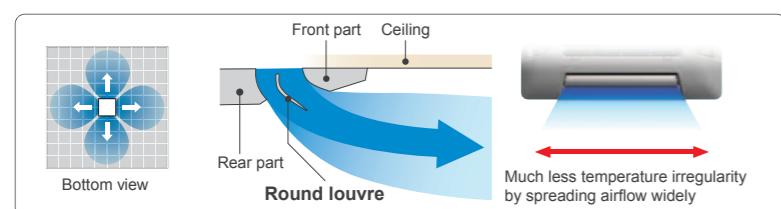

### Adjustment of hanger position is possible after installation



### High lift drain pump



## Optional parts


- Wired Remote Controller: UTY-RNNXM, UTY-RVNXM
- Simple Remote Controller: UTY-RSNXM
- IR Receiver Kit: UTY-LRHXA2
- Wide Panel: UTG-AGYA-W
- Panel Spacer: UTG-BGYA-W
- Air Outlet Shutter Plate: UTR-YDZC
- Insulation Kit For High Humidity: UTZ-KXGA
- Fresh Air Intake Kit: UTZ-VXGA

## Specifications

Model No.	Indoor unit		RCG30LRLE	RCG36LRLE	RCG45LRLA	RCG54LRLA	RCG36LRLA	RCG45LRLA	RCG54LRLA	
	Outdoor unit		ROG30LETL	ROG36LETL	ROG45LETL	ROG54LETL	ROG36LATT	ROG45LATT	ROG54LATT	
Power Source	V/Ø/Hz	230/1/50	230/1/50	230/1/50	230/1/50	230/1/50	400/3/50	400/3/50	400/3/50	
Capacity	Cooling	kW	8.5 (2.8-10.0)	10.0 (2.8-11.2)	12.5 (4.0-14.0)	13.3 (4.5-14.5)	10.0 (4.7-11.4)	12.5 (5.0-14.0)	14.0 (5.4-16.0)	
	Heating		10.0 (2.7-11.2)	11.2 (2.7-12.7)	14.0 (4.2-16.2)	16.0 (4.7-16.5)	11.2 (5.0-14.0)	14.0 (5.4-16.2)	16.0 (5.8-18.0)	
Input Power	Cooling/Heating	kW	2.65/2.77	3.12/3.02	3.88/3.77	4.42/4.69	2.44/2.56	3.54/3.58	4.36/4.43	
EER	Cooling	W/W	3.21	3.21	3.22	3.01	4.10	3.53	3.21	
COP	Heating		3.61	3.71	3.71	3.41	4.38	3.91	3.61	
Pdesign	Cooling/Heating	kW	8.5/8.0	10.0/8.7	-	-	10.0/10.0	-	-	
SEER	Cooling	W/W	6.50	6.30	-	-	6.50	-	-	
SCOP	Heating		4.30	4.20	-	-	4.30	-	-	
Energy Efficiency Class	Cooling		A++	A++	-	-	A++	-	-	
	Heating		A+	A+	-	-	A+	-	-	
Running Current	Cooling/Heating	A	11.6/12.2	13.7/13.3	17.0/16.5	19.3/20.5	3.7/3.9	5.3/5.3	6.5/6.6	
Annual Energy Consumption	Cooling	kWh/a	458	555	-	-	573	-	-	
	Heating		2604	2897	-	-	3253	-	-	
Moisture Removal		l/h	2.5	3.5	4.5	5.0	3.0	4.5	5.0	
Sound Pressure (Cooling)	Indoor	H/M/L/Q	40/38/36/32	43/38/36/32	46/42/40/36	47/43/41/37	44/39/36/33	46/42/40/36	47/43/41/37	
	Outdoor	High	53	54	55	55	51	54	55	
Sound Power (Cooling)	Indoor	High	54	57	-	-	58	-	-	
	Outdoor	High	68	69	-	-	67	-	-	
Airflow Rate (High)	Indoor / Outdoor	m³/h	1600/3600	1800/3800	1900/6750	2000/6750	1800/6200	1900/6900	2000/6900	
	Indoor	mm	288x240x40	50x950x950	288x40x40	50x950x950	288x40x40	50x950x950	288x40x40	50x950x950
	Indoor	kg(lbs)	26 (57)	5.5 (12)	26 (57)	5.5 (12)	26 (57)	5.5 (12)	26 (57)	5.5 (12)
	Outdoor	mm	830x900x330	830x900x330	1290x900x330	1290x900x330	1290x900x330	1290x900x330	1290x900x330	1290x900x330
	Outdoor	kg(lbs)	61 (135)	61 (135)	86 (190)	86 (190)	104 (229)	104 (229)	104 (229)	104 (229)
Piping Connections (Small / Large)		mm	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88
Drain Hose Diameter (I.D./O.D.)		mm	25.0/32.0	25.0/32.0	25.0/32.0	25.0/32.0	25.0/32.0	25.0/32.0	25.0/32.0	25.0/32.0
Max Pipe Length (Pre-Charge)		m	50 (20)	50 (20)	50 (20)	50 (20)	75 (30)	75 (30)	75 (30)	75 (30)
Max Height Difference		m	30	30	30	30	30	30	30	30
Operation Range	Cooling	°CDB	-15 to 46	-15 to 46						
	Heating		-15 to 24	-15 to 24						
Refrigerant (Global Warming Potential)		R410A (1.975)	R410A (1.975)	R410A (1.975)	R410A (1.975)	R410A (1.975)	R410A (1.975)	R410A (1.975)	R410A (1.975)	R410A (1.975)
Cassette Grille		CG-GFA	CG-GFA	CG-GFA	CG-GFA	CG-GFA	CG-GFA	CG-GFA	CG-GFA	CG-GFA

## Dimensions

Models : RCG30LRLE / RCG36LRLE / RCG36LRLA / RCG45LRLA / RCG54LRLA

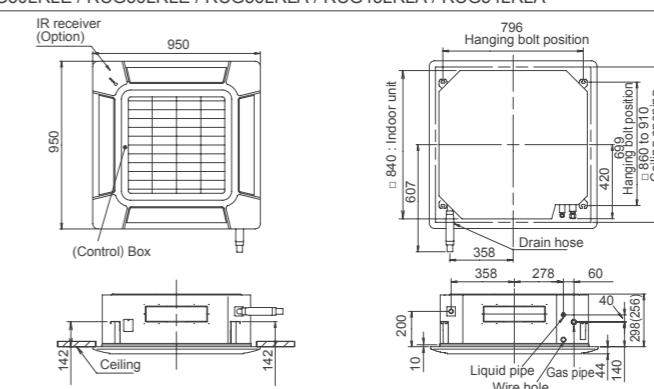



Model : RYG30LRTE / RYG36LRTE / RYG45LRTA /

RYG36LRTA [3phase] / RYG45LRTA [3phase] / RYG54LRTA [3phase]




Wireless R.C. For RYG30/36LRTA For RYG36/45/54LRTA

**ALL  
DC**




## Features

### Installation

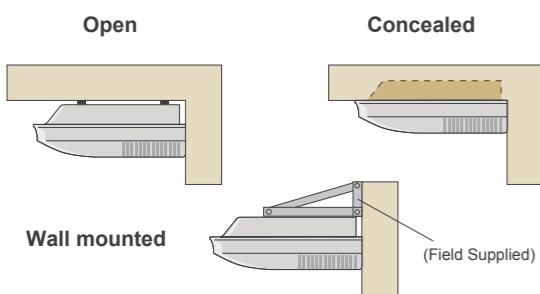


### Multi auto swing

A combination of right/left and up/down directional swing allows 3-dimensional air direction control.

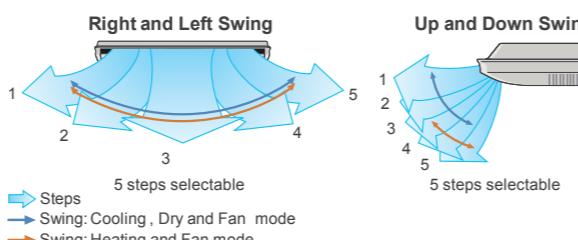

### Condensate lift-up mechanism (Option)


Optional drain lift-up mechanism allows flexible installation.

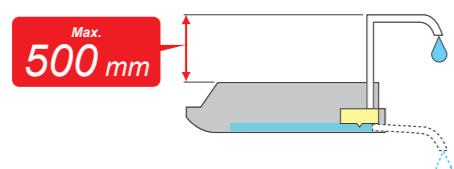


### Easy installation

Main work settings can be done easily from the remote controller at installation

**Main work settings**  
•High ceiling setting  
•Auto restart  
•Temperature adjustment when cooling / heating

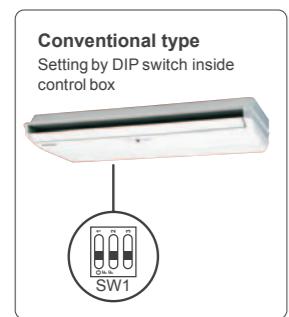

### Fresh air intake

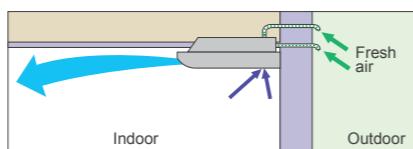

### Optional parts

- Wired Remote Controller: UTY-RNNXM, UTY-RVNXM
- Simple Remote Controller: UTY-RSNXM
- Drain Pump Unit: UTR-DPB24T
- Flange: UTD-RF204


## Specifications

Model No.	Indoor unit		RYG30LRTA	RYG36LRTA	RYG45LRTA	RYG36LRTA	RYG45LRTA	RYG54LRTA
	Outdoor unit	ROG30LETL	ROG36LETL	ROG45LETL	ROG36LATT	ROG45LATT	ROG54LATT	
Power Source	V/Ø/Hz	230/1/50	230/1/50	230/1/50	400/3/50	400/3/50	400/3/50	
Capacity	Cooling kW	8.5 (2.8-10.0)	9.4 (2.8-11.2)	12.1 (4.0-13.3)	10.0 (4.7-11.4)	12.5 (5.0-14.0)	14.0 (5.4-16.0)	
	Heating kW	10.0 (2.7-11.2)	11.2 (2.7-12.7)	13.3 (4.2-15.5)	11.2 (5.0-14.0)	14.0 (5.4-16.2)	16.0 (5.8-18.0)	
Input Power	Cooling/Heating kW	2.65/2.77	2.93/3.02	3.77/3.68	2.84/2.87	3.89/3.88	4.65/4.67	
EER	Cooling W/W	3.21	3.21	3.21	3.52	3.21	3.01	
COP	Heating W/W	3.61	3.71	3.61	3.90	3.61	3.43	
Pdesign	Cooling/Heating kW	8.5/8.0	9.4/8.7	-	10.0/10.0	-	-	
SEER	Cooling W/W	6.10	6.00	-	6.10	-	-	
SCOP	Heating W/W	4.20	4.10	-	4.10	-	-	
Energy Efficiency Class	Cooling A++	A+	-	A++	-	-	-	
	Heating A+	A+	-	A+	-	-	-	
Running Current	Cooling/Heating A	11.6/12.2	12.8/13.2	16.5/16.1	4.3/4.4	5.8/5.8	6.9/6.9	
Annual Energy Consumption	Cooling kWh/a	487	548	-	573	-	-	
	Heating kWh/a	2662	2965	-	3414	-	-	
Moisture Removal l/h		2.5	3.0	4.0	3.0	4.5	5.0	
Sound Pressure (Cooling)	Indoor H/M/L/Q	45/43/37/32	47/43/37/32	49/45/39/34	47/43/37/32	49/45/39/34	51/48/42/38	
	Outdoor High	53	54	55	51	54	55	
Sound Power (Cooling)	Indoor High	57	60	-	61	-	-	
	Outdoor High	68	69	-	67	-	-	
Airflow Rate (High)	Indoor / Outdoor m³/h	1660/3600	1900/3800	2100/6200	1900/6200	2100/6900	2300/6900	
	Indoor mm	240x1660x700	240x1660x700	240x1660x700	240x1660x700	240x1660x700	240x1660x700	
Net Dimension H x W x D kg/lbs	Indoor (101)	46 (101)	46 (101)	46 (101)	46 (101)	46 (101)	48 (106)	
	Outdoor mm	830x900x330	830x900x330	1290x900x330	1290x900x330	1290x900x330	1290x900x330	
	kg/lbs	61 (134)	61 (134)	86 (189)	104 (229)	104 (229)	104 (229)	
Piping Connections (Small / Large)	mm	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88	
Drain Hose Diameter (I.D./O.D.)	mm	21.5/26.0	21.5/26.0	21.5/26.0	21.5/26.0	21.5/26.0	21.5/26.0	
Max Pipe Length (Pre-Charge)	m	50 (20)	50 (20)	50 (20)	75 (30)	75 (30)	75 (30)	
Max Height Difference		30	30	30	30	30	30	
Operation Range Cooling °CDB		-15 to 46						
	Heating °CDB	-15 to 24						
Refrigerant (Global Warming Potential)	R410A (1,975)	R410A (1,975)	R410A (1,975)	R410A (1,975)	R410A (1,975)	R410A (1,975)	R410A (1,975)	

### Dimensions

Models : RYG30LRTA / RYG36LRTA / RYG45LRTA / RYG54LRTA


(Unit : mm)

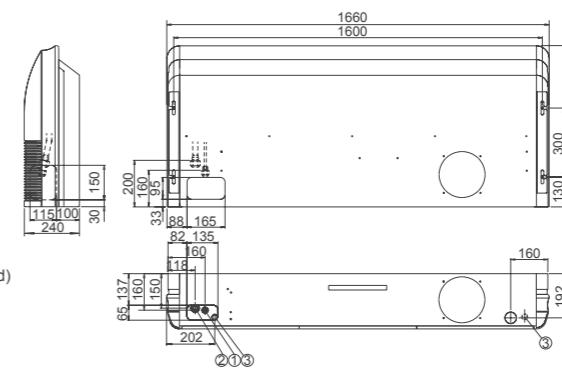

- ① Refrigerant piping flare connection (Liquid)
- ② Refrigerant piping flare connection (Gas)
- ③ Drain piping connection

# Slim Duct

Model : RDG12LLTB / RDG14LLTB / RDG18LLTB

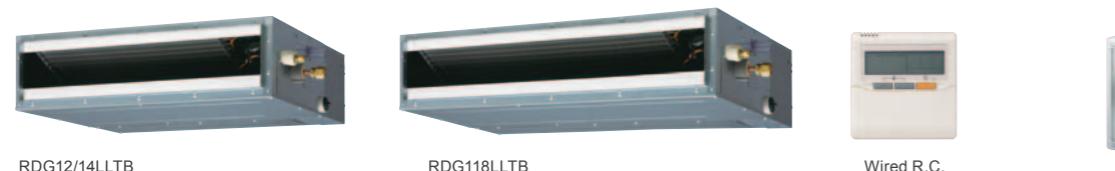


**ALL  
DC**



## Features


### Slim design

The slim design allows installations where ceilings are narrow.

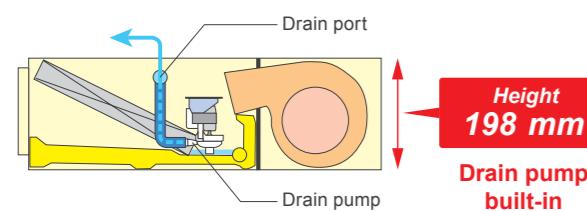

### Drain hose as standard accessory

For flexible installation.

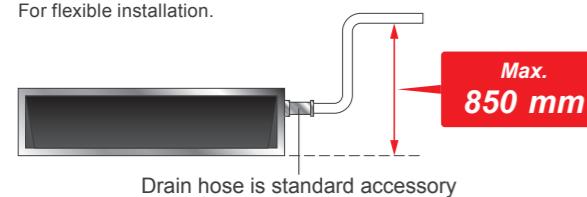

### Selectable with a wide range of static pressure

By using the DC fan motor, it is possible to change the static pressure range from 0 to 90 Pa.


The change of static pressure range is possible by remote controller.



**Static pressure range  
0 to 90 Pa**

### Air-intake

Air intake direction can be selected to match the installation site.

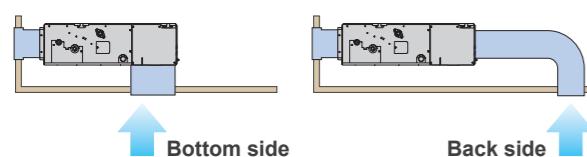


### Flexible installation

Ceiling concealed      Floor concealed



### Auto Louver Grille Kit (Option)

Simple flat Auto Louver will provide comfort airflow and harmonize with luxury interior.

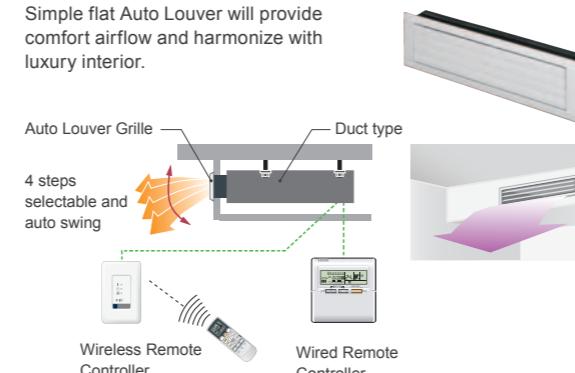

### Optional parts

Wired Remote Controller: UTY-RNNXM, UTY-RVNXM

Simple Remote Controller: UTY-RSNXM

IR Receiver Kit: UTY-LRHXM

Remote Sensor Unit: UTY-XSZX

Auto Louver Grille Kit: UTD-GXSA-W (For RDG12 / 14LLTB)


UTD-GXSB-W (For RDG18LLTB)

## Specifications

Model No.	Indoor unit		RDG12LLTB	RDG14LLTB	RDG18LLTB
	Outdoor unit	ROG12LALL			
Power Source	V/Ø/Hz	230/1/50	230/1/50	230/1/50	230/1/50
Capacity	Cooling	3.5 (0.9-4.4)	4.3 (0.9-5.4)	5.0 (0.9-6.5)	5.2 (0.9-5.9)
	Heating	4.1 (0.9-5.7)	5.0 (0.9-6.5)	6.0 (0.9-7.5)	6.0 (0.9-7.5)
Input Power	Cooling/Heating	kW	1.05/1.11	1.33/1.34	1.62/1.66
EER	Cooling		3.33	3.21	3.21
COP	Heating		3.69	3.71	3.61
Pdesign	Cooling/Heating	kW	3.5/4.2	4.3/4.5	5.2/5.2
SEER	Cooling		5.90	5.80	6.20
SCOP	Heating		4.00	3.90	4.10
Energy Efficiency Class	Cooling		A+	A+	A++
	Heating		A+	A	A+
Running Current	Cooling/Heating	A	4.8/5.1	6.1/6.1	7.2/7.4
Annual Energy Consumption	Cooling	kWh/a	207	259	293
	Heating		1467	1614	1774
Moisture Removal		l/h	1.3	1.5	2.0
Sound Pressure (Cooling)	Indoor	H/M/L/Q	29/28/26/25	32/30/28/26	32/30/29/27
	Outdoor	High	47	49	50
Sound Power (Cooling)	Indoor	High	58	60	58
	Outdoor	High	61	62	62
Airflow Rate (High)	Indoor / Outdoor	m³/h	650/1780	800/1910	940/2000
Static pressure range (Standard)		Pa	0 to 90 (25)	0 to 90 (25)	0 to 90 (25)
Net Dimension H x W x D	Indoor	mm	198x700x620	198x700x620	198x900x620
	Outdoor	mm	578x790x300	578x790x300	578x790x300
		kg(lbs)	19 (42)	19 (42)	23 (51)
Piping Connections (Small / Large)		mm	40 (88)	40 (88)	40 (88)
Drain Hose Diameter (I.D./O.D.)		mm	6.35/9.52	6.35/12.70	6.35/12.70
Max Pipe Length (Pre-Charge)		m	25/32	25/32	25/32
Max Height Difference		m	25 (15)	25 (15)	25 (15)
Operation Range	Cooling	°CDB	-10 to 46	-10 to 46	-10 to 46
	Heating		-15 to 24	-15 to 24	-15 to 24
Refrigerant (Global Warming Potential)			R410A (1,975)	R410A (1,975)	R410A (1,975)

## Dimensions

Models : RDG12LLTB / RDG14LLTB / RDG18LLTB

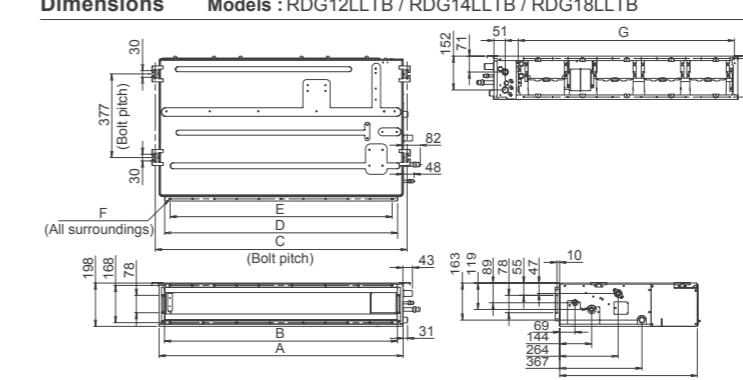

(Unit : mm)

	RDG12 / 14LLTB	RDG18LLTB
A	700	900
B	650	850
C	734	934
D	650	850
E	P100x6=600	P100x8=800
F	18x05	22x05
G	574	774

# Medium Static Pressure Duct

Model : RDG24LMLA / RDG30LMLE / RDG36LMLE / RDG45LMLA /  
RDG36LMLA [3phase] / RDG45LMLA [3phase]




ALL  
DC


## Features

### Slim & Compact design

In the case of bottom return air connection, not only does the indoor unit design allow for installation in a narrow ceiling space of up to 270 mm, further space savings have been achieved by mounting the control box internally inside the chassis.

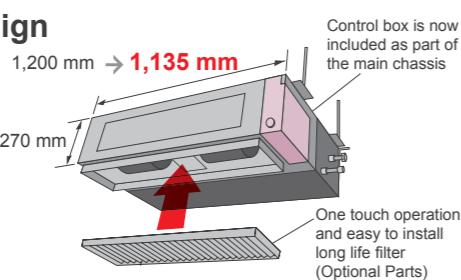


### Two-direction drain piping

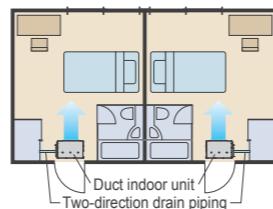


### Easy maintenance

Structural improvement is attained by making the bottom panel two pieces, front and rear. The internal fan casing is also manufactured in two pieces, namely upper and lower. The maintenance of the motor and fan can be easily carried out by removing the rear panel and the lower part of the casing while leaving the main chassis installed.

### See below for the case of rear suction type


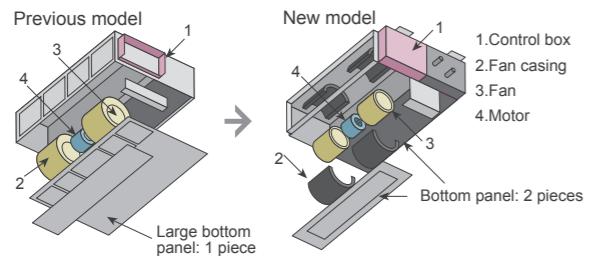


### Low ambient operation

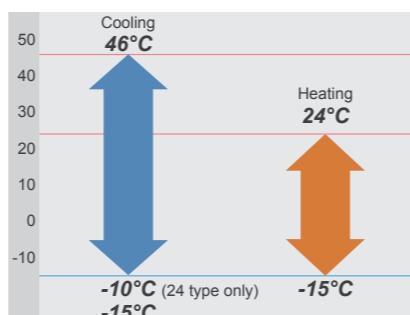

### Easy installation

Main work settings can be done easily from the remote controller at installation

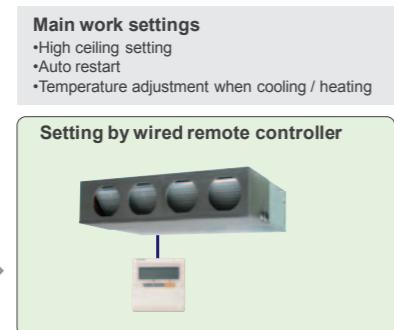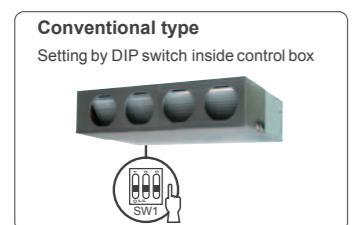

### Optional parts


Wired Remote Controller:	UTY-RNNXM, UTY-RVNXM
Simple Remote Controller:	UTY-RSNXM
Flange (Round):	UTD-RF204
Flange (Square):	UTD-SF045T
Long Life Filter:	UTD-LF25NA
Remote Sensor Unit:	UTY-XSZX
Drain Pump Unit:	UTZ-PX1NBA
IR Receiver Kit:	UTY-LRHXM

## Specifications

Model No.	Indoor unit		RDG24LMLA	RDG30LMLE	RDG36LMLE	RDG45LMLA	RDG36LMLA	RDG45LMLA
	Outdoor unit	ROG24LALA	ROG30LETL	ROG36LETL	ROG45LETL	ROG36LATT	ROG45LATT	
Power Source	V/Ø/Hz	230/1/50	230/1/50	230/1/50	230/1/50	400/3/50	400/3/50	
Capacity	Cooling	kW	6.8 (0.9-8.0)	8.5 (2.8-10.0)	9.4 (2.8-11.2)	12.1 (4.0-13.3)	10.0 (4.7-11.4)	12.5 (5.0-14.0)
	Heating		8.0 (0.9-9.1)	10.0 (2.7-11.2)	11.2 (2.7-12.7)	13.3 (4.2-15.5)	11.2 (5.0-14.0)	14.0 (5.4-16.2)
Input Power	Cooling/Heating	kW	2.21/2.26	2.65/2.68	2.96/3.10	3.77/3.68	2.84/2.87	3.89/3.88
EER	Cooling	W/W	3.08	3.21	3.18	3.21	3.52	3.21
COP	Heating		3.54	3.73	3.61	3.61	3.90	3.61
Pdesign	Cooling/Heating	kW	6.8/6.0	8.5/8.0	9.4/8.7	-	10.0/10.0	-
SEER	Cooling	W/W	6.20	5.90	5.70	-	5.80	-
SCOP	Heating		4.00	3.90	3.80	-	4.00	-
Energy Efficiency Class	Cooling		A++	A+	A+	-	A+	-
	Heating		A+	A	A	-	A+	-
Running Current	Cooling/Heating	A	9.7/9.9	11.6/11.7	13.0/13.6	16.5/16.1	4.3/4.4	5.8/5.8
Annual Energy Consumption	Cooling	kWh/a	384	504	576	-	603	-
	Heating		2098	2868	3202	-	3497	-
Moisture Removal		l/h	2.5	2.5	3.0	4.0	3.0	4.5
Sound Pressure (Cooling)	Indoor	H/M/L/Q	31/29/27/25	39/35/30/26	39/35/30/26	42/38/32/28	38/36/31/26	42/38/32/28
	Outdoor	High	52	53	54	55	51	54
Sound Power (Cooling)	Indoor	High	60	65	65	-	65	-
	Outdoor	High	67	68	69	-	67	-
Airflow Rate (High)	Indoor / Outdoor	m³/h	1100/2470	1900/3600	1900/3800	2100/6200	1800/6200	2100/6750
Static pressure range (Standard)		Pa	30 to 150 (35)	30 to 150 (47)	30 to 150 (60)		30 to 150 (47)	30 to 150 (60)
Net Dimension H x W x D	Indoor	mm	270x1135x700	270x1135x700	270x1135x700		270x1135x700	270x1135x700
	Outdoor	mm	578x790x315	830x900x330	830x900x330		40 (88)	40 (88)
		kg/lbs	38 (84)	40 (88)	40 (88)		1290x900x330	1290x900x330
Piping Connections (Small / Large)		mm	4.35/15.88	9.52/15.88	9.52/15.88		104 (229)	104 (229)
Drain Hose Diameter (I.D./O.D.)		mm	35.7/38.1	35.7/38.1	35.7/38.1		9.52/15.88	9.52/15.88
Max Pipe Length (Pre-Charge)		m	30 (15)	50 (20)	50 (20)		35.7/38.1	35.7/38.1
Max Height Difference		m	20	30	30		75 (30)	75 (30)
Operation Range	Cooling	°CDB	-10 to 46	-15 to 46	-15 to 46	-15 to 46	30	30
	Heating		-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24
Refrigerant (Global Warming Potential)		R410A (1,975)	R410A (1,975)	R410A (1,975)	R410A (1,975)		R410A (1,975)	R410A (1,975)

Dimensions Models : RDG24LMLA / RDG30LMLE / RDG36LMLE / RDG36LMLA / RDG45LMLA

(Unit : mm)

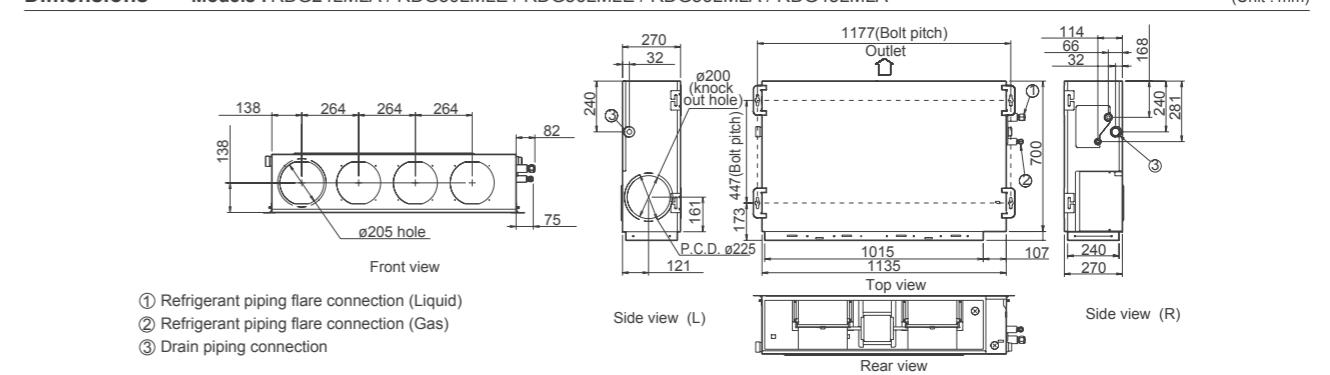

# High Static Pressure Duct

**Model :** RDG45LHTA / RDG54LHTA /  
RDG45LHTA [3phase] / RDG54LHTA [3phase] / RDG60LHTA [3phase]




## Features

### High energy efficiency


Significantly greater efficiency is realized by using all DC inverter technology. (60 type)

**Easy installation  
(Compact size & Lightweight)**


A compact size and lightweight indoor unit has been developed by reducing the basic chassis and the overall material weight.

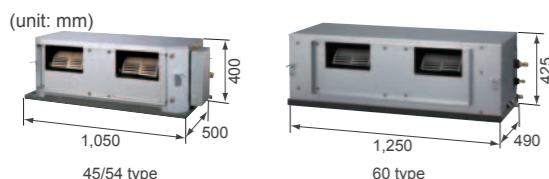

**Design also corresponding to  
high static pressure**

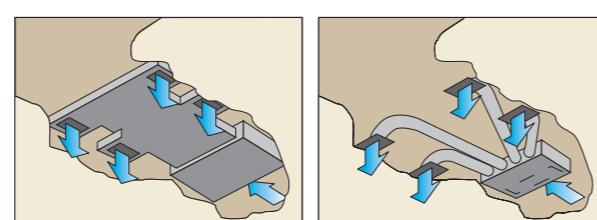


### **Low ambient operation**

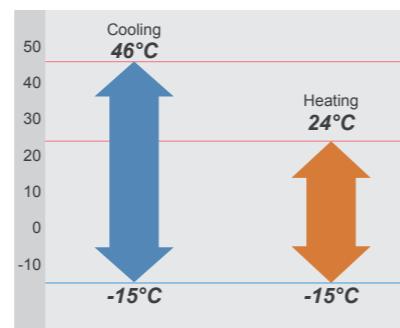

## Low noise

## Indoor unit

Cutting off the corners has enabled less turbulent airflow.  
Low noise is realized by adopting a plastic case and a plastic fan.

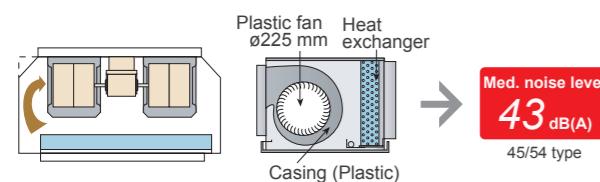

## Outdoor unit

2 stage low noise mode can be selected. (Option)



### Optional parts

Wired Remote Controller:	UTY-RNNXM, UTY-RVNXM
Simple Remote Controller:	UTY-RSNXM
Long-Life Filter:	UTD-LF60KA (For RDG45/54LHTA only)
Remote Sensor Unit:	UTY-XSZX
IR Receiver Kit:	UTY-LRHYM(For RDG60LHTA only)

## Specifications


Model No.	Indoor unit		RDG45LHTA	RDG54LHTA	RDG45LHTA	RDG54LHTA	RDG60LHTA
	Outdoor unit		ROG45LETL	ROG54LETL	ROG45LATT	ROG54LATT	ROG60LATT
Power Source	V/Ø/Hz		230/1/50	230/1/50	400/3/50	400/3/50	400/3/50
Capacity	Cooling	kW	12.5 (4.5-14.0)	13.4 (5.0-14.5)	12.5 (5.0-14.0)	14.0 (5.4-16.0)	15.0 (6.2-17.5)
	Heating		14.0 (5.0-16.2)	16.0 (5.5-18.0)	14.0 (5.4-16.2)	16.0 (5.8-18.0)	18.0 (6.2-20.0)
Input Power	Cooling/Heating	kW	4.30/3.80	4.77/4.69	4.06/3.67	4.65/4.37	4.70/5.15
EER	Cooling	W/W	2.91	2.81	3.08	3.01	3.19
COP	Heating		3.68	3.41	3.81	3.66	3.50
Running Current	Cooling/Heating	A	18.9/16.7	20.9/20.5	6.1/5.5	6.9/6.5	6.9 /7.6
Moisture Removal		l/h	1.5	2.0	1.5	2.5	2.0
Sound Pressure (Cooling)	Indoor	H/M/L	47/43/40	47/43/40	47/43/40	47/43/40	45/40/36
	Outdoor	High	55	55	54	55	56
Airflow Rate (High)	Indoor / Outdoor	m³/h	3350/6750	3350/6750	3350/6750	3350/6900	3550/6900
Static pressure range (Standard)		Pa	100 to 250 (100)	60 to 260 (60)			
Net Dimension H x W x D	Indoor		mm	400x1050x500	400x1050x500	400x1050x500	425x1250x490
			kg(lbs)	46 (101)	46 (101)	46 (101)	54 (119)
	Outdoor		mm	1290x900x330	1290x900x330	1290x900x330	1290x900x330
			kg(lbs)	86 (189)	86 (189)	104 (229)	104 (229)
Piping Connections (Small / Large)		mm	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88
Drain Hose Diameter (I.D./O.D.)		mm	23.4/25.4	23.4/25.4	23.4/25.4	23.4/25.4	23.4/25.4
Max Pipe Length (Pre-Charge)		m	50 (20)	50 (20)	75 (30)	75 (30)	75 (30)
Height Difference			30	30	30	30	30
Operation Range	Cooling	°CDB	-15 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46
	Heating		-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24
Refrigerant			R410A	R410A	R410A	R410A	R410A

**Dimensions** Models : RDG45LHTA / RDG54LHTA / RDG60LHTA

---

**Model:** RDG45LHTA / RDG54LHTA

Model: RDG60LHTA

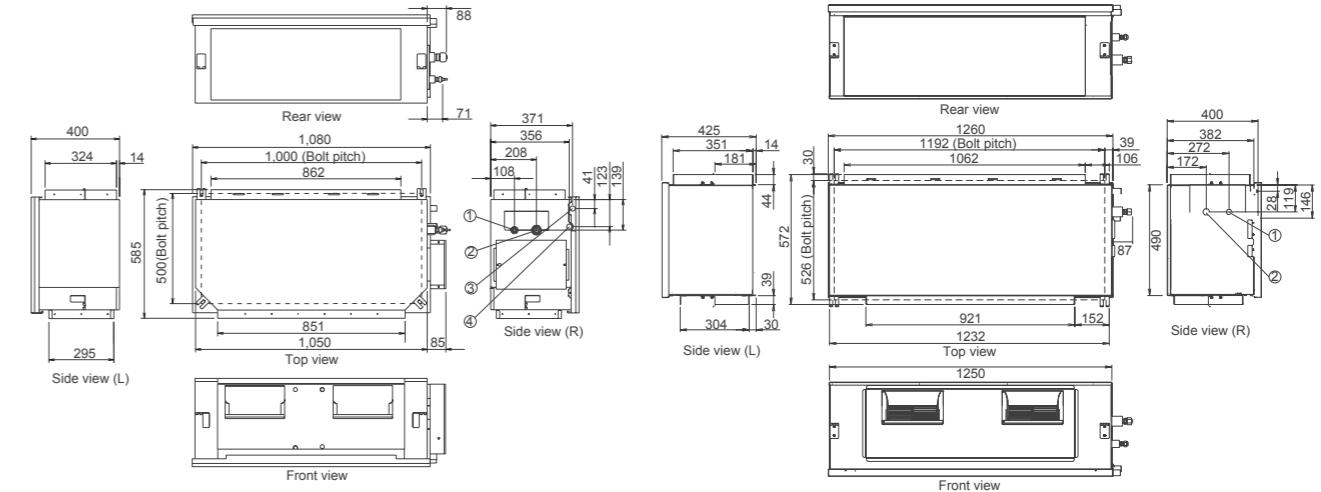

① Refrigerant piping flare connection (Liquid)      ③ Drain piping connection (Safety drain pan)  
 ② Refrigerant piping flare connection (Gas)      ④ Drain piping connection (Main drain pan)

## High Static Pressure Duct

**Model :** RDC72LHTA [3phase], RDC90LHTA [3phase]




ALL  
DC

## Features


### High energy efficiency

Significantly greater efficiency is realized by using DC twin rotary compressor, all DC inverter technology, and large heat exchanger.

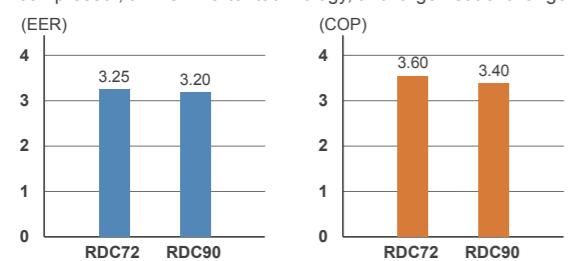


## 5 Static Pressure selection

Improvement and design flexibility has allowed multiple fan speeds and static pressure modes. Low noise is realized by adopting plastic case, plastic fan.

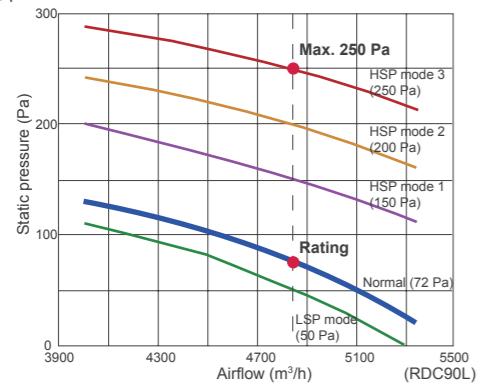

## Pursuance of amenity performance

Various remote controllers and sensors can be selected

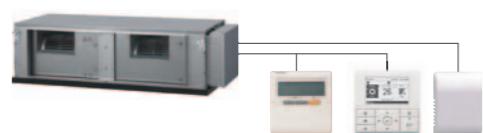

## Outdoor unit quiet operation


A low outdoor noise operation mode allows the outdoor unit to have two quiet mode operation settings.

## Peak cut operation

A peak power consumption mode controls a 4 step outdoor operation control to cut down energy usage at peak energy usage times.

### **Easy Service & Maintenance**

- Split front panel allows for maintenance from top or bottom of the outdoor unit
  - Fan motors of the indoor unit can be removed separately

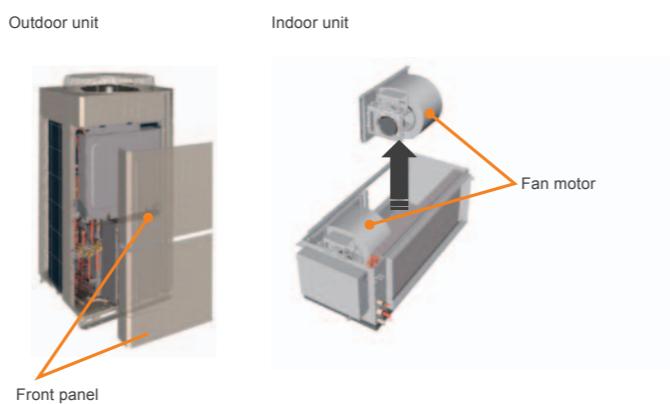

## Optional parts

Wired Remote Controller: UTY-RNNXM, UTY-RVNXM  
Simple Remote Controller: UTY-RSNXM  
Remote Sensor Unit: UTY-XSZX


The image shows a large, modern lecture hall or auditorium. The seating consists of numerous blue upholstered chairs arranged in rows, facing a central stage area. The stage features a large white projection screen. The ceiling is high and has a complex, illuminated grid structure with several black spotlights. The walls are light-colored and have a textured, grid-like pattern. The floor is a bright green carpet. The overall atmosphere is clean and professional.

## Specifications


Model No.	Indoor unit		RDC72LHTA	RDC90LHTA
	Outdoor unit		ROA72LALT	ROA90LALT
Power Source	V/ Ø/Hz		400/3/50	400/3/50
Capacity	Cooling	kW	20.3 (10.8-23.5)	25.0 (11.2-28.0)
	Heating		22.6 (12.0-26.5)	28.0 (12.5-31.5)
Input Power	Cooling/Heating	kW	6.25/6.27	7.82/8.24
EER	Cooling	W/W	3.25	3.20
COP	Heating		3.60	3.40
Running Current	Cooling/Heating	A	9.6/9.6	11.9/12.5
Moisture Removal		l/h	4.5	6.0
Sound Pressure (Cooling)	Indoor	H/M/L/Q dB(A)	47/44/41	49/46/43
	Outdoor		57	58
Airflow Rate (High)	Indoor / Outdoor	m³/h	4300/9300	4850/10700
Static pressure range (Standard)		Pa	50 to 250 (72)	50 to 250 (72)
Net Dimension H x W x D	Indoor		mm	450x1587x700
			kg(lbs)	100 (220)
	Outdoor		mm	1690x930x765
			kg(lbs)	215 (473)
Piping Connections (Small / Large)		mm	12.70/25.40	12.70/25.40
Max Pipe Length (Pre-Charge)		m	75 (20)	75 (20)
Height Difference			30	30
Operation Range	Cooling	°CDB	-5 to 46	-5 to 46
	Heating		-15 to 24	-15 to 24
Refrigerant			R410A	R410A

**Dimensions** Models : RDC72LHTA / RDC90LHTA

Model: RDC72LHTA

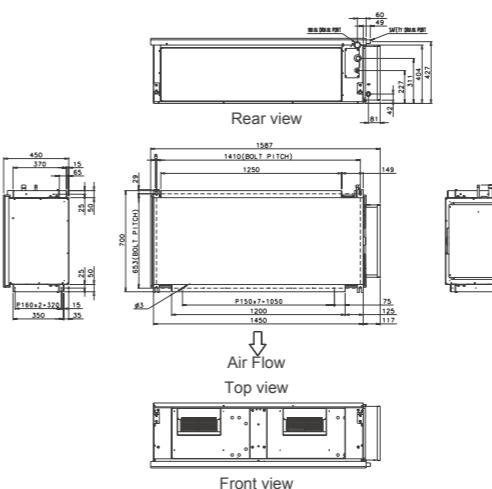

Model: RDC90LHTA

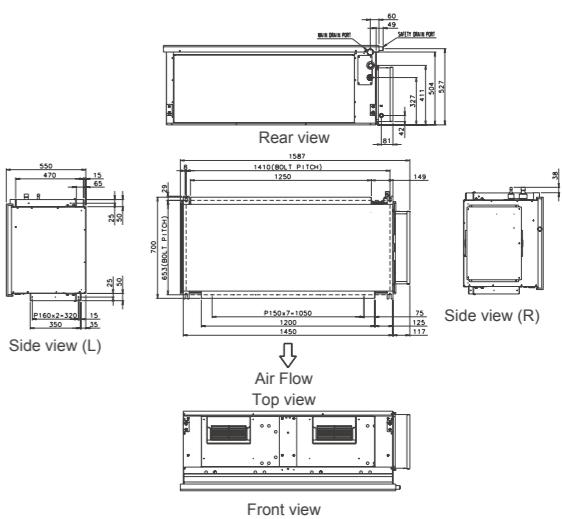




Control several indoor units  
with one outdoor unit.  
Build the optimum system you desire.

If you want to keep a large floor as well as many rooms comfortable,  
we recommend you use Multi Split to build a simple system using one  
outdoor unit.

Choose from a large lineup of indoor units that best matches your rooms.  
You can mix and match them at will.  
Build the system that is just right for you.

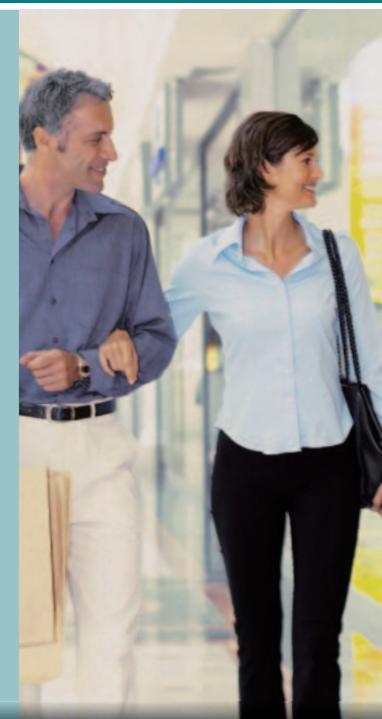


Multi Split provides comfort in a variety of situations  
from **home** to **office** and **store**.

- 048** Multi type Line-up
- 050** 2 & 3-4 Rooms Multi
- 052** 8 Rooms Multi
- 056** Specifications of All Indoor Units
- 058** Multi Combination Table
- 068** Simultaneous Multi
- 070** Optional Parts for Split & Multi Split

## MULTI SPLIT

# Multi type Line-up

## Multi Split Line-up

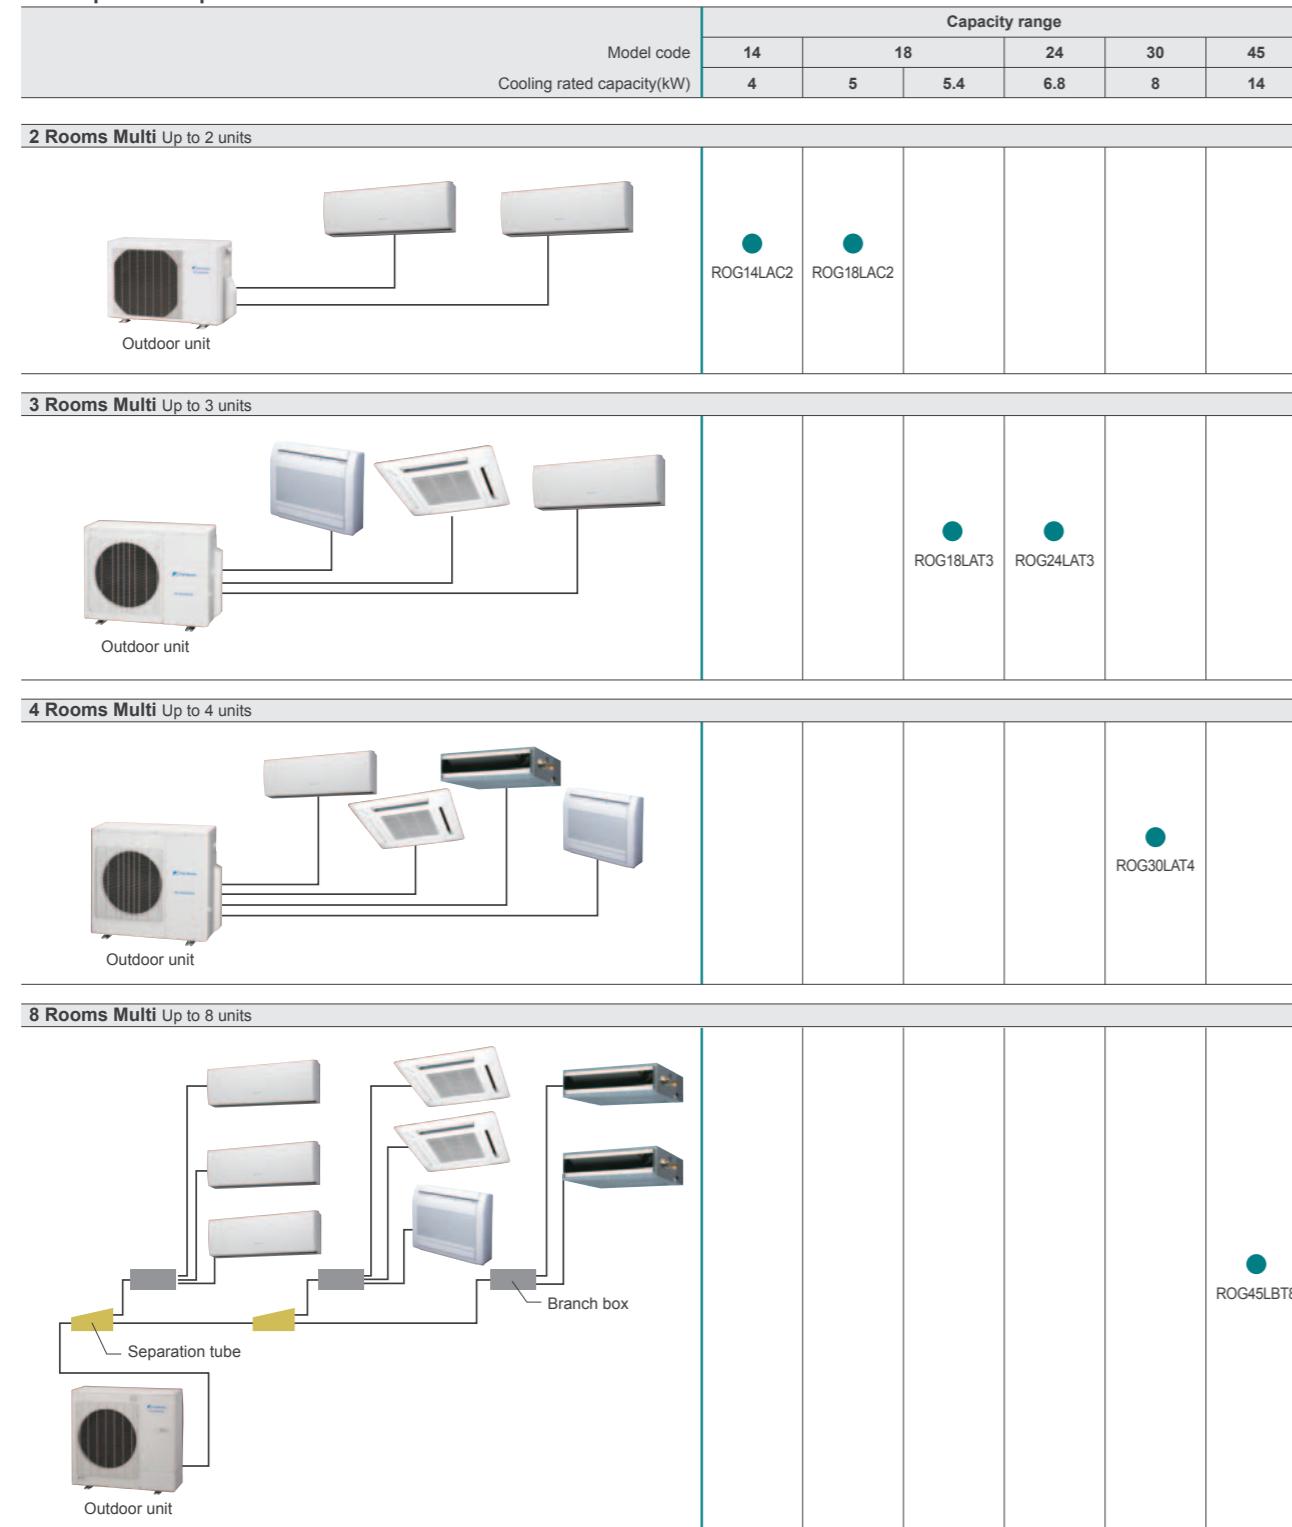

Note : 1. 2 Rooms Multi : Connectable indoor units are 2 units.

ROG14LAC2 : Total capacity of indoor units connected must be between 4.0kW and 6.2kW.

ROG18LAC2 : Total capacity of indoor units connected must be between 4.0kW and 7.0kW.

2. 3 Rooms Multi : Connectable indoor units are 2 to 3 units.

ROG18LAT3 : Total capacity of indoor units connected must be between 4.0kW and 8.5kW.

ROG24LAT3 : Total capacity of indoor units connected must be between 4.0kW and 10.5kW.



3. 4 Rooms Multi : Connectable indoor units are 3 to 4 units.

ROG30LAT4 : Total capacity of indoor units connected must be between 7.9kW and 14.4kW.



4. 8 Rooms Multi : Connectable indoor units are 2 to 8 units.

ROG45LBT8 : Total capacity of indoor units connected must be between 11.2kW and 18.2kW.

## Connectable Indoor unit line-up

Outdoor Unit	Type	2 Rooms		3 Rooms		4 Rooms		8 Rooms	
	Model name	ROG14LAC2	ROG18LAC2	ROG18LAT3	ROG24LAT3	ROG30LAT4	ROG45LBT8	(Branch Box)	
		Capacity (kW)	Cooling	4.0	5.0	5.4	6.8	8.0	14.0
	Heating	4.4	5.6	6.8	8.0	9.6	16.0		
Indoor Unit	BTU	kW Class							
	7000	2.0	●	●	●	●	●	●	●
	9000	2.5	●	●	●	●	●	●	●
	12000	3.5	●	●	●	●	●	●	●
	14000	4.0	—	●	●	●	●	●	●
	18000	5.0	—	—	—	●	●	●	●
	24000	7.0	—	—	—	—	●	●	●
	9000	2.5	—	●	●	●	●	●	●
	12000	3.5	—	●	●	●	●	●	●
	14000	4.0	—	—	●	●	●	●	●
	7000	2.0	—	●	●	●	●	●	●
	9000	2.5	—	●	●	●	●	●	●
	12000	3.5	—	●	●	●	●	●	●
	14000	4.0	—	—	●	●	●	●	●
	18000	5.0	—	—	—	●	●	●	●

## Indoor unit features

 Up/Down	 Double	 Adjust	 Restart	 Auto Changeover	 10°C	 Fresh	 Economy	 POWERFUL	 Sleep	 Program	 Weekly	 W+S	 Filter	Ion	AF	Wash
	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●

○ : Optional function

# 2 & 3-4 Rooms Multi

**2 Rooms : ROG14LAC2 / ROG18LAC2**

**3 Rooms : ROG18LAT3 / ROG24LAT3**

**4 Rooms : ROG30LAT4**

**ALL  
DC**





## Features

### Space-saving installation


Multiple indoor units can be connected to 1 outdoor unit, and long piping connection is also possible. Compared with single type, the outdoor unit can be installed in various places to realize the space-saving installation.

**Example:**  
**Single type installation**

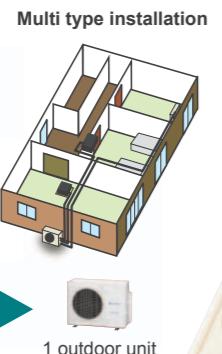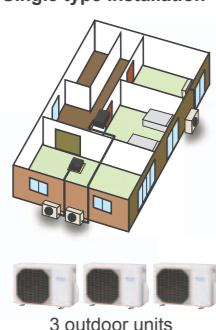

### Wide range of indoor units with various models


7 types 25 models are lined up in the capacity range from 2 kW to 7 kW class. Wide range of needs can be met from rooms of private homes to large shops and hotels.

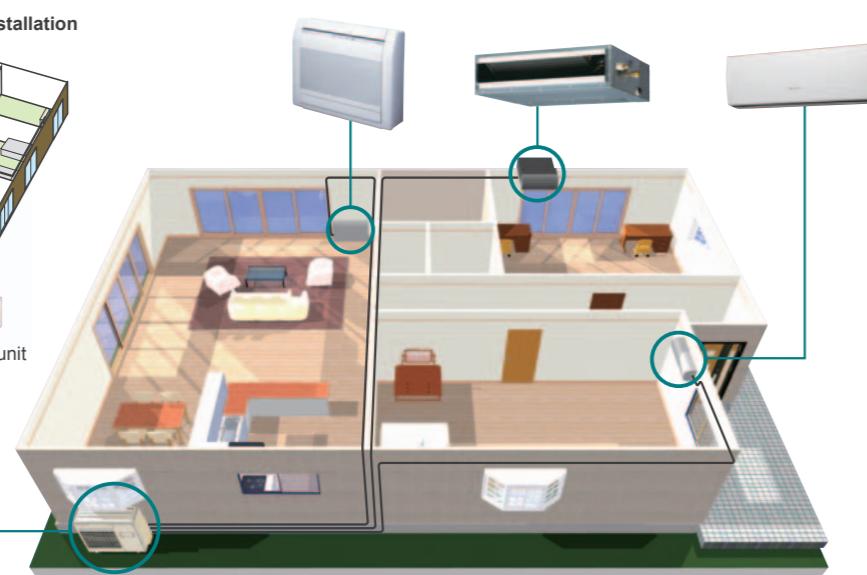

### Flexible installation

Up to max. piping length of 70 m (ROG30LAT4), max. height difference of 15 m can be supported. Multi type can be installed at large-size residence or buildings with multiple floors.

**Max. Piping Length (Each Unit):**  
20m (ROG14LAC2 / 18LAC2),  
25m (ROG18LAT3 / 24LAT3 / 30LAT4)



**Max. Height:**  
15m (ROG14LAC2 / 18LAC2 / 18LAT3 / 24LAT3 / 30LAT4)



**Total Piping Length:**  
30m (ROG14LAC2 / 18LAC2),  
50m (ROG18LAT3 / 24LAT3),  
70m (ROG30LAT4)


### Specifications (2 ROOMS, 3 ROOMS, 4 ROOMS)

Model No.	Outdoor unit	ROG14LAC2	ROG18LAC2	ROG18LAT3	ROG24LAT3	ROG30LAT4
Power Source	V/Ø/Hz	230/1/50	230/1/50	230/1/50	230/1/50	230/1/50
Rated Capacity (min-max)	KW	4.0 (1.4-4.4) 4.4 (1.1-5.4)	5.0 (1.7-5.6) 5.6 (1.8-6.1)	5.4 (1.8-6.8) 6.8 (2.0-8.0)	6.8 (1.8-8.5) 8.0 (2.0-8.8)	8.0 (3.5-10.1) 9.6 (3.7-12.0)
EER						
COP						
Sound Pressure (High)	dB(A)	47 49	50 51	46 47	48 49	50 51
Sound Power (High)		61 63	63 64	65 67	68 70	68 70
Net Dimension H x W x D	mm	540x790x290	540x790x290	700x900x330	700x900x330	830x900x330
Weight	kg(lbs)	37 (82)	38 (84)	55 (121)	55 (121)	68 (150)
Connection pipe	Piping Connections	Small (Liquid) Large (Gas)	Ø6.35x2 Ø9.52x2	Ø6.35x2 Ø9.52x2, Ø12.7 *(Ø9.52, Ø12.7)	Ø6.35x3 Ø9.52x2, Ø12.7 *(Ø9.52x3)	Ø6.35x4 *(Ø6.35x3, Ø9.52) Ø9.52x2, Ø12.7x2 *(Ø9.52x3, Ø12.7) *(Ø9.52x2, Ø12.7, Ø15.88)
Max. Length	Total / Each	30 / 20	30 / 20	50 / 25	50 / 25	70 / 25
Max. Height Difference	m	15 10	15 10	15 10	15 10	15 10
Operation Range	Cooling Heating	10 to 46 -15 to 24	10 to 46 -15 to 24	-10 to 46 -15 to 24	-10 to 46 -15 to 24	0 to 46 -10 to 24
Refrigerant		R410A	R410A	R410A	R410A	R410A


\* Connect to connection valve by the adapter.

### Dimensions


Models : ROG14LAC2 / ROG18LAC2

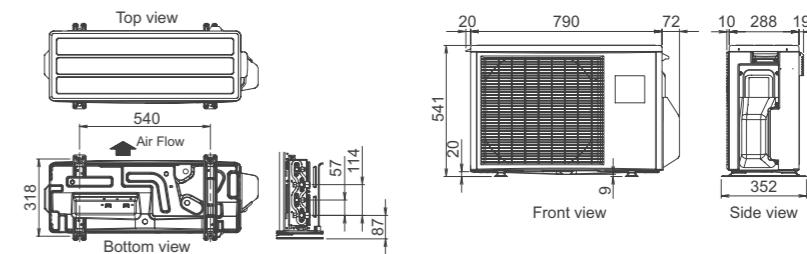

Models : ROG18LAT3 / ROG24LAT3

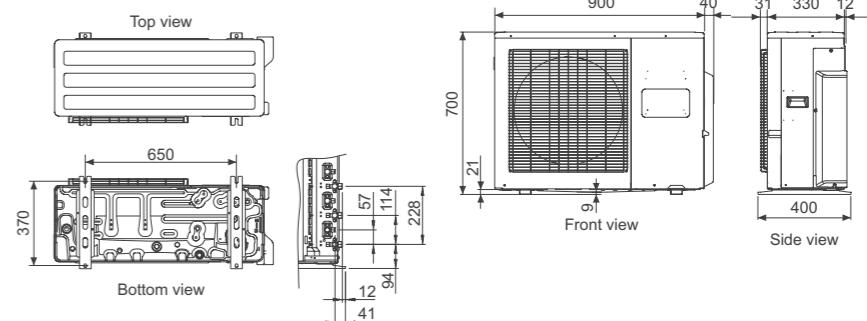

Models : ROG30LAT4

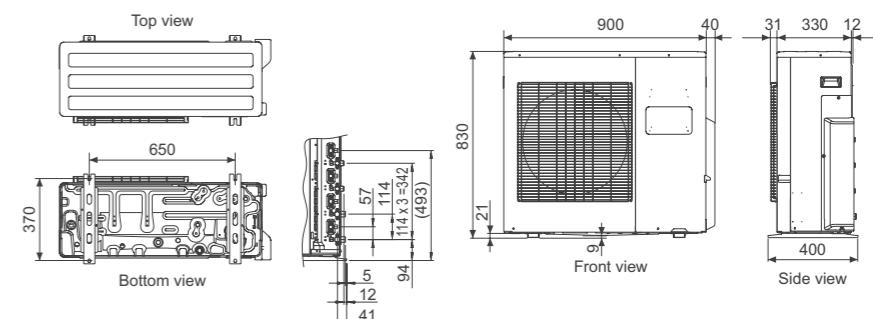

# 8 Rooms Multi

8 Rooms : ROG45LBT8

ALL  
DC

## Features

### High Efficiency & Compact


#### Compact outdoor unit




#### High seasonal efficiency

The actual performance is conducted under various outside temperatures depending on weather and seasons, furthermore, especially for multi system, not all the rooms are operated all the time. So over 90% of actual operation time, air conditioners are operated at partial capacity instead of rated capacity. Considering these, we focused on energy-saving performance which is based on actual use.

Efficiency of part load performance was drastically improved by developing ALL DC and our own inverter system.

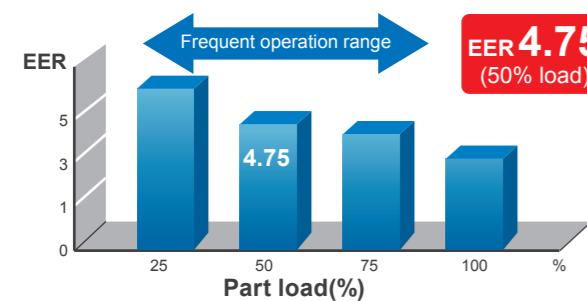


#### Innovated technology

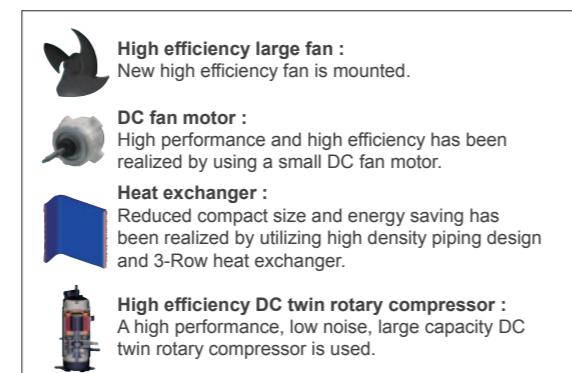

#### More Comfort

##### Quick comfort by optimized refrigerant control

Every room meets the set point most quickly and comfortably by optimized refrigerant control.

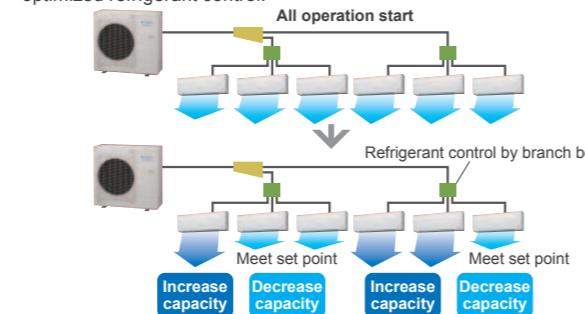

## Features

### Central Remote Controller Option

Central remote controller developed for residential applications. All indoor units can be batched controlled using simple operations. Schedule management and other functions can be used to achieve even greater energy savings.

#### Central & Individual Control

Batched control of up to 8 indoor units. The temperature, airflow volume, and remote control prohibition settings of all indoor units can be batched.

#### Easy-To-Use operation

- Large backlight LED screen
- Large easy-to-see operation panel




UTY-DMMX

#### Multiple language support


Corresponds to 9 different languages (English, German, French, Spanish, Russian, Portuguese, Italian, Greek, and Turkish)

#### System configuration

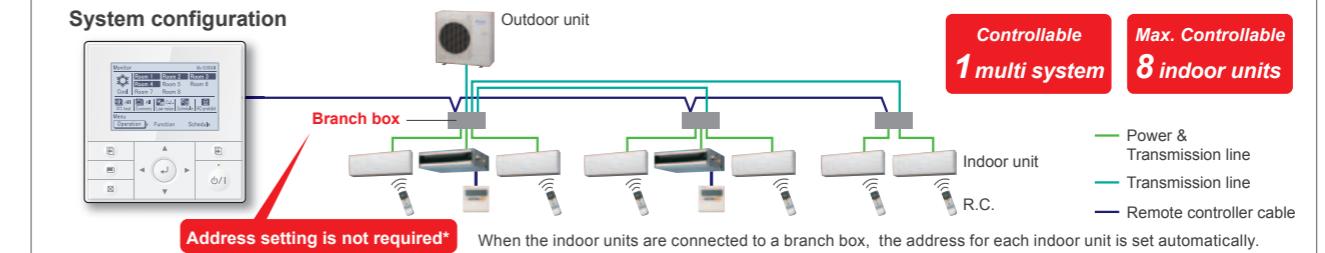


#### 10°C heat operation

When you leave, minimum heating operation is performed to maintain the room temperature (maintain at 10°C).

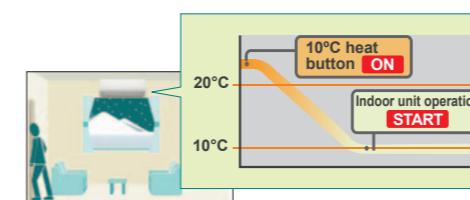


#### Weekly schedule timer

The ON/OFF setting can be set for 4 times a day. Two weekly patterns can be set to match the cooling and heating seasons.

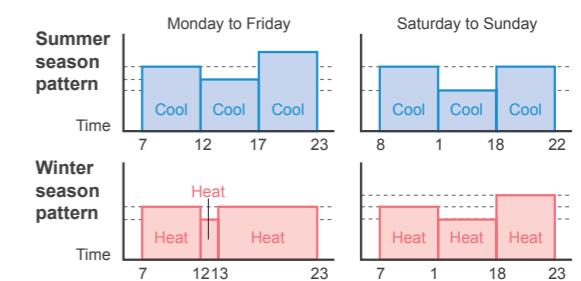

#### Economy operation

Economy operation is energy saving, as the set temperature of indoor unit is shifted by 1°C and the maximum electric value of the outdoor unit is suppressed.

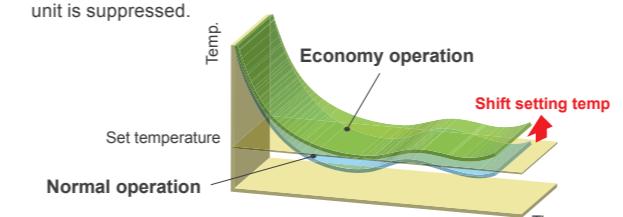


#### Prohibited Settings

The remote controller operation of all indoor units comes with a lock function to prevent unapproved operations in the various rooms. The central remote controller also has a key lock function to prevent children from playing with it, etc.

#### Low noise operation

Users can choose from 4 low noise levels, depending on the installation environment. The operation time can be set using the timer.

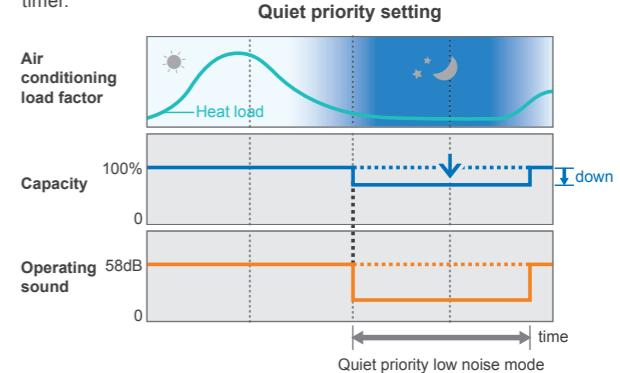


## Features

### Flexible Design & Easy Installation


#### Large capacity connection

Up to 8 indoor units can be connected to one outdoor unit. A maximum of 130% indoor unit connectable capacity. Match any room layout.

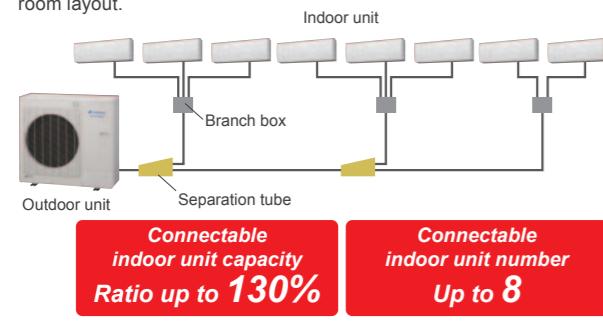


#### Long piping design

Can be installed in high rise condominiums or commercial buildings.

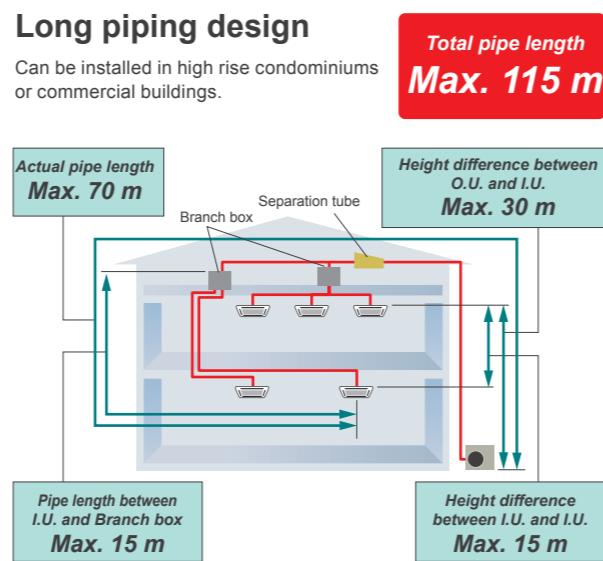


All flare piping connection and simple installation that minimizes wiring mistakes.

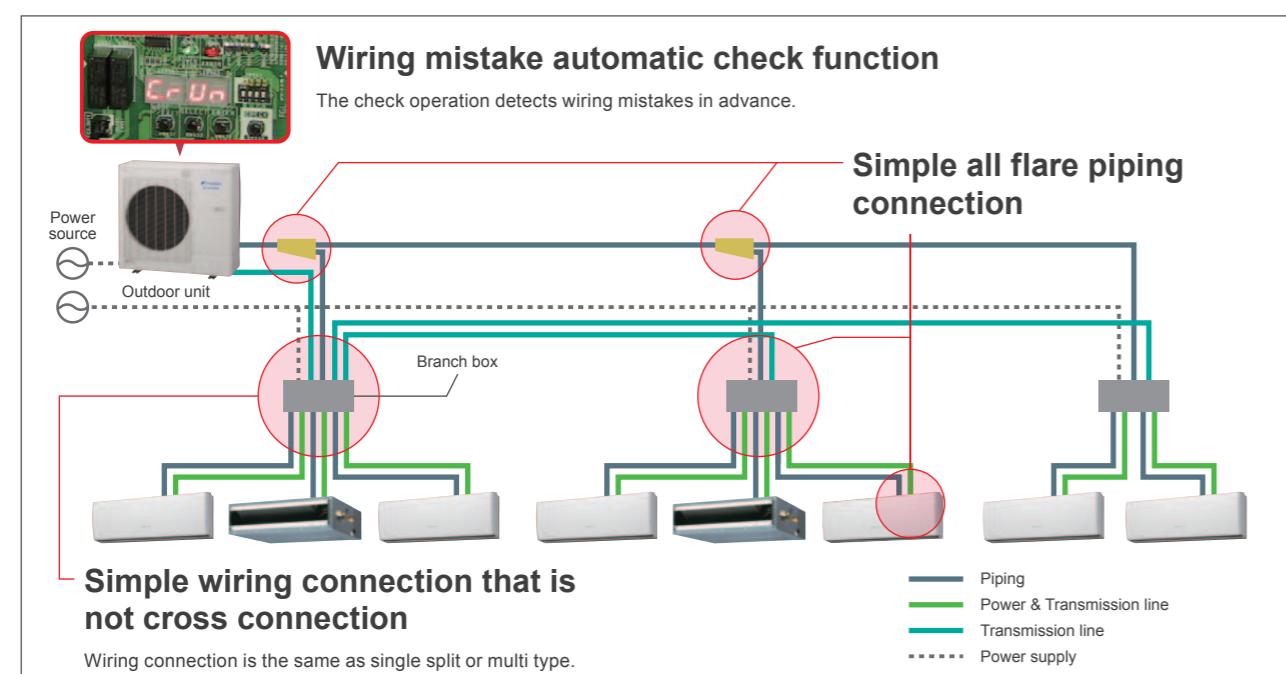


#### Branch Box can be mounted flexibly.

Allowed Branch Box Mounting Direction




Hanging from the ceiling

Do not hang from the ceiling when performing a vertical installation.



Horizontal Wall Mounting

Install the unit with its top side facing upwards.



Vertical Wall Mounting

Install the unit with the control box facing upwards.

## Specifications


		ROG45LBT8	
Model name		Maximum Connectable Indoor Unit	8
Indoor unit connectable capacity	Cooling	kW	11.2 - 18.2
Power source	V/Ø/Hz		230/1/50
Rated Capacity	Cooling	kW	14.0
	Heating		16.0
Input Power	Cooling	kW	5.20
	Heating		5.07
Air flow rate	Cooling	m³/h	4,650
	Heating		4,800
Sound pressure level	Cooling	dB(A)	56
	Heating		58
Heat exchanger fin		Plate fin coil	
Net Dimensions H x W x D	mm	914 x 970 x 370	
Weight	kg(lbs)	98 (217)	
Piping Connections (Small / Large)	mm	9.52/15.88	
Max Pipe Length	m	115 (Total)	
Max Height Difference (O.U. ~ I.U.)	m	30	
Operating range	Cooling	°CDB	-5 to 46
	Heating		-15 to 24
Refrigerant		R410A	

		UTP-PY03A	UTP-PY02A
Model name		Connectable indoor unit	1 to 3 Units
Power source	V/Ø/Hz	230/1/50	230/1/50
Available voltage range		198-264V	198-264V
Power consumption	W	10	10
Running current	A	0.05	0.05
Dimensions (HxWxD)	mm	195x433x370	195x433x370
Weight	kg	9	9
Connection pipe	Size	Main: 9.52x1, Branch:6.35x3 Main: 15.88x1, Branch:12.7x3	Main: 9.52x1, Branch:6.35x2 Main: 15.88x1, Branch:12.7x2
	Liquid Gas		
Method	Flare	Flare	Flare


Note: Specifications are based on the following conditions.  
Power source of specifications: 230V.

## Dimensions


Outdoor Unit : ROG45LBT8

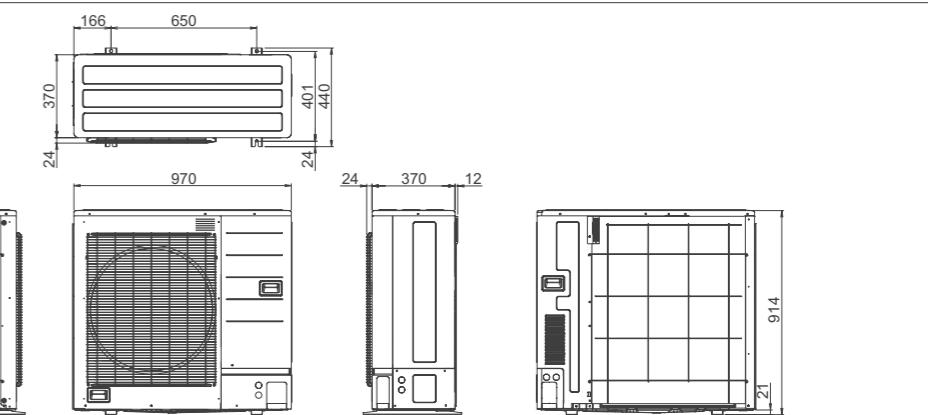

Branch Box : UTP-PY03A (3 branches type)

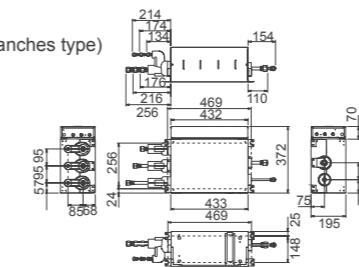

Branch Box : UTP-PY02A (2 branches type)

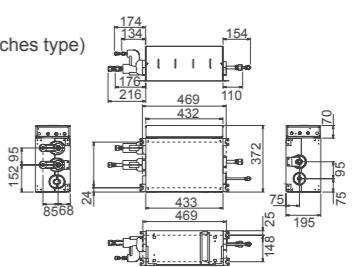

# Specifications of All Indoor Units

## Specifications

Compact wall mounted



Model No.	Indoor unit		RSG07LUCA	RSG09LUCA	RSG12LUCA	RSG14LUCA
kW Class		kW	2.0	2.5	3.5	4.0
Power Source		V/Ø/Hz	230/1/50	230/1/50	230/1/50	230/1/50
Sound Pressure Level	Cooling H/M/L/Q	dB(A)	35/30/28/21	36/32/28/21	37/34/31/21	41/36/33/25
Sound Power Level	Heating H	dB(A)	35/30/28/21	36/32/28/21	37/34/31/21	41/36/34/27
Air Flow	Cooling H/M/L/Q	m³/h	570/520/470/330	600/550/470/330	660/600/530/330	710/640/570/390
	Heating		570/520/470/330	600/550/470/330	660/600/530/330	710/640/590/430
Net Dimension		mm	282x870x185	282x870x185	282x870x185	282x870x185
Weight		kg(lbs)	9.5 (21)	9.5 (21)	9.5 (21)	9.5 (21)
Pipe Size	Liquid/Gas	mm	Ø6.35/Ø9.52	Ø6.35/Ø9.52	Ø6.35/Ø12.7	Ø6.35/Ø12.7

Floor ceiling



Model No.	Indoor unit		RYG14LVTA	RYG18LVTB
kW Class		kW	4.0	5.0
Power Source		V/Ø/Hz	230/1/50	230/1/50
Sound Pressure Level	Cooling H/M/L/Q	dB(A)	36/34/33/29 (Under ceiling) 39/37/36/32 (Floor console)	41/38/34/32 (Under ceiling) 44/41/37/35 (Floor console)
Sound Power Level	Heating H	dB(A)	36/34/33/29 (Under ceiling) 39/37/36/32 (Floor console)	41/38/34/32 (Under ceiling) 44/41/37/35 (Floor console)
Air Flow	Cooling H/M/L/Q	m³/h	51 640/590/540/480	55 780/700/560/500
	Heating		640/590/540/480	780/700/560/500
Net Dimension		mm	199x990x655	199x990x655
Weight		kg(lbs)	27 (60)	27 (60)
Pipe Size	Liquid/Gas	mm	Ø6.35/Ø12.7	Ø6.35/Ø12.7

Wall mounted



Model No.	Indoor unit		RSG07LMCA	RSG09LMCA	RSG12LMCA	RSG14LMCA	RSG18LFCA	RSG24LFCC
kW Class		kW	2.0	2.5	3.5	4.0	5.0	7.0
Power Source		V/Ø/Hz	230/1/50	230/1/50	230/1/50	230/1/50	230/1/50	230/1/50
Sound Pressure Level	Cooling H/M/L/Q	dB(A)	36/32/29/21 36/32/29/22	37/33/29/21 37/33/29/22	40/36/30/21 40/36/31/22	42/38/33/25 42/38/35/27	43/37/33/26 42/37/33/25	49/42/37/33 48/42/37/33
Sound Power Level	Heating H	dB(A)	51 51	52 52	54 55	56 57	58 58	64 64
Air Flow	Cooling H/M/L/Q	m³/h	560/500/430/310 560/500/430/330	600/520/430/310 600/520/430/330	660/560/450/310 660/560/470/330	730/600/530/360 730/615/560/375	900/740/620/550 900/740/620/550	1120/900/740/620 1100/900/740/620
	Heating		600/500/430/310 600/500/430/330	600/520/430/310 600/520/430/330	660/560/450/310 660/560/470/330	730/615/560/375 730/615/560/375	900/740/620/550 900/740/620/550	1100/900/740/620 1100/900/740/620
Net Dimension		mm	268x840x203	268x840x203	268x840x203	268x840x203	320x998x238	320x998x238
Weight		kg(lbs)	8.5 (19)	8.5 (19)	8.5 (19)	8.5 (19)	14 (30.8)	14 (30.8)
Pipe Size	Liquid/Gas	mm	Ø6.35/Ø9.52	Ø6.35/Ø9.52	Ø6.35/Ø9.52	Ø6.35/Ø12.7	Ø6.35/Ø15.88	Ø6.35/Ø15.88

Compact cassette



Model No.	Indoor unit		RCG07LVLA	RCG09LVLA	RCG12LVLB	RCG14LVLB	RCG18LVLB
kW Class		kW	2.0	2.5	3.5	4.0	5.0
Power Source		V/Ø/Hz	230/1/50	230/1/50	230/1/50	230/1/50	230/1/50
Sound Pressure Level	Cooling H/M/L/Q	dB(A)	33/31/29/27 34/32/29/27	33/31/29/27 34/32/29/27	37/33/31/28 37/33/31/28	40/35/32/29 40/37/34/29	42/37/33/29 44/40/37/30
Sound Power Level	Heating H	dB(A)	46 47	46 47	49 49	52 52	54 56
Air Flow	Cooling H/M/L/Q	m³/h	540/490/440/390 540/490/440/390	540/490/440/390 540/490/440/390	610/530/470/410 610/530/470/410	680/580/490/410 700/620/550/430	750/610/520/410 800/710/600/450
	Heating		540/490/440/390 540/490/440/390	540/490/440/390 540/490/440/390	610/530/470/410 610/530/470/410	700/620/550/430 700/620/550/430	750/610/520/410 800/710/600/450
Net Dimension		mm	245x570x570	245x570x570	245x570x570	245x570x570	245x570x570
Weight		kg(lbs)	15(33.1)	15 (33.1)	15 (33.1)	15 (33.1)	15 (33.1)
Cassette Grille					CG-UFFD		
Pipe Size	Liquid/Gas	mm	Ø6.35/Ø9.52	Ø6.35/Ø9.52	Ø6.35/Ø9.52	Ø6.35/Ø12.7	Ø6.35/Ø12.7

Floor



Model No.	Indoor unit		RGG09LVCA	RGG12LVCA	RGG14LVCA
kW Class		kW	2.5	3.5	4.0
Power Source		V/Ø/Hz	230/1/50	230/1/50	230/1/50
Sound Pressure Level	Cooling H/M/L/Q	dB(A)	39/34/28/22 39/35/30/22	42/36/30/22 42/38/32/22	44/38/31/22 44/39/33/22
Sound Power Level	Heating H	dB(A)	52 52	55 55	56 56
Air Flow	Cooling H/M/L/Q	m³/h	530/440/360/270 530/460/380/270	600/490/380/270 600/510/410/270	650/520/400/270 650/540/430/270
	Heating		530/440/360/270 530/460/380/270	600/490/380/270 600/510/410/270	650/520/400/270 650/540/430/270
Net Dimension		mm	600x740x200	600x740x200	600x740x200
Weight		kg(lbs)	14 (30.7)	14 (30.7)	14 (30.7)
Pipe Size	Liquid/Gas	mm	Ø6.35/Ø9.52	Ø6.35/Ø9.52	Ø6.35/Ø12.7

Slim duct



Model No.	Indoor unit		RDG07LLTA	RDG09LLTA	RDG12LLTB	RDG14LLTB	RDG18LLTB
kW Class		kW	2.0	2.5	3.5	4.0	5.0
Power Source		V/Ø/Hz	230/1/50	230/1/50	230/1/50	230/1/50	230/1/50
Sound Pressure Level	Cooling H/M/L/Q	dB(A)	28/26/25/24 28/26/25/24	28/27/26/25 28/26/25/24	29/28/27/26 29/28/27/24	32/30/28/26 33/30/28/25	32/31/30/29 33/32/31/29
Sound Power Level	Heating H	dB(A)	57 57	57 57	58 58	60 61	58 59
Air Flow	Cooling H/M/L/Q	m³/h	550/490/470/440 550/490/470/440	600/550/500/450			

# Multi Combination Table

## 2 Rooms Multi cooling

ROG14LAC2	Combination of Indoor Unit	COOLING OPERATION									
		Cooling Capacity			Input Power (min-max)	EER	Seasonal Data			Pdesign	SEER
		Room 1	Room 2	Total Capacity (min-max)			kW	kW	kW		
2 Room	7 7	2.00	2.00	4.00 (1.4 - 4.4)	1.09 (0.35 - 1.40)	3.67	4.0	6.7	A++		
	7 9	1.95	2.05	4.00 (1.4 - 4.4)	1.09 (0.35 - 1.40)	3.67	4.0	6.6	A++		
	7 12	1.65	2.35	4.00 (1.4 - 4.6)	1.05 (0.35 - 1.47)	3.81	4.0	6.5	A++		
	9 9	2.00	2.00	4.00 (1.4 - 4.5)	1.09 (0.35 - 1.43)	3.67	4.0	6.6	A++		
2 Room	9 12	1.70	2.30	4.00 (1.4 - 4.7)	1.05 (0.35 - 1.47)	3.81	4.0	6.5	A++		

Note: •7:7000Btu/h / 9:9000Btu/h / 12:12000Btu/h models

•The above is the value for connecting with Wall Mounted type.

•2 or more indoor units should be connected.

•Cooling capacity is based on 27°CDB/19°CWB (indoor temperature), 35°CDB (outdoor temperature).

•Pipe Length: 5 m, Height difference: 0 m (Outdoor unit to Indoor unit)

•The Total ability of connected a indoor unit is up to 21000Btu from 14000Btu.

## 2 Rooms Multi heating

ROG14LAC2	Combination of Indoor Unit	HEATING OPERATION									
		Heating Capacity			Input Power (min-max)	COP	Seasonal Data			Pdesign	SCOP
		Room 1	Room 2	Total Capacity (min-max)			kW	kW	kW		
2 Room	7 7	2.20	2.20	4.40 (1.1 - 5.4)	1.03 (0.25 - 1.78)	4.27	3.8	4.1	A+		
	7 9	2.15	2.25	4.40 (1.1 - 5.4)	1.03 (0.25 - 1.78)	4.27	3.8	4.1	A+		
	7 12	1.95	2.45	4.40 (1.1 - 5.5)	1.02 (0.25 - 1.76)	4.31	3.8	4.0	A+		
	9 9	2.20	2.20	4.40 (1.1 - 5.4)	1.03 (0.25 - 1.78)	4.27	3.8	4.0	A+		
2 Room	9 12	2.00	2.40	4.40 (1.1 - 5.5)	1.02 (0.25 - 1.76)	4.31	3.8	4.0	A+		

Note: •7:7000Btu/h / 9:9000Btu/h / 12:12000Btu/h models

•The above is the value for connecting with Wall Mounted type.

•2 or more indoor units should be connected.

•Heating capacity is based on 20°CDB (indoor temperature), 7°CDB/6°CWB (outdoor temperature).

•Pipe Length: 5 m, Height difference: 0 m (Outdoor unit to Indoor unit)

•The Total ability of connected a indoor unit is up to 21000Btu from 14000Btu.

ROG18LAC2	Combination of Indoor Unit	COOLING OPERATION									
		Cooling Capacity			Input Power (min-max)	EER	Seasonal Data			Pdesign	SEER
		Room 1	Room 2	Total Capacity (min-max)			kW	kW	kW		
2 Room	7 7	2.10	2.10	4.20 (1.7 - 5.2)	1.24 (0.35 - 1.68)	3.39	4.2	7.0	A++		
	7 9	2.10	2.50	4.60 (1.7 - 5.3)	1.26 (0.35 - 1.79)	3.65	4.6	6.8	A++		
	7 12	1.90	3.10	5.00 (1.7 - 5.6)	1.55 (0.35 - 1.95)	3.23	5.0	6.5	A++		
	7 14	1.80	3.20	5.00 (1.8 - 5.7)	1.55 (0.40 - 1.99)	3.23	5.0	6.5	A++		
2 Room	9 9	2.50	2.50	5.00 (1.7 - 5.6)	1.56 (0.35 - 1.95)	3.21	5.0	6.6	A++		
	9 12	2.10	2.90	5.00 (1.7 - 5.7)	1.55 (0.35 - 1.95)	3.23	5.0	6.5	A++		
	9 14	2.00	3.00	5.00 (1.8 - 5.8)	1.55 (0.40 - 1.99)	3.23	5.0	6.4	A++		
	12 12	2.50	2.50	5.00 (1.7 - 5.8)	1.56 (0.35 - 1.99)	3.21	5.0	6.4	A++		

Note: •7:7000Btu/h / 9:9000Btu/h / 12:12000Btu/h / 14:14000Btu/h models

•The above is the value for connecting with Wall Mounted type.

•2 or more indoor units should be connected.

•Cooling capacity is based on 27°CDB/19°CWB (indoor temperature), 35°CDB (outdoor temperature).

•Pipe Length: 5 m, Height difference: 0 m (Outdoor unit to Indoor unit)

•The Total ability of connected a indoor unit is up to 24000Btu from 14000Btu.

•Where "14" means "wall mounted type" only models. Other types of indoor units can not be connected.

## 3 Rooms Multi heating

ROG18LAT3	Combination of Indoor Unit	HEATING OPERATION									
		Heating Capacity			Input Power (min-max)	COP	Seasonal Data			Pdesign	SCOP
		Room 1	Room 2	Total Capacity (min-max)			kW	kW	kW		
2 Room	7 7	-	2.70	-	5.40 (2.0 - 6.1)	1.59 (0.52 - 1.93)	3.40	4.0	4.1	A+	
	7 9	-	2.75	-	6.00 (2.0 - 6.4)	1.87 (0.52 - 2.06)	3.21	4.0	4.1	A+	
	7 12	-	2.39	-	6.30 (2.0 - 6.5)	1.99 (0.52 - 2.06)	3.10	4.0	4.1	A+	
	7 14	-	2.31	-	6.80 (2.0 - 6.5)	1.92 (0.50 - 2.06)	3.54	4.0	4.1	A+	
2 Room	9 9	-	3.15	-	5.30 (2.0 - 6.5)	1.98 (0.50 - 2.03)	3.18	4.0	4.1	A+	
	9 12	-	2.89	-	6.40 (2.0 - 6.6)	1.99 (0.52 - 2.06)	3.22	4.0	4.1	A+	
	9 14	-	2.77	-	6.80 (2.0 - 7.2)	1.91 (0.50 - 2.06)	3.56	4.0	4.1	A+	
	12 12	-	3.20	-	6.40 (2.0 - 6.6)	1.98 (0.52 - 2.06)	3.23	4.0	4.1	A+	
3 Room	12 14	-	3.09	-	6.80 (2.0 - 7.3)	1.90 (0.50 - 2.06)	3.58	4.0	4.1	A+	
	7 7 7	2.27	2.27	-	6.80 (2.0 - 7.7)	1.62 (0.50 - 2.06)	4.20	5.0	4.3	A+	
	7 7 9	2.14	2.14	5.60 (2.0 - 7.8)	1.62 (0.50 - 2.06)</td						

# Multi Combination Table

**4 Rooms Multi cooling**

ROG30LAT4	Combination of Indoor Unit	COOLING OPERATION									
		Cooling Capacity					Input Power (min-max)	EER	Seasonal Data		
		Room 1 kW	Room 2 kW	Room 3 kW	Room 4 kW	Total Capacity (min-max) kW			Pdesign kW	SEER	Energy efficiency class
3 Room	7 7 14 -	1.96	1.96	3.27	-	7.20 (1.6 - 8.9)	2.22 (0.68 - 3.43)	3.24	7.2	5.9	A+
	7 7 18 -	1.81	1.81	4.08	-	7.70 (2.8 - 10.0)	2.22 (0.98 - 3.55)	3.47	7.7	5.8	A+
	7 7 24 -	1.61	1.61	4.57	-	7.80 (2.8 - 10.1)	2.19 (0.98 - 3.53)	3.56	7.8	5.8	A+
	7 9 12 -	2.08	2.34	2.78	-	7.20 (1.6 - 8.9)	2.22 (0.68 - 3.41)	3.24	7.2	5.9	A+
	7 9 14 -	1.90	2.14	3.16	-	7.20 (2.8 - 9.1)	2.22 (0.98 - 3.56)	3.24	7.2	5.9	A+
	7 9 18 -	1.76	1.93	3.26	-	7.20 (2.8 - 9.1)	2.22 (0.98 - 3.56)	3.47	7.7	5.8	A+
	7 9 24 -	1.57	1.77	4.46	-	7.80 (2.8 - 10.1)	2.19 (0.98 - 3.53)	3.56	7.8	5.8	A+
	7 12 12 -	1.96	2.62	2.62	-	7.20 (2.8 - 9.1)	2.22 (0.68 - 3.43)	3.24	7.2	5.9	A+
	7 12 14 -	1.83	2.43	3.04	-	7.20 (2.8 - 9.2)	2.22 (0.98 - 3.56)	3.29	7.3	5.9	A+
	7 12 18 -	1.68	2.24	3.78	-	7.70 (2.8 - 9.9)	2.22 (0.98 - 3.56)	3.47	7.7	5.8	A+
	7 12 24 -	1.51	2.01	4.28	-	7.80 (2.8 - 10.1)	2.19 (0.98 - 3.56)	3.56	7.8	5.8	A+
	7 14 14 -	1.68	2.81	2.81	-	7.30 (2.8 - 9.3)	2.22 (0.98 - 3.58)	3.29	7.3	5.9	A+
	7 14 18 -	1.57	2.61	3.52	-	7.70 (3.5 - 10.0)	2.22 (1.17 - 3.58)	3.47	7.7	5.8	A+
	7 14 24 -	1.44	2.39	4.07	-	7.90 (3.5 - 10.1)	2.20 (1.17 - 3.58)	3.59	7.9	5.8	A+
	7 18 18 -	1.42	3.19	3.19	-	7.80 (3.5 - 10.1)	2.22 (1.17 - 3.58)	3.51	7.8	5.7	A+
	7 18 24 -	1.30	2.92	3.68	-	7.90 (4.7 - 10.1)	2.22 (1.27 - 3.58)	3.56	7.9	5.7	A+
	9 9 9 -	2.40	2.40	2.40	-	7.20 (2.8 - 8.9)	2.22 (0.98 - 3.42)	3.24	7.2	5.9	A+
	9 9 12 -	2.26	2.26	2.68	-	7.20 (2.8 - 9.1)	2.22 (0.98 - 3.54)	3.24	7.2	5.9	A+
	9 9 14 -	2.10	2.10	3.11	-	7.30 (2.8 - 9.2)	2.22 (0.98 - 3.57)	3.29	7.3	5.9	A+
	9 9 18 -	1.93	1.93	3.85	-	7.70 (2.8 - 9.9)	2.22 (0.98 - 3.56)	3.47	7.7	5.8	A+
	9 9 24 -	1.73	1.73	4.35	-	7.80 (2.8 - 10.1)	2.20 (1.17 - 3.54)	3.55	7.8	5.8	A+
	9 12 12 -	2.14	2.53	2.53	-	7.20 (2.8 - 9.1)	2.22 (0.98 - 3.54)	3.24	7.2	5.9	A+
	9 12 14 -	1.99	2.36	2.95	-	7.30 (2.8 - 9.2)	2.22 (0.98 - 3.57)	3.29	7.3	5.9	A+
	9 12 18 -	1.84	2.18	3.68	-	7.70 (2.8 - 9.9)	2.22 (0.98 - 3.56)	3.47	7.7	5.8	A+
	9 12 24 -	1.66	1.97	4.18	-	7.80 (2.8 - 10.1)	2.19 (0.98 - 3.56)	3.56	7.8	5.8	A+
	9 14 14 -	1.84	2.73	2.73	-	7.30 (3.5 - 9.3)	2.22 (1.17 - 3.58)	3.29	7.3	5.9	A+
	9 14 18 -	1.74	2.58	3.48	-	7.80 (3.5 - 10.0)	2.22 (1.17 - 3.58)	3.51	7.8	5.8	A+
	9 14 24 -	1.58	2.34	3.98	-	7.90 (3.5 - 10.1)	2.22 (1.27 - 3.56)	3.56	7.9	5.8	A+
	9 16 18 -	1.56	3.12	3.12	-	7.80 (4.7 - 10.1)	2.22 (1.27 - 3.58)	3.51	7.8	5.7	A+
	12 12 12 -	2.43	2.43	2.43	-	7.30 (2.8 - 9.2)	2.22 (0.98 - 3.55)	3.29	7.3	5.9	A+
	12 12 14 -	2.26	2.66	2.85	-	7.30 (2.8 - 9.3)	2.22 (0.98 - 3.58)	3.33	7.4	5.9	A+
	12 12 18 -	2.12	2.12	3.57	-	7.80 (3.5 - 10.0)	2.22 (0.98 - 3.57)	3.51	7.8	5.8	A+
	12 12 24 -	1.92	1.92	4.07	-	7.90 (3.5 - 10.1)	2.20 (1.17 - 3.54)	3.59	7.9	5.8	A+
	12 14 14 -	2.11	2.64	2.64	-	7.40 (3.5 - 9.4)	2.22 (1.17 - 3.58)	3.33	7.4	5.9	A+
	12 14 18 -	1.98	2.48	3.34	-	7.80 (3.5 - 10.1)	2.22 (1.17 - 3.58)	3.51	7.8	5.8	A+
	12 18 18 -	1.81	3.05	3.05	-	7.80 (4.7 - 10.1)	2.22 (1.27 - 3.58)	3.56	7.9	5.7	A+
	7 7 7 -	1.93	1.93	1.93	1.93	7.70 (1.6 - 9.6)	2.20 (0.68 - 3.41)	3.50	7.7	6.2	A++
	7 7 9 -	1.89	1.89	2.13	2.13	7.80 (1.6 - 9.8)	2.22 (0.68 - 3.54)	3.51	7.8	6.2	A++
	7 7 12 -	1.83	1.83	2.41	2.41	7.90 (1.6 - 9.9)	2.20 (0.68 - 3.54)	3.56	7.9	6.1	A++
	7 7 14 -	1.70	1.70	2.80	2.80	7.90 (2.8 - 9.9)	2.22 (0.98 - 3.56)	3.56	7.9	6.1	A++
	7 7 18 -	1.52	1.52	3.43	3.43	8.00 (2.8 - 10.1)	2.20 (0.98 - 3.55)	3.64	8.0	6.0	A+
	7 9 9 -	1.86	2.09	2.09	2.09	7.90 (2.8 - 9.7)	2.22 (0.98 - 3.42)	3.56	7.9	6.2	A++
	7 9 12 -	1.78	1.78	1.99	2.35	7.90 (2.8 - 9.9)	2.22 (0.98 - 3.55)	3.56	7.9	6.1	A++
	7 9 14 -	1.68	1.68	1.88	2.76	8.00 (2.8 - 10.0)	2.22 (0.98 - 3.57)	3.60	8.0	6.1	A++
	7 9 18 -	1.49	1.49	1.67	3.35	8.00 (3.5 - 10.1)	2.20 (1.17 - 3.55)	3.64	8.0	6.0	A+
	7 12 12 -	1.72	1.72	2.28	2.28	8.00 (2.8 - 10.0)	2.22 (0.98 - 3.55)	3.60	8.0	6.1	A++
	7 12 14 -	1.61	1.61	2.13	2.65	8.00 (2.8 - 10.0)	2.22 (0.98 - 3.57)	3.60	8.0	6.1	A++
	7 12 18 -	1.43	1.43	1.91	3.22	8.00 (3.5 - 10.1)	2.20 (1.17 - 3.56)	3.64	8.0	6.0	A+
	7 14 14 -	1.50	1.50	2.50	2.50	8.00 (3.5 - 10.1)	2.22 (1.17 - 3.58)	3.60	8.0	6.0	A+
	7 14 18 -	1.35	2.25	3.04	8.00 (3.5 - 10.1)	2.22 (1.17 - 3.58)	3.60	8.0	6.0	A+	
	7 9 9 -	1.81	2.03	2.03	2.03	7.90 (2.8 - 9.9)	2.22 (0.98 - 3.56)	3.56	7.9	6.2	A++
	7 9 12 -	1.76	1.96	2.32	8.00 (2.8 - 10.0)	2.22 (0.98 - 3.56)	3.60	8.0	6.1	A++	
	7 9 14 -	1.64	1.83	2.70	8.00 (3.5 - 10.1)	2.22 (1.17 - 3.58)	3.60	8.0	6.1	A++	
	7 9 18 -	1.45	1.64	3.27	8.00 (3.5 - 10.1)	2.22 (1.17 - 3.56)	3.60	8.0	6.0	A+	
	7 9 24 -	1.28	1.68	2.22	2.22	8.00 (2.8 - 10.0)	2.22 (0				

# Multi Combination Table

8 Rooms Multi cooling

ROG45LBT8	Combination of indoor unit		COOLING OPERATION										Input power		
			Cooling Capacity												
	Room 1	Room 2	Room 3	Room 4	Room 5	Room 6	Room 7	Room 8	Total	KW	KW	KW	KW		
2 Room	24	24	-	-	-	-	-	-	7.03	7.03	-	-	-	14.06	5.20
	18	24	-	-	-	-	-	-	5.27	7.03	-	-	-	12.30	4.24
	18	18	24	-	-	-	-	-	4.63	4.63	6.18	-	-	15.45	5.89
	18	18	18	-	-	-	-	-	5.01	5.01	5.01	-	-	15.03	5.90
	14	24	24	-	-	-	-	-	3.54	6.07	6.07	-	-	15.68	5.87
	14	18	24	-	-	-	-	-	3.84	4.94	6.59	-	-	15.37	5.90
	14	18	18	-	-	-	-	-	4.10	5.27	5.27	-	-	14.64	5.50
	14	14	24	-	-	-	-	-	4.10	4.10	7.03	-	-	15.23	5.79
	14	14	18	-	-	-	-	-	4.10	4.10	5.27	-	-	13.47	4.89
	14 <sup>1</sup>	14 <sup>1</sup>	14 <sup>1</sup>	-	-	-	-	-	4.10	4.10	4.10	-	-	12.30	4.24
	12	24	24	-	-	-	-	-	3.09	6.18	6.18	-	-	15.45	5.89
	12	18	24	-	-	-	-	-	3.35	5.01	6.68	-	-	15.04	5.90
	12	18	18	-	-	-	-	-	3.52	5.27	5.27	-	-	14.06	5.20
	12	14	24	-	-	-	-	-	3.52	4.10	7.03	-	-	14.65	5.50
	12	14	18	-	-	-	-	-	3.52	4.10	5.27	-	-	12.89	4.57
	12 <sup>1</sup>	14 <sup>1</sup>	14 <sup>1</sup>	-	-	-	-	-	3.52	4.10	4.10	-	-	11.72	3.91
	12	12	24	-	-	-	-	-	3.52	3.52	7.03	-	-	14.07	5.20
	12	12	18	-	-	-	-	-	3.52	3.52	5.27	-	-	12.31	4.24
	9	24	24	-	-	-	-	-	2.46	6.54	6.54	-	-	15.54	5.90
	9	18	24	-	-	-	-	-	2.64	5.27	5.27	-	-	14.94	5.65
	9	18	18	-	-	-	-	-	2.64	5.27	5.27	-	-	13.18	4.73
	9	14	24	-	-	-	-	-	2.64	4.10	7.03	-	-	13.77	5.05
	9	14	18	-	-	-	-	-	2.64	4.10	5.27	-	-	12.01	4.08
	9	12	24	-	-	-	-	-	2.64	3.52	7.03	-	-	13.19	4.73
	9	12	18	-	-	-	-	-	2.64	3.52	5.27	-	-	11.43	3.74
	9	9	24	-	-	-	-	-	2.64	2.64	7.03	-	-	12.31	4.24
	7	24	24	-	-	-	-	-	1.93	6.64	6.64	-	-	15.21	5.90
	7	18	24	-	-	-	-	-	2.05	5.27	7.03	-	-	14.35	5.35
	7	18	18	-	-	-	-	-	2.05	5.27	5.27	-	-	12.59	4.41
	7	14	24	-	-	-	-	-	2.05	4.10	7.03	-	-	13.18	4.73
	7	14	18	-	-	-	-	-	2.05	4.10	5.27	-	-	11.42	3.74
	7	12	24	-	-	-	-	-	2.05	3.52	7.03	-	-	12.60	4.41
	7	9	24	-	-	-	-	-	2.05	2.64	7.03	-	-	11.72	3.91
	14	14	14	18	-	-	-	-	3.60	3.60	4.63	-	-	15.45	5.89
	14	14	14	14	-	-	-	-	3.84	3.84	3.84	-	-	15.37	5.90
	12	14	18	18	-	-	-	-	3.04	3.54	4.55	-	-	15.68	5.87
	12	14	18	18	-	-	-	-	3.15	3.67	4.72	-	-	15.21	5.90
	12	14	14	14	-	-	-	-	3.35	3.90	3.90	-	-	15.04	5.90
	12	12	18	18	-	-	-	-	3.09	3.09	4.63	-	-	15.45	5.89
	12	12	14	24	-	-	-	-	3.04	3.04	5.67	-	-	15.69	5.87
	12	12	14	18	-	-	-	-	3.30	3.30	3.84	-	-	15.38	5.90
	12	12	14	14	-	-	-	-	3.52	3.52	4.10	-	-	15.24	5.79
	12	12	12	24	-	-	-	-	3.09	3.09	3.09	-	-	15.45	5.89
	12	12	12	18	-	-	-	-	3.35	3.35	5.01	-	-	15.05	5.90
	12	12	12	12	-	-	-	-	3.52	3.52	3.52	-	-	14.66	5.50
	12	12	12	12	-	-	-	-	3.52	3.52	3.52	-	-	14.08	5.20
	12	12	12	12	-	-	-	-	3.52	3.52	3.52	-	-	13.20	4.73
	12	12	12	12	-	-	-	-	3.52	3.52	4.10	-	-	14.66	5.50
	12	12	12	12	-	-	-	-	3.52	3.52	3.52	-	-	14.08	5.20
	9	14	18	18	-	-	-	-	2.34	3.64	4.67	-	-	15.33	5.89
	9	14	14	24	-	-	-	-	2.30	3.57	6.12	-	-	15.57	5.88
	9	14	14	18	-	-	-	-	2.49	3.87	4.97	-	-	15.21	5.90
	9	14	14	14	-	-	-	-	2.64	4.10	4.10	-	-	14.94	5.65
	9	12	18	18	-	-	-	-	2.46	4.90	4.90	-	-	15.54	5.90
	9	12	14	24	-	-	-	-	2.34	3.12	3.64	-	-	15.33	5.89
	9	12	14	18	-	-	-	-	2.53	3.37	3.93	-	-	14.87	4.89
	9	12	14	14	-	-	-	-	2.64	3.52	4.10	-	-	15.21	5.90
	9	12	12	24	-	-	-	-	2.46	3.28	3.28	-	-	14.36	5.35
	9	12	12	18	-	-	-	-	2.64	3.28	6.54	-	-	15.55	5.90
	9	12	12	14	-	-	-	-	2.64	3.52	5.27	-	-	14.95	5.65
	9	12	12	12	-	-	-	-	2.64	3.52	4.10	-	-	13.78	5.05
	9	12	12	12	-	-	-	-	2.64	3.52	3.52	-	-	15.05	5.88
	9	12	12	12	-	-	-</td								

# Multi Combination Table

8 Rooms Multi cooling

ROG45LB8	Combination of indoor unit		COOLING OPERATION										Input power					
			Cooling Capacity															
	Room 1	Room 2	Room 3	Room 4	Room 5	Room 6	Room 7	Room 8	Total	KW	KW	KW	KW					
6 Room	7	9	9	9	9	9	18	-	-	1.79	2.30	2.30	4.59	-	-	15.57	5.88	
	7	9	9	9	9	9	12	-	-	1.93	2.49	2.49	3.32	-	-	15.22	5.90	
	7	9	9	9	9	9	9	-	-	2.05	2.64	2.64	2.64	-	-	15.25	5.79	
	7	7	12	12	12	12	12	-	-	1.77	1.77	3.04	3.04	-	-	15.69	5.87	
	7	7	9	12	12	12	14	-	-	1.79	1.79	2.30	3.07	3.57	-	15.57	5.88	
	7	7	9	12	12	12	14	-	-	1.82	1.82	2.34	3.12	3.12	-	15.34	5.89	
7 Room	7	7	9	9	14	14	14	-	-	1.80	1.80	2.32	2.32	3.60	-	15.45	5.89	
	7	7	9	9	12	18	-	-	1.77	1.77	2.28	3.04	4.55	-	-	15.69	5.87	
	7	7	9	9	12	14	-	-	1.83	1.83	2.36	2.36	3.15	3.67	-	-	15.21	5.90
	7	7	9	9	12	12	-	-	1.92	1.92	2.47	2.47	3.30	3.30	-	-	15.38	5.90
	7	7	9	9	9	18	-	-	1.82	1.82	2.34	2.34	4.67	-	-	15.33	5.89	
	7	7	9	9	9	14	-	-	1.93	1.93	2.49	2.49	3.49	3.87	-	-	15.21	5.90
8 Room	7	7	9	9	9	12	-	-	1.96	1.96	2.53	2.53	3.37	-	-	14.88	5.90	
	7	7	7	12	14	14	-	-	2.05	2.64	2.64	2.64	-	-	14.66	5.50		
	7	7	7	12	12	14	-	-	1.79	1.79	3.07	3.57	-	-	15.57	5.88		
	7	7	7	12	12	14	-	-	1.82	1.82	3.12	3.64	-	-	15.33	5.89		
	7	7	7	12	12	12	-	-	1.91	1.91	3.28	3.28	-	-	15.55	5.90		
	7	7	7	9	14	18	-	-	1.77	1.77	2.28	3.54	4.55	-	-	15.68	5.87	
6 Room	7	7	7	9	14	14	-	-	1.84	1.84	2.36	3.67	3.67	-	-	15.21	5.90	
	7	7	7	9	12	18	-	-	1.80	1.80	2.32	3.09	4.63	-	-	15.45	5.89	
	7	7	7	9	12	14	-	-	1.92	1.92	2.47	3.30	3.84	-	-	15.38	5.90	
	7	7	7	9	12	12	-	-	1.95	1.95	2.51	3.35	3.35	-	-	15.05	5.90	
	7	7	7	9	18	-	-	1.91	1.91	2.46	2.46	4.90	-	-	15.54	5.90		
	7	7	7	9	14	-	-	1.96	1.96	2.53	2.53	3.93	-	-	14.87	5.90		
7 Room	7	7	9	9	12	-	-	2.05	2.05	2.64	2.64	3.52	-	-	14.95	5.65		
	7	7	7	9	9	-	-	2.05	2.05	2.64	2.64	2.64	-	-	14.07	5.20		
	7	7	7	7	14	18	-	-	1.80	1.80	1.80	3.60	4.63	-	-	15.45	5.89	
	7	7	7	7	14	14	-	-	1.92	1.92	1.92	3.84	3.84	-	-	15.37	5.90	
	7	7	7	7	12	18	-	-	1.84	1.84	1.84	3.15	4.72	-	-	15.21	5.90	
	7	7	7	7	12	14	-	-	1.95	1.95	1.95	3.35	3.90	-	-	15.04	5.90	
8 Room	7	7	7	7	12	-	-	2.05	2.05	2.64	2.64	3.52	-	-	15.24	5.79		
	7	7	7	7	9	24	-	-	1.79	1.79	2.30	6.12	-	-	15.57	5.88		
	7	7	7	7	9	18	-	-	1.93	1.93	2.49	4.97	-	-	15.21	5.90		
	7	7	7	7	9	14	-	-	2.05	2.05	2.64	4.10	-	-	14.94	5.65		
	7	7	7	7	9	12	-	-	2.05	2.05	2.64	3.52	-	-	14.36	5.35		
	7	7	7	7	9	-	-	2.05	2.05	2.64	2.64	-	-	13.48	4.89			
7 Room	7	7	7	7	7	24	-	-	1.82	1.82	1.82	6.24	-	-	15.33	5.89		
	7	7	7	7	7	18	-	-	1.96	1.96	1.96	5.05	-	-	14.87	5.90		
	7	7	7	7	7	14	-	-	2.05	2.05	2.05	2.05	4.10	-	-	14.35	5.35	
	7	7	7	7	7	12	-	-	2.05	2.05	2.05	2.05	3.52	-	-	13.77	5.05	
	7	7	7	7	7	9	-	-	2.05	2.05	2.05	2.05	2.64	-	-	12.89	4.57	
	7	7	7	7	7	7	-	-	2.05	2.05	2.05	2.05	2.05	-	-	12.30	4.24	
8 Room	7	9	9	9	9	9	-	1.78	2.30	2.30	2.30	2.30	2.30	-	-	15.57	5.88	
	7	7	9	9	9	12	-	1.77	2.28	2.28	2.28	3.04	-	-	15.69	5.87		
	7	7	9	9	9	9	-	1.82	2.34	2.34	2.34	2.34	-	-	15.34	5.89		
	7	7	9	9	9	14	-	1.77	2.28	2.28	2.28	3.54	-	-	15.69	5.87		
	7	7	7	9	9	12	-	1.80	1.80	2.32	2.32	3.23	3.09	-	-	15.45	5.89	
	7	7	7	9	9	9	-	1.91	1.91	2.46	2.46	2.46	-	-	15.55	5.90		
4 Room	7	7	7	7	9	12	-	1.79	1.79	2.30	3.07	3.07	-	-	15.57	5.88		
	7	7	7	7	7	7	-	1.77	1.77	2.28	2.28	2.28	2.28	-	-	15.69	5.87	
	7	7	7	7	7	7	-	1.77	1.77	2.28	2.28	2.28	2.28	-	-	15.69	5.87	
	7	7	7	7	7	7	-	1.77	1.77	2.28	2.28	2.28	2.28	-	-	15.69	5.87	
	7	7	7															

# Multi Combination Table

## 8 Rooms Multi heating

ROG45LTB8	Combination of indoor unit		HEATING OPERATION										Input power				
			Heating Capacity														
			Room 1	Room 2	Room 3	Room 4	Room 5	Room 6	Room 7	Room 8	Total	KW					
4 Room	7	7	14	18	-	-	-	-	2.37	2.37	4.80	5.86	-	-	-	15.40	4.75
	7	7	14	14	-	-	-	-	2.37	2.37	4.80	4.80	-	-	-	14.34	4.21
	7	7	12	24	-	-	-	-	2.36	2.36	3.94	7.87	-	-	-	16.53	5.11
	7	7	12	18	-	-	-	-	2.37	2.37	3.96	5.86	-	-	-	14.56	4.46
5 Room	7	7	12	14	-	-	-	-	2.37	2.37	3.96	4.80	-	-	-	13.50	4.00
	7	7	9	24	-	-	-	-	2.37	2.37	2.99	7.91	-	-	-	15.64	4.91
	7	7	9	18	-	-	-	-	2.37	2.37	2.99	5.86	-	-	-	13.59	4.10
	7	7	7	24	-	-	-	-	2.37	2.37	2.37	7.91	-	-	-	15.02	4.60
	7	7	7	18	-	-	-	-	2.37	2.37	2.37	5.86	-	-	-	12.97	3.90
	12	12	12	12	14	-	-	-	3.51	3.51	4.26	-	-	-	-	18.32	5.98
6 Room	12	12	12	12	12	-	-	-	3.58	3.58	3.58	3.58	-	-	-	17.90	5.98
	9	12	12	14	14	-	-	-	2.66	3.52	3.52	4.27	4.27	-	-	16.26	5.98
	9	12	12	12	14	-	-	-	2.71	3.59	3.59	4.35	-	-	-	17.84	5.98
	9	12	12	12	12	-	-	-	2.85	3.77	3.77	3.77	-	-	-	17.95	5.87
	9	9	14	14	14	-	-	-	2.67	2.67	4.28	4.28	-	-	-	18.19	5.98
	9	9	12	14	18	-	-	-	2.66	2.66	3.52	5.21	-	-	-	18.30	5.98
	9	9	12	14	14	-	-	-	2.72	2.72	3.60	4.37	4.37	-	-	17.77	5.98
	9	9	12	12	18	-	-	-	2.71	2.71	3.58	5.30	-	-	-	17.88	5.98
	9	9	12	12	14	-	-	-	2.86	2.86	3.78	3.78	4.58	-	-	17.86	5.70
	9	9	12	12	12	-	-	-	2.89	2.89	3.83	3.83	-	-	-	17.28	5.43
7 Room	9	9	9	14	18	-	-	-	2.71	2.71	4.36	5.32	-	-	-	17.82	5.98
	9	9	9	14	14	-	-	-	2.86	2.86	4.59	4.59	-	-	-	17.77	5.56
	9	9	9	12	18	-	-	-	2.85	2.85	3.78	5.59	-	-	-	17.92	5.87
	9	9	9	12	14	-	-	-	2.90	2.90	3.84	4.65	-	-	-	17.19	5.32
	9	9	9	12	12	-	-	-	2.97	2.97	3.93	3.93	-	-	-	16.78	5.16
	9	9	9	9	24	-	-	-	2.70	2.70	2.70	7.14	-	-	-	17.94	5.98
	9	9	9	9	18	-	-	-	2.89	2.89	2.89	5.67	-	-	-	17.25	5.43
	9	9	9	9	14	-	-	-	2.97	2.97	2.97	4.77	-	-	-	16.67	5.11
	9	9	9	9	12	-	-	-	2.99	2.99	2.99	3.96	-	-	-	15.92	5.07
	9	9	9	9	9	-	-	-	2.99	2.99	2.99	2.99	-	-	-	14.95	4.60
8 Room	7	12	14	14	14	-	-	-	2.10	3.51	4.25	4.25	-	-	-	18.37	5.98
	7	12	12	14	14	-	-	-	2.14	3.57	4.33	4.33	-	-	-	17.95	5.98
	7	12	12	12	18	-	-	-	2.13	3.56	3.56	5.26	-	-	-	18.06	5.98
	7	12	12	12	14	-	-	-	2.25	3.76	3.76	4.56	-	-	-	18.10	5.87
	7	12	12	12	12	-	-	-	2.28	3.81	3.81	3.81	-	-	-	17.52	5.56
	7	9	14	14	18	-	-	-	2.09	2.64	4.24	5.18	-	-	-	18.40	5.98
	7	9	14	14	14	-	-	-	2.14	2.71	4.34	4.34	-	-	-	17.88	5.98
	7	9	12	18	-	-	-	-	2.13	2.69	3.57	5.28	-	-	-	17.99	5.98
	7	9	12	14	14	-	-	-	2.26	2.85	3.77	4.57	4.57	-	-	18.01	5.70
	7	9	12	12	18	-	-	-	2.25	2.84	3.76	5.56	-	-	-	18.16	5.98
6 Room	7	9	12	12	14	-	-	-	2.28	2.88	3.81	5.64	-	-	-	17.49	5.56
	7	9	9	12	14	-	-	-	2.35	2.97	3.93	4.76	-	-	-	16.97	5.16
	7	9	9	12	12	-	-	-	2.37	2.98	3.95	3.95	-	-	-	16.24	5.08
	7	9	9	9	24	-	-	-	2.17	2.74	2.74	7.24	-	-	-	17.63	5.98
	7	9	9	9	18	-	-	-	2.35	2.96	2.96	5.81	-	-	-	17.05	5.23
	7	9	9	9	14	-	-	-	2.37	2.99	2.99	4.79	-	-	-	16.12	5.07
	7	9	9	9	12	-	-	-	2.37	2.99	2.99	3.96	-	-	-	15.30	4.75
	7	9	9	9	9	-	-	-	2.37	2.99	2.99	2.99	-	-	-	14.33	4.33
	7	7	14	14	18	-	-	-	2.12	2.12	4.30	4.30	5.25	-	-	18.10	5.98
	7	7	14	14	14	-	-	-	2.25	2.25	4.55	4.55	4.55	-	-	16.16	5.70
7 Room	7	7	12	18	18	-	-	-	2.11	2.11	3.53	5.23	-	-	-	18.21	5.98
	7	7	12	14	18	-	-	-	2.16	2.16	3.62	3.55	-	-	-	17.68	5.98
	7	7	12	14	14	-	-	-	2.28	2.28	3.80	4.61	4.61	-	-	17.58	

# Simultaneous Multi Twin / Triple

Model : ROG36LATT [3phase]  
 ROG45LATT [3phase]  
 ROG54LATT [3phase]

ALL  
DC

## Features

**Can support various installation scenes from office to commercial space by same place multi connection of up to 3 units.**

Indoor units distributed layout according to the shape and number of people and lighting conditions of the room even on wide floors and atypical floors. Ideal comfortable air flow distribution can be realized.



## Simultaneous Operation Multi type Indoor Unit Line up

	Twin			Triple
	18x2	22x2	24x2	18x3
Cassette	RCG18LV×2	RCG22LV×2	RCG24LV×2	RCG18LV×3
Duct	RDG18LL×2	RDG22LM×2	RDG24LM×2	RDG18LL×3
Ceiling	RYG18LV×2	RYG22LV×2	RYG24LV×2	RYG18LV×3
Outdoor unit	ROG36LATT	ROG45LATT	ROG54LATT	


Note: Combinations other than the above are not available.



## Features

### Simultaneous control

Max 16 indoor units are simultaneously controlled with a wired remote controller.

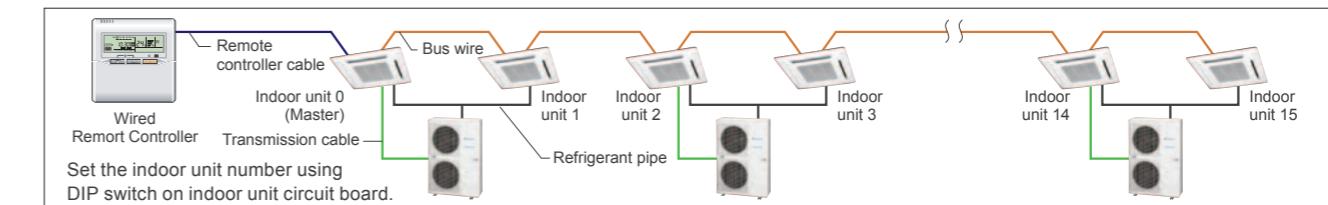


## Specifications

Model No.	Indoor unit	Compact Cassette			Floor/Ceiling Universal		
		RCG18LVLB	RCG22LVLA	RCG24LVLA	RYG18LVTB	RYG22LVTA	RYG24LVTA
Power Source	V/Ø/Hz	230/1/50	230/1/50	230/1/50	230/1/50	230/1/50	230/1/50
Air Flow (High)	Cooling H/M/L/Q m³/h	680/580/490/410	930/830/600/450	930/830/600/450	980/820/680/540	980/820/680/540	980/820/680/540
Net Dimension H x W x D	mm	245x570x570	245x570x570	245x570x570	199 x 990 x 655	199 x 990 x 655	199 x 990 x 655
Weight	kg(lbs)	15 (33)	16 (35)	16 (35)	27 (60)	27 (60)	27 (60)
Cassette Grille		CG-UFFD	CG-UFFD	CG-UFFD	UTP-SX236A (Twin)	UTP-SX254A (Twin)	UTP-SX254A (Twin) / UTP-SX354A (Triple)
Model No.	Indoor unit	Duct			Floor/Ceiling Universal		
		RDG18LLTB	RDG22LMLA	RDG24LMLA	RYG18LVTB	RYG22LVTA	RYG24LVTA
Power Source	V/Ø/Hz	230/1/50	230/1/50	230/1/50	230/1/50	230/1/50	230/1/50
Air Flow (High)	Cooling H/M/L/Q m³/h	940/880/820/750	1100/910/750/580	1100/910/750/580	780/700/560/500	980/820/680/540	980/820/680/540
Net Dimension H x W x D	mm	198 x 900 x 620	270 x 1135 x 700	199 x 990 x 655	199 x 990 x 655	199 x 990 x 655	199 x 990 x 655
Weight	kg(lbs)	23 (51)	38 (84)	38 (84)	27 (60)	27 (60)	27 (60)
Model No.	Outdoor unit	ROG36LATT		ROG45LATT		ROG54LATT	
		Cooling kW	Heating kW	Cooling kW	Heating kW	Cooling kW	Heating kW
Capacity	V/Ø/Hz	10.0	11.2	12.5	14.5	14.0	16.0
Power source		400/3/50	400/3/50	400/3/50	400/3/50	400/3/50	400/3/50
Pdesign	Cooling (@-10°C) kW	10.0	10.0	-	-	-	-
SEER	Cooling W/W	6.00	-	-	-	-	-
SCOP	Heating W/W	4.00	-	-	-	-	-
Annual Energy Consumption	Cooling kWh/a	583	-	-	-	-	-
Energy Efficiency Class	Heating kWh/a	3499	-	-	-	-	-
Sound Pressure (High)	Cooling dB(A)	51	54	55	-	-	-
Sound Power (High)	Heating dB(A)	67	-	-	-	-	-
Net Dimension H x W x D	mm	1290x900x330	1290x900x330	1290x900x330	1290x900x330	1290x900x330	1290x900x330
Weight	kg(lbs)	104 (229)	104 (229)	104 (229)	104 (229)	104 (229)	104 (229)
Piping Connections (Small / Large)	mm	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88	9.52/15.88
Max Pipe Length (Pre-Charge)	m	75(30)	75(30)	75(30)	75(30)	75(30)	75(30)
Height Difference		30	30	30	30	30	30
Operation Range	Cooling °CDB	-15 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46	-15 to 46
	Heating °CDB	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24	-15 to 24
Refrigerant		R410A	R410A	R410A	R410A	R410A	R410A
Separation tube		UTP-SX236A (Twin)	UTP-SX254A (Twin)	UTP-SX254A (Twin)	UTP-SX254A (Twin) / UTP-SX354A (Triple)	UTP-SX254A (Twin) / UTP-SX354A (Triple)	UTP-SX254A (Twin) / UTP-SX354A (Triple)

\*Different type and capacity indoor units can not be connected .

## Dimensions

Outdoor Unit : ROG36LATT / ROG45LATT / ROG54LATT

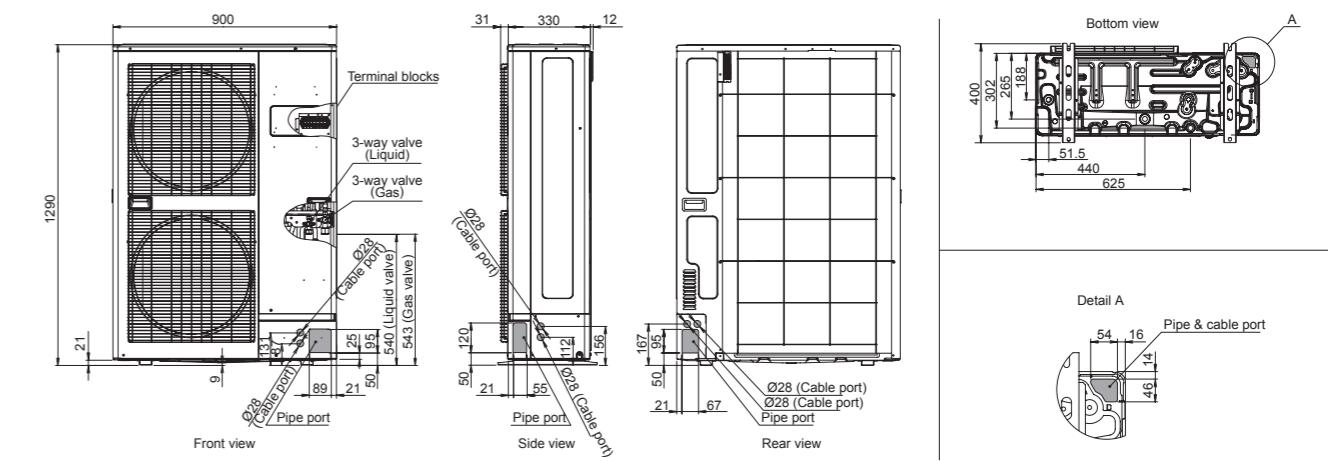

# OPTIONAL PARTS FOR SPLIT & MULTI SPLIT

## Optional Parts List

Type	Wall Mounted										Duct						Cassette			Floor	Floor/Ceiling	Ceiling				
	Compact					Large					Slim		Medium static		High static		Compact		Large							
	RSG 09/12 LTCA	RSG 07/09/ 12/14 LUCA	RSG 07/09/ 12/14 LMCA	RSG 07/09/12 LLCC	RSG 18LFCA/ 24LFCC	RSG 30LFCA	RDG 07/09 LLTA/ 12/14 LLTB	RDG 18LLTB	RDG 22/24/36/ 45MLLA/ 30/36 LMLA	RDG 45/54 LHTA	RDG60 72LHTA/ 90LHTA	RDC 07/09 LVLB/ 12/14/18 LVLB	RCG 07/09 LRLE/ 36/45/54 LRLA	RCG 22/24 LRLE/ 36/45/54 LRLA	RCG 30/36 LRTE/ 36/45/54 LRTA	RGG 09/12/14 LVCA	RYG 14LVTA/ 18LVTB	RYG 22LVTA/ 24LVTA	RYG 30/36 LRTE/ 36/45/54 LRTA							
Wired Remote Controller		UTY-RVNXM		UTY-RVNXM		UTY-RVNXM		UTY-RVNXM		UTY-RVNXM		UTY-RVNXM		UTY-RVNXM		UTY-RVNXM		UTY-RVNXM		UTY-RVNXM						
Simple Remote Controller		UTY-RNNXM		UTY-RNNXM		UTY-RNNXM		UTY-RNNXM		UTY-RNNXM		UTY-RNNXM		UTY-RNNXM		UTY-RNNXM		UTY-RNNXM		UTY-RNNXM						
Central Remote Controller		UTY-RSNXM		UTY-RSNXM		UTY-RSNXM		UTY-RSNXM		UTY-RSNXM		UTY-RSNXM		UTY-RSNXM		UTY-RSNXM		UTY-RSNXM		UTY-RSNXM						
IR Receiver Kit with Wireless Remote Controller	For Duct  For Cassette					UTY-LRHXM		UTY-LRHXM		UTY-LRHXM		UTY-LRHXM2														
Remote Sensor Unit						UTY-XSZX																				
Auto Louver Grille Kit						UTD-GXSA		UTD-GXSB																		
Long Life Filter						UTD-LF25NA		UTD-LF60KA																		
Flange						UTD-RF204/SF045T																				
Drain Pump Unit						UTZ-PX1NBA																				
Wide Panel																										
Panel Spacer	Panel spacer																									
Fresh Air Intake Kit	For Compact Cassette  For Cassette																									
Air Outlet Shutter Plate	For Compact Cassette  For Cassette																									
Insulation for High Humidity	For Compact Cassette																									
Half Concealed Kit	This kit is used to half conceal floor type indoor unit into the wall.																									
Remote controller holder						UTZ-RXL																				

## Optional parts list (Communication devices)

Type	Indoor Unit										Outdoor Unit												
	Wall Mounted					Duct					Cassette			Floor	Floor/Ceiling	Ceiling	Single-phase		3-phase				
	Compact		Large			Slim		Medium static		High static		Compact		Large									
Type	RSG 09/12 LTCA	RSG 07/09/ 12/14 LUCA	RSG 07/09/ 12/14 LMCA	RSG 07/09/12 LLCC	RSG 18LFCA/ 24LFCC	RSG 30LFCA	RDG 07/09 LLTA/ 12/14 LLTB	RDG 18LLTB	RDG 22/24/36/ 45MLLA/ 30/36 LMLA	RDG 45/54 LHTA	RDG60 72LHTA/ 90LHTA	RDG 07/09 LVLB/ 12/14/18 LVLB	RDG 45/54/60 LHTA	RDG 22/24 LVLB/ 12/14/18 LVLB	RCG 09/12/14 LVCA	RYG 14LVTA/ 18LVTB	RYG 22LVTA/ 24LVTA	RYG 30/36 LRTE/ 36/45/54 LRTA	ROG 09/12/14 LVCA	RYG 14LVTA/ 18LVTB	RYG 30/36 LRTE/ 36/45/54 LRTA		
Wireless LAN Interface																							
KNX® Interface																							
MODBUS® Interface																							
Communication Kit																							
For Compact Wall Mounted	UTY-TWBXF																						
For Indoor Unit*																							
For Indoor Unit*																							
For Outdoor Unit																							
For Outdoor Unit																							
External Control Set																							
For Indoor Unit (Duct type only) Use to connect with various peripheral devices and air conditioner PC board.	UTD-ECS5A																						

\*Duct type is excluded.

## Refrigerant Piping Parts

### Connection Units

#### Separation Tube

UTP-SX236A / UTP-SX254A

For 3-phase simultaneous multi



UTP-SX354A

For 3-phase simultaneous multi



UTP-SX248A

For 8 Rooms Multi



### Branch Box

UTP

# OPTIONAL PARTS FOR SPLIT & MULTI SPLIT

## Wired Remote Controller : UTY-RVNXM

Hi-grade individual control using various functions.

- 3.7-inch LCD backlight screen.
- Supporting various Energy Saving functions with simple operation.
- Multiple Language Support.  
(English, German, French, Spanish, Russian, Portuguese, Italian, Greek, and Turkish)



Max. controllable  
**16**  
Indoor units

## High performance and compact size

- In addition to the individual control, various energy saving controls can be realized using only one remote controller.




## Various energy saving function

### Auto OFF Timer

- The indoor unit automatically is turned off when it reaches the preset operating time frame.
- The time frame of the "Auto off timer" can be flexibly scheduled.
- Can be set off time 30 to 240 minutes


## Weekly Timer function

- Can be set up to 8 times per day (On/Off, mode, Temp)
- 2 pattern settings(i.e. Summer/Winter setting) are available.

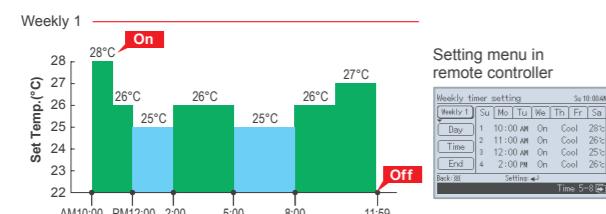


## High visibility and Easy operation

- Icon display of effectual functions.
- Main functions in large icons: "Mode", "Set Temp", and "Fan".
- Easy to operate by Control guide display.
- Simple operation with easy 4-way navigation pad.

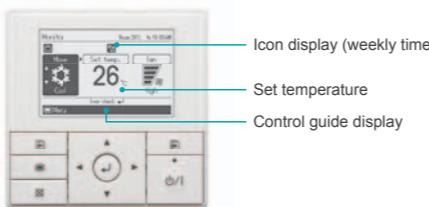


## Set Temperature Auto Return

- The setting temperature automatically returns to the previously set temperature.
- The time range in which the set temperature can be changed is 30 to 120 minutes.

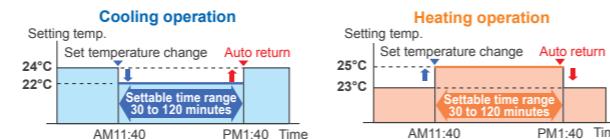

## Set Temperature Upper and Lower Limit Setting

- The set temperature range can be set for each operation mode.  
(Cooling / Heating / Auto)

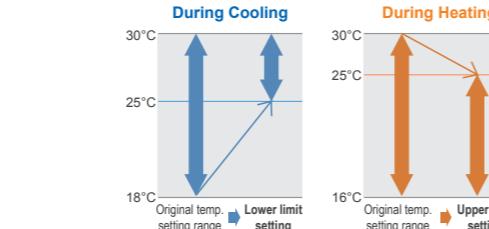

## Specifications

Model name	UTY-RVNXM
Power supply	DC 12 V
Dimension (H × W × D) (mm)	120 × 120 × 21.3
Weight (g)	220


\* DC12 V is supplied by indoor unit.

## Auto Louver Grille Kit : UTD-GXSA-W / UTD-GXSB-W


Simple flat Auto Louver will provide comfort airflow and harmonize with luxury interior.



## Dimensions

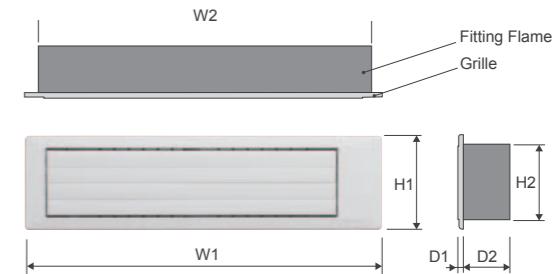

Model Name	W1	W2	H1	H2	D1	D2
UTD-GXSA-W	683	645	180	148	9	84
UTD-GXSB-W	883	845				

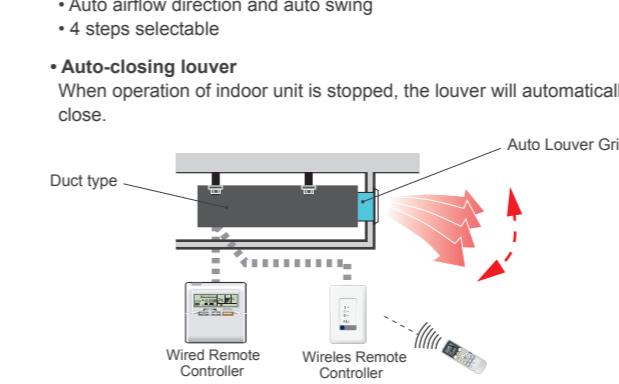

## Specifications


Model name	UTD-GXSA-W	UTD-GXSB-W
Applicable Indoor Unit	RDG07/09LLTA RDG12/14LLTB	RDG18LLTB
Power Supply	Connecting with Control box of indoor unit	
Fixing of Auto Louver Grille	Screw fixing to Flange or Square Duct	
Extension Square Duct Limit	1.0m (Max. duct length between indoor unit and Grille)	
Net Dimension (H × W × D)	mm (inch) 180x683x(84+9) [7-3/32x26-7/8x(3-5/16+11/32)]	180x883x(84+9) [7-3/32x34-3/4x(3-5/16+11/32)]
Weight	Net kg (lb.) 2.0 (4.4) 3.0 (6.7)	2.5 (5.6) 3.5 (7.8)
Color	White	
Louver Motor	Stepping Motor	
Accessories	Fitting Flame, etc.	
Operation range	Cooling °C (°F) % RH Heating °C (°F)	18 to 32 (64 to 90) 80% or less 16 to 30 (60 to 88)

## OPTIONAL PARTS FOR SPLIT & MULTI SPLIT

### NEW Wireless LAN Interface : FJ-RC-WIFI-1



- It is the most advanced solution to remotely manage an Air Conditioning system using all sort of mobile devices such as Smartphones, Tablets and PC
- No separate external power supply required
- Can be used for single indoor units and group controlled (up to 16) indoor units

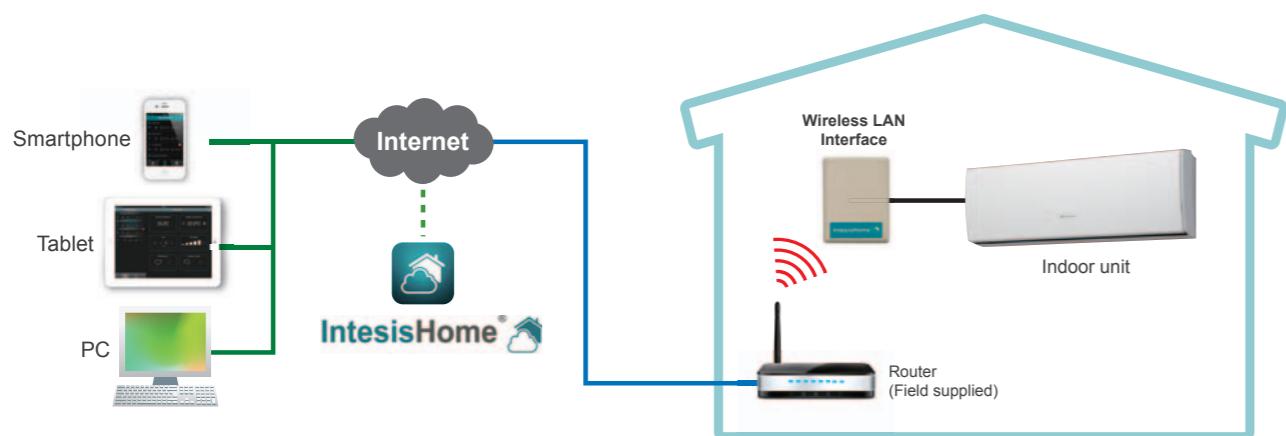

#### Basic control

- Turning the units on and off
- Mode control (Heat, Cool, Dry, Auto, Fan)
- Fan speed setting
- Louver position (Airflow direction setting)
- Room temperature display
- Set temperature control
- Multi Language
- One Scene and Timer



#### Advanced control (Optional functions)

- Climate working modes (ECO, Comfort, Powerful) (future release)
- Schedulable functionalities (ON/OFF, Modes, Set point temperature, Fan Speed, Louver position)
- Set temperature limitation (future release)
- Multiple Scenes & Timers and Calendar function

#### Notifications and history


- Alerts e-mail notification (future release)
- Air conditioning malfunction alerts
- Connectivity monitoring and alerts
- History (future release)

### NEW KNX® Interface : FJ-RC-KNX-1i



The KNX Interface allows a complete integration of air conditioners with KNX Network systems.

- Simple installation due to small and compact size.
- No separate external power supply required (just KNX bus power).
- Can be used for single indoor units and group controlled (up to 16) indoor units.

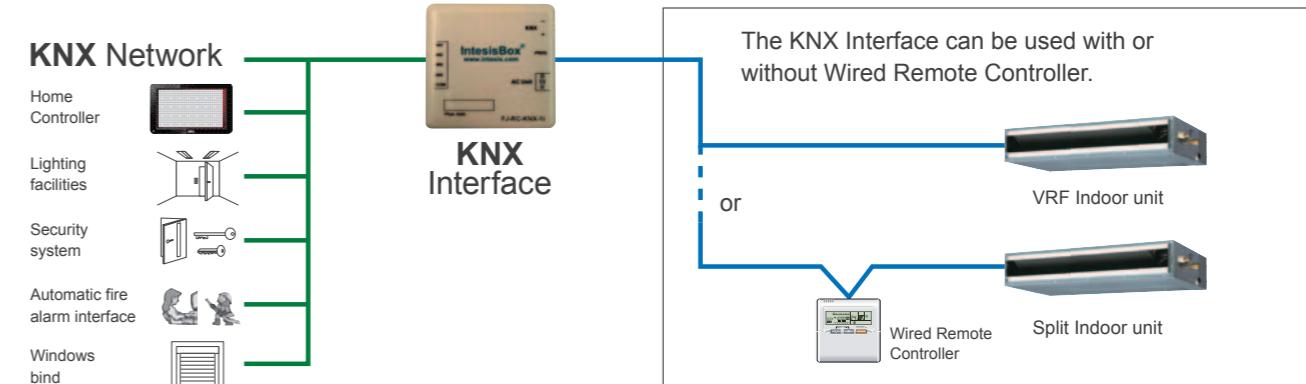


### NEW MODBUS® Interface : FJ-RC-MBS-1



The MODBUS Interface allows a complete integration of air conditioners into MODBUS Networks.

- Simple installation due to small and compact size.
- No separate external power supply required.
- The Modbus Interface permits central monitoring and control of air conditioners from BMS.

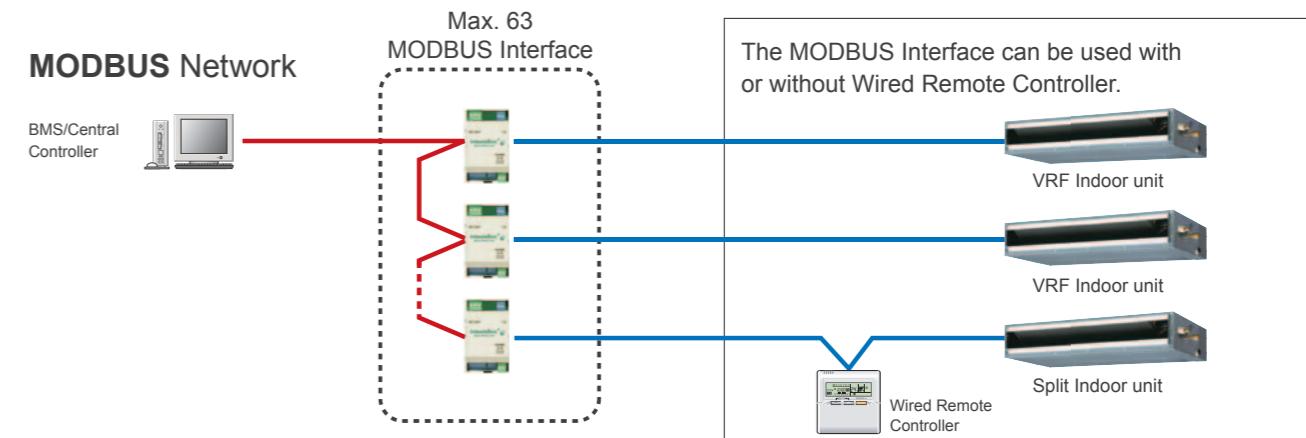

#### Specifications

Model name	FJ-RC-WIFI-1
Dimensions (H x W x D) (mm)	70x108x28
Weight (g)	80


#### Specifications

Model name	FJ-RC-MBS-1	FJ-RC-KNX-1i
Dimensions (H x W x D) (mm)	93x53x58	70x70x28
Weight (g)	85	70


# OPTIONAL PARTS FOR SPLIT & MULTI SPLIT

## Controllers


### For Individual & Centralized Control

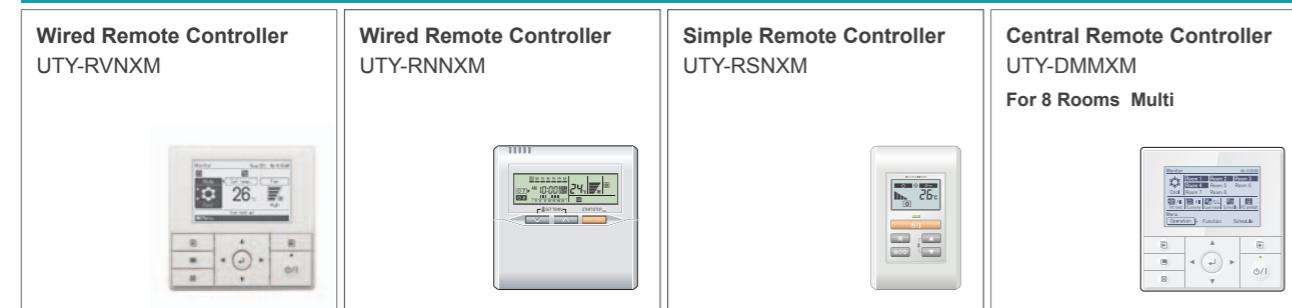

## Communication devices

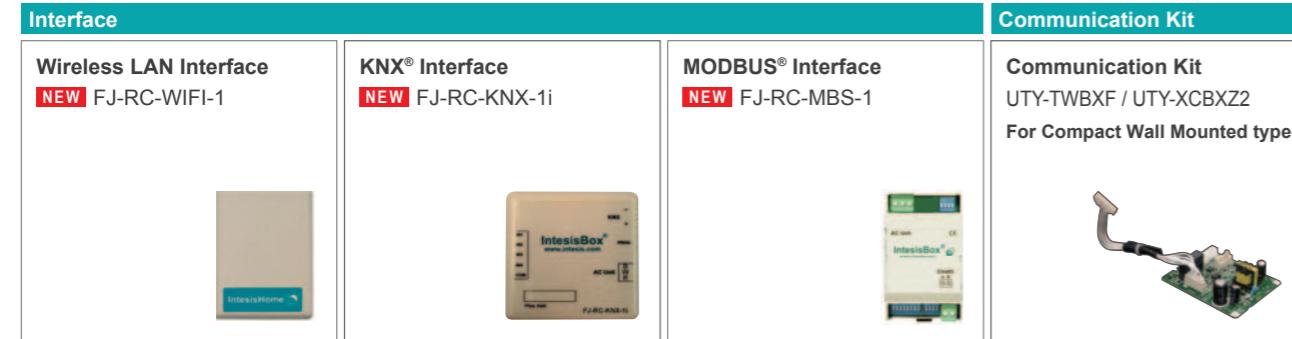

## External Connect Kit / External Control set

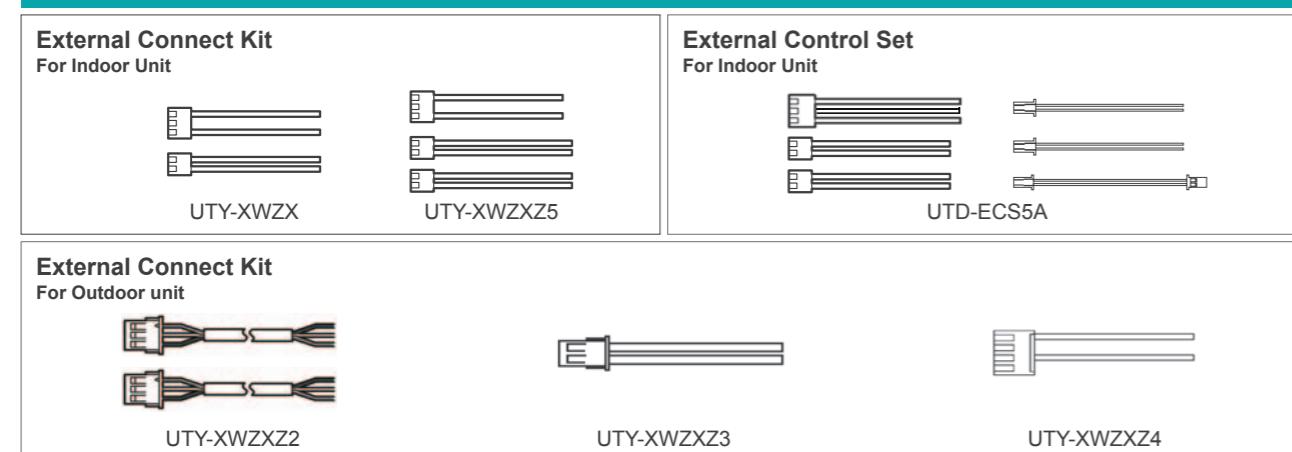

## Function list


	For Indoor unit			For Outdoor unit		
	UTY-XWZX	UTY-XWZXZ5	UTD-ECS5A	UTY-XWZXZ2	UTY-XWZXZ3	UTY-XWZXZ4
Input	Control	●	●	—	—	—
	Peak cut	—	—	●	●	—
	Low noise	—	—	●	●	—
	Priority	—	—	—	●	—
	Emergency stop	—	—	—	●	—
	Operation status	●	●	●	●	—
Output	Error status	—	●	●	●	—
	Fresh air control	—	—	—	—	—
	Auxiliary heater	—	—	●	—	—
	Preparation	—	—	—	—	—
	Base heater	—	—	—	—	●

\* 1 : Duct type does not have this function.

\* 2 : Cassette and Ceiling type does not have this function.

## Others


### For Duct type

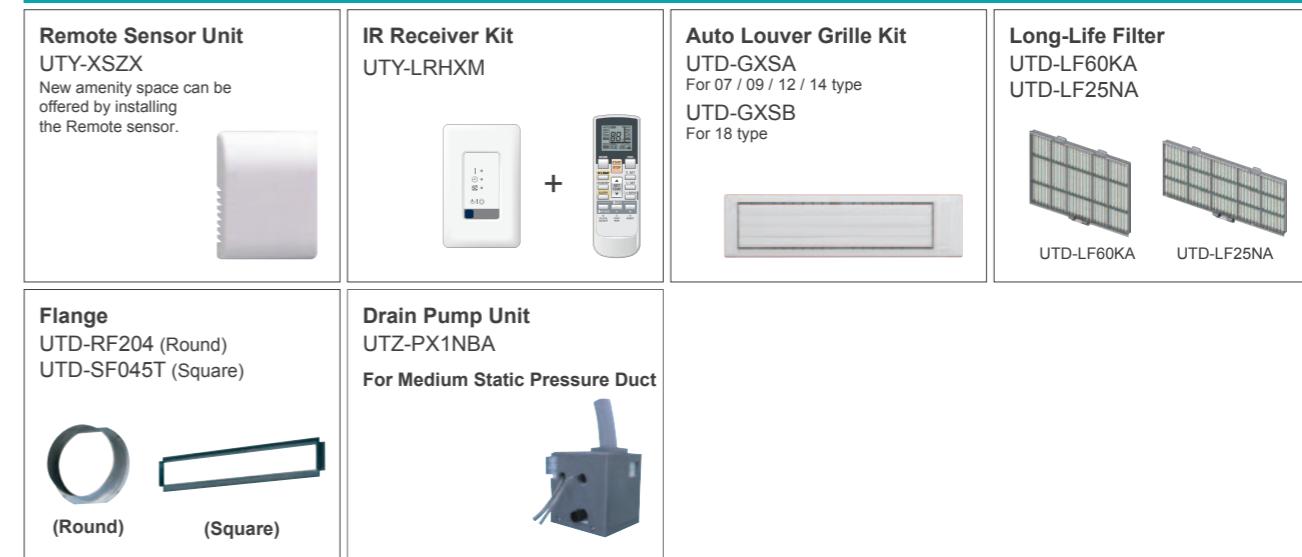


### For Cassette type



### Air Outlet Shutter Plate

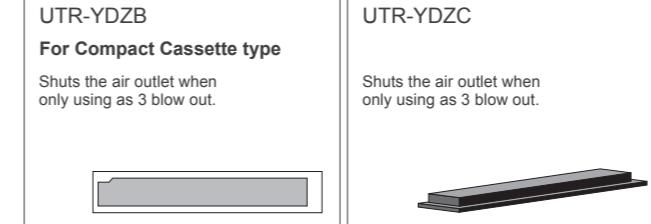

### For Floor type

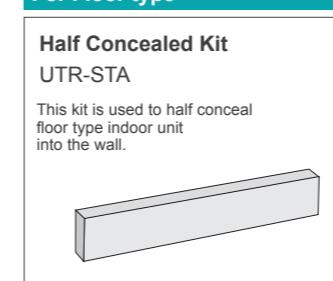


### For Wall Mounted type



### For Ceiling type



### Service & Maintenance

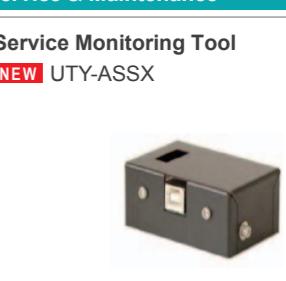

## Comfortable Function

 <b>Human sensor</b> Human sensor catches movements of people in a room.
 <b>Up / down swing flaps</b> The up / down flaps automatically swing up and down.
 <b>Double swing automatic</b> Complex swing action of flaps enables automatically to swing both horizontal and vertical directions.
 <b>Automatic air flow adjustment</b> The micro-computer automatically adjusts the air flow effectively to follow the changes of room temperature.
 <b>Auto restart</b> In the event of a temporary power failure, the air conditioner will automatically restart in the same operating mode as before, once the power supply is restored.
 <b>Auto-changeover</b> The unit automatically switches between heating and cooling modes based on your temperature setting and the room temperature.
 <b>10°C HEAT operation</b> The room temperature can be set to go no lower than 10°C, thus ensuring that the room does not get too cold when not occupied.
 <b>Connectable distributing duct</b>
 <b>Connectable fresh air duct</b>
 <b>Fresh air intake</b> Fresh air can be taken in by a fan which can be connected using external control unit.
 <b>Economy mode</b> Limits the maximum operation current, and performs operation with the power consumption suppressed.
 <b>Powerful mode</b> Operation at maximum air flow and compressor speed, and quickly makes the room comfortable.
 <b>Low Noise Mode</b> Sound noise level of outdoor unit can be selected.
 <b>V-PAM control models</b>
 <b>i-PAM control models</b>

## Convenient Function

 <b>Sleep timer</b> The micro-computer gradually changes the room temperature automatically to afford a comfortable night's sleep.
 <b>Program timer</b> This digital timer allows selection of one of four options: ON, OFF, ON → OFF or OFF → ON.
 <b>Weekly timer</b> Different ON-OFF times can be set for each day.
 <b>Weekly + setback timer</b> Weekly + Setback timer can set temperature for two times spans and for each day of the week.
 <b>Filter sign</b> Indicates the filter cleaning period by lamp.

## Feature Summary

	Wall Mounted	Compact Cassette / Cassette	Floor/Ceiling	Ceiling	Slim Duct	Medium Static Pressure Duct	High Static Pressure Duct
 <b>Human sensor</b>	●						
 <b>Up / down swing flaps</b>	●	●	●	●	●	●	○
 <b>Double swing automatic</b>			●				●
 <b>Automatic air flow adjustment</b>	●	●	●	●	●	●	●
 <b>Auto restart</b>	●	●	●	●	●	●	●
 <b>Auto-changeover</b>	●	●	●	●	●	●	●
 <b>10°C heat operation</b>	●	●	●	●	●	●	●
 <b>Connectable distributing duct</b>					●		●
 <b>Connectable fresh air duct</b>					○	●	●
 <b>Fresh air intake</b>					○	○	○
 <b>Economy mode</b>	●	●	●	●	●	●	●
 <b>Powerful mode</b>	●	●	●	●			
 <b>Low Noise mode</b>	●	●	●			(45/54) (36LRLA)	(45/54) (36LRRA)
 <b>Sleep timer</b>	●	●	●	●	●	●	●
 <b>Program timer</b>	●	●	●	●	●	●	●
 <b>Weekly timer</b>	●	●					
 <b>Weekly + setback timer</b>	○	○	○	○	○	○	○
 <b>Filter sign</b>	●	●	●	●	●	●	●
 <b>Ion deodorization filter</b>	●	●	●	●	●		
 <b>Apple-catechin filter</b>	●	●	●	●	●		
<b>Washable panel</b>		●	●	●	●		

○: Optional function