

P2P Wireless IP camera User Manual

PC client version 2.1

Brief Instruction:

Real Plug and Play(P2P) is brand new technology for ip camera market.

The ip cameras could be more easy to install and use.

With the p2p ip camera:

- 1.No need to set up port forward
- 2.No need to apply additional DDNS
- 3.No need to change router's configuration
- 4.No need to watch the live video stream remotely by IE link via internet.

What you need to do,it's just follow our brief instruction,and all installation could be accomplished around one minute.

1.Install the pc client for local lan and remote watch by internet.

A:Please download the pc client from our official software website:


www.netcam360.com

B:Please double click the software icon.




During the download and installation period,maybe your computer anti virus protection system will remind you this software is not safe,please ignore it.

C:Follow the software instruction and choose the language you need.

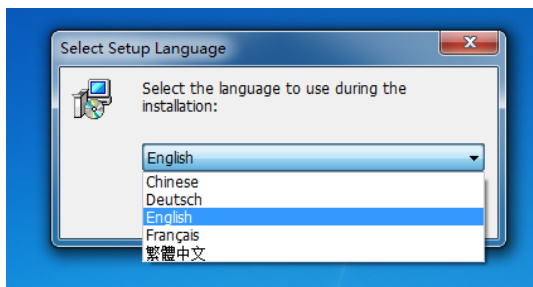


D: Accomplish the software installation, and you will get the icon on your computer.

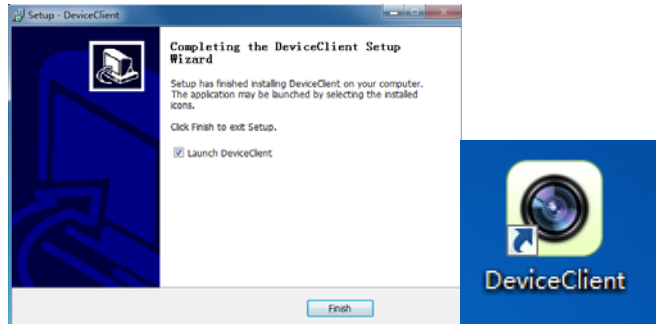

2. Add camera:


A: General PC client user interface

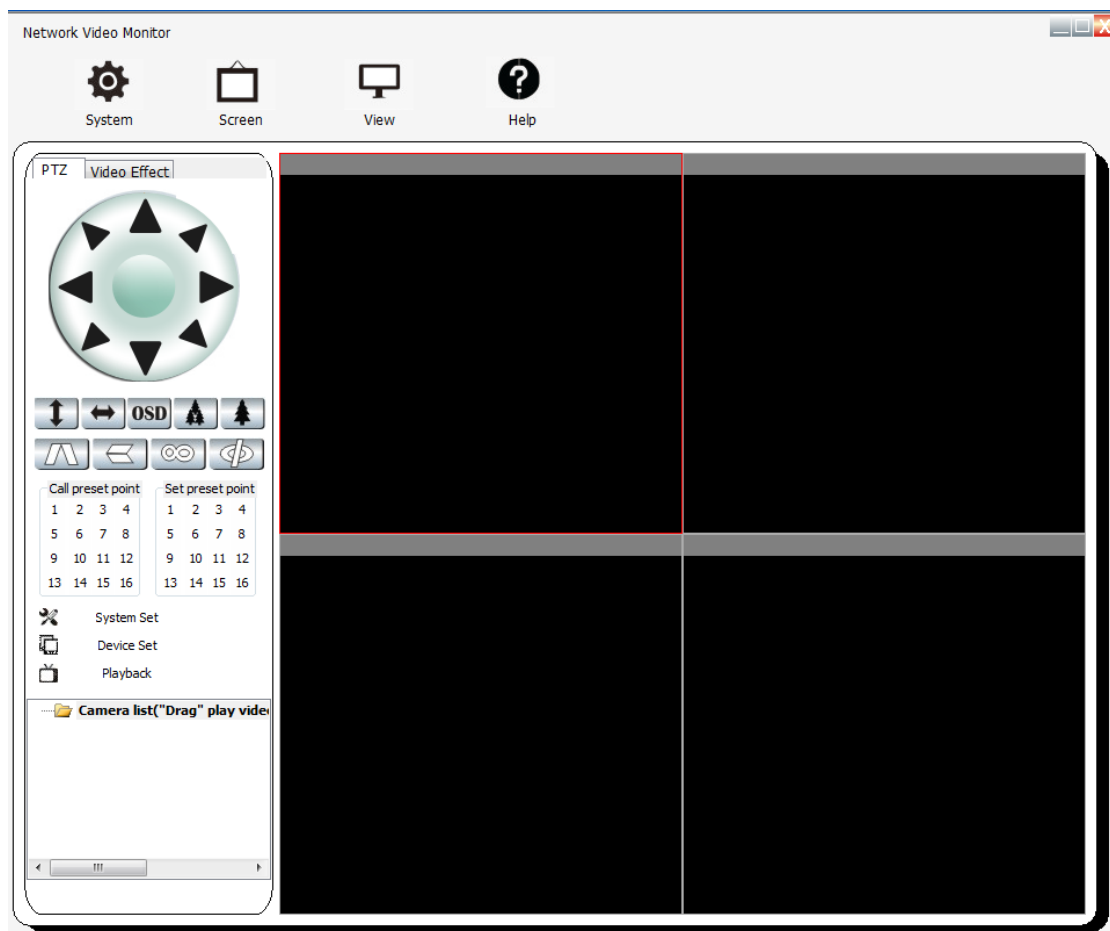


B: Add camera under Lan network situation

1.1 local area network search


- *Please make sure your computer and camera are connected with the same router.
- *Please click "Device Set" at the lower-left corner.
- *Please click "Open search tools".

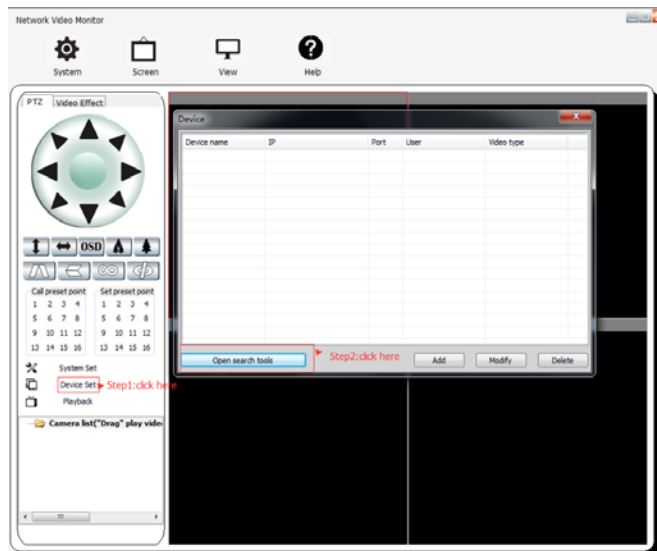

*Please Click “Search” and you will get camera list under same lan.

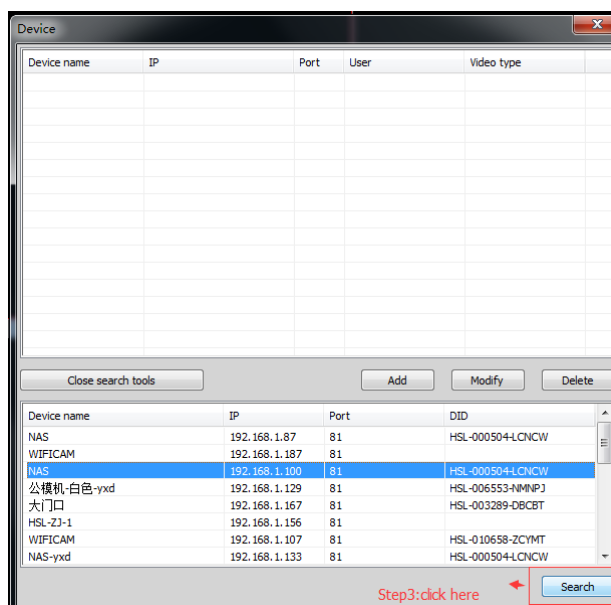

*Please add the camera as you need by double click:

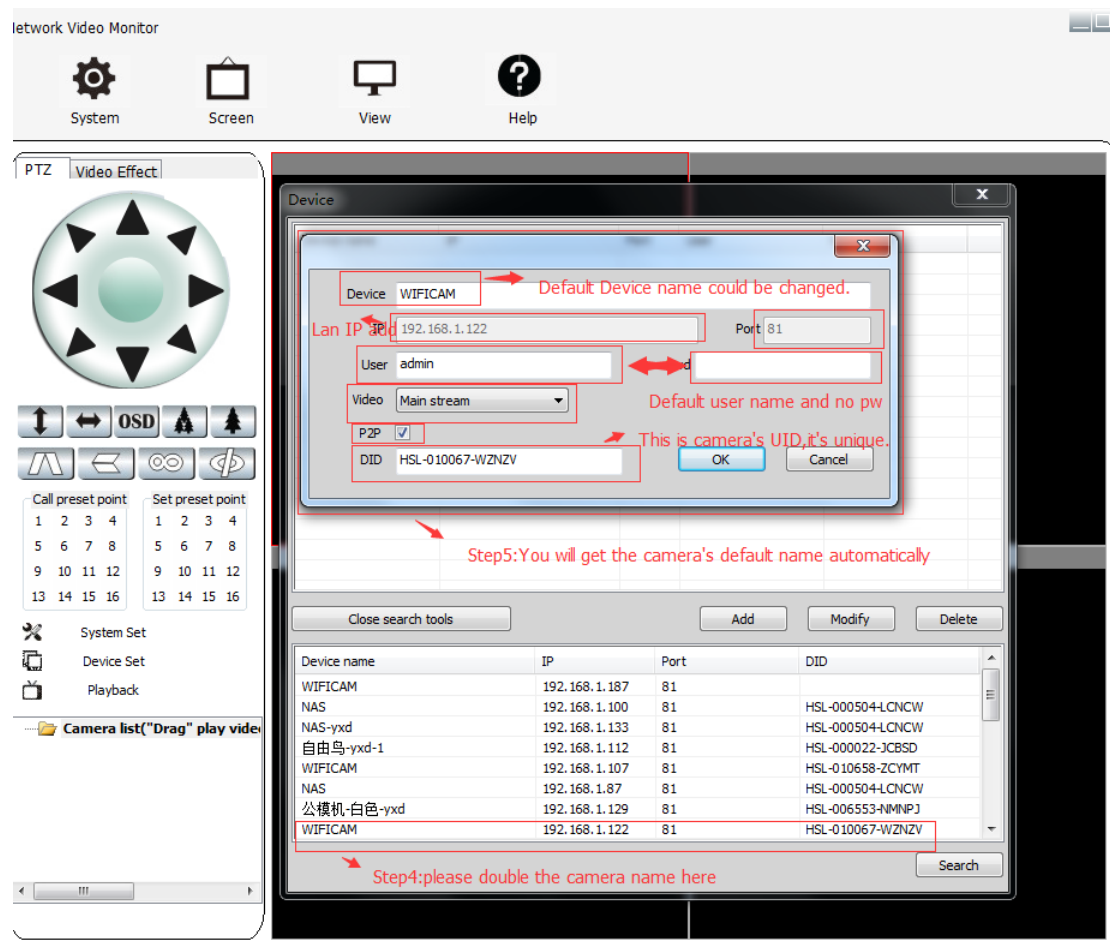


*The camera will be on the above list.

*You could add another or more cameras by click "add" too by input information Manually.


*You also could add another or more cameras directly double click the camera list in the "search camera list"

*You could modify the camera's default name by click "modify"


*You could delete the camera by click "delete"

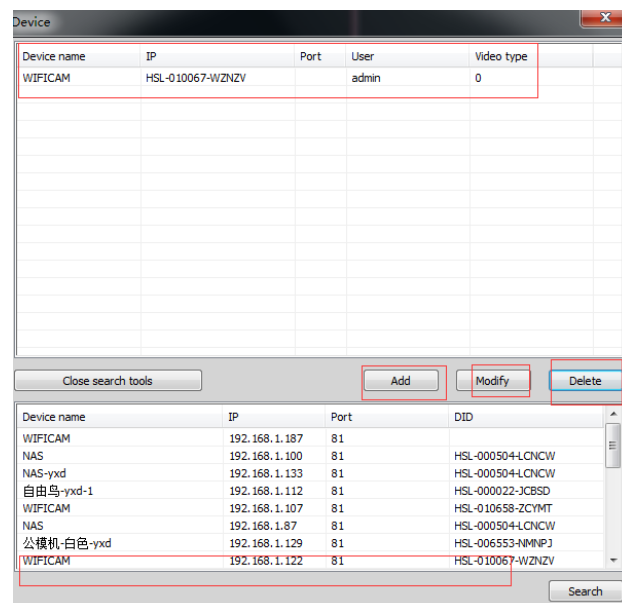

*The camera's icon is yellow,that means it's disconnect by pc client.

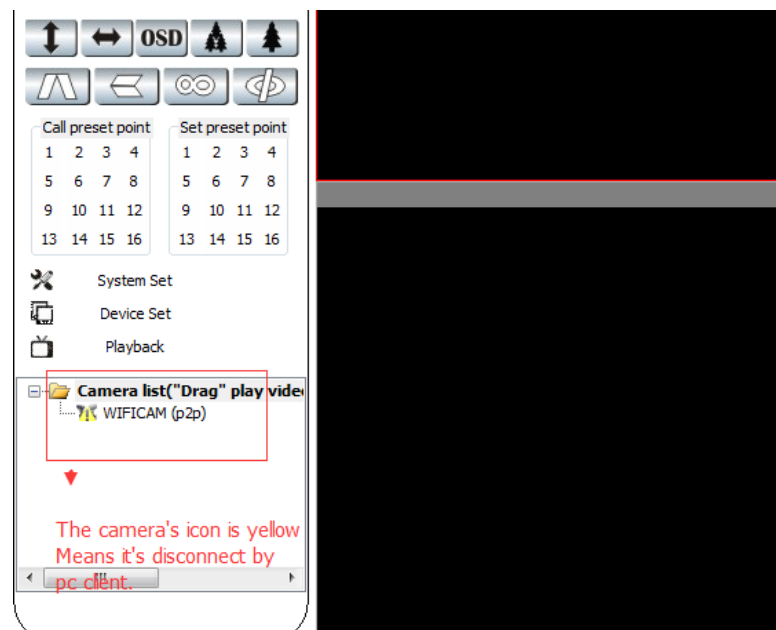

*Please drag the icon to right window,after connect,the icon will become green.
The camera now is online watch workable.

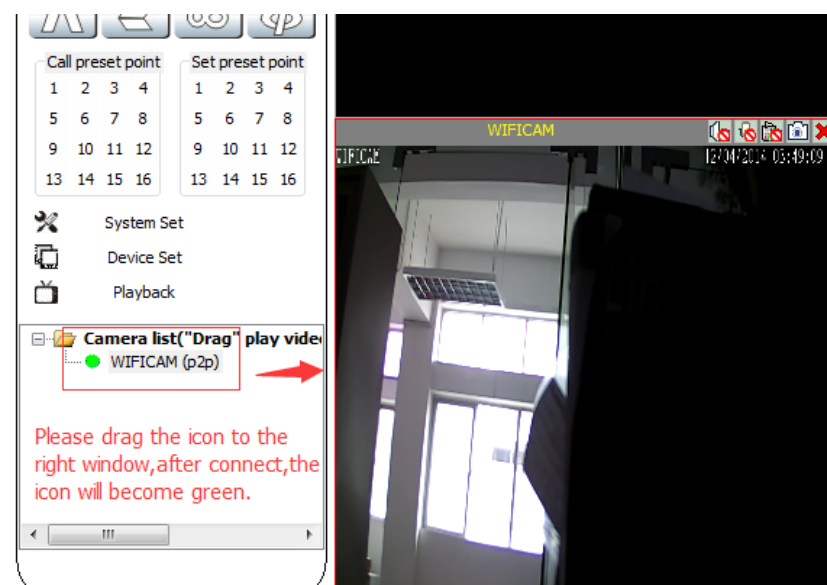

C:Add camera remotely by internet.

*Please click the “Device set”

*Please directly click the “Add”

*Please directly input below information:

1:UID information,you could find it from the label which is on the bottom of camera.


2:Please note:default user name is admin,no password.

and after you get the camera,please change the password for security reason a.s.a.p.

3.You could name the device as you like.


4.Other info is default setting.

*After above steps,you already add the camera.

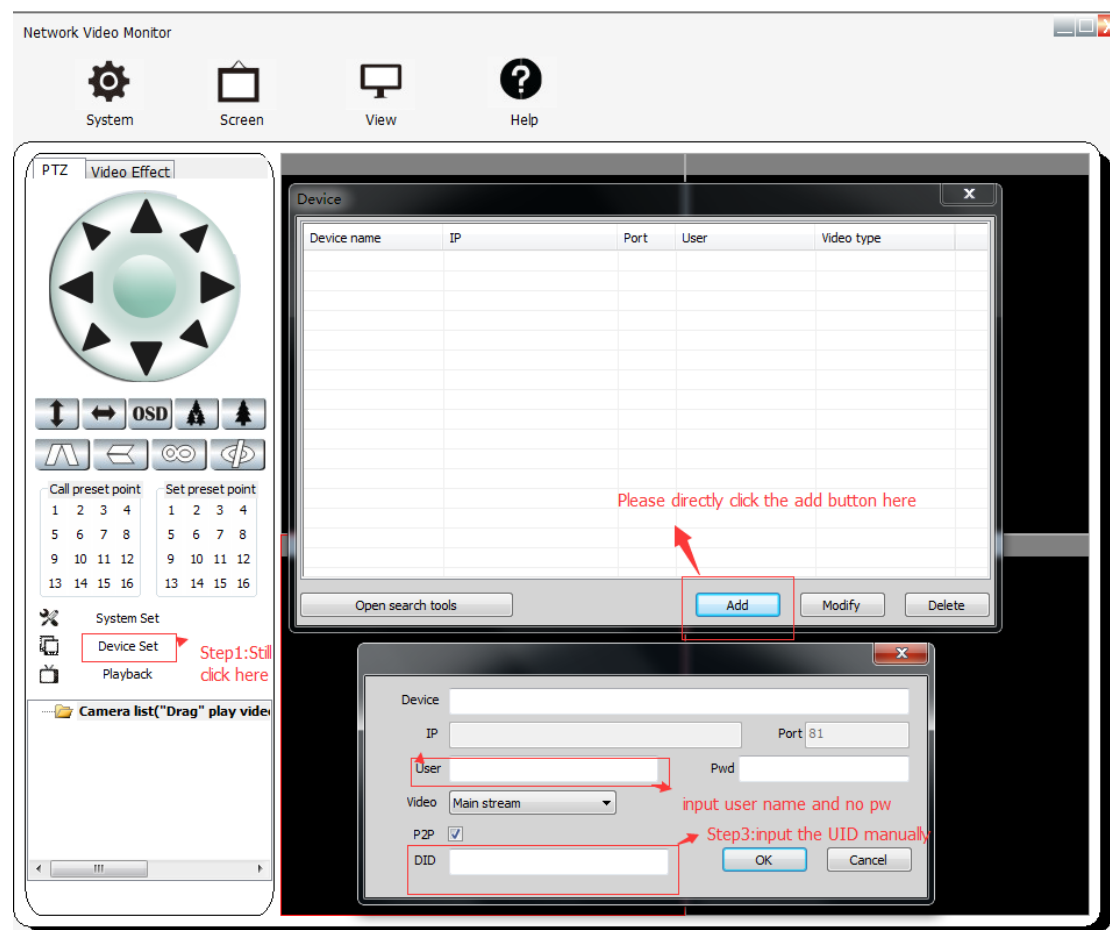


Main Functions Of PC client:

*After the camera is online, please double click the green camera's name.

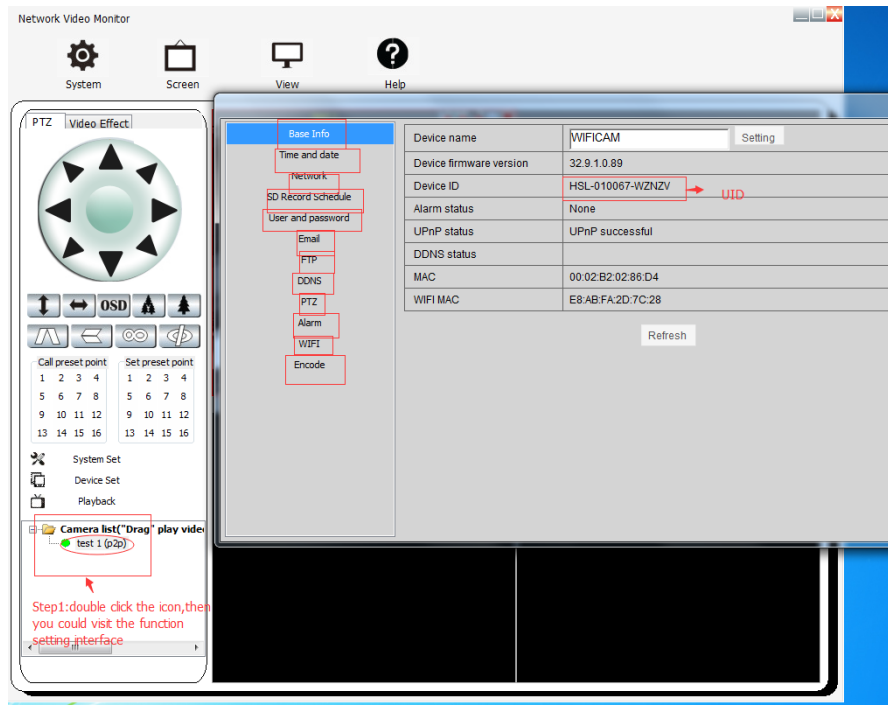


*Main function:


1. User name and password change, and user level setting:

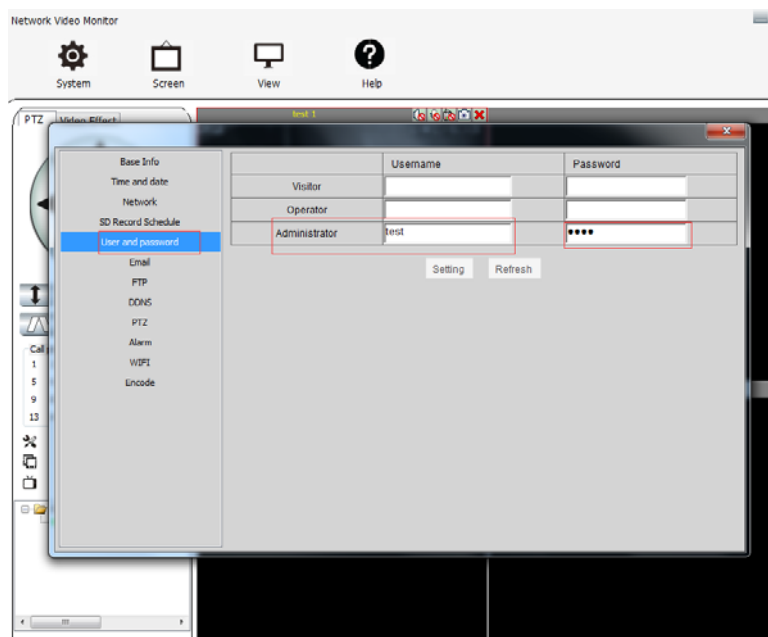


2.Email setting:for motion detection alarm push by email

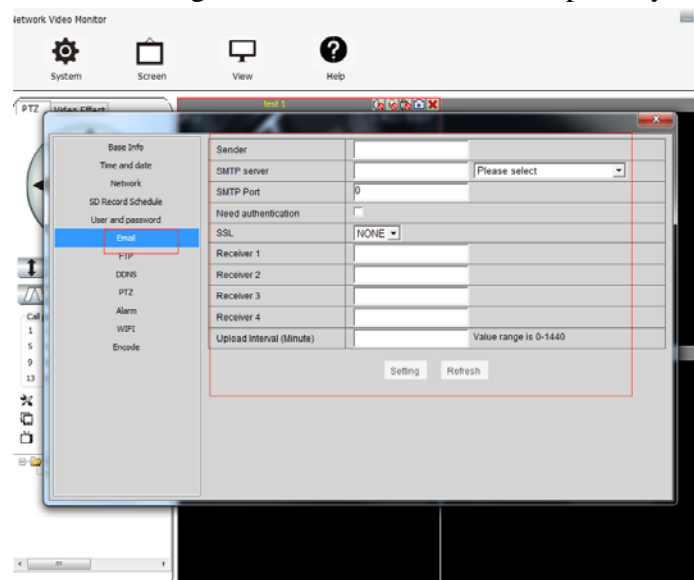


3.DDNS setting(no necessary,just for the purpose if you want to share the live stream video by URL link quickly)

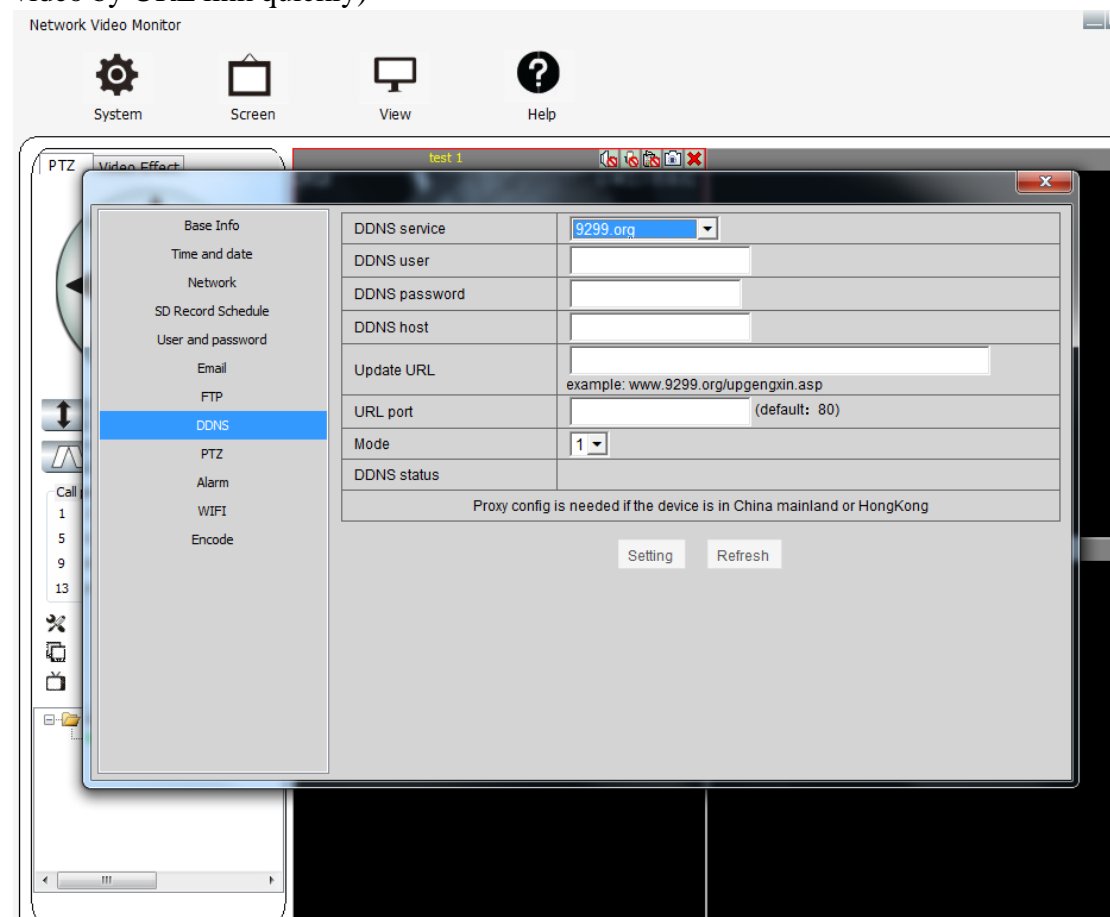




4. Alarm: You could set up the motion detection alarm as you need.

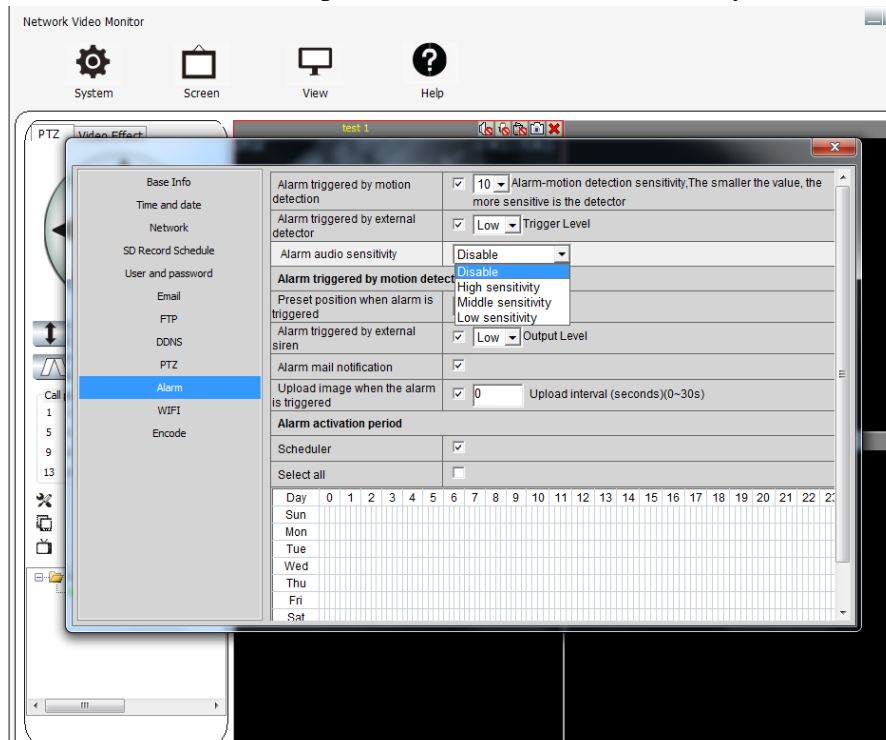

5. Wireless Setting: Please note, at the first time, if you want to set up wireless, you need to set up wireless under wired mode with cable. After setting completed, the camera will restart, it will cost around one minute, then you could unplug the cable. The camera wireless setting is completed successfully.

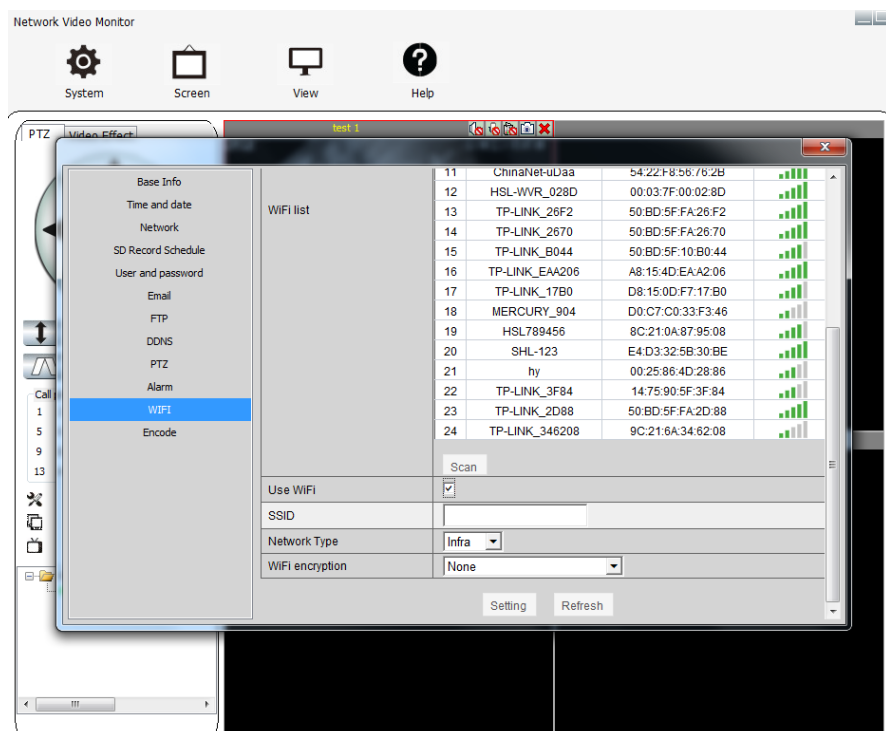


Other Functions:

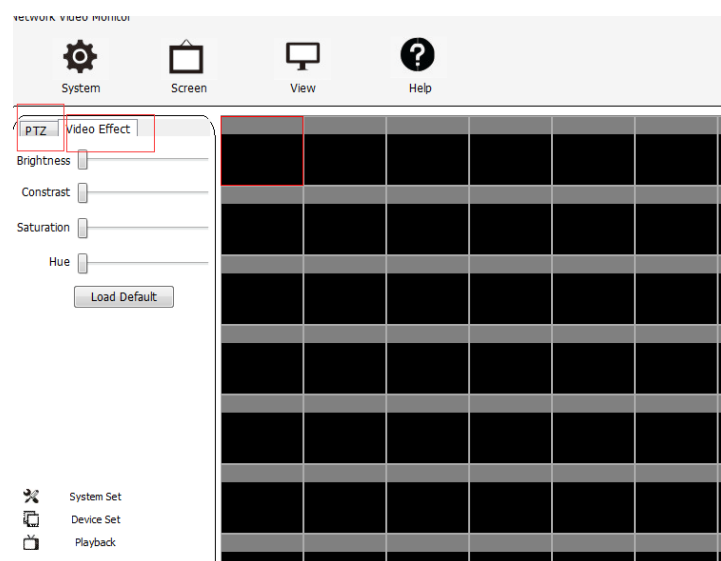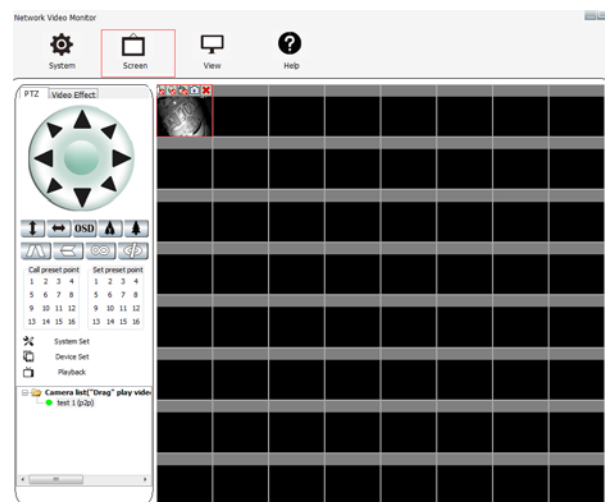
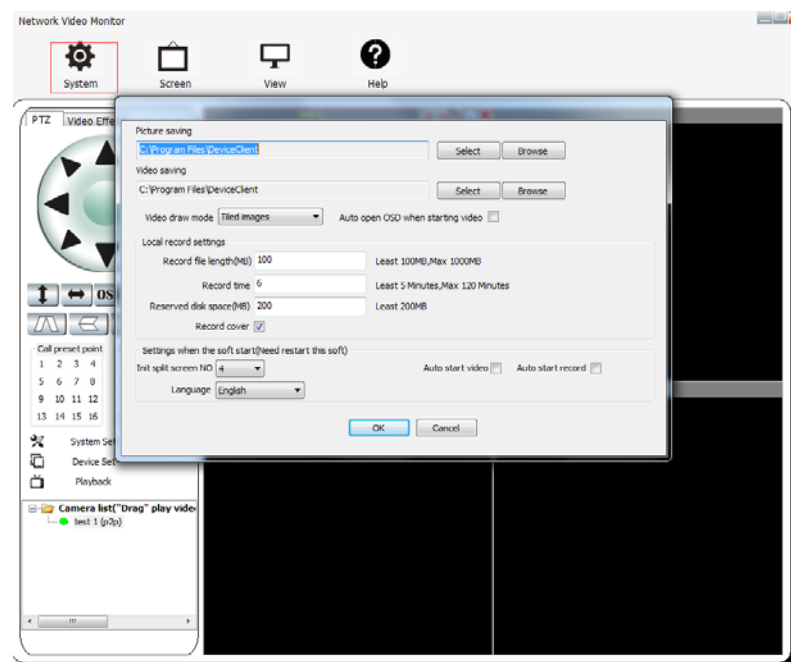



IE version:

Actually the IE user interface is almost as same as pc client.as first use,
Please choose the mode according to your default browser and install plugin if need.



Wireless Camera

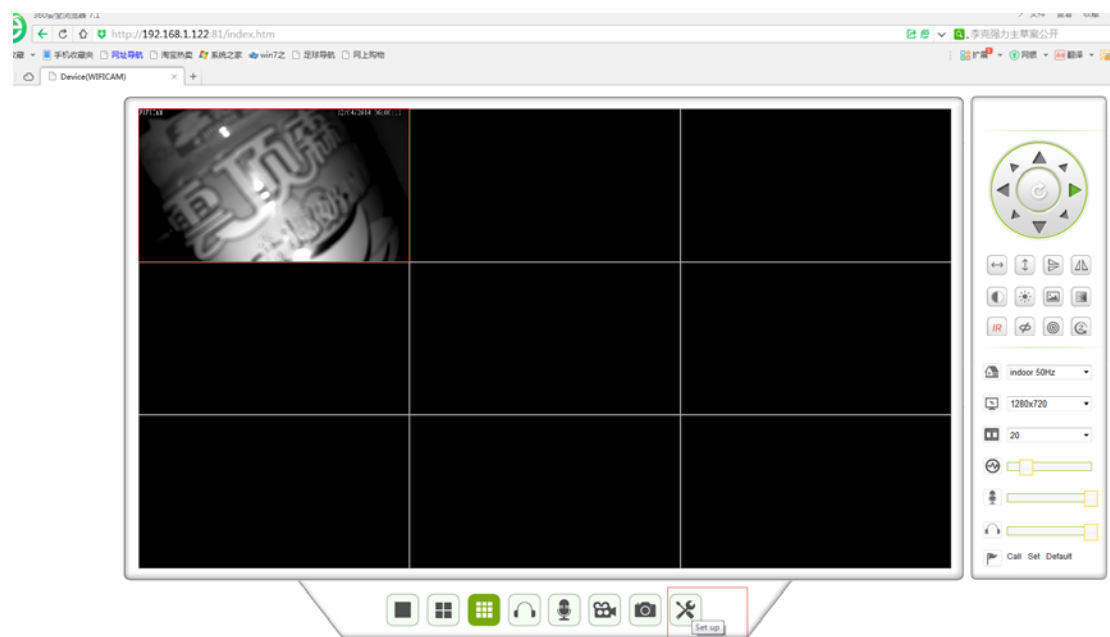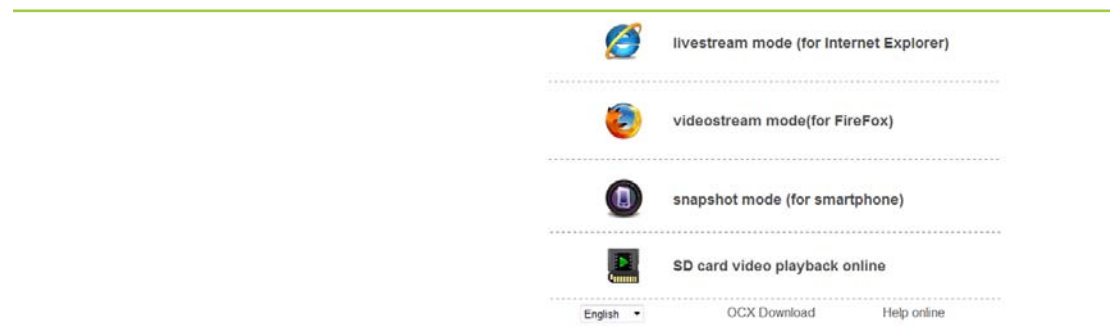

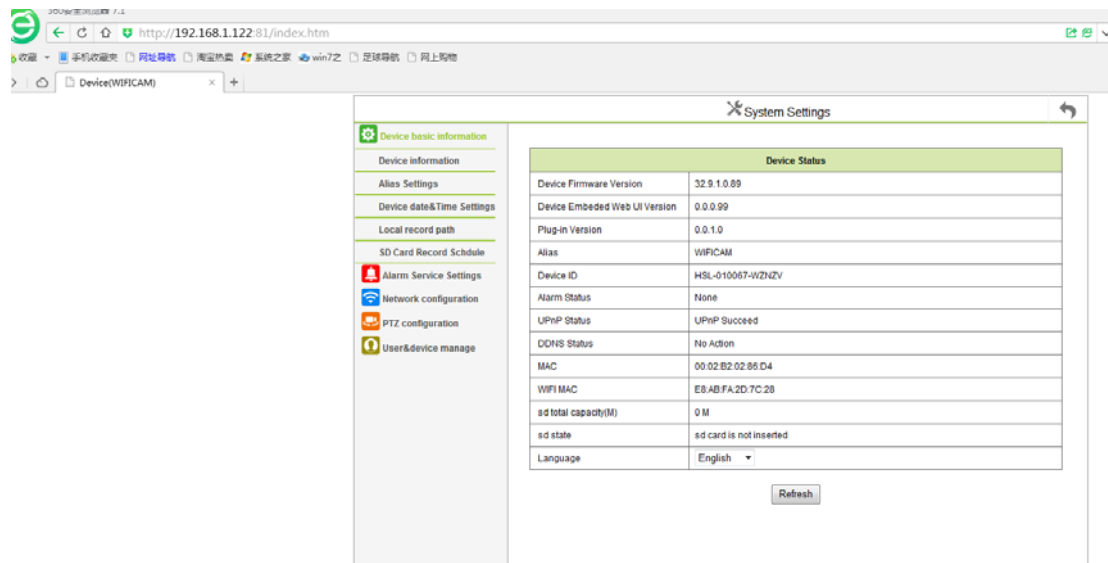

Any questions during you install and use the camera, and if you could not find answers from this manual, please directly contact our brand re-sellers. Distributions, or, you also could directly contact us. The below after service Supplied by professional tech staff from 9AM-6PM, local china time.

1. Online tech support
2. Remote assistance by team viewer
3. RMA policy, please directly contact the seller.
4. Your email will be replied within 24 hours since email sent.

You also could call our overseas brand re-sellers for help.

Hereby, Hope you enjoy our cameras and smart home products.

Any feedback, we will appreciate.

We hope you could join us, and help us make our products be

More easy use and better.