

MILAN S.r.l. a socio unico


Head Office – Export department:
 Viale Europa, 74
 20090 Cusago (MI) Italy
 T. +39 02 9039.4556-4158
 F. +39 02 9039.4551
 www.taskercables.com

Ufficio Commerciale e Centro Distribuzione
 Viale Europa 72 Strada F12
 20090 Cusago (MI) Italy
 T. +39 02 9039.0037-0059
 F. +39 02 9039.0049
 www.tasker.it

Technical Datasheet



tasker® C204 - 2x0,35 + 1x0,35 mm² Low Capacity Professional Flat Shielded Audio Cable

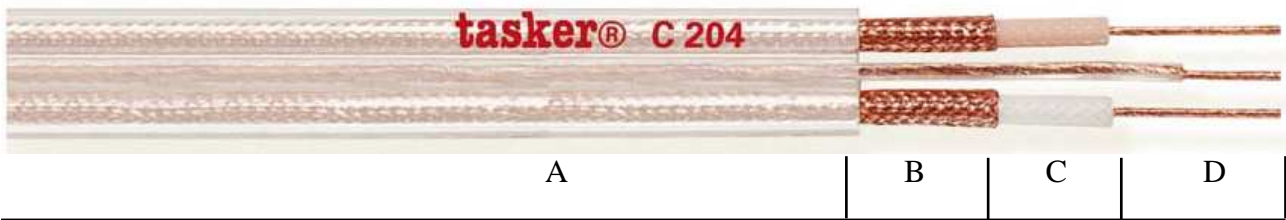

CATEGORY Shielded Flat Audio Cables (See Audio Catalogue)
APPLICATIONS Hi quality Audio installation and professional premade cables.

- A:** Transparent **PVC** Sheath.
Outer cable Dimensions: 5,30x13,00 (±0,10) mm.
- B:** Two conductors are shielded with O.F.C. red copper braid, covering 100%. The central one is unshielded.
- C:** Core Insulation in Foam PE. Diam. Ø 3,10 (±0,10) mm.
- D:** Stranded formation with very thin elementary wire of O.F.C. red copper, 45x0,10 mm. Nom. Cross section 2+1x0,35 mm².

MARKING tasker® C204 2+1x0,35 mm² O.F.C. Shielded Supreme Audio Cable - Made In Italy
CUSTOM PRODUCTION This product may be custom produced also in **LSZH** polymer, **PE**, **PUR**.

Cable Properties

Conductor Resistance	58 Ω/Km
Capacity Core/Core	24 pF/m
Capacity Core/Shield	65 pF/m
Max Rated Voltage	49 V
Operative Temperature	-15/+70°C

USE	X	Indoor	Interno Edificio	INSTALLATION	X	Fixed	Fissa	INFORMATION	X	RoHS2 Compliant
Impiego		Outdoor Limited	Esterno Limitato	Posa	X	Restricted Mobile	Mobile Limitata	Informazioni	X	Ver. A / 16.05.16
		Outdoor	Esterno			Mobile	Mobile			
		Outdoor Direct Burial	Esterno Interrato			Mobile in Drag Chain	Mobile in Catena			