

SELF PRIMING TRASH PUMP PTX201T/301T

TRASH PUMPS are specially designed for HEAVY-DUTY USE such as CONSTRUCTION SITES. They are capable of sucking solid debris up to 31 mm in diameter with 3" pump, and 20 mm diameter debris with 2" pump.

TOUGH AND POWERFUL PUMP
MECHANICAL SEAL is made of Silicon-Carbide, which vastly increases the durability of mechanical seal. IMPELLER is made from Hi-chrome cast iron. INNER CASING is made of cast-iron with stainless steel liner, which ensures long life and low maintenance. PUMP CASING and FRONT COVER are made of cast aluminum.




PTX201T



PTX301T

PERFORMANCE CURVE

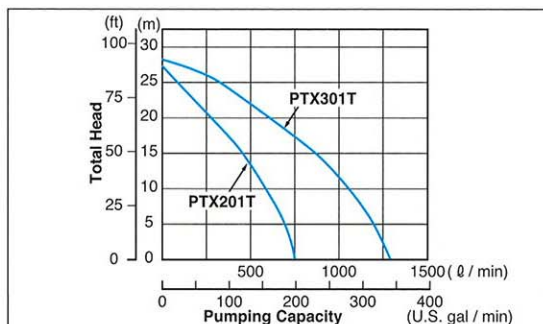

STANDARD ACCESSORIES



PTX201T/PTX301T

The above picture shows typical samples. Material and design may vary by models.

SPECIFICATIONS

Model		PTX201T	PTX301T
PUMP	Type	Self-priming, Centrifugal, Trash	
	Suction×Delivery Diameters (mm) [in.]	50.8×50.8 [2×2]	76.2×76.2 [3×3]
	Total Head (m) [ft]	27 [89]	28 [92]
	Maximum Delivery Volume (L/min) [U.S.gal/min]	750 [198]	1300 [343]
	Suction Head (m) [ft]	8 [26]	
	Axle Seal Material (Mechanical Seal)	Silicon-carbide	
ENGINE	Model	EX17	EX27
	Type	Air-cooled, 4-stroke, OHC Gasoline engine	
	Fuel	Automotive Unleaded Gasoline	
	Fuel Tank Capacity (L) [U.S.gal.]	3.6 [0.95]	6.1 [1.6]
	Starting System	Recoil Starter	
Dimensions (L×W×H) (mm) [in.]	570×436×397 [22.4×17.2×15.6]	672×484×610 [26.5×19.1×24.0]	
Dry Weight (kg) [lb.]	34.5 [76.1]	48.5 [106.9]	
Standard Accessories	Engine Tool Kit (1set), Strainer (1pc.), Hose Coupling (2pcs.), Hose Band (3pcs.)		

Specifications are subject to change without notice.